



Installation Instructions

CONTENTS

	Page
GENERAL	1
SAFETY CONSIDERATIONS	1
INSTALLATION	2
Step 1 — Perform Jobsite Survey	2
Step 2 — Place Unit	2
Step 3 — Roof Mount Unit	2
Step 4 — Slab Mount Unit	2
Step 5 — Install Curb Gasketing	2
Step 6 — Field-Fabricate Ductwork	16
Step 7 — Rig Unit	16
Step 8 — Connect Condensate Drain	21
Step 9 — Install Outdoor Hoods	33
Step 10 — Install Economizer Hoods (Units with Optional High-Capacity Power Exhaust)	34
Step 11 — Route Field Wiring	36
Step 12 — Make Field Electrical Connections	36
Step 13 — Connect Air Pressure Tubing	169
Step 14 — Supply-Fan Shipping Brackets	172
Step 15 — Remove Optional Return/Exhaust-Fan Shipping Brackets	173
Step 16 — Install Supply-Air Thermistors (Optional SCR Electric Heat Units Only)	173
Step 17 — Greenspeed/Low Ambient Control (Optional)	173
Step 18 — Install Unit Accessories	174
CONTROLS INSTALLATION	174
Constant Volume (CV) Units	174
Variable Air Volume (VAV) Units	174
Option and Accessory Control Wiring	176
Carrier Comfort Network® Interface	176
Optional UPC Open Installation	181
Smoke Control Modes	184

GENERAL

This installation instruction contains basic unit installation information, including installation of thermostats and remote temperature sensors which are required on all units.

For additional information, refer to the separate Controls and Troubleshooting literature.

Size 075-100 units are available with optional factory-installed integral economizer and high-capacity power exhaust.

SAFETY CONSIDERATIONS

Installation and servicing of air-conditioning equipment can be hazardous due to system pressure and electrical components. Only trained and qualified service personnel should install, repair, or service air-conditioning equipment.

Untrained personnel can perform basic maintenance functions of cleaning coils and filters and replacing filters. All other operations should be performed by trained service personnel. When working on air-conditioning equipment, observe precautions in the literature, tags and labels attached to the unit, and other safety precautions that may apply.

Follow all safety codes, including ANSI (American National Standards Institute) Z223.1. Wear safety glasses and work gloves. Use quenching cloth for unbrazing operations. Have fire extinguisher available for all brazing operations.

⚠ WARNING

Electrical shock can cause personal injury and death. Shut off all power to this equipment during installation. There may be more than one disconnect switch. Tag all disconnect locations to alert others not to restore power until work is completed.

⚠ WARNING

Do not store or use gasoline or other flammable vapors and liquids in the vicinity of this or any other appliance.

⚠ WARNING

Improper installation, adjustment, alteration, service, or maintenance can cause injury or property damage. Refer to this manual. For assistance or additional information, consult a qualified installer, service agency, or the gas supplier.

⚠ DANGER

DO NOT USE TORCH to remove any component. System contains oil and refrigerant under pressure.

To remove a component, wear protective gloves and goggles and proceed as follows:

- a. Shut off electrical power to unit.
- b. Recover refrigerant to relieve all pressure from system using both high-pressure and low pressure ports.
- c. Traces of vapor should be displaced with nitrogen and the work area should be well ventilated. Refrigerant in contact with an open flame produces toxic gases.
- d. Cut component connection tubing with tubing cutter and remove component from unit. Use a pan to catch any oil that may come out of the lines and as a gage for how much oil to add to the system.
- e. Carefully un-sweat remaining tubing stubs when necessary. Oil can ignite when exposed to torch flame.

Failure to follow these procedures may result in personal injury or death.

⚠ CAUTION

DO NOT re-use compressor oil or any oil that has been exposed to the atmosphere. Dispose of oil per local codes and regulations. DO NOT leave refrigerant system open to air any longer than the actual time required to service the equipment. Seal circuits being serviced and charge with dry nitrogen to prevent oil contamination when timely repairs cannot be completed. Failure to follow these procedures may result in damage to equipment.

⚠ WARNING

CARBON-MONOXIDE POISONING HAZARD

Failure to follow instructions could result in severe personal injury or death due to carbon-monoxide poisoning, if combustion products infiltrate into the building.

Check that all openings in the outside wall around the vent (and air intake) pipe(s) are sealed to prevent infiltration of combustion products into the building.

Check that furnace vent (and air intake) terminal(s) are not obstructed in any way during all seasons.

⚠ AVERTISSEMENT

RISQUE D'INTOXICATION AU MONOXYDE DE CARBONE

Si ces directives ne sont pas suivies, cela peut entraîner des blessures graves ou une intoxication au monoxyde de carbone pouvant causer la mort, si des produits de combustion s'infiltrent dans le bâtiment.

Vérifier que toutes les ouvertures pratiquées dans le mur extérieur autour du ou des tuyaux d'évent (et de la prise d'air) sont scellées de manière à empêcher l'infiltration de produits de combustion dans le bâtiment.

Veiller à ce que la ou les sorties de l'évent de l'appareil de chauffage (et la prise d'air) ne soient, en aucune façon, obstruées, quelle que soit la saison.

INSTALLATION

Step 1 — Perform Jobsite Survey

Complete the following checks before installation.

1. Consult local building codes and the NEC (National Electrical Code) (ANSI/NFPA [National Fire Protection Association] 70) for special installation requirements.
2. Determine unit location (from project plans) or select unit location.
3. Check for possible overhead obstructions which may interfere with unit lifting or rigging.

⚠ CAUTION

Do not lift unit with forklift truck. Move unit with overhead rigging only. Damage to unit may result.

Step 2 — Place Unit

Inspect unit for transportation damage. File claim with transportation agency.

Provide clearance around and above unit for airflow, safety, and service access. Do not restrict top (area above condenser fans) in any way. Allow at least 6 ft on all sides for rated performance, code compliance, and service. On units equipped with power ex-

haust option, high velocity air is exhausted out the hood. Unit should be positioned with at least 10 ft clearance between the exhaust hood and any obstruction.

Check unit dimensional drawings for unit arrangement and minimum performance and service clearances.

Do not install unit in an indoor location. Do not locate air inlets near exhaust vents or other sources of contaminated air.

Although unit is weatherproof, guard against water from higher level runoff and overhangs.

Level by using unit frame as a reference. Physical data is shown in Tables 1-12.

Step 3 — Roof Mount Unit

Check building codes for weight distribution requirements. Unit weight is shown in Tables 1-3. Unit may be mounted on class A, B, or C roofing material.

ROOF CURB

Assemble and install as described in instructions shipped with the accessory. Accessory roof curb and information required to field fabricate a roof curb is shown in Fig. 1-5. Install insulation, cant strips, roofing and counter flashing as required. For unit condensate drain to function properly, curb must be level or within tolerances shown in Fig. 1-5.

STEEL BEAMS

If roof curb is not used, support unit with steel beams along its entire length and then support steel as required. As a minimum, unit must be supported across its width at each lifting lug location.

Step 4 — Slab Mount Unit

Provide a level concrete slab that extends beyond unit cabinet at least 6 inches. Make a slab 8 in. thick with 4 in. above grade. Use gravel apron in front of condenser coil air inlet to prevent grass and foliage from obstructing airflow. Ensure that slab is of sufficient height to allow for condensate trap as described in Step 8 on page 21.

Step 5 — Install Curb Gasketing

SIZE 030-060 UNITS

After ductwork has been connected to the roof curb, attach adhesive-backed gasketing on all end rails, cross rails, and duct rails. Be sure all joints and corners of gasket are square and flush to prevent possible water leaks. Follow all applicable building codes.

SIZE 070-100 UNITS

After ductwork has been connected to the roof curb, apply gasket material (1/2-in. thick x 1 1/2 in. wide neoprene) where indicated.

Single-Thickness Gasketing (See Fig. 6 and 7 for Item Numbers)

Apply gasketing in the following places:

1. Along both side rails (1) — 2 places, full length
2. Along return air end rail (2) — 1 place
3. Around return-air internal duct flange (3) — 1 or 2 places
4. Around supply-air internal duct flanges (4) — 3 places

Double-Thickness Gasketing (See Fig. 6 and 7 and Detail A-A)

Locate a line 9 3/4-in. from the supply air end of the accessory curb. Apply a double-thickness of gasket material along line per detail A-A.

NOTE: Do not apply gasket material along the outside edge of the curb (area "X"). This pan area of the curb extends out beneath the end of the unit's air handler section; applying gasket here develops a potential water trap area on top of the curb.

Condenser Section Roof Curb (See Fig. 8)

Apply single-thickness gasket along both side rails (5).

Table 1 — Physical Data (Sizes 030-050)

BASE UNIT	50P030			50P035		
NOMINAL CAPACITY (tons)	30			35		
OPERATING WEIGHT (lb)	Standard Chassis		Extended Chassis		Standard Chassis	Extended Chassis
Base Unit						
Vertical Discharge	4810		5310		4910	5410
Horizontal Discharge and Vertical Discharge with Discharge Plenum	5110		5610		5210	5710
With Economizer						
Vertical Discharge	5110		5610		5210	5710
Horizontal Discharge and Vertical Discharge with Discharge Plenum	5410		5910		5510	6010
COMPRESSORS				Scroll		
Quantity...Type	1...ZP154/1...ZP154			1...ZP182/1...ZP182		
Oil Charge (oz) per Compressor	110			110		
Number of Refrigerant Circuits	2			2		
REFRIGERANT	R-410A					
Operating Charge (lb), Ckt 1/Ckt 2						
Standard Evaporator Coil	15.4/14.8				17.1/17.5	
Standard Evaporator with Humidi-MiZer®	15.4/24.9				17.1/27.6	
Alternate High-Capacity Evaporator Coil	17.2/16.0				N/A	
Alternate High-Capacity Evaporator with Humidi-MiZer	17.2/26.1				N/A	
CONDENSER COILS	Aluminum Novation® Heat Exchanger with Microchannel Coils					
Quantity	1				1	
Total Face Area (sq ft)	33.3				33.3	
EVAPORATOR COILS						
Quantity			1			
Total Face Area (sq ft)			32.1			
Refrigerant Feed Device...No. per Circuit			TXV...1			
Standard Evaporator Coils						
Rows...Fins/in.	3...15.0				4...15.0	
Fin Type	Double Wavy				Double Wavy	
Tube Type	Cross Hatched				Cross Hatched	
Alternate, High-Capacity Evaporator Coils						
Rows...Fins/in.	4...15.0				N/A	
Fin Type	Double Wavy				N/A	
Tube Type	Cross Hatched				N/A	
CONDENSER FANS	Propeller Type					
Quantity...Diameter (in.)	2...30				2...30	
Nominal Cfm	18,000				19,500	
Motor Hp...Rpm	1.0...1140				1.0...1140	
SUPPLY FAN	Centrifugal 25 x 25 in.					
Nominal Cfm	12,000				14,000	
AHRI/DOE Rated Cfm	9,000				8,750	
Maximum Allowable Cfm	15,000				15,000	
Maximum Allowable Rpm	900				900	
Shaft Diameter at Pulley (in.)	1 ¹¹ / ₁₆				1 ¹¹ / ₁₆	
SUPPLY-FAN MOTOR AND DRIVE	(Any motor available on any unit)					
Motor Hp	7.5	10	15	20	25	
Motor Frame Size	213T	215T	254T	256T	284T	
Efficiency at Full Load (%)						
High Efficiency	88.5	89.5	91.0	91.0	91.7	
Premium Efficiency	91.7	91.7	93.0	93.6	93.6	
Fan Pulley Pitch Diameter (in.)	13.7	13.7	13.7	13.7	13.7	
Motor Pulley Pitch Diameter (in.)	4.3	4.3	4.9	5.5	6.5	
Resulting Fan Speed (rpm)	348	549	626	703	830	
Belts Quantity...Type	2...BX60	2...5VX630	2...5VX630	2...5VX630	2...5VX650	
Center Distance Range (in.)	17.74-14.30	17.74-14.30	17.63...14.01	17.63...14.01	16.63...12.87	
OPTIONAL POWER EXHAUST†	Centrifugal, 18 x 15 in. (Any motor available on any unit)					
Quantity...Motor Hp	2...3.0	2...5.0	2...7.5	2...10		
Motor Frame Size	56HZ	184T	213T	215T		
	182T	184T	213T	215T		
Efficiency at Full Load (%) High/Premium	81.0/88.5	87.5/89.5	88.5/91.7	89.5/91.7		
Fan Pulley Pitch Diameter (in.)	11	10.4	12	12		
	11.0	10.4	12	12		
Motor Pulley Pitch Diameter Range (in.)	4.1-3.1	4.7-3.7	6.0-4.8	7.0-5.8		
	4.1-3.1	4.7-3.7	6.0-4.8	7.0-5.8		
Motor Pulley Pitch Diameter Factory Setup (in.)	4.1	4.2	5.4	6.4		
Blower Shaft Diameter at Pulley (in.)	1 ⁷ / ₁₆	1 ⁷ / ₁₆	1 ⁷ / ₁₆	1 ⁷ / ₁₆		
Fan Rpm Range	500-656	621-785	717-882	854-1000		
Factory Setup Fan Rpm	656	703	800	927		
Maximum Allowable Rpm	1000	1000	1000	1000		
FILTERS						
Standard Efficiency Throwaway (Standard)						
Quantity...Size (in.)	8...20 x 25 x 2, 8...20 x 20 x 2				8...20 x 25 x 2, 8...20 x 20 x 2	
Medium Efficiency (30%) Pleated (Optional)						
Quantity...Size (in.)	8...20 x 25 x 2, 8...20 x 20 x 2				8...20 x 25 x 2, 8...20 x 20 x 2	
High Efficiency (90%) Bag Filters with High Velocity Prefilters (Opt)						
Quantity...Size (in.)	6...20 x 24 x 22, 6...20 x 20 x 22				6...20 x 24 x 22, 6...20 x 20 x 22	
Bag Filter	12...16 x 20 x 2, 3...20 x 24 x 2				12...16 x 20 x 2, 3...20 x 24 x 2	
Prefilter						
MERV 15 Cartridge Filters with High Velocity Prefilters (Opt)						
Quantity...Size (in.)	6...20 x 24 x 12, 6...20 x 20 x 12				6...20 x 24 x 12, 6...20 x 20 x 12	
Cartridge Filter	12...16 x 20 x 2, 3...20 x 24 x 2				12...16 x 20 x 2, 3...20 x 24 x 2	
Prefilter						
OUTSIDE AIR SCREENS						
Standard Hood (25%) Quantity...Size (in.)	None				None	
OPTIONAL ECONOMIZER FILTER	Aluminum Frame, Permanent					
Quantity...Size (in.)	5...20 x 20 x 2, 2...20 x 25 x 1				5...20 x 20 x 1, 2...20 x 25 x 1	

LEGEND

- AHRI — Air Conditioning, Heating and Refrigeration Institute
- DOE — Department of Energy
- TXV — Thermostatic Expansion Valve

* 460-3-60 only.

†See Table 10 — Optional Power Exhaust Fan Drive Data on page 8 for more information.

Table 1 — Physical Data (Sizes 030-050) (cont)

BASE UNIT	50P040			50P050	
NOMINAL CAPACITY (tons)	40			50	
OPERATING WEIGHT (lb)	Standard Chassis	Extended Chassis		Standard Chassis	Extended Chassis
Base Unit					
Vertical Discharge	5310	5810		5525	6025
Horizontal Discharge and Vertical Discharge with Discharge Plenum	5610	6110		5825	6325
With Economizer					
Vertical Discharge	5610	6110		5825	6325
Horizontal Discharge and Vertical Discharge with Discharge Plenum	5910	6410		6125	6625
COMPRESSORS	Scroll			2...ZP120/2...ZP137	
Quantity...Type	2...ZP103/1...ZP182			2...ZP120/2...ZP137	
Oil Charge (oz) per Compressor	110			110	
Number of Refrigerant Circuits	2			2	
REFRIGERANT	R-410A				
Operating Charge (lb), Ckt 1/Ckt 2					
Standard Evaporator Coil	22.6/27.9			29.4/29.0	
Standard Evaporator with Humidi-MiZer®	22.6/40.6			29.4/41.4	
Alternate High-Capacity Evaporator Coil	31.1/37.2			35.2/36.5	
Alternate High-Capacity Evaporator with Humidi-MiZer	31.1/49.6			35.2/48.9	
CONDENSER COILS	Aluminum Novation® Heat Exchanger with Microchannel Coils				
Quantity	2			2	
Total Face Area (sq ft)	66.7			66.7	
EVAPORATOR COILS	1 45.5 TXV...2				
Quantity					
Total Face Area (sq ft)					
Refrigerant Feed Device...No. per Circuit					
Standard Evaporator Coils					
Rows...Fins/in.	3...15.0			4...15.0	
Fin Type	Double Wavy			Double Wavy	
Tube Type	Cross Hatched			Cross Hatched	
Alternate, High-Capacity Evaporator Coils					
Rows...Fins/in.	6...16.0			6...16.0	
Fin Type	Double Wavy			Double Wavy	
Tube Type	Cross Hatched			Cross Hatched	
CONDENSER FANS	Propeller Type				
Quantity...Diameter (in.)	3...30			4...30	
Nominal Cfm	30,000			38,000	
Motor Hp...Rpm	1.0...1140			1.0...1140	
SUPPLY FAN	Centrifugal 25 x 25 in.				
Nominal Cfm	16,000			20,000	
AHRI/DOE Rated Cfm	12,000			15,000	
Maximum Allowable Cfm	20,000			20,000	
Maximum Allowable Rpm	900			900	
Shaft Diameter at Pulley (in.)	1 ¹¹ / ₁₆			1 ¹¹ / ₁₆	
SUPPLY-FAN MOTOR AND DRIVE	(Any motor available on any unit)				
Motor Hp	7.5	10	15	20	25
Motor Frame Size	213T	215T	254T	256T	284T
Efficiency at Full Load (%)					
High Efficiency	88.5	89.5	91.0	91.0	91.7
Premium Efficiency	91.7	91.7	93.0	93.6	93.6
Fan Pulley Pitch Diameter (in.)	13.7	13.7	13.7	13.7	13.7
Motor Pulley Pitch Diameter (in.)	3.4	4.3	4.9	5.5	6.5
Resulting Fan Speed (rpm)	438	549	626	703	830
Belts Quantity...Type	2...BX60		2...5VX630		3...5VX630
Center Distance Range (in.)	17.74-14.30		17.63...14.01		16.63...12.87
OPTIONAL POWER EXHAUST†	Centrifugal, 18 x 15 in. (Any motor available on any unit)				
Quantity...Motor Hp	2...3.0		2...5.0		2...10
Motor Frame Size	56HZ		184T		213T
High Eff Prem Eff	182T		184T		213T
Efficiency at Full Load (%) High/Premium	81.0/88.5		87.5/89.5		88.5/91.7
Fan Pulley Pitch Diameter (in.)	11		10.4		12
High Eff Prem Eff	11.0		10.4		12
Motor Pulley Pitch Diameter Range (in.)	4.1-3.1		4.7-3.7		6.0-4.8
High Eff Prem Eff	4.1-3.1		4.7-3.7		6.0-4.8
Motor Pulley Pitch Diameter Factory Setup (in.)	4.1		4.2		5.4
Blower Shaft Diameter at Pulley (in.)	1 ⁷ / ₁₆		1 ⁷ / ₁₆		1 ⁷ / ₁₆
Fan Rpm Range	500-656		621-785		717-882
Factory Setup Fan Rpm	656		703		800
Maximum Allowable Rpm	1000		1000		1000
FILTERS					
Standard Efficiency Throwaway (Standard)					
Quantity...Size (in.)	8...20 x 25 x 2, 8...20 x 20 x 2			8...20 x 25 x 2, 8...20 x 20 x 2	
Medium Efficiency (30%) Pleated (Optional)					
Quantity...Size (in.)	8...20 x 25 x 2, 8...20 x 20 x 2			8...20 x 25 x 2, 8...20 x 20 x 2	
High Efficiency (90%) Bag Filters with High Velocity Prefilters (Optional)					
Quantity...Size (in.)	6...20 x 24 x 22, 6...20 x 20 x 22			6...20 x 24 x 22, 6...20 x 20 x 22	
Bag Filter Prefilter	12...16 x 20 x 2, 3...20 x 24 x 2			12...16 x 20 x 2, 3...20 x 24 x 2	
MERV 15 Cartridge Filters with High Velocity Prefilters (Opt)					
Quantity...Size (in.)	6...20 x 24 x 12, 6...20 x 20 x 12			6...20 x 24 x 12, 6...20 x 20 x 12	
Cartridge Filter Prefilter	12...16 x 20 x 2, 3...20 x 24 x 2			12...16 x 20 x 2, 3...20 x 24 x 2	
OUTSIDE AIR SCREENS					
Standard Hood (25%) Quantity...Size (in.)	None			None	
OPTIONAL ECONOMIZER FILTER	Aluminum Frame, Permanent				
Quantity...Size (in.)	5...20 x 20 x 2, 2...20 x 25 x 1			5...20 x 20 x 1, 2...20 x 25 x 1	

LEGEND

- AHRI — Air Conditioning, Heating and Refrigeration Institute
- DOE — Department of Energy
- TXV — Thermostatic Expansion Valve

* 460-3-60 only.

†See Table 10 — Optional Power Exhaust Fan Drive Data on page 8 for more information.

Table 2 — Physical Data (Sizes 055-070)

BASE UNIT	50P055		50P060		50P070	
NOMINAL CAPACITY (tons)	55		60		70	
OPERATING WEIGHT (lb)	Standard Chassis	Extended Chassis	Standard Chassis	Extended Chassis	Standard Chassis	Extended Chassis
Base Unit						
Vertical Discharge	6820	7370	6875	7425	7215	7765
Horizontal Discharge and Vertical Discharge with Discharge Plenum	7370	7920	7425	7975	7765	8315
With Economizer						
Vertical Discharge	7350	7900	7405	7955	7745	8295
Horizontal Discharge and Vertical Discharge with Discharge Plenum	7900	8450	7955	8505	8295	8845
COMPRESSORS	2...ZP137/2...ZP137		Scroll 2...ZP154/2...ZP154		1...ZP154,1...ZP182/1...ZP154,1...ZP182	
Quantity...Type						
Oil Charge (oz) per Compressor	110		110		110	
Number of Refrigerant Circuits	2		2		2	
REFRIGERANT	R-410A					
Operating Charge (lb), Ckt 1/Ckt 2						
Standard Evaporator Coil	37.6/37.9		37.6/37.9		41.2/44.8	
Standard Evaporator with Humidi-MiZer®	37.6/50.3		37.6/50.3		41.2/57.2	
Alternate High-Capacity Evaporator Coil	43.5/42.8		44.6/43.5		52.5/52.0	
Alternate High-Capacity Evaporator with Humidi-MiZer	43.5/55.2		44.6/55.9		52.5/64.4	
CONDENSER COILS	Aluminum Novation® Heat Exchanger with Microchannel Coils					
Quantity	2		2		4	
Total Face Area (sq ft)	66.7		66.7		106.7	
EVAPORATOR COILS						
Quantity			2			
Total Face Area (sq ft)			61.5			
Refrigerant Feed Device...No. per Circuit			TXV...2			
Standard Evaporator Coils						
Rows...Fins/in.	4...15		4...15		4...15	
Fin Type	Double Wavy		Double Wavy		Double Wavy	
Tube Type	Cross Hatched		Cross Hatched		Cross Hatched	
Alternate, High-Capacity Evaporator Coils						
Rows...Fins/in.	6...16		6...16		6...16	
Fin Type	Double Wavy		Double Wavy		Double Wavy	
Tube Type	Cross Hatched		Cross Hatched		Cross Hatched	
CONDENSER FANS	Propeller Type					
Quantity...Diameter (in.)	4...30		4...30		4...30	
Nominal Cfm	36,000		36,000		39,000	
Motor Hp...Rpm	1.0...1140		1.0...1140		1.0...1140	
SUPPLY FAN	Centrifugal 30 x 27.5 in.					
Nominal Cfm	22,000		24,000		28,000	
AHRI/DOE Rated Cfm	16,500		18,000		21,000	
Maximum Allowable Cfm	25,000		30,000		30,000	
Maximum Allowable Rpm	800		800		800	
Shaft Diameter at Pulley (in.)	1 ¹¹ / ₁₆		1 ¹¹ / ₁₆		1 ¹¹ / ₁₆	
SUPPLY-FAN MOTOR AND DRIVE	(Any motor available on any unit)					
Motor Hp	15	20	25	30	40*	
Motor Frame Size	254T	256T	284T	286T	S324T	
Efficiency at Full Load (%)						
High Efficiency	91.0	91.0	91.7	92.4	93.0	
Premium Efficiency	93.0	93.6	93.6	93.6	94.5	
Fan Pulley Pitch Diameter (in.)	13.7	13.7	13.7	15.5	16.1	
Motor Pulley Pitch Diameter (in.)	4.5	5.1	5.5	5.9	6.7	
Resulting Fan Speed (rpm)	575	651	703	711	740	
Belts Quantity...Type	2...5VX1230	2...5VX1230	2...5VX1230	2...5VX1230	3...5VX1250	
Center Distance Range (in.)	48.25-44.00	48.25-44.00	48.50-44.25	48.50-44.25	48.25-44.00	
OPTIONAL POWER EXHAUST†	Centrifugal, 18 x 15 in. (Any motor available on any unit)					
Quantity...Motor Hp	2...5		2...7.5		2...10	
Motor Frame Size	184T		213T		215T	
Efficiency at Full Load (%) High/Premium	87.5/89.5		88.5/91.7		89.5/91.7	
Resulting Fan Rpm	740		820		920	
Maximum Allowable Rpm	1000		1000		1000	
FILTERS						
Standard Efficiency Throwaway (Standard)						
Quantity...Size (in.)	12...20 x 25 x 2, 12...20 x 20 x 2		12...20 x 25 x 2, 12...20 x 20 x 2		12...20 x 25 x 2, 12...20 x 20 x 2	
Medium Efficiency (30%) Pleated (Optional)						
Quantity...Size (in.)	12...20 x 25 x 2, 12...20 x 20 x 2		12...20 x 25 x 2, 12...20 x 20 x 2		12...20 x 25 x 2, 12...20 x 20 x 2	
High Efficiency (90%) Bag Filters with High Velocity Prefilters (Optional)						
Quantity...Size (in.)						
Bag Filter	6...24 x 24 x 22, 6...24 x 20 x 22		6...24 x 24 x 22, 6...24 x 20 x 22		6...24 x 24 x 22, 6...24 x 20 x 22	
Prefilter	6...24 x 24 x 2, 6...20 x 24 x 2		6...24 x 24 x 2, 6...20 x 24 x 2		6...24 x 24 x 2, 6...20 x 24 x 2	
MERV 15 Cartridge Filters with High Velocity Prefilters (optional)						
Quantity...Size (in.)						
Cartridge Filter	6...24 x 24 x 12, 6...24 x 20 x 12		6...24 x 24 x 12, 6...24 x 20 x 12		6...24 x 24 x 12, 6...24 x 20 x 12	
Prefilter	6...24 x 24 x 2, 6...20 x 24 x 2		6...24 x 24 x 2, 6...20 x 24 x 2		6...24 x 24 x 2, 6...20 x 24 x 2	
OUTSIDE AIR SCREENS						
Standard Hood (25%) Quantity...Size (in.)	4...25 x 16 x 1		4...25 x 16 x 1		4...25 x 16 x 1	
	2...20 x 16 x 1		2...20 x 16 x 1		2...20 x 16 x 1	
OPTIONAL ECONOMIZER FILTER	Aluminum Frame, Permanent					
Quantity...Size (in.)	12...16 x 25 x 1		12...16 x 25 x 1		12...16 x 25 x 1	
	2...16 x 20 x 1		2...16 x 20 x 1		2...16 x 20 x 1	

LEGEND

- AHRI — Air Conditioning, Heating and Refrigeration Institute
- DOE — Department of Energy
- TXV — Thermostatic Expansion Valve

* 460-3-60 and 575-3-60 only.

†See Table 10 — Optional Power Exhaust Fan Drive Data on page 8 for more information.

Table 3 — Physical Data (Sizes 075-100)

BASE UNIT	50P075		50P5090		50P100	
NOMINAL CAPACITY (tons)	75		90		100	
OPERATING WEIGHT (lb)	Standard Chassis	Extended Chassis	Standard Chassis	Extended Chassis	Standard Chassis	Extended Chassis
Base Unit	8665	9215	9265	9815	9285	9835
Vertical Discharge	—	—	—	—	—	—
Horizontal Discharge and Vertical Discharge with Discharge Plenum	—	—	—	—	—	—
With Economizer	9195	9745	9795	10,345	9815	10,365
Vertical Discharge	—	—	—	—	—	—
Horizontal Discharge and Vertical Discharge with Discharge Plenum	—	—	—	—	—	—
COMPRESSORS			Scroll			
Quantity...Type	2...ZP182/2...ZP182		3...ZP154,3...ZP154		3...ZP154,3...ZP182	
Oil Charge (oz) per Compressor	110		110		110	
Number of Refrigerant Circuits	2		2		2	
REFRIGERANT	R-410A					
Operating Charge (lb), Ckt 1/Ckt 2						
Standard Evaporator Coil	41.2/44.8		50.4/51.3		50.8/52.8	
Standard Evaporator with Humidi-MiZer®	41.2/57.2		50.4/69.1		50.8/70.6	
Alternate High-Capacity Evaporator Coil	52.5/52.0		61.5/62.9		59.3/62.8	
Alternate High-Capacity Evaporator with Humidi-MiZer	52.5/64.4		61.5/80.7		59.3/80.6	
CONDENSER COILS	Aluminum Novation® Heat Exchanger with Microchannel Coils					
Quantity	4		6		6	
Total Face Area (sq ft)	106.7		160.0		160.0	
EVAPORATOR COILS						
Quantity			2			
Total Face Area (sq ft)			61.5			
Refrigerant Feed Device...No. per Circuit			TXV...2			
Standard Evaporator Coils						
Rows...Fins/in.	4...15		4...15		4...15	
Fin Type	Double Wavy		Double Wavy		Double Wavy	
Tube Type	Cross Hatched		Cross Hatched		Cross Hatched	
Alternate, High-Capacity Evaporator Coils						
Rows...Fins/in.	6...16		6...16		6...16	
Fin Type	Double Wavy		Double Wavy		Double Wavy	
Tube Type	Cross Hatched		Cross Hatched		Cross Hatched	
CONDENSER FAN	Propeller Type					
Quantity...Diameter (in.)	4...30		6...30		6...30	
Nominal Cfm	39,000		58,000		58,000	
Motor Hp (ea)...rpm	1.0...1140		1.0...1140		1.0...1140	
STANDARD SUPPLY FAN	Forward Curved Centrifugal 36 x 30 in.					
Nominal Cfm	30,000		36,000		40,000	
Maximum Allowable Cfm	30,000		36,000		40,000	
Maximum Allowable Rpm	680		680		680	
Shaft Diameter at Pulley (in.)	1 ¹¹ / ₁₆		1 ¹¹ / ₁₆		1 ¹¹ / ₁₆	
STANDARD SUPPLY-FAN MOTOR AND DRIVE	(Any motor available on any unit)					
Motor Hp	30		40		50	
Motor Frame Size	S268T		S324T		S326T	
Efficiency at Full Load (%)						
High Efficiency	92.4		93.0		93.0	
Premium Efficiency	93.6		94.5		94.5	
Fan Pulley Pitch Diameter (in.)	18.5		18.5		18.5	
Motor Pulley Pitch Diameter (in.)	5.3		5.7		6.5	
Resulting Fan Rpm	501		539		615	
Belts Quantity...Type	3...5VX1320		4...5VX1320		4...5VX1320	
Center Distance Range (in.)	47.88-45.01		47.64-44.76		47.42-44.52	
ALTERNATE, AIRFOIL FAN	Airfoil					
Nominal Airflow (cfm)	30,000		36,000		40,000	
Maximum Allowable Airflow (cfm)	30,000		36,000		40,000	
Maximum Allowable Wheel Speed (rpm)	1846		1846		1846	
Shaft Diameter at Pulley (in.)	2 ¹¹ / ₁₆		2 ¹¹ / ₁₆		2 ¹¹ / ₁₆	
ALTERNATE SUPPLY-FAN MOTOR AND DRIVE	(Any motor available on any unit)					
Motor Hp	30		40		50	
Motor Frame Size	S268T		S324T		S326T	
Efficiency at Full Load (%)						
High Efficiency	92.4		93.0		93.6	
Premium Efficiency	93.6		94.5		95.4	
Fan Pulley Pitch Diameter (in.)	9.7		10.2		8.9	
Motor Pulley Pitch Diameter (in.)	7.5		8.7		8.1	
Resulting Fan Rpm	1353		1493		1593	
Belts Quantity...Type	2...5VX1150		2...5VX1180		3...5VX1150	
Center Distance Range (in.)	42.96...45.82		42.96...45.57		42.45...45.35	
OPTIONAL POWER EXHAUST*	Centrifugal, 18 x 15 in. (Any motor available on any unit.)					
Quantity...Motor Hp	2...5		2...7.5		2...10	
Motor Frame Size	184T		213T		215T	
Efficiency at Full Load (%)						
High Efficiency	87.5		88.5		89.5	
Premium Efficiency	89.5		91.7		91.7	
Fan Pulley Pitch Diameter (in.)	10.6		10.6		10.6	
Motor Pulley Pitch Diameter (in.)	4.5		5.0		5.6	
Shaft Diameter at Pulley (in.)	1 ⁷ / ₁₆		1 ⁷ / ₁₆		1 ⁷ / ₁₆	
Resulting Fan Rpm	740		820		920	
Maximum Allowable Rpm	1000		1000		1000	
FILTERS						
Standard Efficiency Throwaway (Standard)	12...20 x 25 x 2		12...20 x 25 x 2		12...20 x 25 x 2	
Quantity...Size (in.)	12...20 x 20 x 2		12...20 x 20 x 2		12...20 x 20 x 2	
30% and 65% Pleated (Optional)	12...20 x 25 x 2		12...20 x 25 x 2		12...20 x 25 x 2	
Quantity...Size (in.)	12...20 x 20 x 2		12...20 x 20 x 2		12...20 x 20 x 2	
OUTSIDE AIR SCREENS						
Standard Hood (25%) Quantity...Size (in.)	4...25 x 16 x 1		4...25 x 16 x 1		4...25 x 16 x 1	
	2...20 x 16 x 1		2...20 x 16 x 1		2...20 x 16 x 1	
OPTIONAL ECONOMIZER FILTER	Aluminum Frame, Permanent					
Quantity...Size (in.)	12...16 x 25 x 1		12...16 x 25 x 1		12...16 x 25 x 1	
	2...16 x 20 x 1		2...16 x 20 x 1		2...16 x 20 x 1	

LEGEND

TXV — Thermostatic Expansion Valve

* See page 7 for Table 6 — Optional High-Capacity Power Exhaust Specifications. See Table 10 — Optional Power Exhaust Fan Drive Data on page 8 for more information.

Table 4 — Hydronic Heat Coil Specifications

UNIT SIZE 50P	030-050	055-100
COIL CONSTRUCTION	½-in. OD copper tubes, aluminum plate fins, galvanized steel frame	
FACE AREA (sq ft)	22.6	(2) sections: total 27.1
ROWS...FINS PER INCH	2...8	2...11
CIRCUIT ARRANGEMENT	Half	Half
CONNECTIONS — (Qty) Dim Supply (in.) Return (in.)	(1) 2½ NPT (1) 2½ NPT	(2) 1½ NPT (2) 1½ NPT
HEADER MATERIAL	Steel	Steel
INTERNAL VOLUME (cu ft)	0.5272	0.6327

Table 5 — Optional Return/Exhaust Fan Specifications

UNIT SIZE 50P	P030-050			P055-070					P075-100			
RETURN/EXHAUST FAN	Plenum Fan, 47.13 in. (Any motor available on any unit.)											
Quantity...Motor Hp	1...10	1...15	1...20	1...25	1...15	1...20	1...25	1...30	1...20	1...25	1...30	1...40
Motor Frame Size	215T	254T	256T	284T	254T	256T	284T	286T	256T	284T	286T	324T
Efficiency at Full Load (%) High/ Premium	91.7	93	93.6	93.6	93	93.6	93.6	93.6	91.0/93.6	91.7/93.6	92.4/93.6	93.0/93.8
Fan Pulley Pitch Diameter (in.)	6.6	7.4	6.8	8.0	9.1	9.1	9.1	9.1	8.5	9.8	8.5	8.5
Motor Pulley Pitch Diameter (in.)	4.9	6.6	6.6	8.0	5.9	6.1	6.7	6.9	5.3	6.7	6.1	6.7
Shaft Diameter at Pulley (in.)	17/16	17/16	17/16	17/16	111/16	111/16	111/16	111/16	215/16	215/16	215/16	215/16
Resulting Fan Rpm	1300	1540	1700	1730	1150	1200	1300	1327	1104	1209	1271	1396
Maximum Allowable Rpm	1750	1750	1750	1750	1750	1750	1750	1750	1447	1447	1447	1447

Table 6 — Optional High-Capacity Power Exhaust Specifications (50P075-100 Only)

UNIT SIZE 50P	075-100				
POWER EXHAUST	Centrifugal, 22 x 20 in., 111/16 in. shaft diameter (Any motor available on any unit)				
Total Hp	20	30	40	50	60
Quantity...Motor Hp	2...10	2...15	2...20	2...25	2...30
Motor Frame Size	S215T	D254T	S256T	S284T	S286T
Efficiency at Full Load (%) High Efficiency	89.5	91	91	91.7	92.4
Premium Efficiency	91.7	93	93.6	93.6	93.6
Fan Sheave Pitch Diameter (in.)	12.4	12.4	11.1	11.1	11.1
Motor Sheave Pitch Diameter (in.)	4.8	5.8	5.9	6.5	6.9
Resulting Fan Rpm	714	841	928	1020	1094
Maximum Allowable Rpm	1175	1175	1175	1175	1175
Belts — Quantity...Type	2...BX93	2...BX93	2...5VX950	2...5VX950	2...5VX950

Table 7 — Optional Humidi-MiZer® Coil Data

UNIT SIZE 50P	030-075	090,100
Humidi-MiZer Coil Construction	Aluminum Novation® Coil	
Quantity	1	1
Face Area (sq ft)	26.7	33.3

Table 8 — Operating Weights of Options and Accessories

OPTION OR ACCESSORY	50P UNIT SIZE							
	030,035	040,050	055	060	070	075	090	100
Electric Heat*	140	140	140	140	140	250	250	250
Condenser Section Roof Curb	—	—	540	540	625	625	625	625
Economizer	300†	300†	530†	530†	530†	530†	530†	530†
Power Exhaust (PE)	710†	710†	710†	710†	710†	710†	710†	710†
Barometric Relief	200	200	200	200	200	200	200	200
Double Wall Construction	700	800	900	900	900	900	900	900
Roof Curb								
50P Standard Length	390	480	560	560	560	605	605	605
50P with Discharge Plenum	455	495	605	605	605	605	605	605
50P Extended Length	545	545	545	545	545	—	—	—
50P Extended Length with Discharge Plenum	545	545	1200	1200	—	—	—	—
50P with High-Capacity Power Exhaust	—	—	—	—	—	700	700	700
High-Efficiency Filters	20	20	20	20	20	20	20	20
Bag Filters	35	35	40	40	40	—	—	—
Hail Guard	120	150	145	145	210	210	210	210
Inlet Guide Vanes	95	95	115	115	115	115	115	115
Variable Frequency Drive								
7.5 hp	20	20	—	—	—	—	—	—
10 hp	20	20	—	—	—	—	—	—
15 hp	35	35	35	35	35	—	—	—
20 hp	35	35	35	35	35	—	—	—
25 hp	53	53	53	53	53	—	—	—
30 hp	—	—	53	53	53	53	53	53
40 hp	—	—	53	53	53	53	53	53
50 hp	—	—	—	—	—	53	53	53
60 hp	—	—	—	—	—	53	53	53
75 hp	—	—	—	—	—	152	152	152
High-Capacity Evaporator Coil	150	300	300	300	300	300	300	300
Airfoil Fan	—	—	—	—	—	350	350	350
Hot Water Coil*	150	150	180	180	180	180	180	180
Humidi-MiZer Adaptive Dehumidification System	72	72	72	72	72	72	92	92

*Vertical discharge units only.

†Includes hood.

Table 9 — Supply Fan Drive Data

HP	SHAFT DIA (in.)	SPEED (rpm)	MOTOR SHEAVE	MOTOR PITCH DIA. (in.)	WHEEL SHEAVE	WHEEL PITCH DIA. (in.)	QUANTITY ...BELT
Sizes 030-050							
7.5	1 ³ / ₈	438	2BK36	3.4	2B5V136	13.6	2...BX60
10	1 ³ / ₈	549	2B5V42	4.3	2B5V136	13.7	2...5VX630
15	1 ⁵ / ₈	626	2B5V48	4.9	2B5V136	13.7	2...5VX630
20	1 ⁵ / ₈	703	2B5V54	5.5	2B5V136	13.7	2...5VX630
25	1 ⁷ / ₈	830	2B5V64	6.5	2B5V136	13.7	2...5VX650
30*	1 ⁷ / ₈	910	3B5V64	6.5	3B5V124	12.5	3...5VX630
Sizes 055-070							
15	1 ⁵ / ₈	575	2B5V44	4.5	2B5V136	13.7	2...5VX1230† 2...5VX1120**
20	1 ⁵ / ₈	651	2B5V50	5.1	2B5V136	13.7	2...5VX1230† 2...5VX1150**
25	1 ⁷ / ₈	703	2B5V54	5.5	2B5V136	13.7	2...5VX1230† 2...5VX1150**
30	1 ⁷ / ₈	711	2B5V62	5.9	2B5V154	15.5	2...5VX1230† 2...5VX1180**
40	2 ¹ / ₈	740	3B5V66	6.7	3B5V160	16.1	3...5VX1250† 3...5VX1180**
Sizes 075-100 (Forward Curved Fan)							
30	1 ⁷ / ₈	501	3B5V52	5.33	B5V184	18.5	3...5VX1320
40	2 ¹ / ₈	539	4B5V56	5.74	B5V184	18.5	4...5VX1320
50	2 ¹ / ₈	615	4B5V64	6.54	B5V184	18.5	4...5VX1320
60	2 ³ / ₈	672	4B5V70	7.14	B5V184	18.5	4...5VX1320
Sizes 075-100 (Airfoil Fan)							
30	1 ⁷ / ₈	1353	2B5V74	7.5	2Q5V97	9.7	2...5VX1150
40	2 ¹ / ₈	1493	2B5V86	8.7	2Q5V103	10.2	2...5VX1180
50	2 ¹ / ₈	1593	3B5V80	8.1	3R5V90	8.9	3...5VX1150
60	2 ³ / ₈	1711	3B5V86	8.7	3R5V90	8.9	3...5VX1150
75	2 ³ / ₈	1799	3B5V110	11.1	3R5V109	10.8	3...5VX1230

*Sizes 040,050 only.

†Horizontal discharge units.

**Vertical discharge and extended plenum units.

NOTE: Part numbers are Browning Manufacturing Corp. reference.

Table 10 — Optional Power Exhaust Fan Drive Data

TOTAL HP	MOTOR QTY...HP	MOTOR SHAFT DIAMETER (in.)	FAN SPEED RPM	MOTOR SHEAVE		BLOWER SHEAVE		50P2,P3 UNITS		50P4,P5 UNITS	
				Part Number	Pitch Diameter (in.)	Part Number	Pitch Diameter (in.)	BELTS QTY...P/N	CENTER DISTANCE RANGE (in.)	BELTS QTY...P/N	CENTER DISTANCE RANGE (in.)
Sizes 030-050											
6*	2...3	7/8	656/500	1VL44	4.1-3.1	BK115	11.0	1...BX71	23.62-26.50	1...BX46	11.40-13.26
6†	2...3	1 ¹ / ₈	656/500	1VP44L	4.1-3.1	BK115	11.0	1...BX71	23.62-26.50	1...BX46	11.40-13.26
10**	2...5	1 ¹ / ₈	785/621	1VP50L	4.7-3.7	BK110	10.4	1...BX71	23.62-26.50	1...BX46	11.16-13.05
15**	2...7.5	1 ³ / ₈	882/717	1VP65	6.0-4.8	BK130	12.0	1...BX77	23.62-26.50	1...BX53	11.40-13.26
20**	2...10	1 ³ / ₈	1000/854	1VP75	7.0-5.8	BK130	12.0	1...BX79	23.62-26.50	1...BX53	11.04-12.95
Sizes 055-100											
10	2...5	1 ¹ / ₈	740	2P3V45	4.5	2Q3V106	10.6	2...3VX71	22.71-26.38	2...3VX50	10.91-13.30
15	2...7.5	1 ³ / ₈	820	2P3V50	5.0	2Q3V106	10.6	2...3VX71	22.71-26.38	2...3VX50	10.78-13.20
20	2...10	1 ³ / ₈	920	2P3V56	5.6	2Q3V106	10.6	2...3VX75	22.71-26.38	2...3VX50	10.78-13.20

*High Efficiency Motor Option.

†Premium Efficiency Motor Option.

**Applies to both motor options.


NOTE: Part numbers are Browning Manufacturing Corp. reference.

Table 11 — Optional High-Capacity Power Exhaust Fan Drive Data

TOTAL HP	MOTOR QTY...HP	MOTOR SHAFT DIA. (in.)	SPEED RPM	MOTOR SHEAVE		BLOWER SHEAVE		QTY...BELT	CENTER DISTANCE RANGE (in.)
				Part Number	Pitch Diameter (in.)	Part Number	Pitch Diameter (in.)		
20	2...10	1.375	714	2B5V48	4.8	2B5V124	12.4	2...BX93	32.8 to 36.7
30	2...15	1.625	841	2B5V58	5.8	2B5V124	12.4	2...BX93	32.6 to 36.5
40	2...20	1.625	928	2B5V58	5.9	2B5V110	11.1	2...5VX950	32.6 to 36.5
50	2...25	1.875	1020	2B5V64	6.5	2B5V110	11.1	2...5VX950	32.5 to 36.3
60	2...30	1.875	1094	2B5V68	6.9	2B5V110	11.1	2...5VX950	32.5 to 36.3

Table 12 — Optional Return/Exhaust Fan Drive Data

TOTAL HP	MOTOR QTY...HP	MOTOR SHAFT DIA. (in.)	SPEED RPM	MOTOR SHEAVE		BLOWER SHEAVE		QTY...BELT	CENTER DISTANCE RANGE (in.)
				Part Number	Pitch Diameter (in.)	Part Number	Pitch Diameter (in.)		
P030-050									
10	1...10	1.375	1300	2B5V48	4.9	D4700	6.6	2...BX80	31.3 to 34.20
15	1...15	1.625	1540	2B5V66	6.6	2BK80	7.4	2...BX86	38.2 to 35.7
20	1...20	1.625	1700	2B5V66	6.6	D4720	6.8	2...BX85	38.2 to 35.7
25	1...25	1.875	1730	2B5V80	8.0	2B5V808	8.0	2...BX90	33.0 to 35.9
P055-070									
15	1...15	1.625	1150	2B5V58	5.9	2B5V90	9.1	2...5VX950	34.8 to 37.7
20	1...20	1.625	1200	2B5V60	6.1	2B5V90	9.1	2...5VX950	34.8 to 37.7
25	1...25	1.875	1300	2B5V66	6.7	2B5V90	9.1	2...5VX1000	35.6 to 38.5
30	1...30	1.875	1327	2B5V68	6.9	2B5V90	9.1	2...5VX1000	35.6 to 38.5
P075-100									
20	1...20	1.625	1104	3B5V52	5.3	3R5V85	8.5	3...5VX1000	38.1 to 41.0
25	1...25	1.875	1209	3B5V66	6.7	3R5V97	9.8	3...5VX1060	38.9 to 41.8
30	1...30	1.875	1271	3B5V60	6.1	3R5V85	8.5	3...5VX1030	38.9 to 41.8
40	1...40	2.125	1396	3B5V66	6.7	3R5V85	8.5	3...5VX1060	39.9 to 42.8

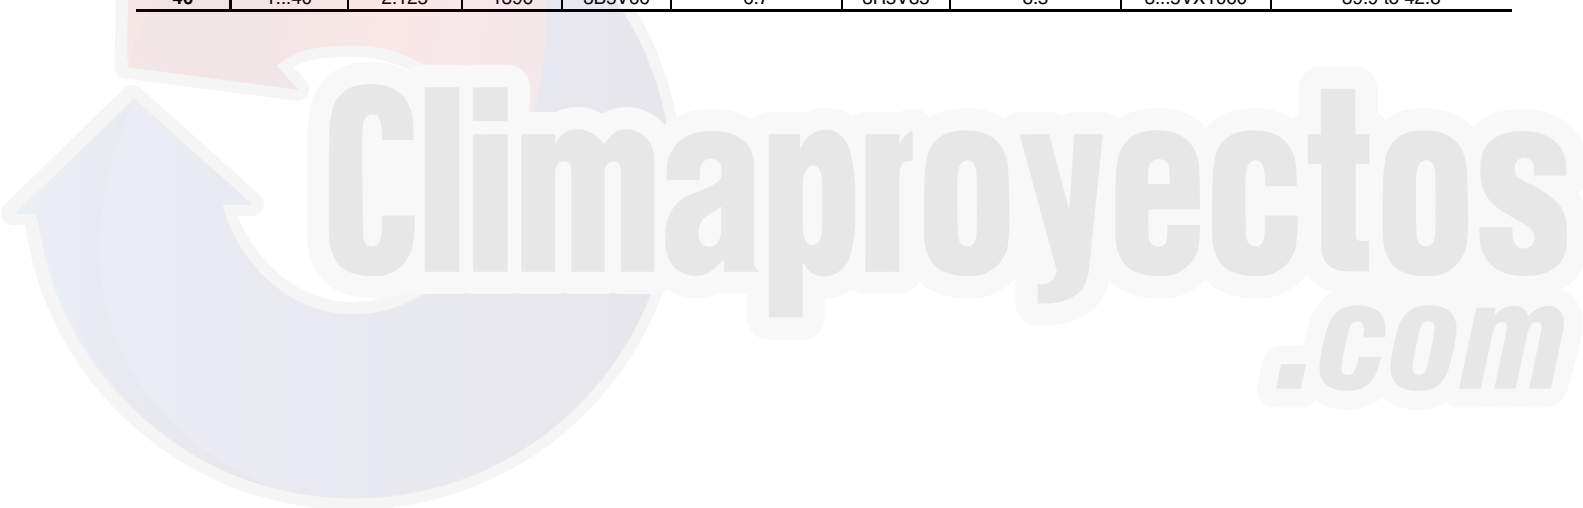

NOTES:

1. ROOF CURB IS SHIPPED DISASSEMBLED.
2. ROOF CURB: 14 GA. (VA03-56) STL.
3. DIMENSIONS IN () ARE MILLIMETERS.


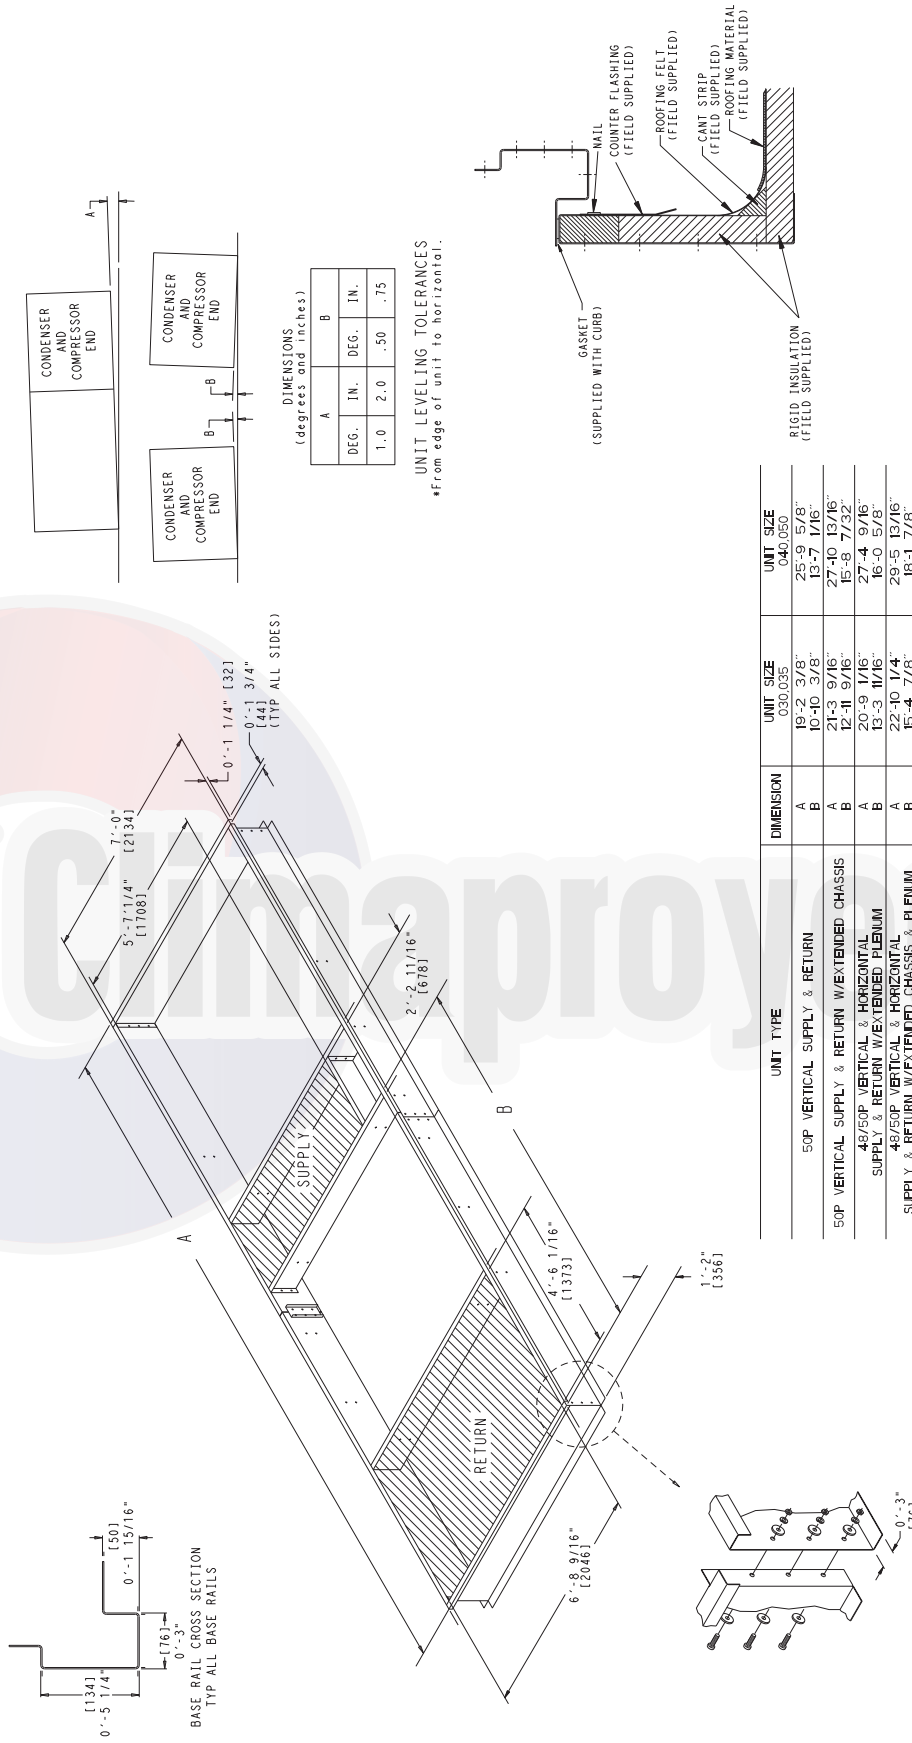


Fig. 1 — Roof Curb — Sizes 030-050

- NOTES:
1. ROOF CURB IS SHIPPED DISASSEMBLED.
 2. ROOF CURB: 1.4 GA. (VA03-56) STL.
 3. DIMENSIONS IN [] ARE MILLIMETERS.

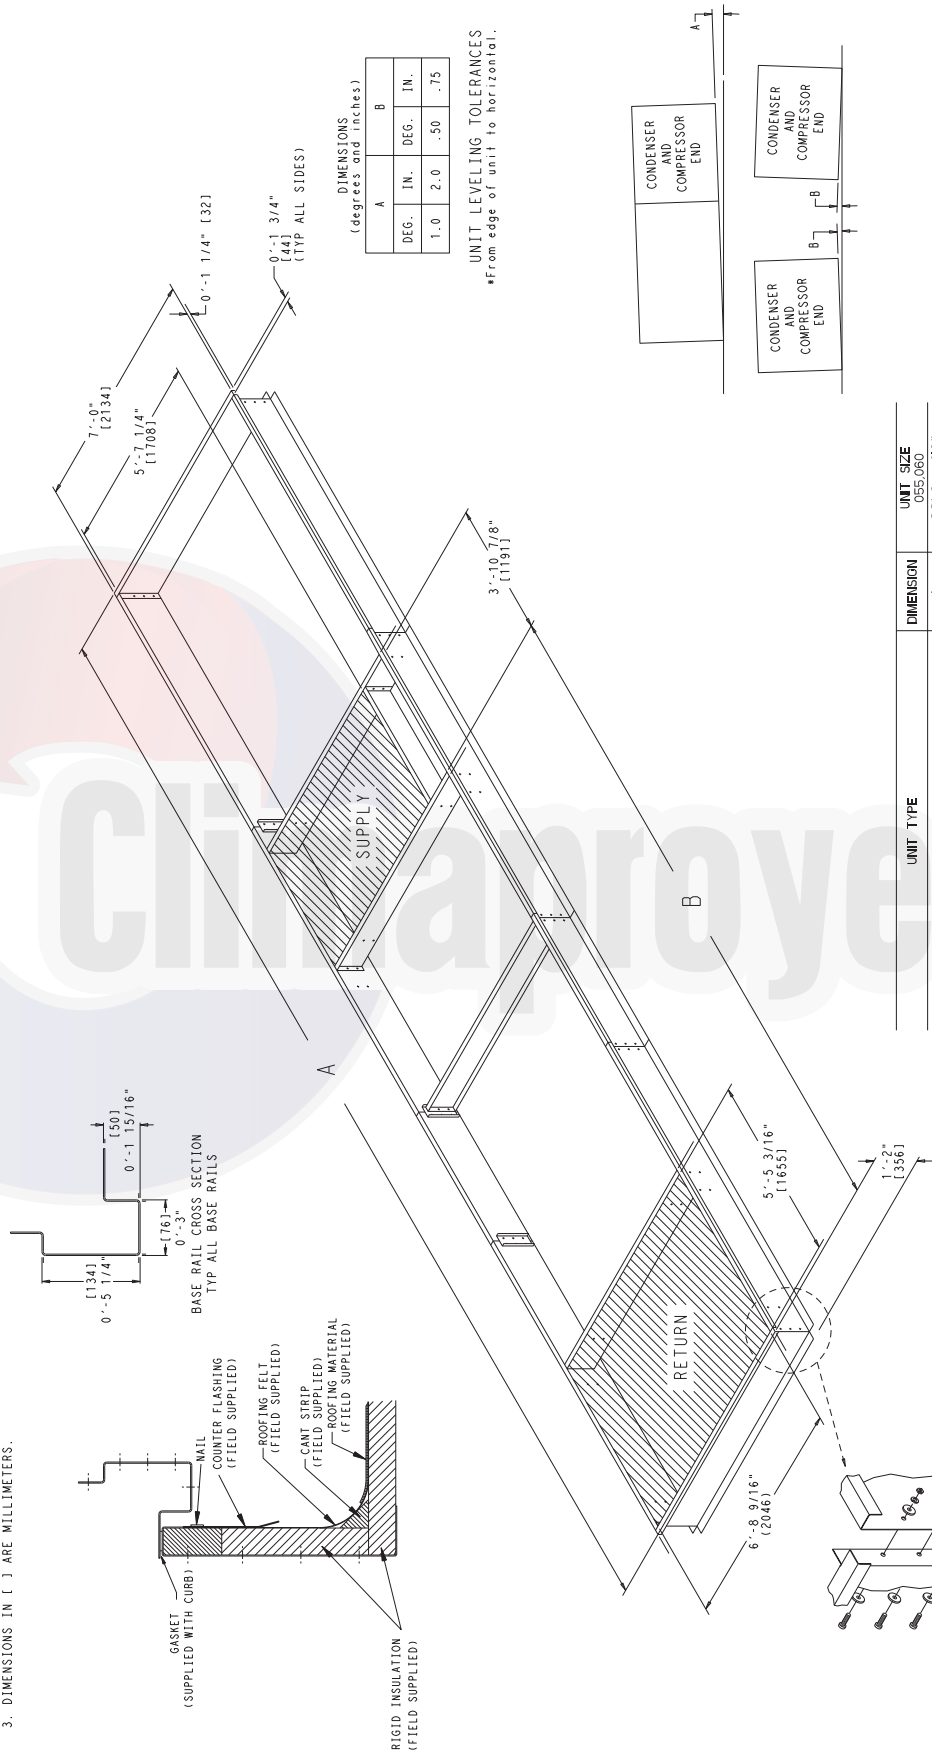


UNIT TYPE	DIMENSION	UNIT SIZE
50P VERTICAL SUPPLY & RETURN	A	32-6 7/16"
	B	19-5 9/16"
50P VERTICAL SUPPLY & RETURN W/EXTENDED CHASSIS	A	34-7 5/8"
	B	21-6 3/4"
48/50P VERTICAL & HORIZONTAL SUPPLY & RETURN W/EXTENDED PLENUM	A	35-11 1/16"
	B	22-10 3/16"
48/50P VERTICAL & HORIZONTAL SUPPLY & RETURN W/EXTENDED CHASSIS & PLENUM	A	38-0 1/4"
	B	24-11 3/8"

Fig. 2 — Roof Curb — Sizes 055, 060

(CORNER CONNECTIONS AND SPLICE PLATE CONNECTIONS)

- NOTES:
1. ROOF CURB ACCESSORY IS SHIPPED DISASSEMBLED.
 2. ROOF CURB: 14 GA. (1VA03-561 STL).
 3. DIMENSIONS IN \square ARE MILLIMETERS.
 4. SUGGESTED HOLE LOCATION FOR FIELD WIRING THROUGH ROOF CURB (HOLES TO BE SUPPLIED BY FIELD).
 5. COVER TO BE INSTALLED AFTER SUPPLY DISCHARGE.

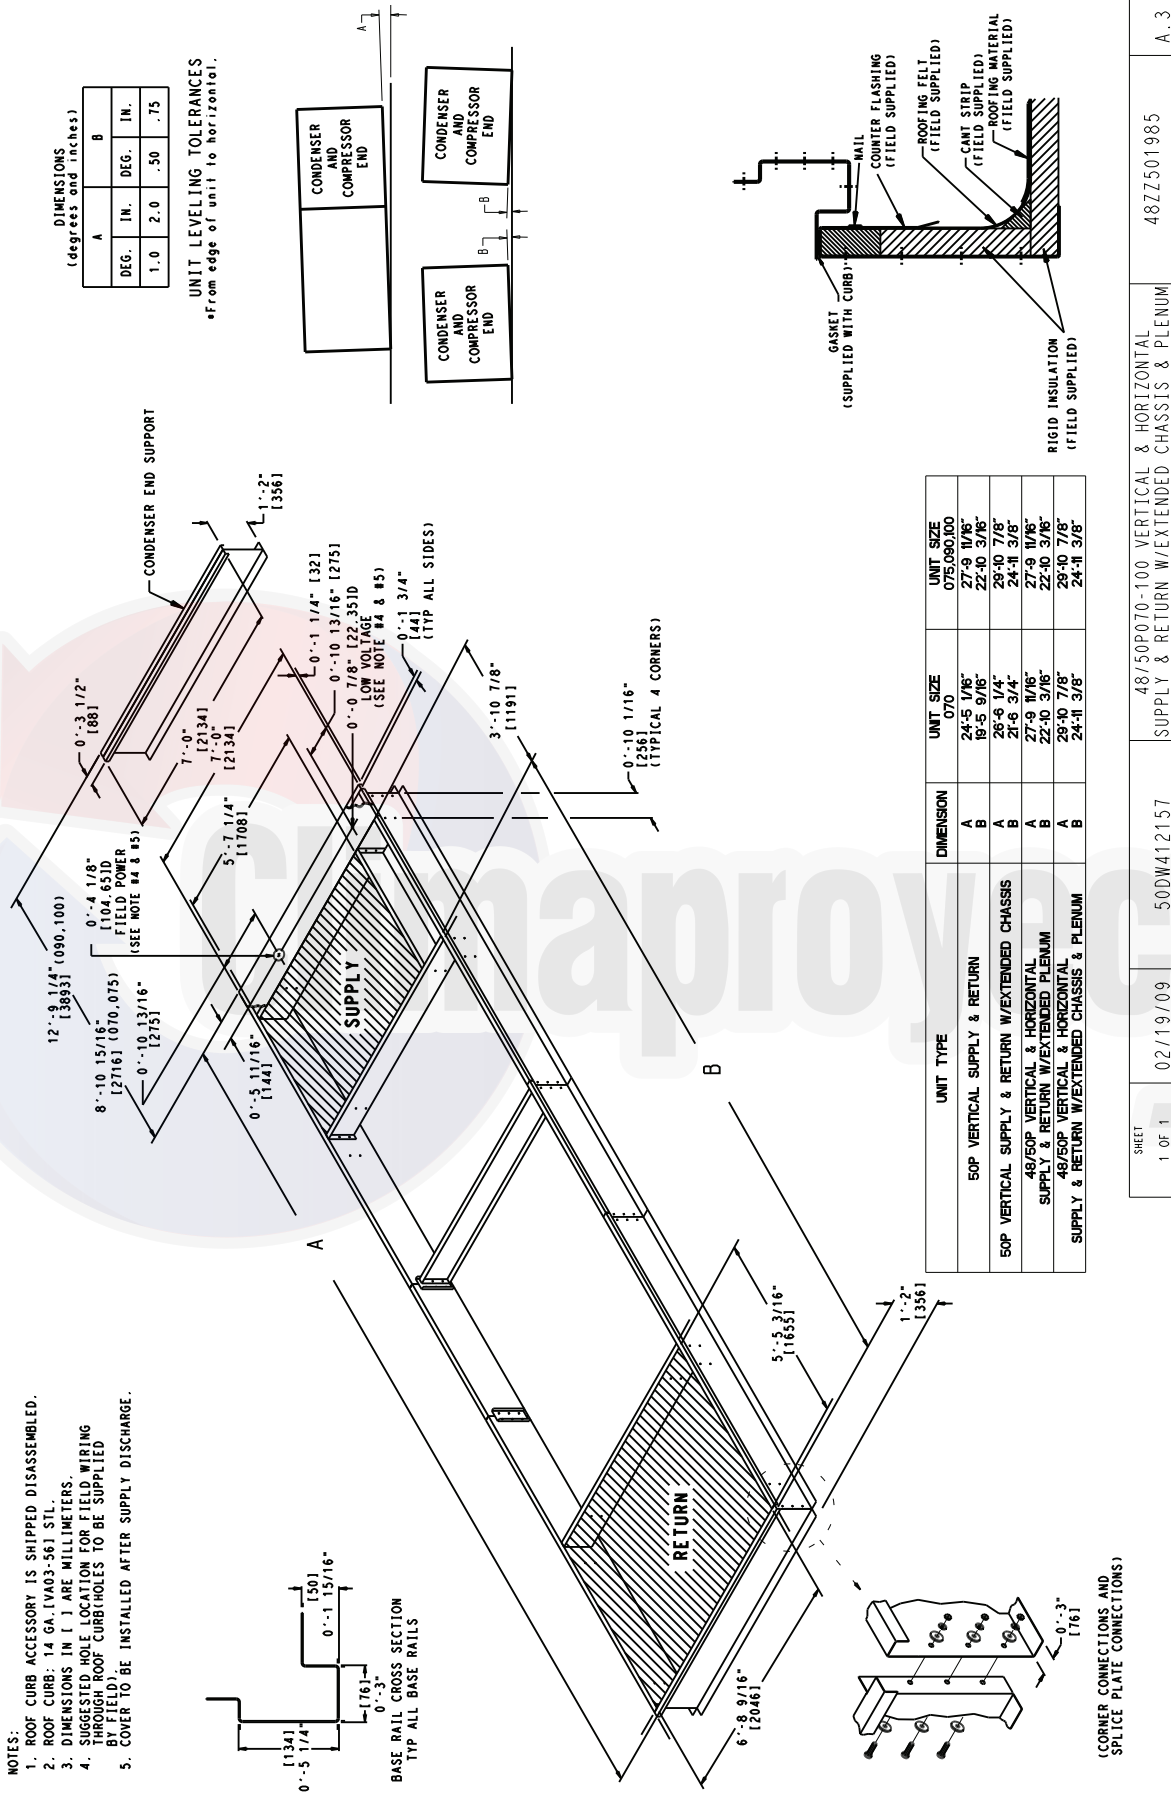

DIMENSIONS (degrees and inches)

A		B	
DEG.	IN.	DEG.	IN.
1.0	2.0	.50	.75


UNIT LEVELING TOLERANCES
 *From edge of unit to horizontal.

UNIT TYPE	DIMENSION	UNIT SIZE	UNIT SIZE
50P VERTICAL SUPPLY & RETURN	A	24-5 1/8"	075,080,100
	B	19-5 9/16"	27-9 1/8"
50P VERTICAL & RETURN W/EXTENDED CHASSIS	A	26-9 1/4"	22-10 3/8"
	B	21-6 3/4"	28-10 7/8"
48/50P VERTICAL & HORIZONTAL SUPPLY & RETURN W/EXTENDED PLENUM	A	27-9 1/8"	24-11 3/8"
	B	22-10 3/8"	27-9 1/8"
48/50P VERTICAL & HORIZONTAL SUPPLY & RETURN W/EXTENDED CHASSIS & PLENUM	A	28-10 7/8"	22-10 3/8"
	B	24-11 3/8"	28-10 7/8"

SHEET	02/19/09	50DW412157	48/50P070-100 VERTICAL & HORIZONTAL SUPPLY & RETURN W/EXTENDED CHASSIS & PLENUM	487Z501985	A.3
-------	----------	------------	---	------------	-----

Fig. 3 — Roof Curb — Sizes 070-100

- NOTES:
1. ROOF CURB ACCESSORY CRRFCURB070A00 IS SHIPPED DISASSEMBLED.
 2. DIMENSIONS IN () ARE MILLIMETERS.
 3. ROOF CURB: 14 GA. (VA03-56) STL.
 - ROOF CURB PANS: 16 GA. (VA03-56) STL.

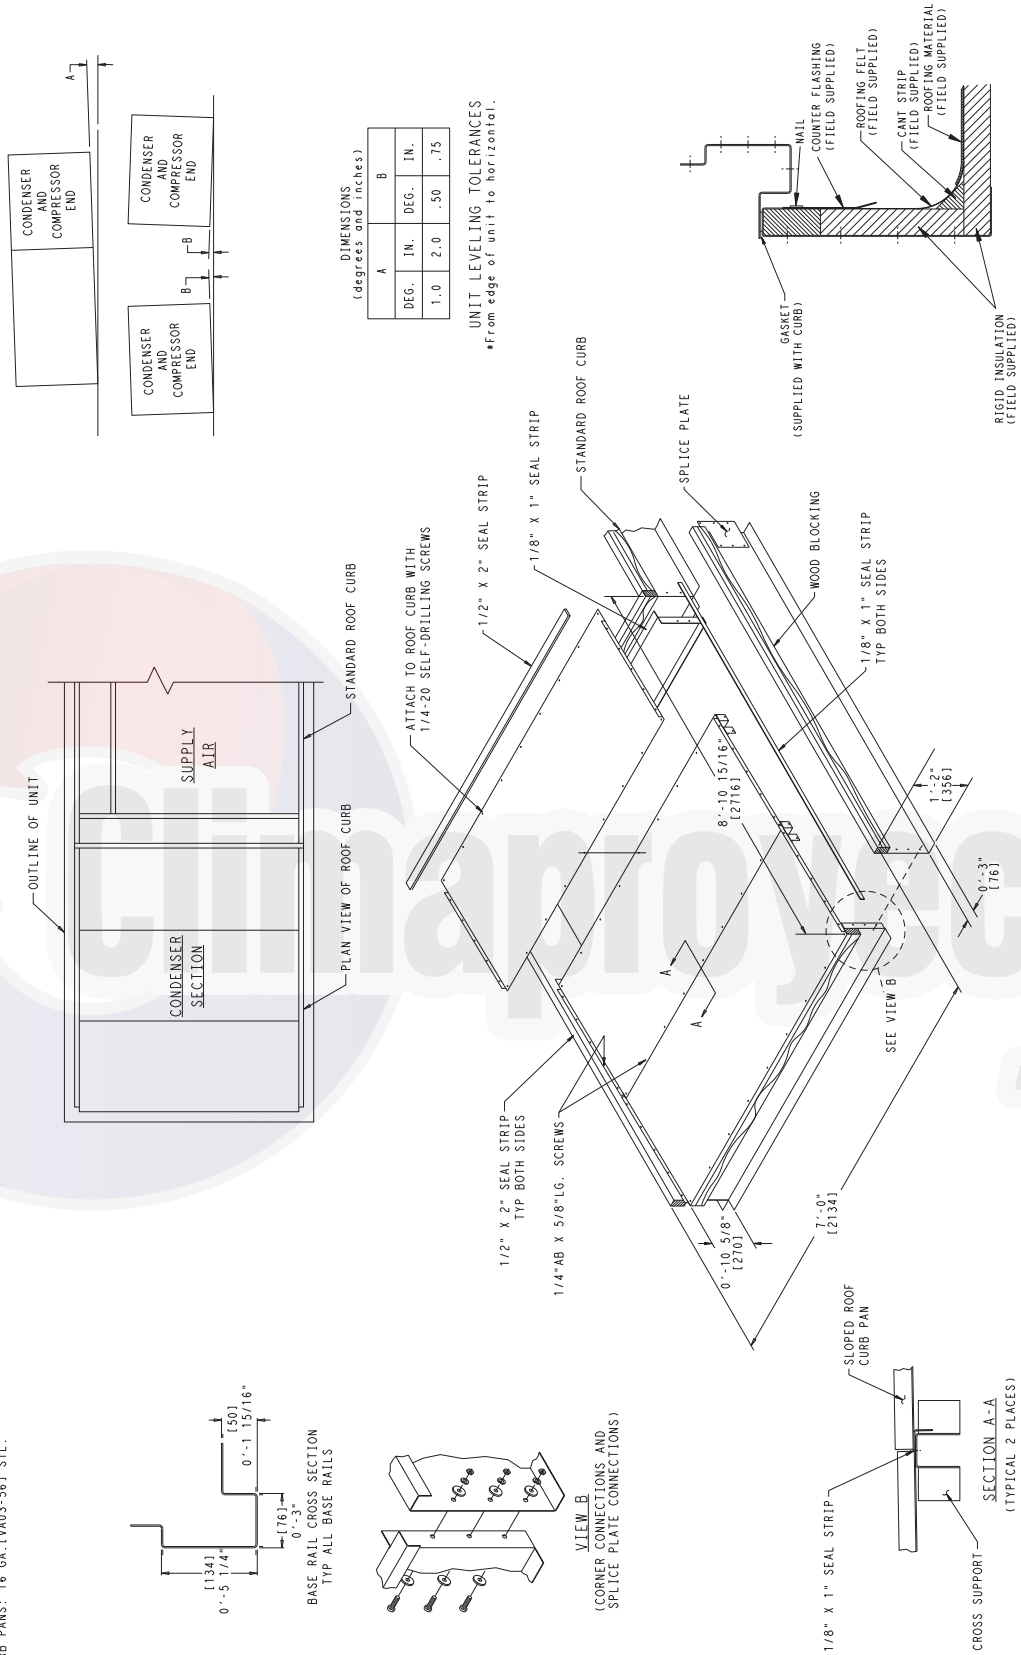

DIMENSIONS (degrees and inches)

A		B	
DEG.	IN.	DEG.	IN.
1.0	2.0	.50	.75

UNIT LEVELING TOLERANCES
 *From edge of unit to horizontal.

Fig. 4 — Condenser Section Roof Curb (Sizes 070 and 075)

- NOTES:
1. ROOF CURB ACCESSORY CRRCURB071A00 IS SHIPPED DISASSEMBLED.
 2. DIMENSIONS IN [] ARE MILLIMETERS.
 3. ROOF CURB: 14 GA. [VA03-56] STL.
ROOF CURB PANS: 16 GA. [VA03-56] STL.

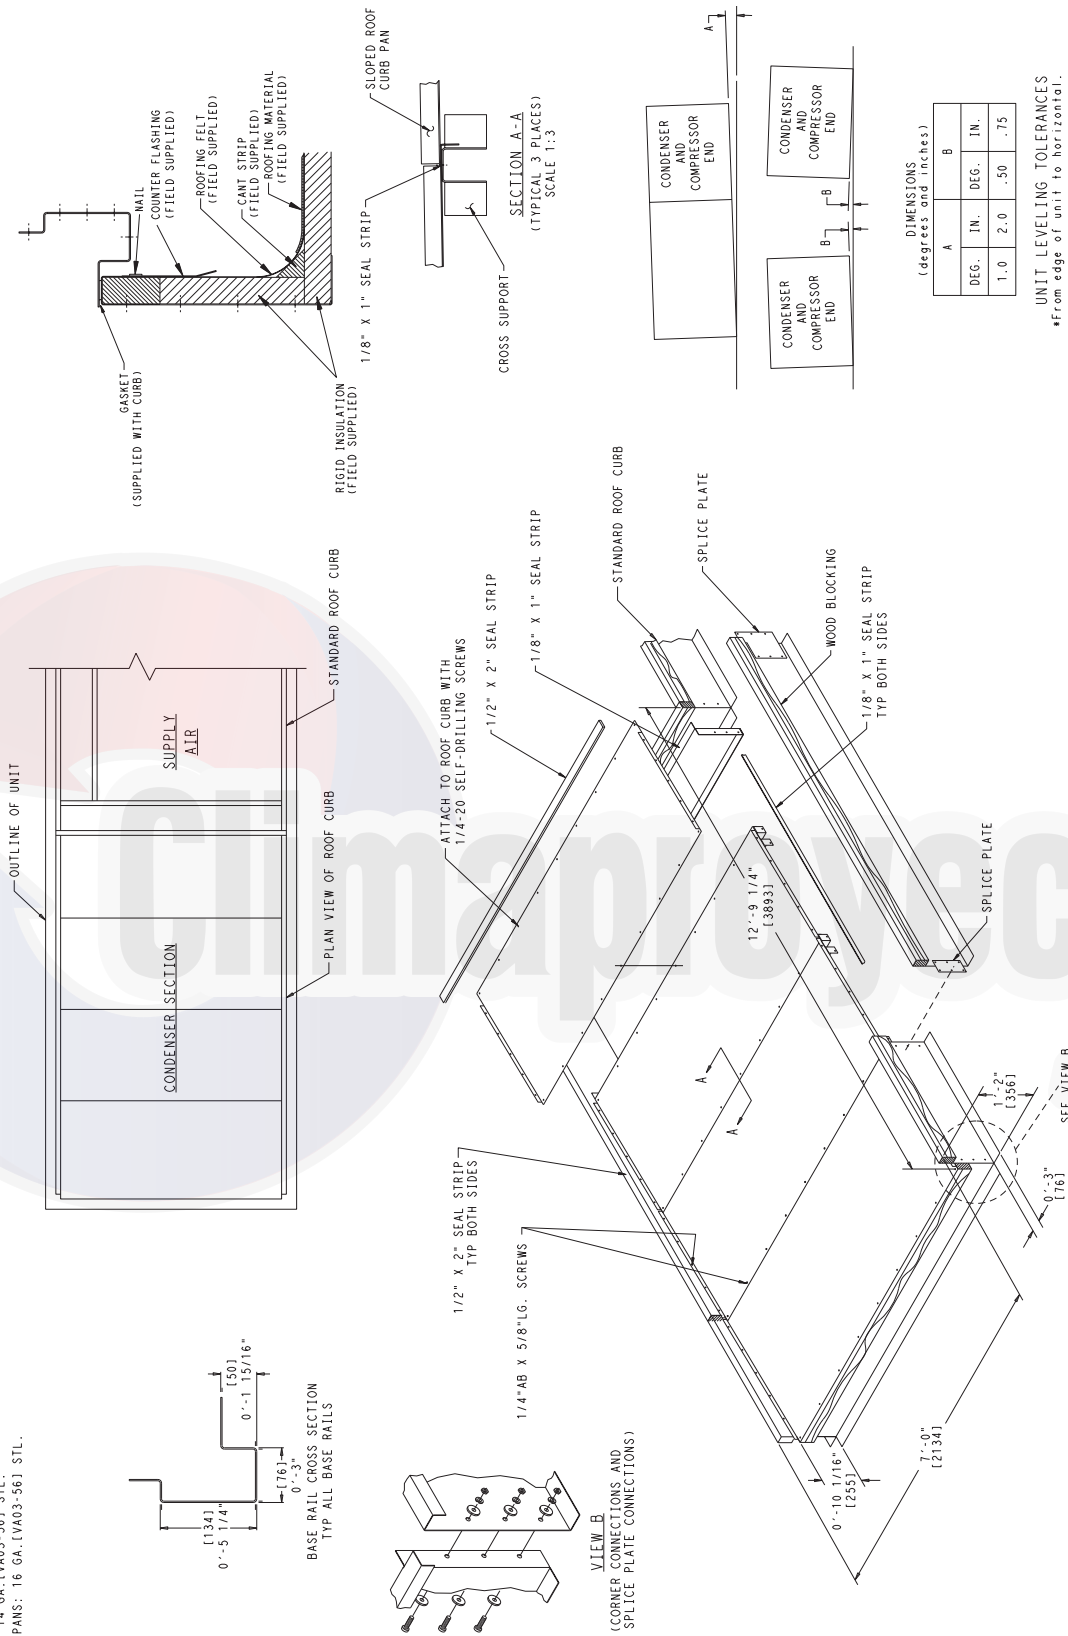


Fig. 5 — Condenser Section Roof Curb (Sizes 090 and 100)

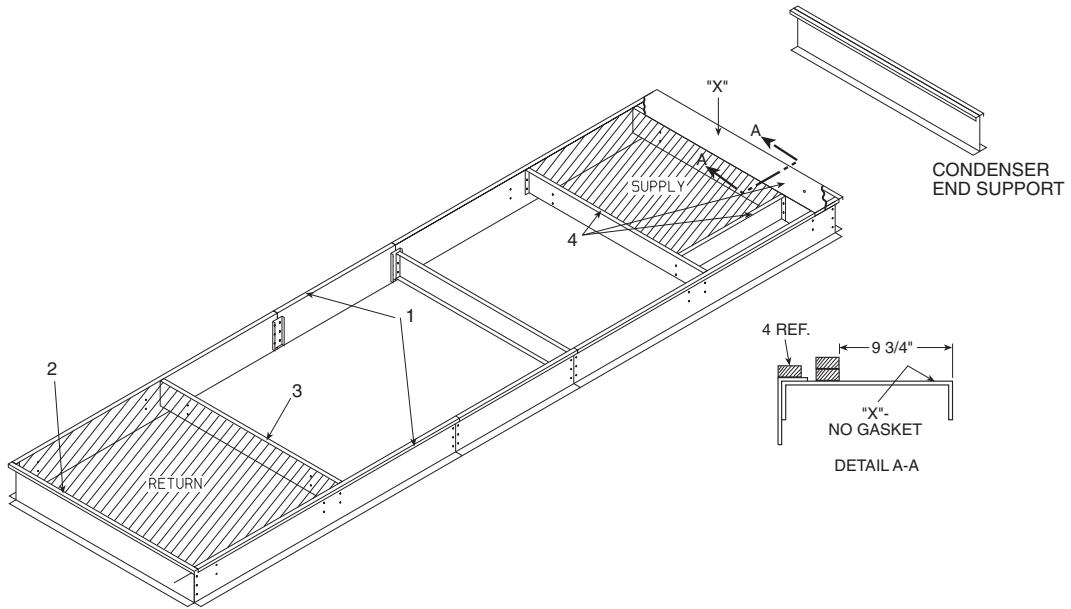


Fig. 6 — Gasket Location on Roof Curb (Size 070-100 Units)

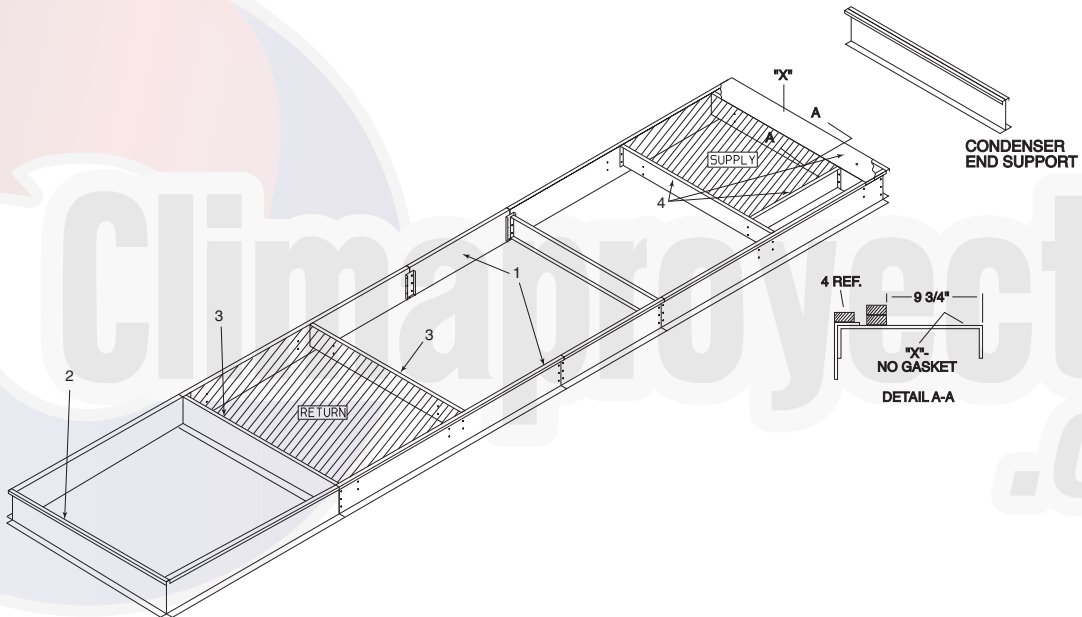


Fig. 7 — Gasket Location on Roof Curb (Size 075-100 Units with Optional High-Capacity Power Exhaust)

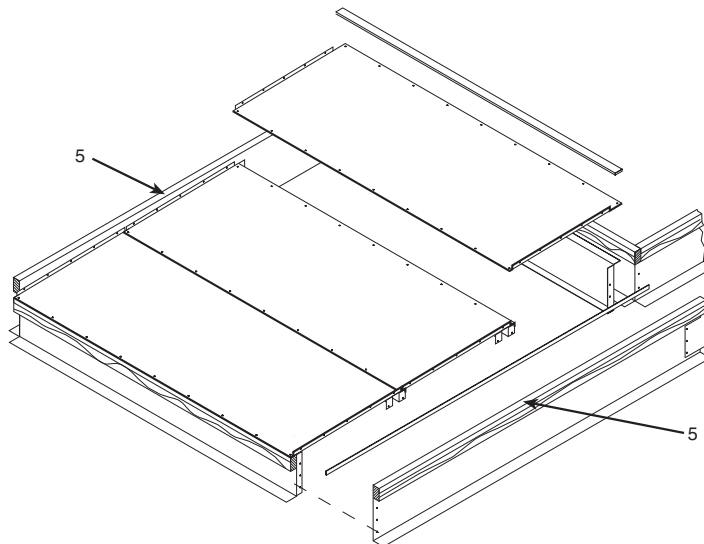


Fig. 8 — Gasket Location — Condenser Section Roof Curb (Size 070-100 Units)

Step 6 — Field-Fabricate Ductwork

WARNING

For vertical supply and return units, tools or parts could drop into ductwork and cause an injury. Install a 90-degree elbow in the return ductwork between the unit and the conditioned space. If a 90-degree elbow cannot be installed, then a grille of sufficient strength and density should be installed to prevent objects from falling into the conditioned space. Due to electric heater, supply duct will require 90-degree elbow. Failure to follow these instructions could result in personal injury or property damage due to fire or falling objects.

NOTE: A 90-degree elbow must be provided in the supply ductwork to comply with UL (Underwriters Laboratories) codes for use with electric heat.

VERTICAL SUPPLY/RETURN

The 50P2,P3,P6,P7 units are designed for vertical supply/return only. Field-fabricated ductwork must be attached to the roof curb, or to the support steel, prior to the final rigging and installation of the unit. Supply and return duct dimensions are shown in Fig. 1-3.

To attach ductwork to roof curb, insert duct approximately 10 to 11 in. up into roof curb. Connect ductwork to 14-gage roof curb material with sheet metal screws driven from inside the duct.

Secure all ducts to the building structure, using flexible duct connectors between roof curbs and ducts as required. Ducts passing through an unconditioned space must be insulated and covered with a vapor barrier. Outlet grilles must not lie directly below unit discharge.

Design supply duct strong enough to handle expected static pressures.

HORIZONTAL SUPPLY/RETURN

The 50P4,P5,P8,P9 units are designed for horizontal return (end of unit) and horizontal supply (left hand side of unit). Units are shipped with sheet metal duct opening covers. Units are provided with duct flanges on each opening. Ductwork should be connected directly to the unit duct flanges after the unit has been rigged, positioned, and installed. Remove and discard duct covers prior to connecting ductwork. Supply and return duct dimensions are shown in Base Unit Dimensional Drawings on pages 22-31.

To attach ductwork to unit flanges, insert duct approximately 3-in. over the flanges. Connect ductwork to 14-gage flanges with sheet

metal screws driven from outside of the duct. Add sealant or caps to sharp points on screws where appropriate for technician safety.

Secure all ducts to the building structure, using flexible duct connectors between roof curbs and ducts as required. Ducts passing through an unconditioned space must be insulated and covered with a vapor barrier.

Design supply duct strong enough to handle expected static pressures.

HORIZONTAL SUPPLY/VERTICAL RETURN WITH OPTIONAL RETURN/EXHAUST FAN

The 50P4,P5 units with return/exhaust fan are designed for vertical return and horizontal supply (left hand side of unit). Units are shipped with sheet metal duct opening cover for the horizontal supply. Units are provided with duct flanges on the supply opening. Ductwork should be connected directly to the unit duct flanges after the unit has been rigged, positioned and installed. Remove and discard duct covers prior to connecting ductwork. Field-fabricated ductwork must be attached to the return roof curb, on to the support steel, prior to the final rigging and installation of the unit. Return duct dimensions are shown in Fig. 3.

To attach ductwork to roof curb, insert duct approximately 10 to 11-in. up into roof curb. Connect ductwork to 14-gage roof curb material with sheet metal screws driven from inside the duct. To attach ductwork to unit flanges, insert duct approximately 3-in. over the flanges. Connect ductwork to 14-gage flanges with sheet metal screws driven from outside of the duct. Add sealant or caps to sharp points on screws where appropriate for technician safety.

Secure all ducts to the building structure, using flexible duct connectors between roof curbs and ducts, as required. Ducts passing through an unconditioned space must be insulated and covered with a vapor barrier. Outlet grilles must not lie directly below unit discharge. The return duct must have a 90-degree elbow before opening into the building space if the unit is equipped with power exhaust.

Design supply duct strong enough to handle expected static pressures.


Step 7 — Rig Unit

Do not drop unit; keep upright. Use spreader bars over unit to prevent sling or cable damage. Sheets of plywood placed along the condenser coils will provide additional protection. All lifting lugs MUST be used when lifting unit. Level by using unit frame as a reference. See Fig. 9 and 10 for information. Unit and accessory weights are shown in Tables 1-3 and 8. Weight distribution and center of gravity can be found in Fig. 11.

⚠ CAUTION - NOTICE TO RIGGERS: ALL PANELS MUST BE IN PLACE WHEN RIGGING.

NOTE: Rig with four cables and spread with two 95 inch (2413 MM) spreader bars.

1,2,3	Position 4	5	Units	Size	Weight				Center of Gravity Dimensions				Lifting Lugs	
					Lbs		Kgs		Inches		Millimeters		Inches	Millimeters
					A	B	C	D	E	F				
48P	2,3,4,5 6,7,8,9	B,D,H	48 P2, P3, P4, P5, P6,P7,P8,P9 Vertical Supply/ Return Horizontal Supply/ Return Low Gas Heat	30 35 40 50 55 60 70	6019 6169 6710 6925 9220 9275 9615	2733 2801 3046 3144 4186 4211 4365	170.6 170.9 198.2 198.0 228.9 228.9 244.7	4334 4342 5035 5029 5914 5903 6215	45.8 45.8 45.8 45.8 45.8 45.8 45.8	1164 1164 1164 1164 1164 1021 1021	166.4 166.4 185.3 185.3 257.5 257.5 219.0	4227 4227 4707 4707 6541 6541 5563		
48P	2,3,4,5 6,7,8,9	C,E,J	48 P2, P3, P4, P5, P6,P7,P8,P9 Vertical Supply/ Return Horizontal Supply/ Return High Gas Heat	30 35 40 50 55 60 70	6149 6299 6840 7055 9350 9405 9745	2792 2860 3105 3203 4245 4270 4424	168.7 170.0 197.3 200.4 228.0 228.5 244.8	4310 4319 5012 5090 5916 5805 6218	45.8 45.8 45.8 45.8 45.8 45.8 45.8	1164 1164 1164 1164 1164 1021 1021	166.4 166.4 185.3 185.3 257.5 257.5 219.0	4227 4227 4707 4707 6541 6541 5563		
48P	2,3,4,5 6,7,8,9	P,R,W	48 P2, P3, P4, P5, P6,P7,P8,P9 Vertical Supply/ Return Horizontal Supply/ Return Low Gas Heat Extended Chassis	30 35 40 50 55 60 70	6519 6669 7210 7425 9770 9825 10165	2960 3028 3273 3371 4436 4461 4615	187.1 187.7 214.8 217.8 242.7 242.2 258.3	4753 4768 5456 5532 6164 6151 6562	45.8 45.8 45.8 45.8 45.8 45.8 45.8	1164 1164 1164 1164 1164 1164 1021	191.6 191.6 208.2 208.2 273.2 273.2 250.2	4867 4867 5288 5288 6939 6939 6355		
48P	2,3,4,5 6,7,8,9	Q,S,X	48 P2, P3, P4, P5, P6,P7,P8,P9 Vertical Supply/ Return Horizontal Supply/ Return High Gas Heat Extended Chassis	30 35 40 50 55 60 70	6649 6799 7340 7555 9900 9955 10295	3019 3087 3332 3430 4495 4520 4674	186.1 186.7 213.8 216.8 242.7 242.3 258.4	4726 4742 5431 5507 6166 6153 6564	45.8 45.8 45.8 45.8 45.8 45.8 45.8	1164 1164 1164 1164 1164 1164 1021	191.6 191.6 208.2 208.2 273.2 273.2 250.2	4867 4867 5288 5288 6939 6939 6355		
50P	2,3,6,7	-A,B,C	50 P2, P3, P6, P7 Vertical Supply/ Return	30 35 40 50 55 60 70	5519 5689 6210 6425 8230 8285 8625	2506 2574 2819 2917 3736 3761 3916	159.2 159.4 186.1 193.3 212.6 212.3 250.5	4043 4049 4727 4907 5401 5392 6362	45.8 45.8 45.8 45.8 45.8 45.8 45.8	1164 1164 1164 1164 1164 1164 1021	148.1 148.1 169.5 169.5 210.5 210.5 176.5	3762 3762 4305 4305 5347 5347 4483		
50P	2,3,6,7	H	50 P2, P3, P6,P7 Vertical Supply/ Return w/ Ext Plenum	30 35 40 50 55 60 70	5819 5989 6510 6725 8780 8835 9175	2642 2710 2956 3053 3986 4011 4165	152.3 152.1 180.2 183.6 231.7 231.3 247.5	3867 3863 4576 4665 5885 5874 6287	45.8 45.8 45.8 45.8 45.8 45.8 45.8	1164 1164 1164 1164 1164 1164 1021	166.4 166.4 185.3 185.3 257.5 257.5 219.0	4227 4227 4707 4707 6541 6541 5563		
50P	2,3,6,7	R,S,T,V,W	50 P2, P3, P6, P7 Vertical Supply/ Return w/ Extended Chassis	30 35 40 50 55 60 70	6019 6169 6710 6925 9220 9275 9615	2733 2801 3046 3144 4186 4211 4365	175.4 175.2 205.8 205.8 226.0 225.6 264.8	4456 4475 5228 5228 5741 5731 6725	45.8 45.8 45.8 45.8 45.8 45.8 45.8	1164 1164 1164 1164 1164 1164 1021	173.3 173.3 194.7 194.7 208.2 208.2 201.7	4402 4402 4945 4945 5288 5288 5123		
50P	2,3,6,7	P,Y R,W	50 P2, P3, P6, P7 Vertical Supply/ Return w/ Ext Plenum w/ Extended Chassis 50 P4, P5, P8, P9 Horizontal Supply/ Return w/ Extended Chassis	30 35 40 50 55 60 70	6319 6469 7010 7225 9330 9385 9725	2869 2937 3183 3280 4236 4261 4415	166.8 167.1 195.3 198.8 245.1 244.7 260.8	4237 4244 4961 5050 6226 6214 6625	45.8 45.8 45.8 45.8 45.8 45.8 45.8	1164 1164 1164 1164 1164 1164 1021	191.6 191.6 208.2 208.2 273.2 273.2 201.7	4867 4867 5288 5288 6939 6939 5123		
50P	2,3,6,7	-A,B,C	50 P2, P3, P6, P7 Vertical Supply/ Return w/ RE Fan	30 35 40 50 55 60 70	6394 6544 7085 7300 9458 9513 9853	2803 2971 3217 3314 4294 4319 4473	156.7 158.9 185.1 188.0 211.0 210.5 245.0	4030 4037 4703 4776 5358 5347 6325	45.8 45.8 45.8 45.8 45.8 45.8 45.8	1164 1164 1164 1164 1164 1164 1021	191.6 191.6 208.2 208.2 273.2 273.2 250.2	4867 4867 5288 5288 6939 6939 6355		
48P	2,3,6,7	B,D,H	48 P2, P3, P6, P7 Low Gas Heat Vertical Supply/ Return	30 35 40 50 55 60	6894 7044 7585 7800 10448 10503	3130 3198 3444 3541 4743 4768	170.1 170.5 197.3 197.2 227.3 226.8	4321 4330 5013 5008 5774 5790	45.8 45.8 45.8 45.8 45.8 45.8	1164 1164 1164 1164 1164 1164	191.6 191.6 208.2 208.2 273.2 273.2	4867 4867 5288 5288 6939 6939		
48P	2,3,6,7	C,E,J	48 P2, P3, P6, P7 High Gas Heat Vertical Supply/ Return	30 35 40 50 55 60 70	10843 7074 7174 7715 9930 10633 10973	4923 3189 3257 3503 3600 4827 4982	243.0 159.2 169.6 196.5 199.3 226.9 243.2	6173 4288 4307 4990 5061 5763 6176	40.2 45.8 45.8 45.8 45.8 45.8 40.2	1070 1164 1164 1164 1164 1164 1021	250.2 273.2 273.2 208.2 208.2 273.2 250.2	6355 4867 4867 5288 5288 6939 6355		
50P	2,3,6,7	R,S,T,V,W	50 P2, P3, P6, P7 Vertical Supply/ Return w/ Extended Chassis w/ Return Fan	30 35 40 50 55 60 70	6894 7044 7585 7800 10008 10063 10403	3130 3198 3444 3541 4544 4569 4723	176.6 179.9 207.4 210.6 230.0 229.6 263.4	4486 4570 5268 5350 5842 5833 6889	45.8 45.8 45.8 45.8 45.8 45.8 40.2	1164 1164 1164 1164 1164 1164 1021	191.6 191.6 208.2 208.2 273.2 273.2 250.2	4867 4867 5288 5288 6939 6939 6355		
48P	2,3,6,7	P,R,W	48 P2, P3, P6, P7 Vertical Supply/ Return w/ Return Fan Low Gas Heat Extended Chassis	30 35 40 50 55 60 70	7394 7544 8085 8300 10998 11053 11393	3357 3425 3671 3768 4993 5018 5172	188.0 191.6 220.7 224.3 241.2 240.6 240.6	4776 4867 5607 5697 6125 6111 6112	45.8 45.8 45.8 45.8 45.8 45.8 45.8	1164 1164 1164 1164 1164 1164 1021	191.6 191.6 208.2 208.2 273.2 273.2 250.2	4867 4867 5288 5288 6939 6939 6355		
48P	2,3,6,7	Q,S,X	48 P2, P3, P6, P7 Vertical Supply/ Return w/ Return Fan High Gas Heat Extended Chassis	30 35 40 50 55 60 70	7524 7674 8215 8430 11128 11183 11523	3416 3484 3730 3827 5052 5077 5231	187.4 190.6 218.0 221.2 241.3 240.7 276.3	4780 4840 5536 5618 6128 6114 7019	45.8 45.8 45.8 45.8 45.8 45.8 40.2	1164 1164 1164 1164 1164 1164 1021	191.6 191.6 208.2 208.2 273.2 273.2 250.2	4867 4867 5288 5288 6939 6939 6355		

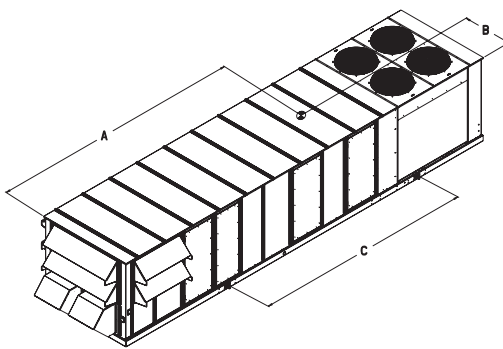

- NOTE:**
1. Weights do not include economizer or power exhaust.
2. Label only for units size 30-70.


48ZZ501077 C

Fig. 9 — Rigging Label — 030-070 Units

⚠ CAUTION - NOTICE TO RIGGERS:
ALL PANELS MUST BE IN PLACE WHEN RIGGING.


NOTE: Rig with four cables and spread with two 95 inch (2413 MM) spreader bars.

1,2,3	Position		Units	Size	Weight		Center of Gravity Dimensions				Lifting Lugs			
	4	5			Lbs	Kgs	A		B		C		D	
							Inches	Millimeters	Inches	Millimeters	Inches	Millimeters	Inches	Millimeters
48P	2,3,4,5 6,7,8,9	B,D,H	48 P2, P3, P4, P5, P6,P7,P8,P9 Low Gas Heat Vertical Supply/ Return Horizontal Supply/ Return	75 90 100	10665 11265 11285	4842 5114 5123	253.1 260.9 260.0	6429 6628 6603	40.2 41.5 41.5	1021 1054 1054	255.7 255.7 255.7	6495 6495 6495	111.3 110.4 110.4	2827 2804 2804
48P	2,3,4,5 6,7,8,9	C,E,J	48 P2, P3, P4, P5, P6,P7,P8,P9 High Gas Heat Vertical Supply/ Return Horizontal Supply/ Return	75 90 100	10795 11395 11415	4901 5173 5182	254.4 262.1 261.3	6462 6657 6637	40.2 41.5 41.5	1021 1054 1054	255.7 255.7 255.7	6495 6495 6495	111.3 110.4 110.4	2827 2804 2804
48P	2,3,4,5 6,7,8,9	P,R,W	48 P2, P3, P4, P5, P6,P7,P8,P9 Low Gas Heat Vertical Supply/ Return Horizontal Supply/ Return Extended Chassis	75 90 100	11215 11815 11835	5092 5364 5373	266.7 274.7 273.4	6775 6976 6944	40.2 41.5 41.5	1021 1054 1054	280.8 280.8 280.8	7132 7132 7132	139.4 139.4 139.4	3541 3541 3541
48P	2,3,4,5 6,7,8,9	Q,S,X	48 P2, P3, P4, P5, P6,P7,P8,P9 High Gas Heat Vertical Supply/ Return Horizontal Supply/ Return Extended Chassis	75 90 100	11345 11945 11965	5151 5423 5432	268.0 275.8 274.7	6808 7005 6978	40.2 41.5 41.5	1021 1054 1054	280.8 280.8 280.8	7132 7132 7132	139.4 139.4 139.4	3541 3541 3541
50P	2,3,4,5 6,7,8,9	- ,B,C	50 P2, P3, P4, P5, P6, P7, P8, P9 Vertical Supply/ Return Horizontal Supply/ Return	75 90 100	10265 10865 10885	4660 4933 4942	250.1 258.4 257.3	6354 6562 6535	40.2 41.5 41.5	1021 1054 1054	255.7 255.7 255.7	6495 6495 6495	111.3 110.4 110.4	2827 2804 2804
50P	2,3,4,5 6,7,8,9	R,T,V,W	50 P2, P3, P4, P5, P6, P7, P8, P9 Vert. Horiz Supply/ Return w/ Extended Chassis	75 90 100	10815 11415 11435	4910 5182 5191	264.6 272.9 271.6	6722 6932 6899	40.2 41.5 41.5	1021 1054 1054	280.8 280.8 280.8	7132 7132 7132	139.4 139.4 139.4	3541 3541 3541
50P	2,3,4,5 6,7,8,9	- ,B,C	50 P2, P3, P4, P5, P6, P7, P8, P9 Vert Supply/Return w/ RE Fan Horz Supply Vert Return w/ RE Fan	75 90 100	11921 12521 12541	5412 5685 5694	220.1 228.4 227.8	5590 5800 5786	40.2 41.5 41.5	1021 1054 1054	255.7 255.7 255.7	6495 6495 6495	111.3 110.4 110.4	2827 2804 2804
48P	2,3,4,5 6,7,8,9	B,D,H	48 P2,P3,P4,P5,P6,P7,P8,P9 Low Gas Heat Vert Supply/Return w/ RE Fan Horz Supply Vert Return w/ RE Fan	75 90 100	12321 12921 12941	5594 5866 5875	224.6 232.6 230.4	5706 5908 5853	40.2 41.5 41.5	1021 1054 1054	255.7 255.7 255.7	6495 6495 6495	111.3 110.4 110.4	2827 2804 2804
48P	2,3,4,5 6,7,8,9	C,E,J	48 P2,P3,P4,P5,P6,P7,P8,P9 High Gas Heat Vert Supply/Return w/ RE Fan Horz Supply Vert Return w/ RE Fan	75 90 100	12451 13051 13071	5653 5925 5934	226.9 233.7 232.9	5764 5936 5915	40.2 41.5 41.5	1021 1054 1054	255.7 255.7 255.7	6495 6495 6495	111.3 110.4 110.4	2827 2804 2804
50P	2,3,4,5 6,7,8,9	R,T,V,W	50 P2, P3, P4, P5, P6, P7, P8, P9 Vert Sup/Ret, Horiz Sup/ Vert Ret w/ RE Fan, w/ Ext Chassis	75 90 100	12471 13071 13091	5662 5934 5943	231.7 240.1 239.2	5885 6098 6075	40.2 41.5 41.5	1021 1054 1054	280.8 280.8 280.8	7132 7132 7132	139.4 139.4 139.4	3541 3541 3541
48P	2,3,4,5 6,7,8,9	P,R,W	48 P2,P3,P4,P5,P6,P7,P8,P9 Low Gas Heat Vert Sup/Ret, Horiz Sup/ Vert Ret w/ RE Fan, w/ Ext Chassis	75 90 100	12871 13471 13491	5843 6116 6125	236.2 244.3 241.8	6000 6205 6142	40.2 41.5 41.5	1021 1054 1054	280.8 280.8 280.8	7132 7132 7132	139.4 139.4 139.4	3541 3541 3541
48P	2,3,4,5 6,7,8,9	Q,S,X	48 P2,P3,P4,P5,P6,P7,P8,P9 High Gas Heat Vert Sup/Ret, Horiz Sup/ Vert Ret w/ RE Fan, w/ Ext Chassis	75 90 100	13001 13601 13621	5902 6175 6184	238.5 245.4 244.2	6058 6234 6203	40.2 41.5 41.5	1021 1054 1054	280.8 280.8 280.8	7132 7132 7132	139.4 139.4 139.4	3541 3541 3541
48P	2,3,4,5 6,7,8,9	B,D,H	48 P2,P3,P4,P5,P6,P7,P8,P9 Low Gas Heat Vert Sup/Ret, Horiz Sup/Ret w/ Hi Cap PE	75 90 100	13499 14097 14119	6129 6400 6410	290.1 297.7 297.1	7367 7561 7546	40.2 41.5 41.5	1021 1054 1054	312.1 312.1 312.1	7927 7927 7927	162.6 171.4 171.4	4130 4354 4354
48P	2,3,4,5 6,7,8,9	C,E,J	48 P2,P3,P4,P5,P6,P7,P8,P9 High Gas Heat Vert Sup/Ret, Horiz Sup/Ret w/ Hi Cap PE	75 90 100	13629 14227 14249	6188 6459 6469	291.3 298.9 298.2	7400 7593 7575	40.2 41.5 41.5	1021 1054 1054	312.1 312.1 312.1	7927 7927 7927	162.6 171.4 171.4	4130 4354 4354
50P	2,3,4,5 6,7,8,9	- ,B,C	50 P2, P3, P4, P5, P6, P7, P8, P9 Vert Sup/Ret, Horiz Sup/Ret w/ Hi Cap PE	75 90 100	13099 13697 13719	5947 6218 6228	287.1 295.1 294.4	7293 7496 7478	40.2 41.5 41.5	1021 1054 1054	312.1 312.1 312.1	7927 7927 7927	162.6 171.4 171.4	4130 4354 4354
48P	2,3,4,5 6,7,8,9	P,R,W	48 P2,P3,P4,P5,P6,P7,P8,P9 Low Gas Heat Vert Sup/Ret, Horiz Sup/Ret w/ Hi Cap PE w/ Ext Chassis	75 90 100	14049 14647 14669	6378 6650 6660	483.5 484.3 493.8	12280 12302 12542	40.2 41.5 41.5	1021 1054 1054	337.3 337.3 337.3	8567 8567 8567	151.7 196.7 196.7	3853 4996 4996
48P	2,3,4,5 6,7,8,9	Q,S,X	48 P2,P3,P4,P5,P6,P7,P8,P9 High Gas Heat Vert Sup/Ret, Horiz Sup/Ret w/ Hi Cap PE w/ Ext Chassis	75 90 100	14179 14777 14799	6437 6709 6719	483.5 484.3 493.8	12280 12301 12542	40.2 41.5 41.5	1021 1054 1054	337.3 337.3 337.3	8567 8567 8567	151.7 196.7 196.7	3853 4996 4996
50P	2,3,4,5 6,7,8,9	R,T,V,W	50 P2, P3, P4, P5, P6, P7, P8, P9 Vert Sup/Ret, Horiz Sup/Ret w/ Hi Cap PE w/ Ext Chassis	75 90 100	13649 14247 14269	6197 6468 6478	483.5 484.4 493.8	12281 12304 12543	40.2 41.5 41.5	1021 1054 1054	337.3 337.3 337.3	8567 8567 8567	151.7 196.7 196.7	3853 4996 4996

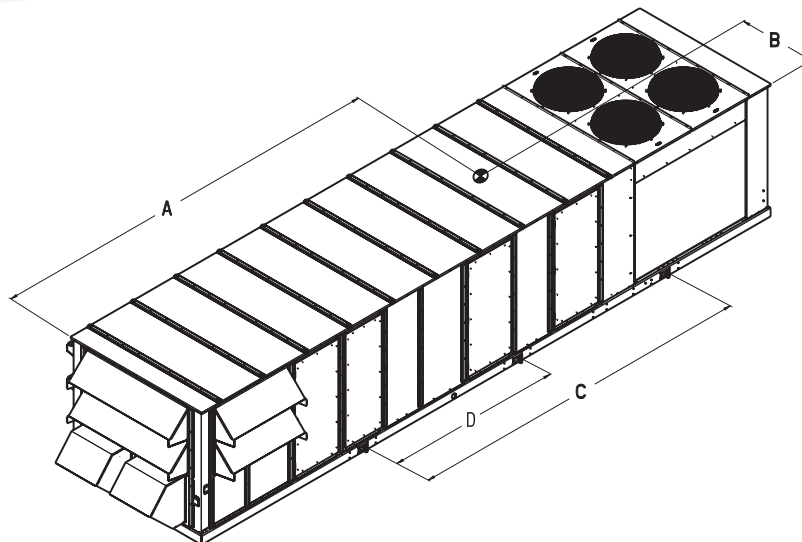

48ZZ501078 C

Fig. 10 — Rigging Label — 075-100 Units

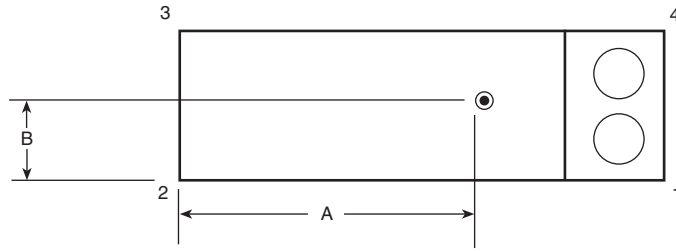

Units	SIZE	CORNER WEIGHTS (lb)				TOTAL (lb)	A in.	B in.
		1	2	3	4			
50 P2, P3, P6, P7 Vertical Supply/ Return	30	1848	914	913	1845	5519	159.16	45.81
	35	1901	935	934	1898	5669	159.42	45.81
	40	1826	1281	1279	1824	6210	186.11	45.81
	50	1921	1293	1291	1919	6425	189.25	45.81
	55	2204	1914	1911	2201	8230	212.64	45.81
	60	2215	1930	1928	2212	8285	212.30	45.81
	70	2984	1860	1452	2329	8625	250.48	40.20
50 P2, P3, P4, P5, P6, P7, P8, P9 Vertical Supply/ Return Horizontal Supply/ Return	75	3219	2545	1987	2514	10265	250.14	40.20
	90	3108	2839	2348	2570	10865	258.36	41.50
	100	3101	2857	2363	2564	10885	257.29	41.50
50 P2, P3, P6, P7 Vertical Supply/ Return w/ Ext Plenum	30	1727	1184	1183	1725	5819	152.25	45.81
	35	1770	1217	1215	1768	5969	152.09	45.81
	40	1749	1508	1506	1746	6510	180.16	45.81
50 P4, P5, P8, P9 Horizontal Supply/ Return	50	1842	1523	1521	1839	6725	183.65	45.81
	55	2321	2072	2069	2318	8780	231.70	45.81
	60	2331	2089	2087	2328	8835	231.27	45.81
	70	2847	2305	1800	2223	9175	247.50	40.20


Units with Optional Extended Chassis	SIZE	CORNER WEIGHTS (lb)				TOTAL (lb)	A in.	B in.
		1	2	3	4			
50 P2, P3, P6, P7 Vertical Supply/ Return w/ Extended Chassis	30	2009	1003	1002	2006	6019	175.44	45.81
	35	2067	1019	1018	2064	6169	176.19	45.81
	40	1992	1365	1363	1989	6710	202.80	45.81
	50	2086	1378	1377	2084	6925	205.83	45.81
	55	2350	2043	2040	2347	8780	226.02	45.81
	60	2361	2060	2057	2357	8835	225.63	45.81
	70	3159	1993	1556	2467	9175	264.78	40.20
50 P2, P3, P4, P5, P6, P7, P8, P9 Vert, Horz Supply/ Return w/ Extended Chassis	75	3398	2676	2089	2653	10815	264.64	40.20
	90	3282	2966	2453	2714	11415	272.91	41.50
	100	3272	2987	2470	2706	11435	271.63	41.50
50 P2, P3, P6, P7 Vertical Supply/ Return w/ Ext Plenum w/ Extended Chassis	30	1872	1290	1288	1869	6319	166.83	45.81
	35	1919	1318	1316	1916	6469	167.08	45.81
	40	1899	1608	1606	1896	7010	195.31	45.81
50 P4, P5, P8, P9 Horizontal Supply/ Return w/ Extended Chassis	50	1992	1623	1620	1990	7225	198.82	45.81
	55	2467	2201	2198	2464	9330	245.14	45.81
	60	2476	2219	2216	2473	9385	244.65	45.81
	70	2683	2183	2180	2679	9725	260.81	45.81

LEGEND

PE — Power Exhaust

NOTE: The weight distribution and center of gravity information include the impact of an economizer, the largest indoor fan motor, and a VFD (variable frequency drive). On units with a return fan or high-capacity power exhaust, the largest motors and VFD are also included. These weights do not include the impact of other factory-installed options such as barometric relief, power exhaust, high-capacity indoor coil, hot water coil, or indoor fan.

Fig. 11 — Weight Distribution and Center of Gravity

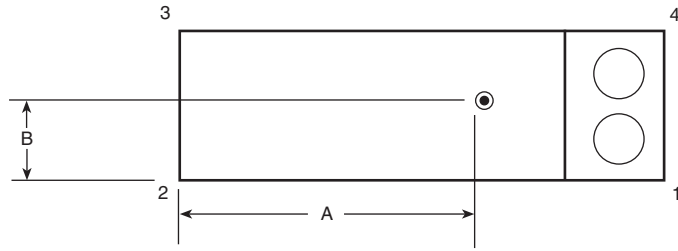

Units with Optional Return Fan	SIZE	CORNER WEIGHTS (lb)				TOTAL (lb)	A in.	B in.
		1	2	3	4			
50 P2, P3, P6, P7 Vertical Supply/ Return w/ RE Fan	30	2142	1070	1068	2139	6419	158.64	45.81
	35	2196	1091	1089	2193	6569	158.93	45.81
	40	2080	1478	1476	2077	7110	185.12	45.81
	50	2176	1489	1487	2173	7325	188.00	45.81
	55	2523	2230	2227	2520	9500	210.91	45.81
	60	2532	2248	2245	2529	9555	210.46	45.81
	70	3402	2154	1682	2656	9895	248.98	40.20
50 P2, P3, P4, P5, P6, P7, P8, P9 Vert Supply/Return w/ RE Fan Horz Supply Vert Return w/ RE Fan	75	3290	3405	2658	2568	11921	220.09	40.20
	90	3166	3688	3049	2618	12521	228.36	41.50
	100	3163	3702	3061	2615	12541	227.79	41.50
50 P2, P3, P6, P7 Vertical Supply/ Return w/ Extended Chassis w/ Return Fan	30	2324	1138	1136	2321	6919	176.60	45.81
	35	2419	1118	1117	2416	7069	179.90	45.81
	40	2310	1497	1495	2307	7610	207.38	45.81
	50	2412	1503	1501	2409	7825	210.59	45.81
	55	2737	2292	2289	2733	10050	229.95	45.81
	60	2747	2308	2305	2744	10105	229.59	45.81
	70	3577	2289	1787	2793	10445	263.32	40.20
50 P2, P3, P4, P5, P6, P7, P8, P9 Vert Sup/Ret, Horz Sup/ Vert Ret w/ RE Fan, w/ Ext Chassis	75	3430	3573	2790	2678	12471	231.69	40.20
	90	3306	3849	3182	2734	13071	240.08	41.50
	100	3299	3867	3198	2728	13091	239.18	41.50

Units with Optional High-Capacity Power Exhaust	SIZE	CORNER WEIGHTS (lb)				TOTAL (lb)	A in.	B in.
		1	2	3	4			
50 P2, P3, P4, P5, P6, P7, P8, P9 Vert Sup/Ret, Horz Sup/Ret w/ Hi Cap PE	75	4006	3350	2615	3128	13099	287.12	40.20
	90	3857	3641	3010	3189	13697	295.12	41.50
	100	3854	3655	3023	3187	13719	294.43	41.50
50 P2, P3, P4, P5, P6, P7, P8, P9 Vert Sup/Ret, Horz Sup/Ret w/ Hi Cap PE w/ Ext Chassis	75	6709	956	746	5238	13649	483.51	40.20
	90	6308	1491	1233	5216	14247	484.40	41.50
	100	6441	1370	1133	5326	14269	493.84	41.50

LEGEND

PE — Power Exhaust

NOTE: The weight distribution and center of gravity information include the impact of an economizer, the largest indoor fan motor, and a VFD (variable frequency drive). On units with a return fan or high-capacity power exhaust, the largest motors and VFD are also included. These weights do not include the impact of other factory-installed options such as barometric relief, power exhaust, high-capacity indoor coil, hot water coil, or indoor fan.

Fig. 11 — Weight Distribution and Center of Gravity (cont)

Step 8 — Connect Condensate Drain

There are a total of five drain connections required on each unit: one primary drain (on right-hand side of the unit) and four secondary drains (two on each side of unit).

PRIMARY DRAIN

The primary drain is a 2-in. FPT pipe connection located on the right-hand side of the unit looking at the unit from the return air end. See Fig. 12-21. Figure 22 shows the additional chassis length for optional extended chassis units.

With field-supplied fittings and pipe sections, plumb the primary condensate drain to the 2-in. FPT connector on the base rail. Use a trap height of at least 4-in. for size 030-070 units and 7-in. for size 075-105 units. See Fig. 23 and 24. Apply a bead of RTV or similar sealant around the pipe joint at the connector in the base rail.

SECONDARY DRAINS (UNITS INSTALLED ON CURB)

There are two secondary drain connections on each side of the unit. There are secondary drains on each side of the unit in the filter section and one on each side of the unit in the supply fan section. There are labels marking each location on the unit base rail. See Fig. 12-21.

Locate the four 1¹/₄-in. drain coupling assemblies and mounting screws (shipped in a bag taped to the basepan in the supply fan section, located behind the access panel marked FAN SECTION). The drain couplings are a 10-gage plate with a 1¹/₄ in. half coupling welded to the plate.

At each secondary drain hole location, there is a 1³/₈-in. hole pre-drilled in the bottom of the base rail, surrounded by four 0.20-in. engagement holes. Install a drain coupling assembly using screws provided at each secondary drain hole location. See Fig. 25. Do not attach any drain coupling assemblies in the condenser section base rail.

Using field-supplied fittings and pipe sections, assemble U-traps at each secondary drain fitting. See Fig. 26. Provide a minimum size of 1/2-in. pipe for secondary drains. Use a trap at least 4-in. deep for size 030-070 units and 7-in. deep for size 075-105 units. Apply a bead of RTV or similar sealant around the drain assemblies. See Fig. 26.

Consult local plumbing codes for direction on joining multiple drain lines. Total size of any combined line does not need to exceed nominal 2-in. size of primary drain connection.

Fill the U-traps at the secondary drain locations prior to unit start-up. Also check the U-traps before each cooling season to ensure the traps are filled and functioning properly.

SECONDARY DRAINS (UNITS INSTALLED ON STEEL BEAM OR SLAB)

There are two secondary drain connections required on each side of the unit. There are secondary drains on the bottom of the base rail on each side of the unit in the filter section and on each side of the unit in the supply fan section. There are labels marking each location on the unit base rail. See Fig. 12-21. Drain holes will need to be drilled in these locations at the side of the base rail. The existing secondary drain holes in the bottom of the base rail must be sealed. Prior to final positioning of the unit, apply a bead of RTV or similar sealant around each secondary drain hole in the bottom of the unit base rail and install field-supplied metal seal plate, then position the unit into final location. See Fig. 27.

Using field-supplied fittings and pipe sections, assemble U-traps at each secondary drain fitting. See Fig. 26. Provide a minimum size of 1/2-in. pipe for secondary drains. Use a trap at least 4-in. deep for size 030-070 units and 7-in. deep for size 075-105 units. Apply a bead of RTV or similar sealant around the drain assemblies. See Fig. 24.

Locate the four 1¹/₄-in. drain coupling assemblies and mounting screws (shipped in a bag taped to the basepan in the supply fan section, located behind the access panel marked FAN SECTION). The drain couplings are a 10-gage plate with a 1¹/₄ in. half coupling welded to the plate.

After final positioning of the unit, perform the following procedure:

1. At each of the four secondary drain location (marked with labels on the unit base rail), position the drain coupling assembly in the side of the base rail. Mark the screw holes and the drain hole locations on the base rail.
2. Drill holes for drain outlet (use 1³/₈-in. hole saw) and for the mounting screws (use 3/16-in. drill bit).
3. Install a drain coupling assembly using screws provided at each secondary drain hole location.
4. Using field-supplied fittings and pipe sections, assemble U-traps at each secondary drain fitting. See Fig. 24. Provide minimum size of 1/2-in. pipe for secondary drains. Use a trap at least 4-in. deep for size 030-070 units and 7-in. deep for size 075-105 units.
5. Apply a bead of RTV or similar sealant around the drain assemblies.

Consult local plumbing codes for direction on joining multiple drain lines. Total size of any combined line does not need to exceed nominal 2-in. size of primary drain connection.

Fill the U-traps at the secondary drain locations prior to unit start-up. Also check the U-traps before each cooling season to ensure the traps are filled and functioning properly.

- NOTES:
1. DIMENSIONS IN () ARE IN MILLIMETERS.
 2. UNIT WEIGHT AND CENTER OF GRAVITY INCLUDES ECONOMIZER.
 3. UNIT WEIGHT AND CENTER OF GRAVITY INCLUDES ECONOMIZER, INDOOR FAN MOTOR AND HIGH CAPACITY EVAPORATOR COIL. TOP DO NOT RESTRICT CONDENSER FANS.
 4. DOWNSHOT DUCTS DESIGNED TO BE ATTACHED TO ACCESSORY ROOF CURB IF UNIT IS MOUNTED ON DRAINAGE. IT IS RECOMMENDED THE DUCTS BE SUPPORTED BY CROSS BRACES AS DONE ON THE ACCESSORY ROOF CURB.
 5. WHEN THE UNIT IS SLAB MOUNTED, PLUG THE FACTORY DRILLED AUXILIARY CONDENSATE DRAIN HOLES.
 6. ECONOMIZER SIDE HOODS ARE FOLDED INSIDE UNIT FOR SHIPPING.

UNIT SIZE	WEIGHT		A		B	
	LBS.	KGS.	MM	FT. IN.	MM	FT. IN.
030	5519	2504	4043	13'-3 3/16"	1164	3'-9 13/16"
035	5669	2572	4049	13'-3 7/16"	1164	3'-9 13/16"

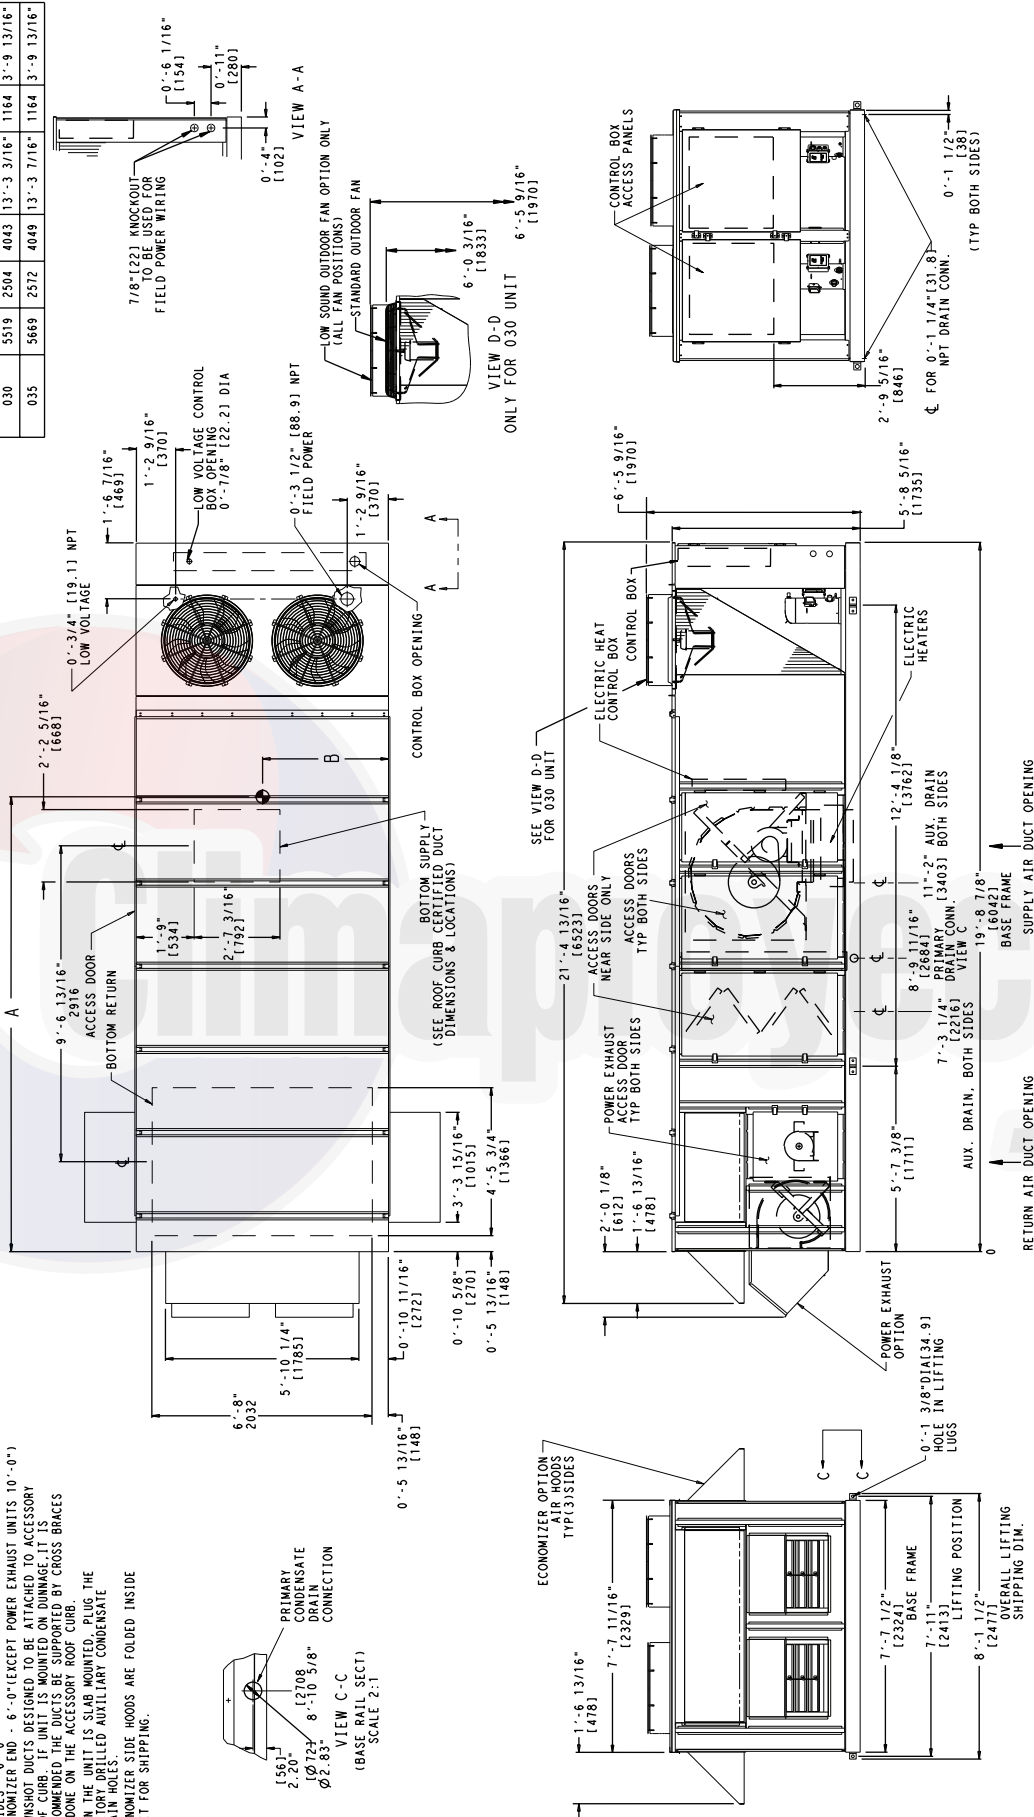


Fig. 12 — Base Unit Dimensional Drawing — 50P2,P3,P6,P7030,035 (Standard Chassis Unit Shown)

- NOTES:
1. DIMENSIONS IN [] ARE IN MILLIMETERS.
 2. UNIT WEIGHT AND CENTER OF GRAVITY INCLUDES ECONOMIZER.
 3. UNIT CLEARANCES:
LARGEST INDOOR FAN MOTOR AND HIGH CAPACITY EVAPORATOR COIL.
CONDENSER BOX END - 6'-0"
ECONOMIZER END - 6'-0" (EXCEPT POWER EXHAUST UNITS 10'-0")
 4. SUGGESTED FIELD CONNECTIONS TO BE MADE INSIDE OR OUTSIDE OF 32.5 mm FLANGE.
 5. WHEN THE UNIT IS SLAB MOUNTED, PLUG THE FACTORY DRILLED AUXILIARY CONDENSATE DRAIN HOLES.
 6. ECONOMIZER SIDE HOODS ARE FOLDED INSIDE UNIT FOR SHIPPING.

UNIT SIZE	WEIGHT	A	B
LBS.	KGS.	MM	MM
		FT. IN.	FT. IN.
030	5819	2640	3867
035	5969	2708	3863
		12'-8 1/16"	1164
		3'-9 13/16"	1164

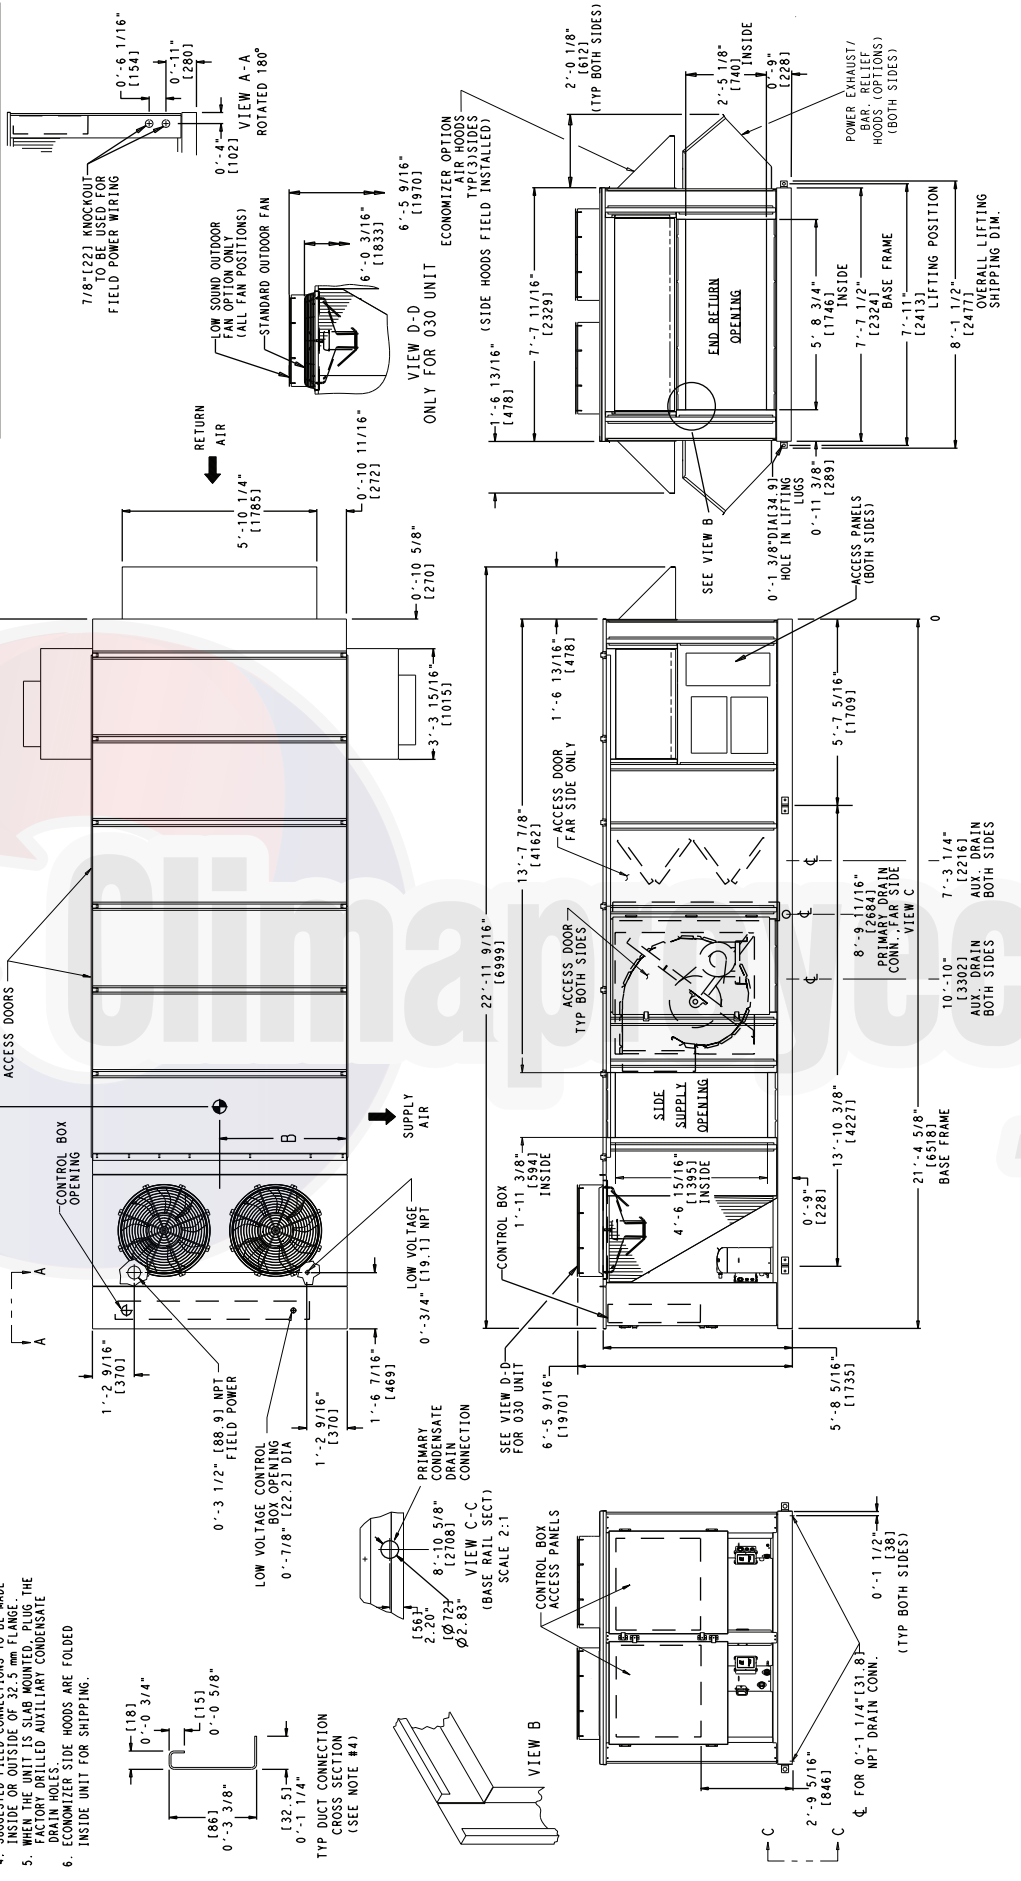


Fig. 13 — Base Unit Dimensional Drawing — 50P4, P5, P8, P9030, 035 (Standard Chassis Unit Shown)

UNIT SIZE	WEIGHT	A	
LBS.	KGS.	MM	FT. IN.
040	2817	4727	15'-6 1/8"
050	6425	2914	15'-9 5/16"

- NOTES:**
1. DIMENSIONS IN () ARE IN MILLIMETERS.
 2. UNIT CLEARANCES INCLUDE ECONOMIZER. LARGEST INDOOR FAN MOTOR AND HIGH CAPACITY EVAPORATOR COIL.
 3. TOP DOORS DO NOT RESTRICT CONDENSER FANS.
 4. DOWNSHOT DUCTS DESIGNED TO BE ATTACHED TO ACCESSORY ECONOMIZER END - 6'-0" (EXCEPT POWER EXHAUST UNITS 10'-0"). ROOF CURB IF UNIT IS MOUNTED ON DUNNAGE, IT IS ATTACHED TO THE ACCESSORY ROOF CURB BY CROSS BRACES AS SHOWN ON THE ACCESSORY ROOF CURB.
 5. WHEN THE UNIT IS SLAB MOUNTED, PLUG THE FACTORY DRILLED AUXILIARY CONDENSATE DRAIN HOLES.
 6. ECONOMIZER SIDE HOODS ARE FOLDED INSIDE UNIT FOR SHIPPING.

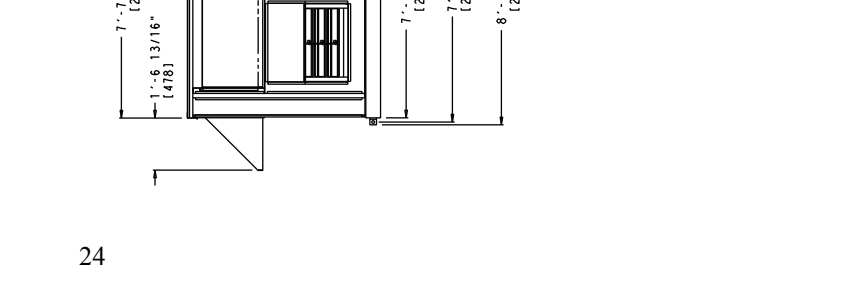
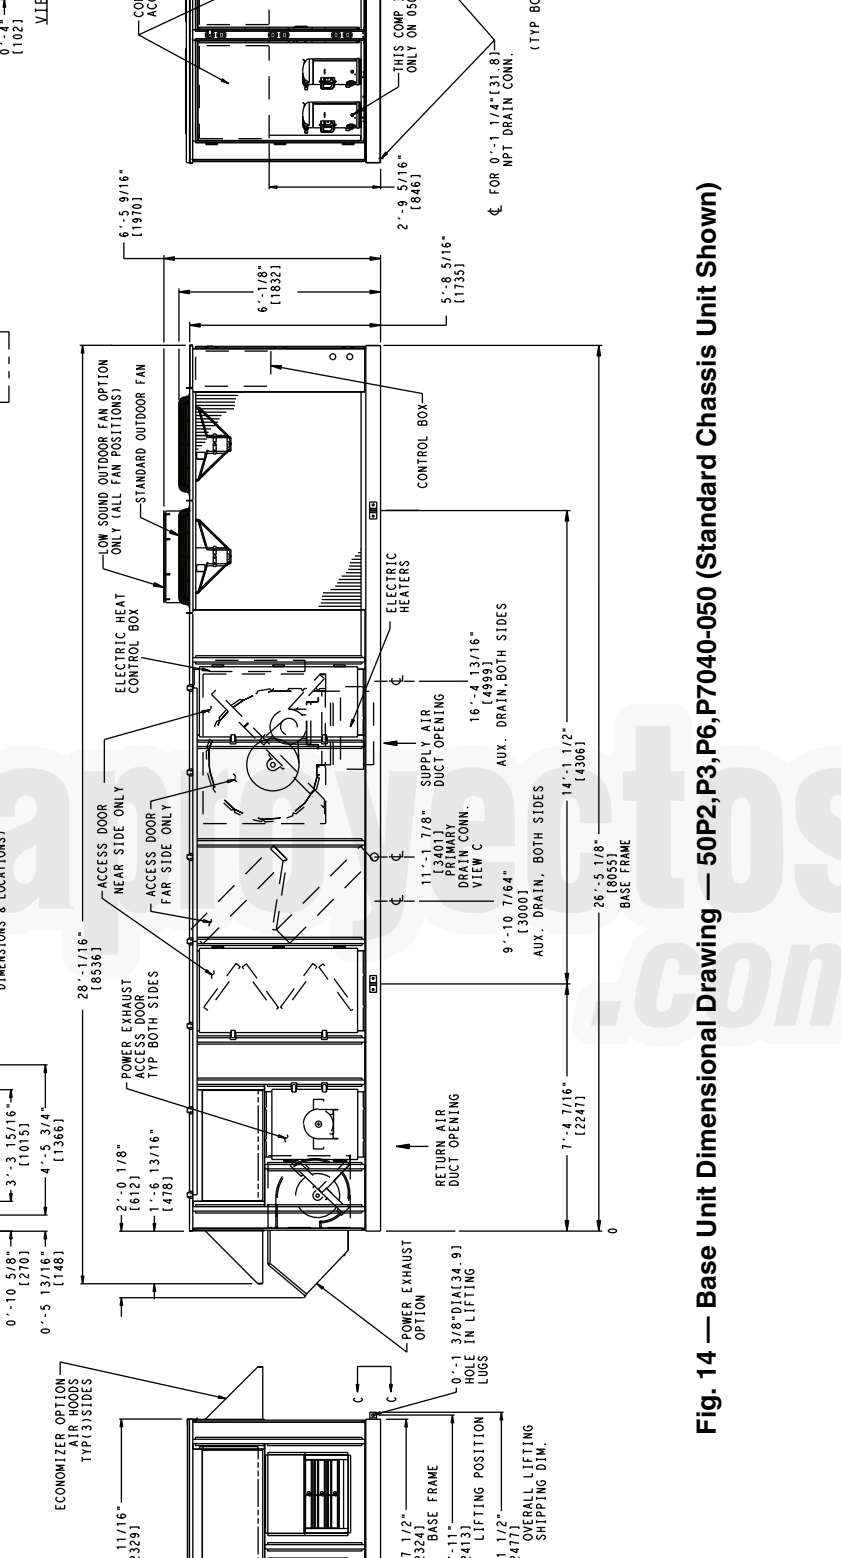
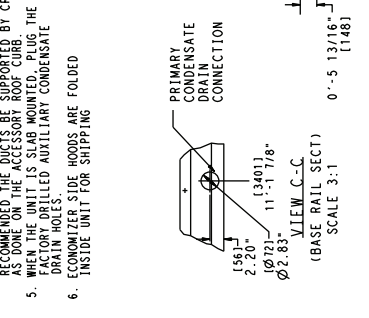
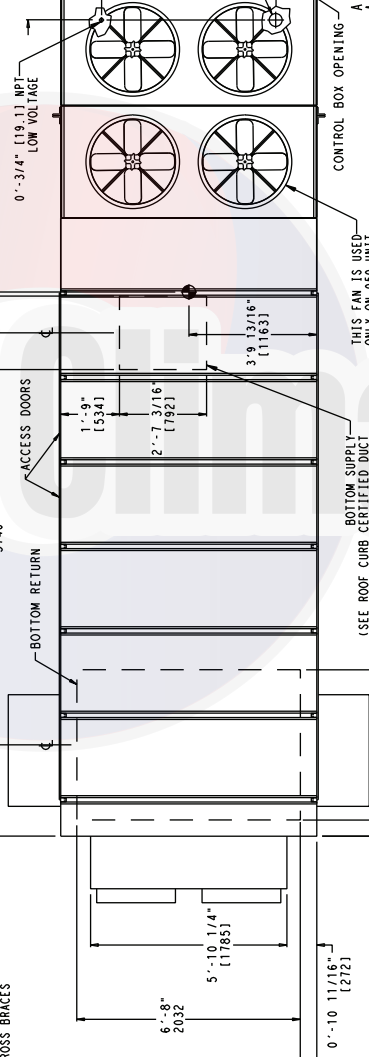


Fig. 14 — Base Unit Dimensional Drawing — 50P2, P3, P6, P7040-050 (Standard Chassis Unit Shown)

UNIT SIZE	WEIGHT		A	
	LBS.	KGS.		MM
040	6510	2953	4576	15'-3 1/16"
050	6125	3050	4665	15'-3 11/16"

- NOTES:
1. DIMENSIONS IN () ARE IN MILLIMETERS.
 2. UNIT WEIGHT AND CENTER OF GRAVITY INCLUDES ECONOMIZER.
 3. UNITS WITH LARGE INDOOR FAN MOTOR AND HIGH CAPACITY EVAPORATOR COIL.
 4. SUGGESTED FIELD CONNECTIONS TO BE MADE AS SHOWN. UNITS WITH SLAB MOUNTED PLUG THE FACTORY DRILLED AUXILIARY CONDENSATE DRAIN HOLES.
 5. ECONOMIZER SIDE HOODS ARE FOLDED INSIDE UNIT FOR SHIPPING.
 6. UNITS WITH CONDENSATE DRAIN CONNECTIONS TO BE MADE AS SHOWN.

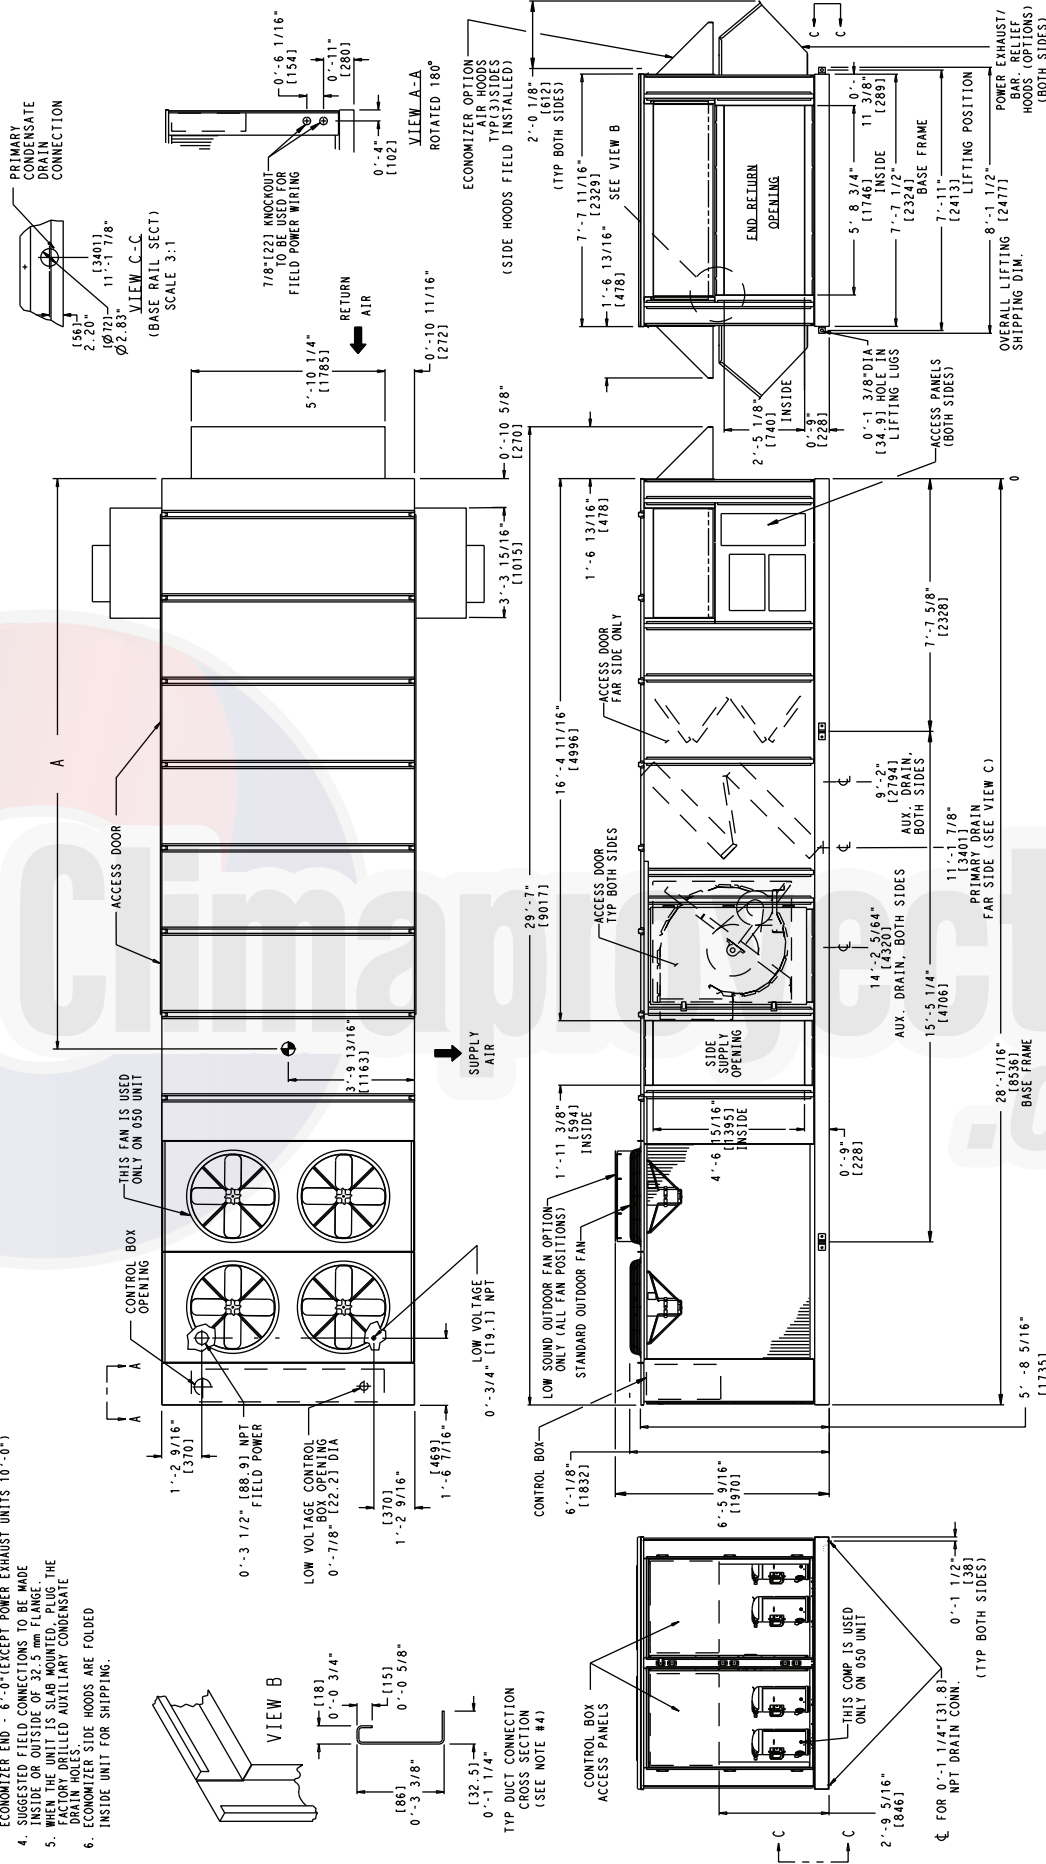


Fig. 15 — Base Unit Dimensional Drawing — 50P4, P5, P8, P9040-050 (Standard Chassis Unit Shown)

UNIT SIZE	WEIGHT		A		B		C		D		E		F			
	LBS.	KGS.	MM	FT. IN.	MM	FT. IN.	MM	FT. IN.	MM	FT. IN.	MM	FT. IN.	MM	FT. IN.		
055	8230	3733	2864	9'-4 3/4"	5363	17'-7 1/8"	5363	17'-7 1/8"	5401	17'-8 5/8"	1163	3'-9 13/16"	10108	33'-1 15/16"	10492	34'-5 1/16"
060	8285	3758	2864	9'-4 3/4"	5363	17'-7 1/8"	5392	17'-8 5/16"	5392	17'-8 5/16"	1163	3'-9 13/16"	10108	33'-1 15/16"	10492	34'-5 1/16"

- NOTES:
- DIMENSIONS IN () ARE IN MILLIMETERS.
 - UNIT WEIGHT AND CENTER OF GRAVITY INCLUDES ECONOMIZER, LARGEST INDOOR FAN MOTOR AND HIGH CAPACITY EVAPORATOR COIL.
 - UNIT CLEARANCES
TOP - DO NOT RESTRICT CONDENSER FANS
CONTROL BOX END - 6'-0"
ECONOMIZER END - 6'-0" (EXCEPT POWER EXHAUST UNITS 10'-0")
 - DOWNSHOT DUCTS DESIGNED TO BE ATTACHED TO ACCESSORY ROOF CURB. THE UNIT IS MOUNTED ON DUNNAGE. IT IS RECOMMENDED THE DUCTS BE SUPPORTED BY CROSS BRACES AS DONE ON THE ACCESSORY ROOF CURB.
 - WHEN THE UNIT IS SLAB MOUNTED, PLUG THE FACTORY DRILLED AUXILIARY CONDENSATE DRAIN HOLES.
 - ECONOMIZER SIDE HOODS ARE FOLDED INSIDE UNIT FOR SHIPPING.

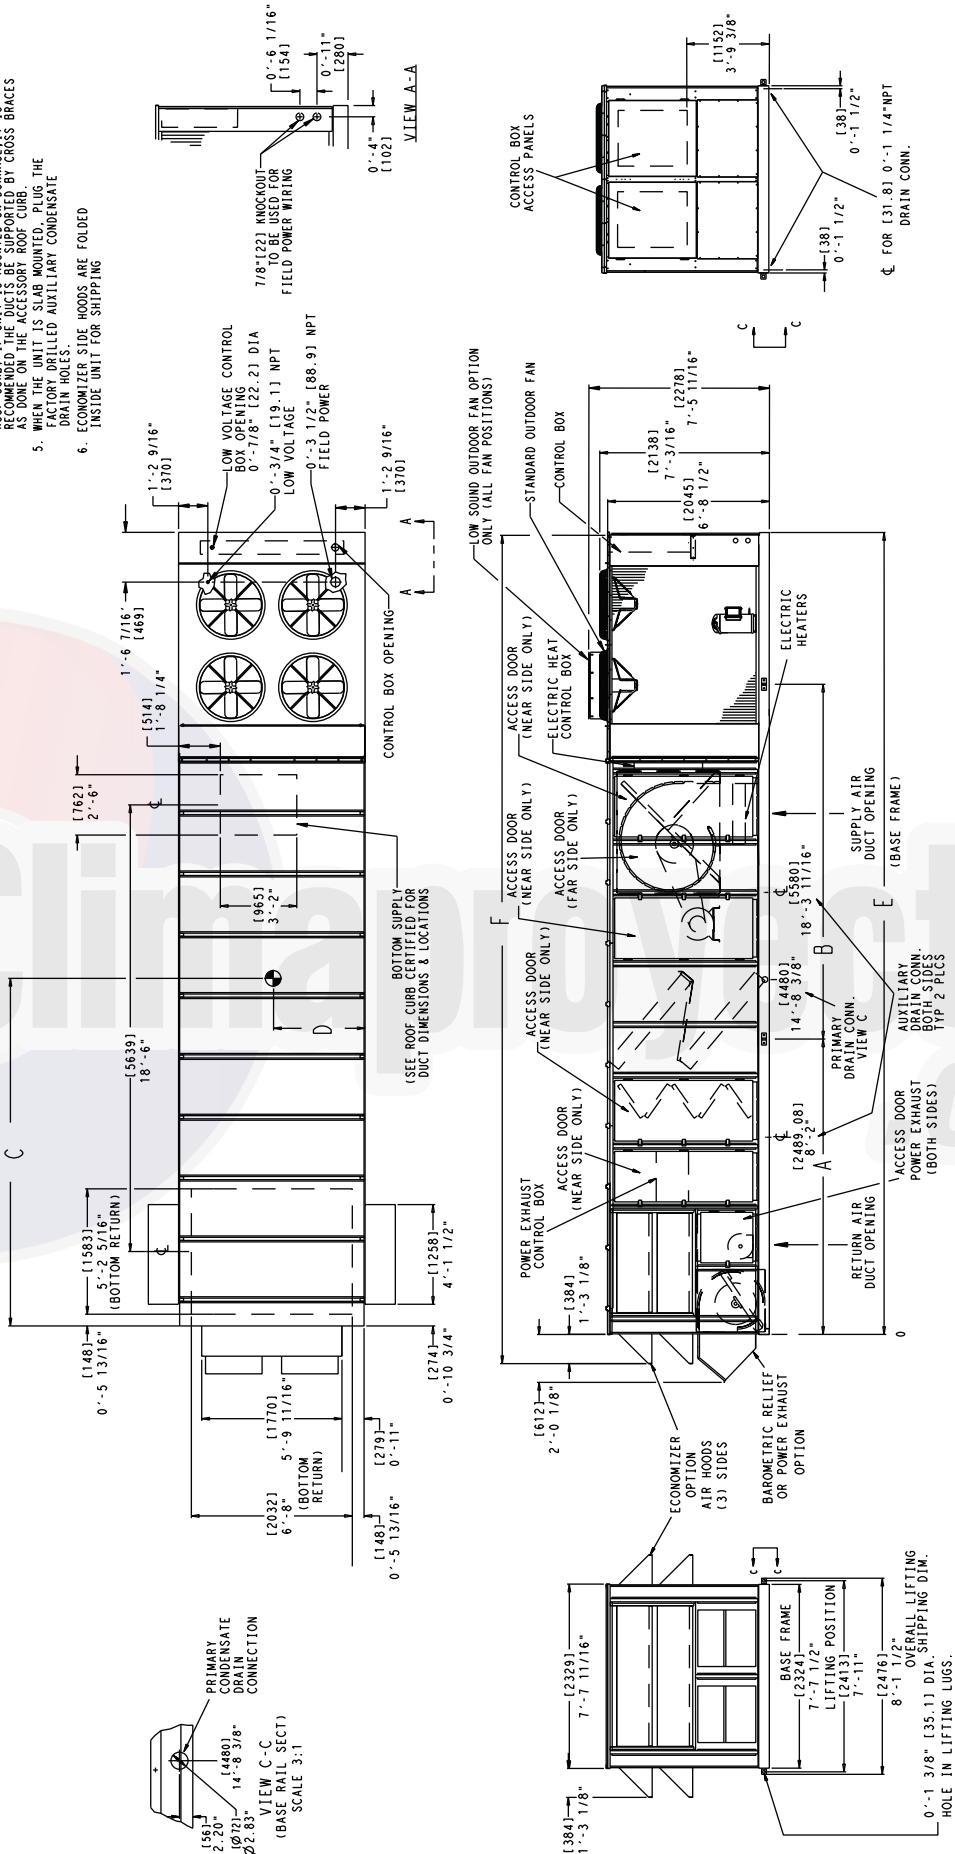


Fig. 16 — Base Unit Dimensional Drawing — 50P2,P3,P6,P7055,060 (Standard Chassis Unit Shown)

UNIT SIZE	WEIGHT		A		B		C		D		E		F	
	LBS.	KGS.	MM	FT. IN.	MM	FT. IN.	MM	FT. IN.	MM	FT. IN.	MM	FT. IN.	MM	FT. IN.
055	8780	3983	2830	9'-3 3/4"	6427	21'-1 1/8"	5885	19'-3 1/16"	1163	3'-9 13/16"	11140	36'-6 9/16"	11524	37'-9 11/16"
060	8835	4008	2830	9'-3 3/4"	6427	21'-1 1/8"	5874	19'-3 5/16"	1163	3'-9 13/16"	11140	36'-6 9/16"	11524	37'-9 11/16"

- NOTES:
1. DIMENSIONS IN () ARE IN MILLIMETERS.
 2. UNIT WEIGHT AND CENTER OF GRAVITY INCLUDES ECONOMIZER.
 3. LARGEST INDOOR FAN MOTOR AND HIGH CAPACITY EVAPORATOR COIL.
 4. UNIT CANNOT BE RESTRICTED CONDENSER FANS.
 5. CONTROL BOX END OF ECONOMIZER END OF POWER EXHAUST UNITS 10'-0"
 6. SUGGESTED FIELD CONNECTIONS TO BE MADE INSIDE OR OUTSIDE OF 32.5 mm FLANGE.
 7. WHEN THE UNIT IS SLAB MOUNTED, PLUG THE DRAIN HOLES.
 8. ECONOMIZER SIDE HOODS ARE FOLDED IN FOR SHIPPING.

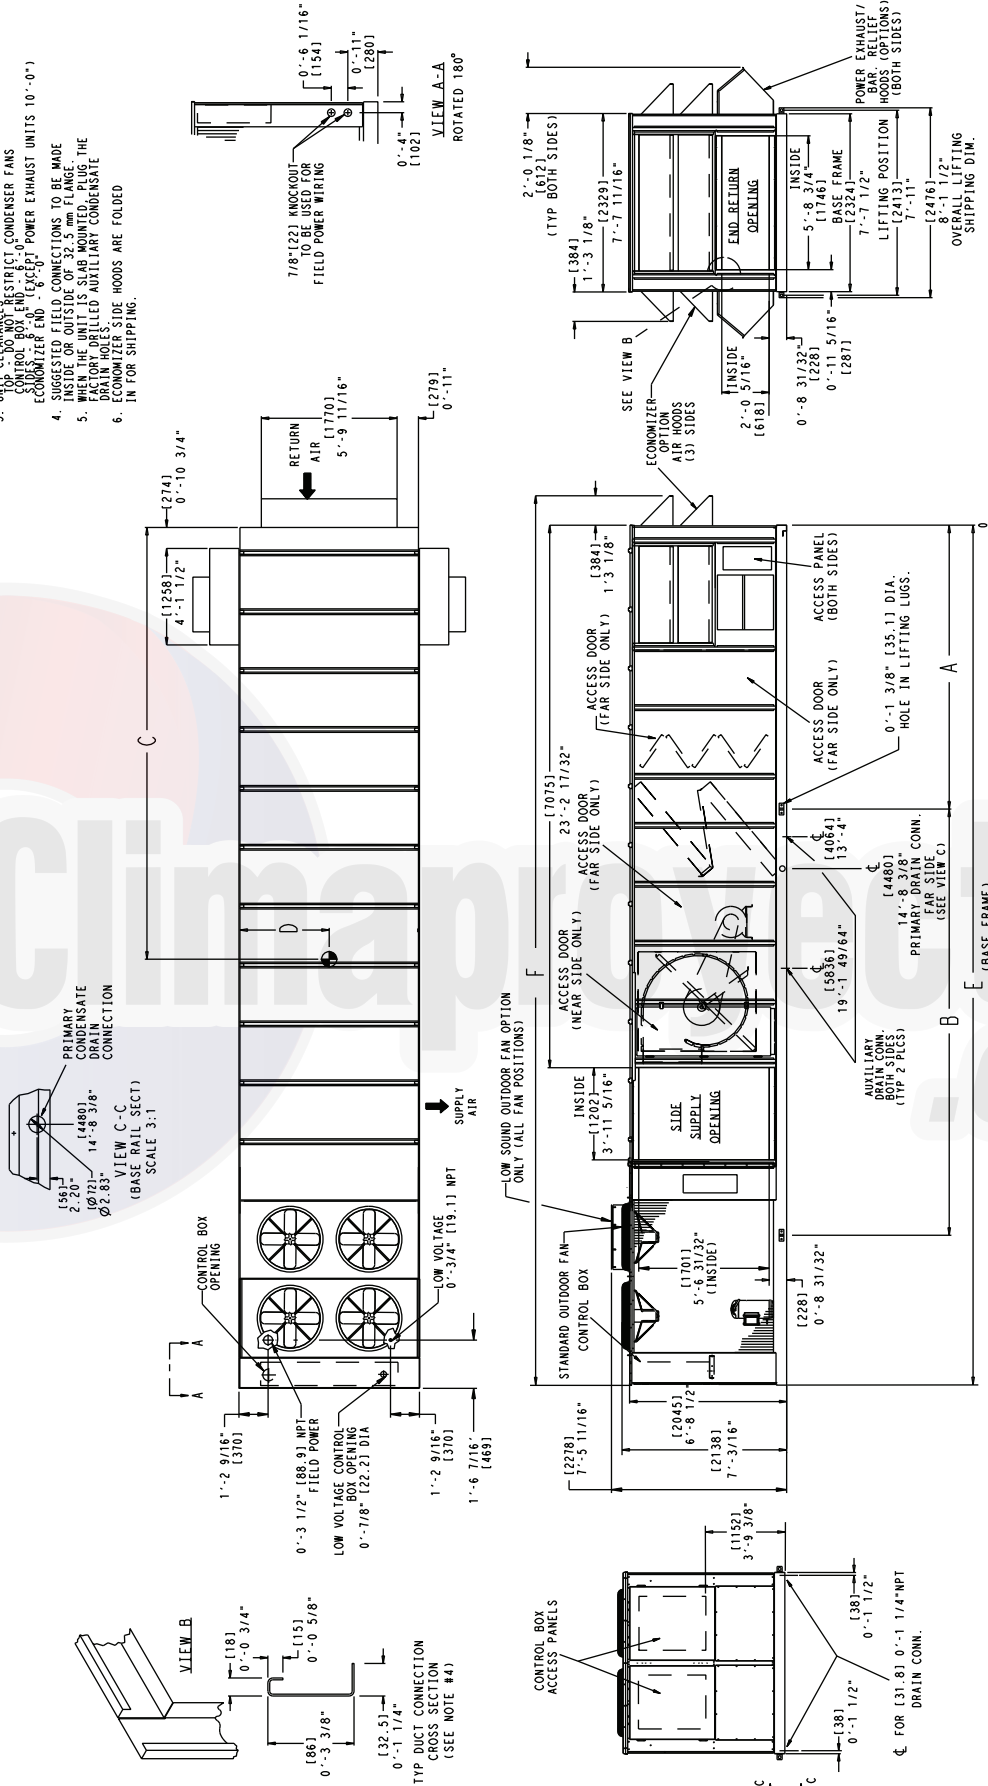


Fig. 17 — Base Unit Dimensional Drawing — 50P4, P5, P8, P9055,060 (Standard Chassis Unit Shown)

UNIT SIZE	LBS.	WGT	KGS.
070	8625	3912	

- NOTES:
1. DIMENSIONS IN () ARE IN MILLIMETERS.
 2. UNIT WEIGHT AND CENTER OF GRAVITY INCLUDES ECONOMIZER, LARGEST INDOOR FAN MOTOR AND HIGH CAPACITY EVAPORATOR COIL.
 3. UNIT CLEARANCES: TOP - DO NOT RESTRICT CONDENSER FANS CONTROL BOX END - 6'-0" CLOSURE END - 6'-0" (EXCEPT POWER EXHAUST UNITS 10'-0") FOR SMALLER SERVICE AND OPERATIONAL CLEARANCES. CONTACT CARRIER APPLICATION ENGINEERING DEPARTMENT.
 4. DOWNSHOT DUCTS DESIGNED TO BE ATTACHED TO ACCESSORY ROOF CURB IF UNIT IS MOUNTED ON DUNNAGE. IT IS RECOMMENDED THAT THE ACCESSORY ROOF CURB BE ASSEMBLED ON THE ACCESSORY ROOF CURB WHEN THE UNIT IS SLAB MOUNTED. PLUG THE DRAIN HOLES.
 5. WHEN THE UNIT IS SLAB MOUNTED, PLUG THE DRAIN HOLES.
 6. ECONOMIZER SIDE HOODS ARE FOLDED INSIDE UNIT FOR SHIPPING.

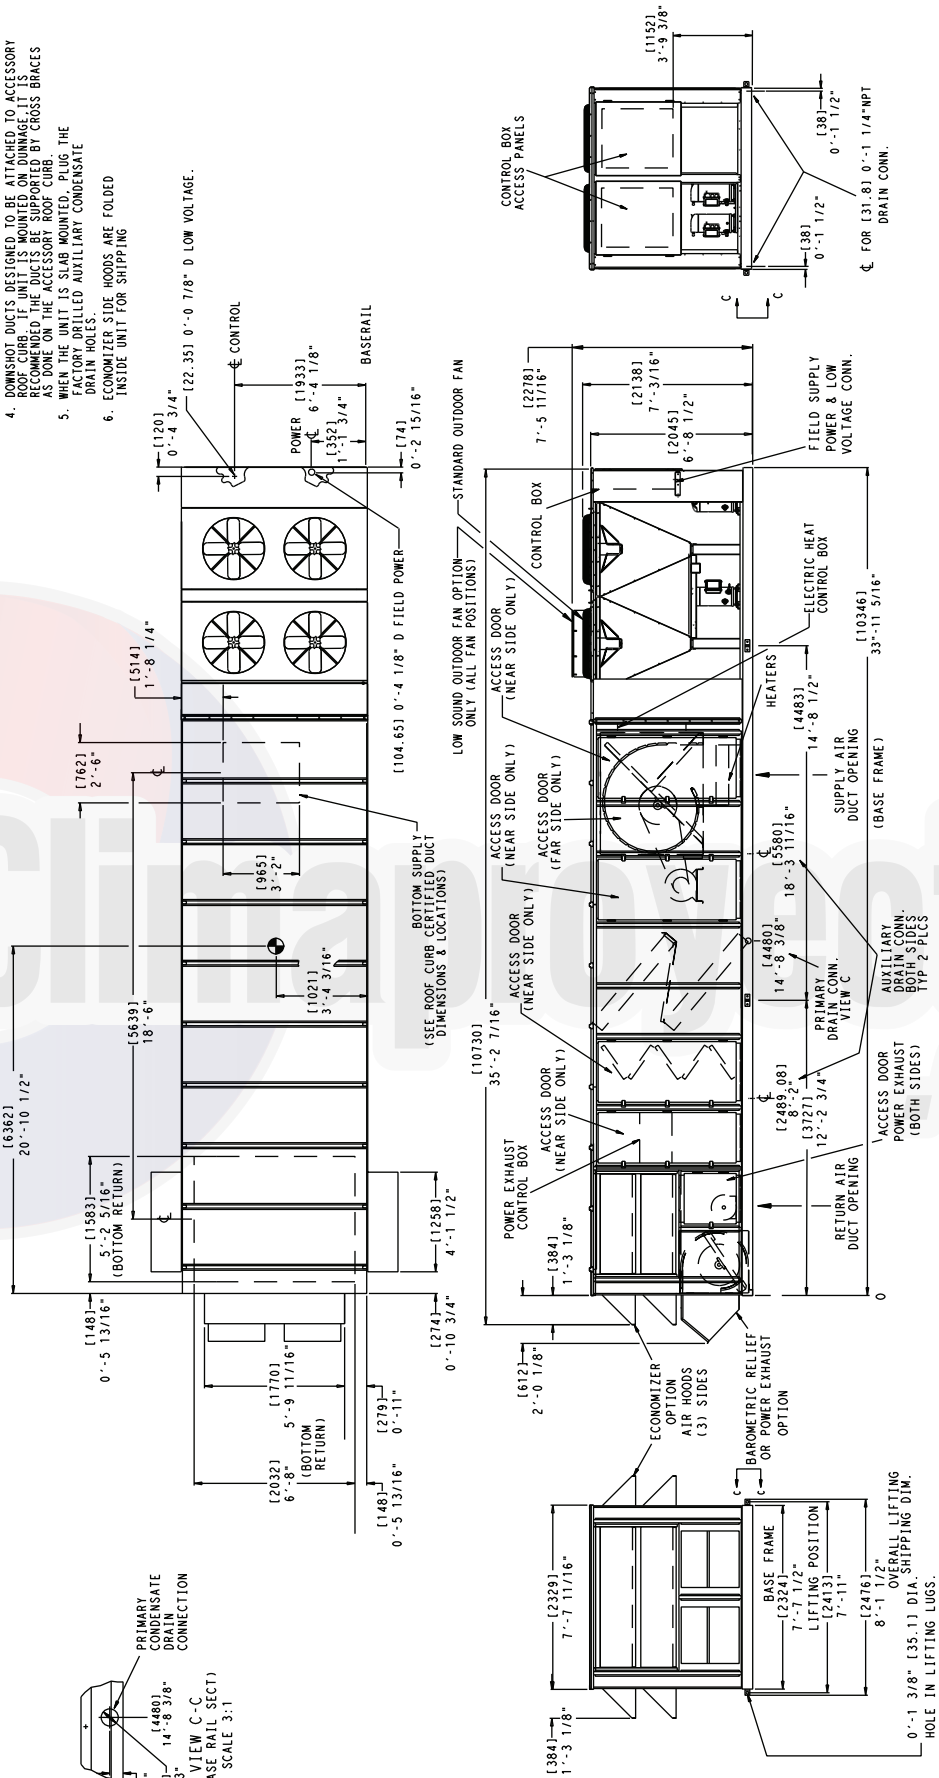



Fig. 18 — Base Unit Dimensional Drawing — 50P2,P3,P6,P7070 (Standard Chassis Unit Shown)

UNIT SIZE	WEIGHT	
	LBS.	KGS.
070	9175	4162

- NOTES:
1. DIMENSIONS IN () ARE IN MILLIMETERS.
 2. UNITS WITH LOW CAPACITY EXHAUSTER COIL INCLUDES ECONOMIZER OPTION.
 3. UNIT CLEARANCES:
 - TOP: 0'-0" (0)
 - REAR: 0'-0" (0)
 - LEFT: 0'-0" (0)
 - RIGHT: 0'-0" (0)
 - FRONT: 0'-0" (0)
 - BASE: 0'-0" (0)
 4. UNITS WITH LOW CAPACITY EXHAUSTER COIL INCLUDES ECONOMIZER OPTION.
 5. UNITS WITH LOW CAPACITY EXHAUSTER COIL INCLUDES ECONOMIZER OPTION.
 6. UNITS WITH LOW CAPACITY EXHAUSTER COIL INCLUDES ECONOMIZER OPTION.

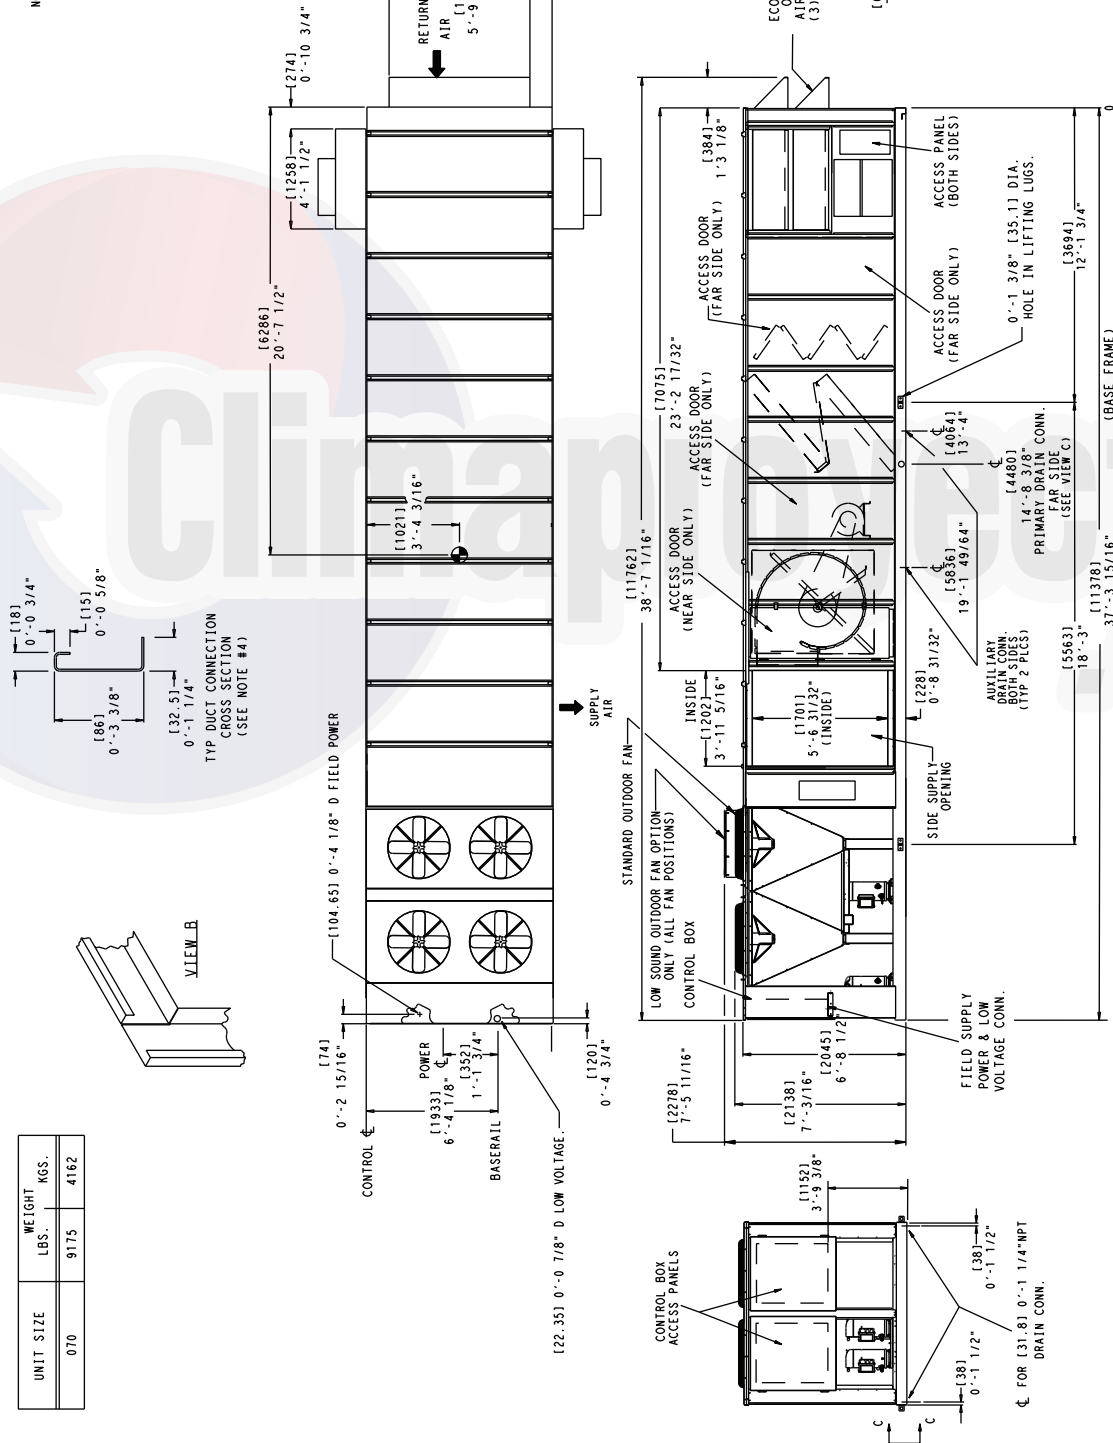


Fig. 19 — Base Unit Dimensional Drawing — 50P4,P5,P8,P9070 (Standard Chassis Unit Shown)

UNIT SIZE	WEIGHT LBS.	WEIGHT KGS.	A MM	A FT. IN.	B MM	B FT. IN.	C MM	C FT. IN.	D MM	D FT. IN.	E MM	E FT. IN.	F MM	F FT. IN.
075	13099	5942	3833	11'-7 1/2"	7927	21'-3 5/8"	7293	23'-11 1/8"	1021	3'-4 3/16"	13380	43'-10 1/4"	13970	45'-10"
090	13697	6213	3833	11'-7 1/2"	7927	21'-3 5/8"	7496	24'-7 1/8"	1054	3'-5 1/2"	14557	47'-9 1/8"	15147	49'-8 5/16"
100	13719	6223	3833	11'-7 1/2"	7927	21'-3 5/8"	7478	24'-6 3/8"	1054	3'-5 1/2"	14557	47'-9 1/8"	15147	49'-8 5/16"

- NOTES:
 1. DIMENSIONS IN 1/8 IN. MILLIMETERS.
 2. UNIT WEIGHT AND CENTER OF GRAVITY INCLUDES ECONOMIZER, LARGEST INDOOR FAN MOTOR, HIGH CAPACITY EVAPORATOR COIL AND LARGEST POWER EXHAUST MOTOR.
 3. UNIT CLEARANCES STRICT COMPENSER FANS CONTROL BOX END - 6'-0"
 4. SUGGESTED FIELD CONNECTIONS TO BE MADE INSIDE OR OUTSIDE OF 32.5 mm FLANGE.
 5. WHEN THE UNIT IS SLAB MOUNTED, PLUG THE FACTORY DRILLED AUXILIARY CONDENSATE DRAIN HOLES.
 6. CONTROL BOX SIDING WOODS ARE FOLDED IN FOR SHIPPING.


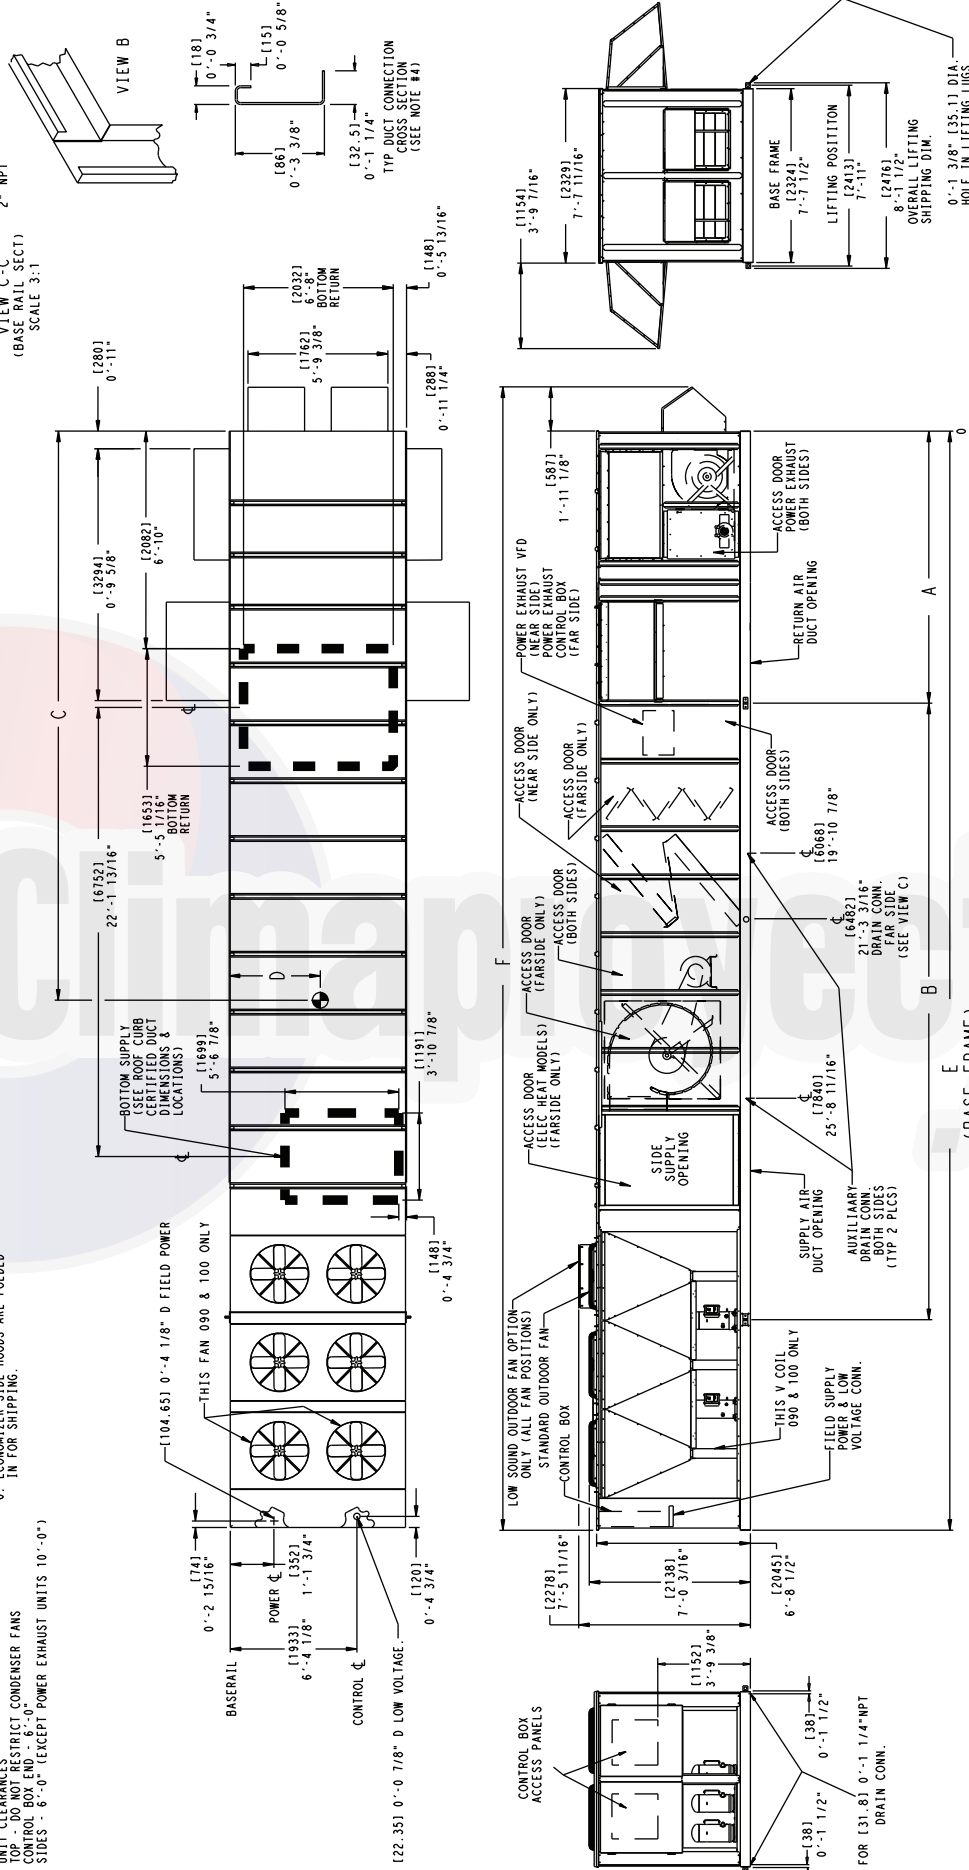


Fig. 20 — Base Unit Dimensional Drawing — 50P2,P3,P6,P7075-100 (Standard Chassis Unit with Optional High-Capacity Power Exhaust Shown)

UNIT SIZE	WEIGHT		A		B		C		D		E		F	
	LBS.	KGS.	MM	FT. IN.	MM	FT. IN.	MM	FT. IN.	MM	FT. IN.	MM	FT. IN.	MM	FT. IN.
075	11921	5407	3543	11'-7 1/2"	6494	21'-3 5/8"	5590	18'-4 1/16"	1021	3'-4 3/16"	11378	37'-3 5/16"	11762	38'-7 1/16"
090	12521	5679	3543	11'-7 1/2"	6494	21'-3 5/8"	5600	19'-0 5/16"	1054	3'-5 1/2"	12555	41'-2 5/16"	12939	42'-5 7/16"
100	12541	5688	3543	11'-7 1/2"	6494	21'-3 5/8"	5786	18'-11 13/16"	1054	3'-5 1/2"	12555	41'-2 5/16"	12939	42'-5 7/16"

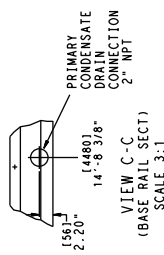

- NOTES:
1. DIMENSIONS IN () ARE IN MILLIMETERS.
 2. UNIT WEIGHT AND CENTER OF GRAVITY INCLUDES ECONOMIZER LARGES INDOOR FAN MOTOR AND CONDENSATE DRAIN COIL AND LARGEST POWER EXHAUST MOTOR.
 3. UNIT CLEARANCES
 - TOP - DO NOT RESTRICT CONDENSER FANS CONTROL BOX END - 6'-0"
 - ECONOMIZER END - 6'-0" (EXCEPT POWER EXHAUST UNITS 10'-0")
 4. SUGGESTED FIELD CONNECTIONS TO BE MADE INSIDE OR OUTSIDE OF 32.5 mm FLANGE.
 5. FACTORY DRILLED ADULTARY CONDENSATE DRAIN HOLES.
 6. ECONOMIZER SIDE HOODS ARE FOLDED IN FOR SHIPPING.

FOR SMALLER SERVICE AND OPERATIONAL CLEARANCES, CONTACT CARRIER APPLICATION ENGINEERING DEPARTMENT.


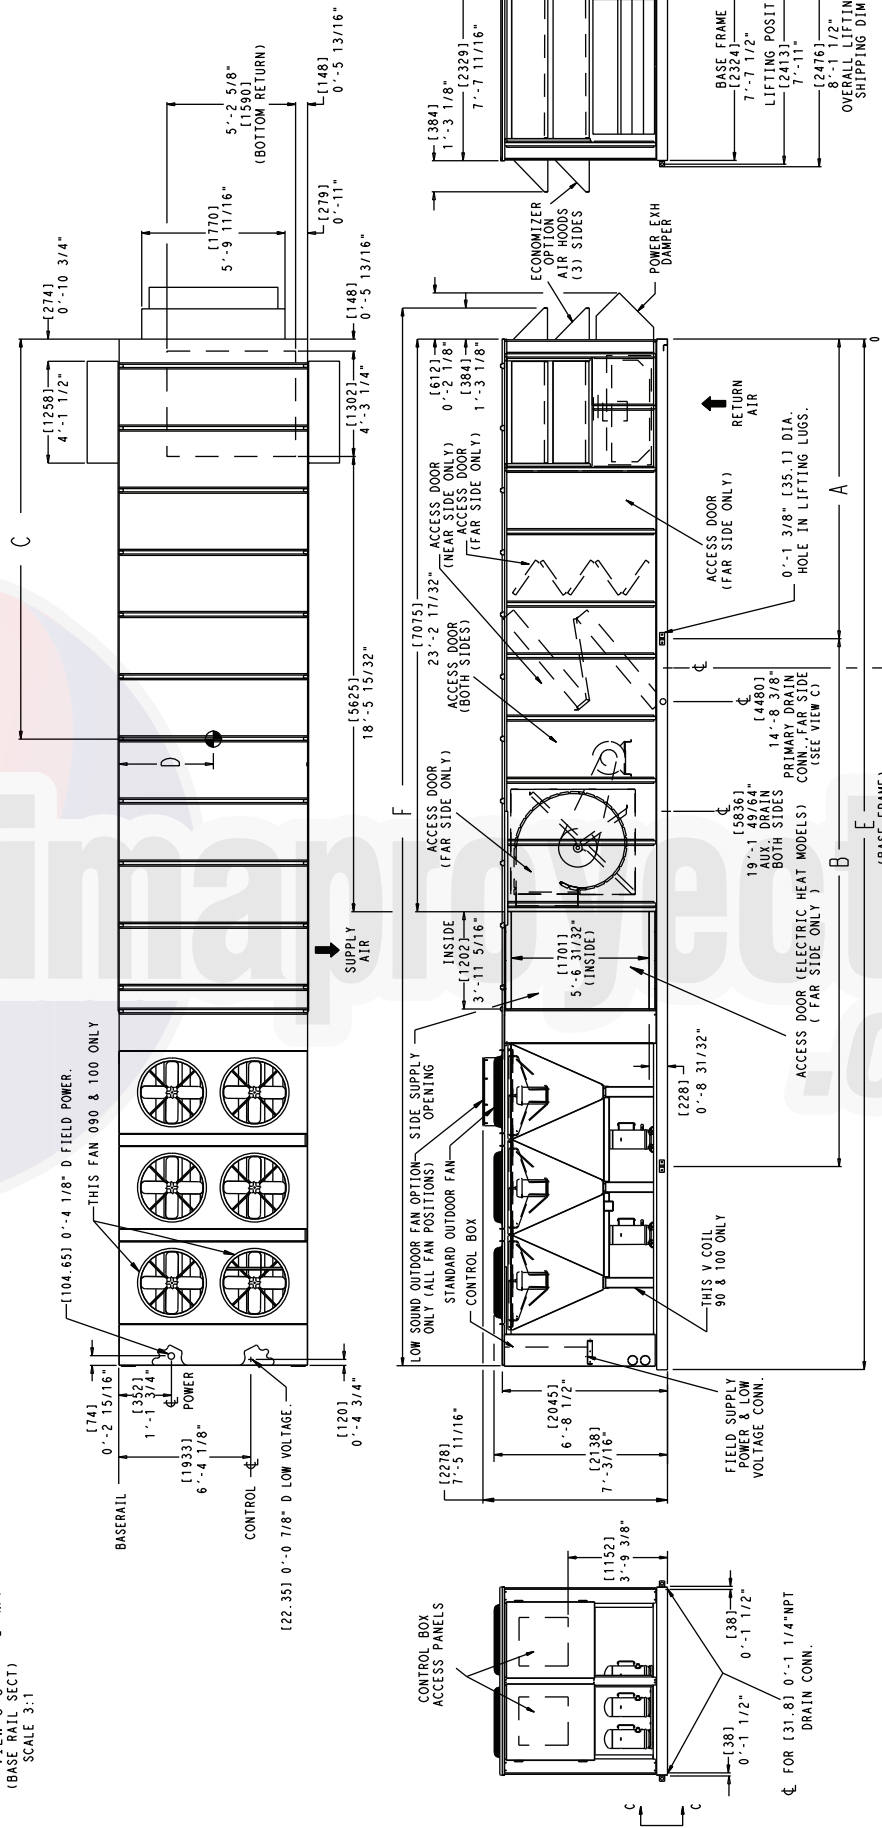


Fig. 21 — Base Unit Dimensional Drawing — 50P4,P5,P8,P9075-100 (Standard Chassis Unit with Optional Return Fan Shown)

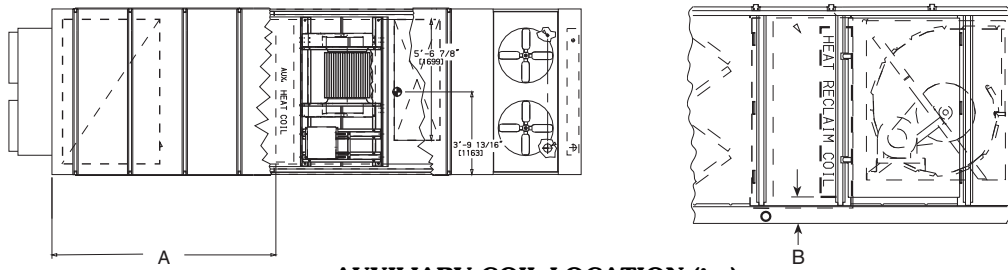

AUXILIARY COIL LOCATION (in.)

UNIT SIZES	DISTANCE A	HEIGHT B
030,035	123.0	6.6
040,050	156.8	6.6
055-070	200.4	6.6
075-100	200.4	6.6
075-100 with High Capacity Power Exhaust	279.2	6.6

Fig. 22 — Units with Optional Extended Chassis — Location of Coil Tracks

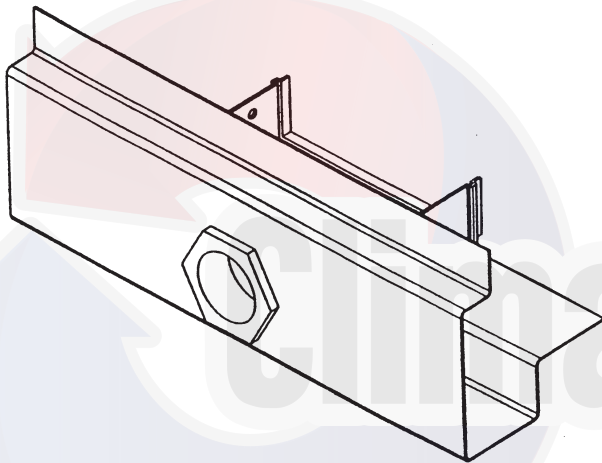


Fig. 23 — Primary Drain Connection


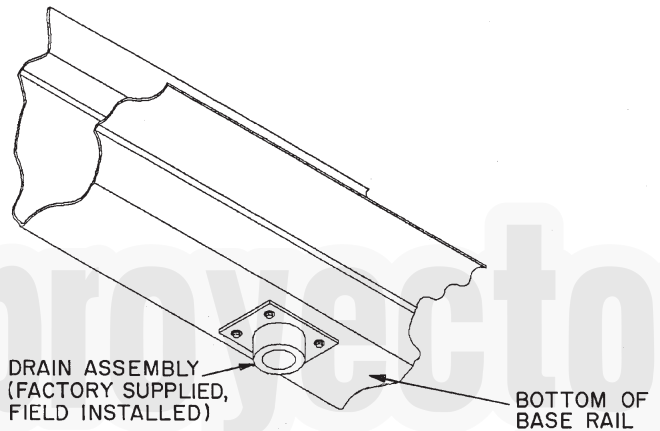



Fig. 25 — Secondary Condensate Drain Location (Curb Mount)

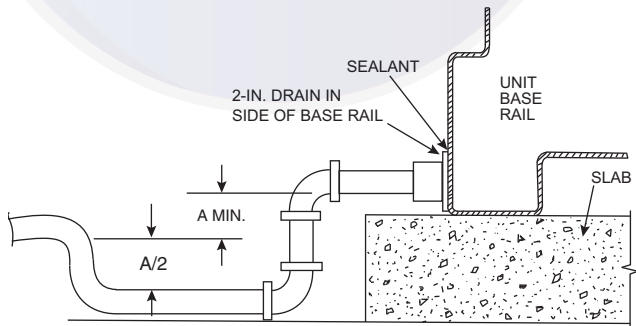

DRAIN PIPE IS FIELD SUPPLIED

A = 4-in. (102 mm) min — Sizes 030-070
7-in. (178 mm) min — Sizes 075-100

Fig. 24 — Primary Condensate Drain Piping Details (Slab and Curb Mounted) and Slab-Mounted Secondary Condensate Drain Piping Details

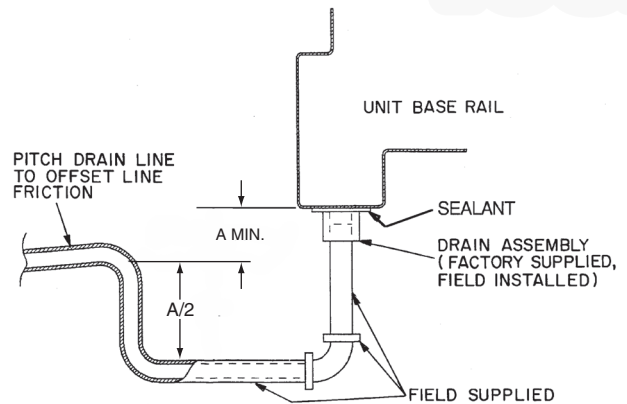

A = 4-in. (102 mm) min — sizes 030-070
7-in. (178 mm) min — sizes 075-100

Fig. 26 — Curb-Mounted Secondary Condensate Drain Pipe Details

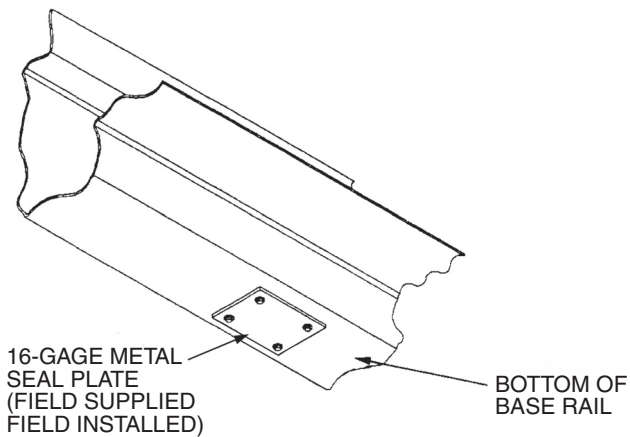


Fig. 27 — Secondary Drain Seal Plate Location (Slab Mount)

Step 9 — Install Outdoor Hoods¹

UNIT SIZES 030-050

25% Outdoor-Air Hoods (Units without Economizer Option) (Fig. 28)

1. Outdoor-air hoods are shipped bolted to the unit in a shipping position. Remove the 6 screws holding each 25% outdoor-air hood shipping cover in place.
2. Remove the holddown screw from each upper corner of each hood.
3. Pivot hoods outward (2 hoods).
4. Install 17 screws around outside of each hood. (Screws are in the fastener package taped to the basepan inside the fan section.)
5. Apply a bead of RTV or similar sealant to corner of each hood at pivot points to prevent water leaks. See Fig. 29.

Economizer Hoods (Units with Economizer Option, Fig. 30 and 31)

1. Outdoor-air hoods are shipped bolted to the unit in a shipping position.
2. Remove the holddown screw from the lower corner of each hood.
3. Pivot hoods out and upward (2 hoods).
4. Apply seal strip to upper horizontal flange of the hood top extensions. Apply seal strip to vertical flange of hood sides. (Hood top extensions, sides, screws, and seal strip are shipped inside the fan section of the unit.)
5. Install hood top extensions on bottom side of hood using 6 screws on each hood. Install hood sides using 10 screws on each side (7 along the top, 3 to fasten to unit side wall).
6. Apply a bead of RTV or similar sealant to corners of economizer hoods at pivot points to prevent water leaks. See Fig. 29.

UNIT SIZES 055-100

25% Outdoor-Air Hoods (Fig. 32)

The outdoor-air hoods are factory installed on the 055-100 units.

Economizer Hoods (Units with Economizer Option) (Fig. 33-35)

1. Outdoor-air hoods are shipped bolted to the unit in a shipping position.

2. Remove the holddown screw from the lower corner of each economizer hood.
3. Pivot hoods out and upward (4 hoods).
4. Apply seal strip to upper horizontal flange of the hood top extensions. Apply seal strip to vertical flange of hood sides. (Hood top extensions, sides, screws, and seal strip are shipped inside the fan section of the unit.)
5. Install hood top extensions on bottom side of hood top using 6 screws for each hood. Install hood sides using 10 screws for each side (7 along the top, 3 to fasten to unit side wall).
6. Apply a bead of RTV or similar sealant to corners of economizer hoods at pivot points to prevent water leaks. See Fig. 29.

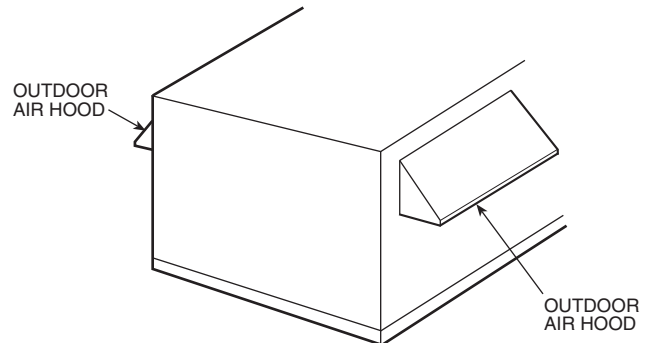


Fig. 28 — Outdoor-Air Hood Installation (Sizes 030-050)

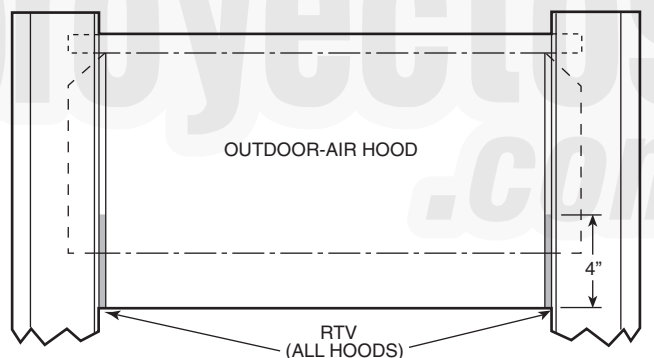


Fig. 29 — Outdoor-Air and Economizer Hood

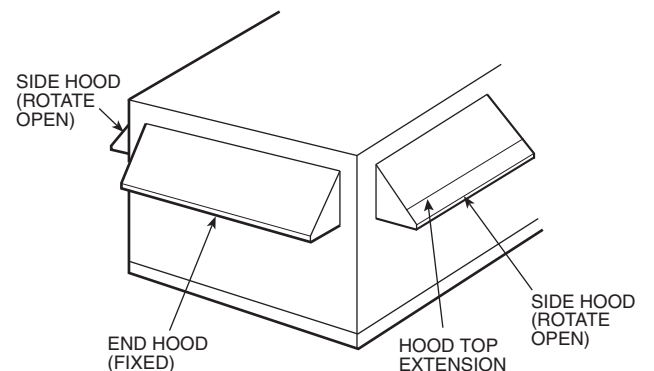


Fig. 30 — Economizer Outdoor-Air Hood Installation (Sizes 030-050)

1. For Greenspeed option units, (50P6,P7,P8,P9), secure the OAT sensor in the outdoor-air stream to measure the ambient air temperature.

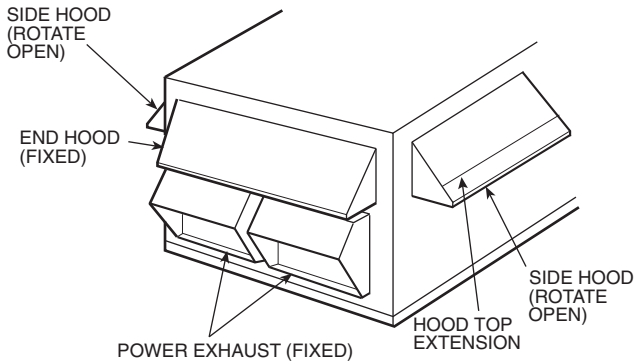


Fig. 31 — Economizer with Power Exhaust Outdoor-Air Hood Installation (Sizes 030-050)

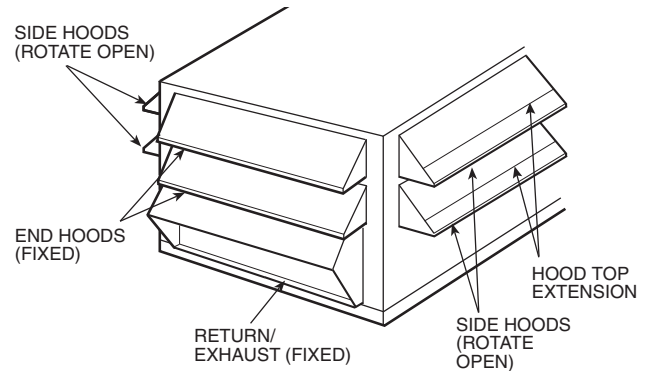


Fig. 35 — Economizer with Return/Exhaust Fan Outdoor-Air Hood Installation (Units with Optional Return Fan)

Step 10 — Install Economizer Hoods (Units with Optional High-Capacity Power Exhaust)

The economizer uses a total of 4 outdoor intake hoods, 2 on each side of the unit. See Fig. 36. Two small hoods (one per side) are factory-installed and are pivoted inside the unit chassis for shipment. Two large hoods are shipped in packages located inside the unit. The large hoods (1 on each side) require field assembly and mounting.

INSTALL SMALL HOODS

To install the small economizer hoods, perform the following procedure:

1. Remove the 10 screws holding each of the small economizer hood shipping covers in place.
2. Pivot hoods outward (2 hoods).
3. Apply seal strip to vertical flange of hood sides.
4. Install 15 screws (4 each side, 7 across top) around the outside of each hood. Screws are in the fastener package taped to the basepan inside the fan section.
5. Apply a bead of RTV or similar sealant to corner of economizer hood at pivot point to prevent water leaks. (See Fig. 29.)

INSTALL LARGE HOODS

Large hoods are shipped disassembled in the economizer section of the unit behind the large economizer hood shipping cover. See Fig. 37 for assembly details for large economizer hoods. To install the large economizer hoods, perform the following procedure:

1. Remove the 17 screws holding each of the large economizer hood shipping covers in place.
2. Remove the packages containing the disassembled large economizer hoods (total of 2 packages). Each package contains the following (see Fig. 37 for Item numbers): left hood side (Item 1), right hood side (Item 2), hood top (Item 3), hood front (Item 4), top filter flange (Item 5), 4 side filter flanges (Item 6), bottom support (Item 7), front support (Item 8), 6 filters (Item 9), 9 filter clips (Item 10), seal strip, and fasteners.
3. Place seal strip on backside of bottom support (Item 7) along entire length of support, covering 6 clearance holes.
4. Attach bottom support piece (Item 7) to unit. Be sure seal strip is between bottom support and panel on unit.
5. Place seal strip on 3/4-in. flange on both the left and right hood sides (Items 1 and 2).
6. Attach the side filter flanges (Item 6) to the left and right hood sides (Items 1 and 2), 2 on each hood side.

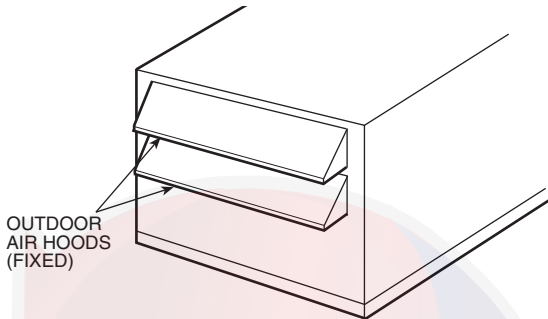


Fig. 32 — 25% Outdoor-Air Hood Location (Sizes 055-100)

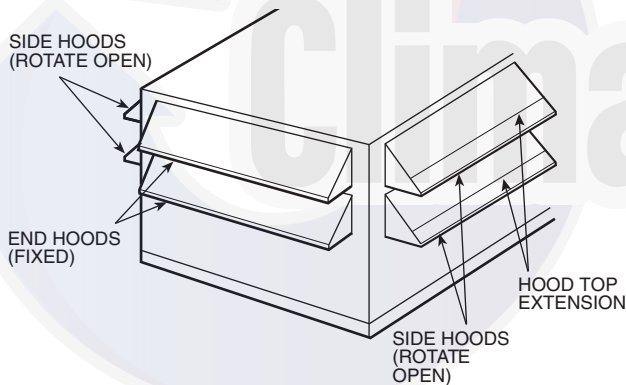


Fig. 33 — Economizer Outdoor-Air Hood Installation (Sizes 055-100)


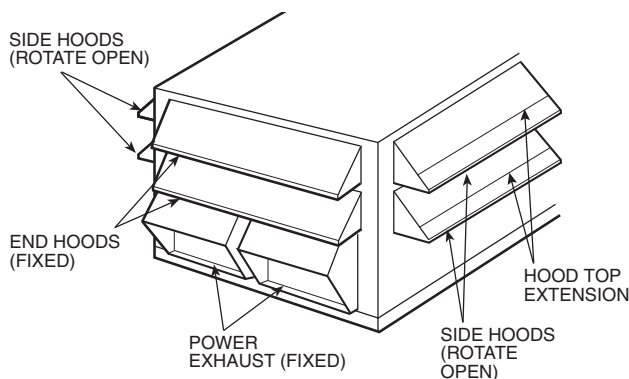


Fig. 34 — Economizer with Power Exhaust Outdoor-Air Hood Installation (Sizes 055-100)

7. Attach left and right hood sides (Items 1 and 2) to unit. Be sure seal strip is between hood side and unit.
8. Place seal strip on $\frac{3}{4}$ -in. flange on hood top (Item 3).
9. Attach top filter flange (Item 5) to hood top (Item 3).
10. Attach top hood to unit and to hood sides. Be sure seal strip is between hood top and unit.
11. Attach front support (Item 8) between left and right hood sides.
12. Place seal strip on all filter flanges.
13. Attach filter clips (Item 10) to front and bottom supports (Items 7 and 8).
14. Install filters (Item 9). Filters are held in place with filter clips.
15. Attach hood front (Item 4) to hood top and sides.
16. Apply RTV or similar sealant to 6 places shown in Fig. 37.

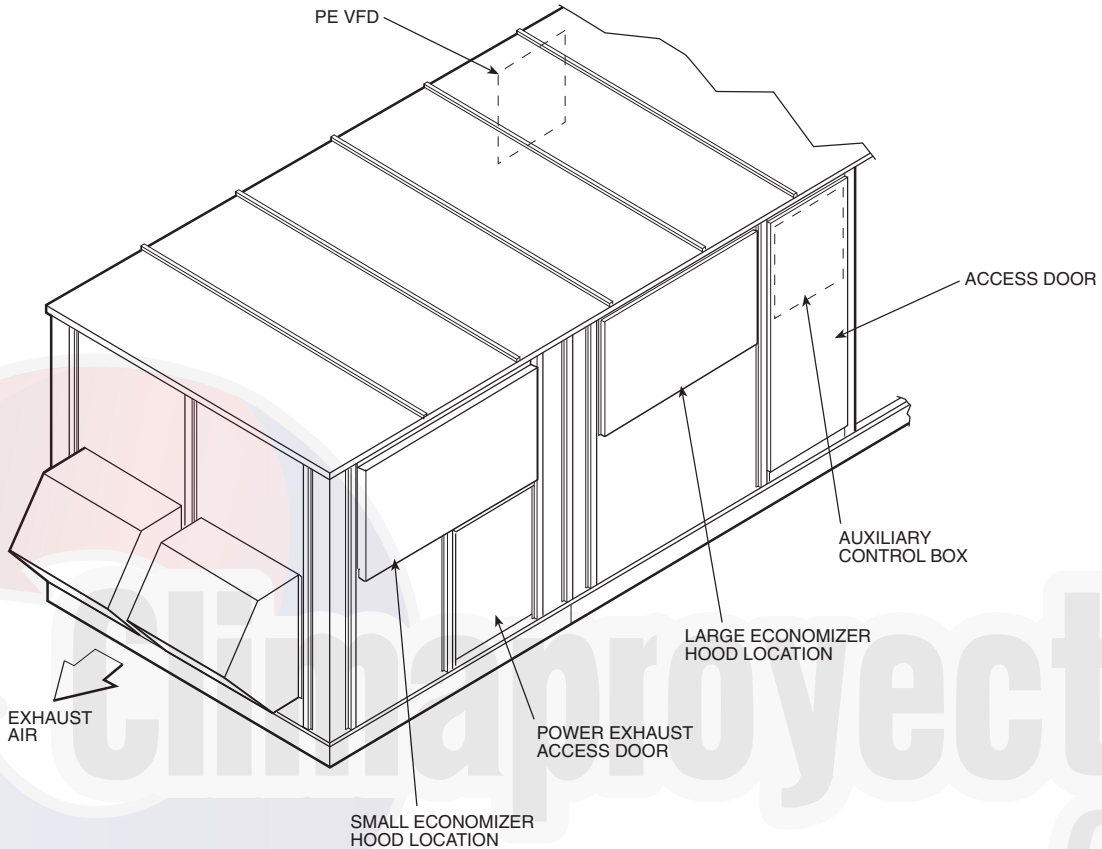

LEGEND

PE VFD — Power Exhaust Variable Frequency Drive

Fig. 36 — Economizer Hood Location — Units with High-Capacity Power Exhaust

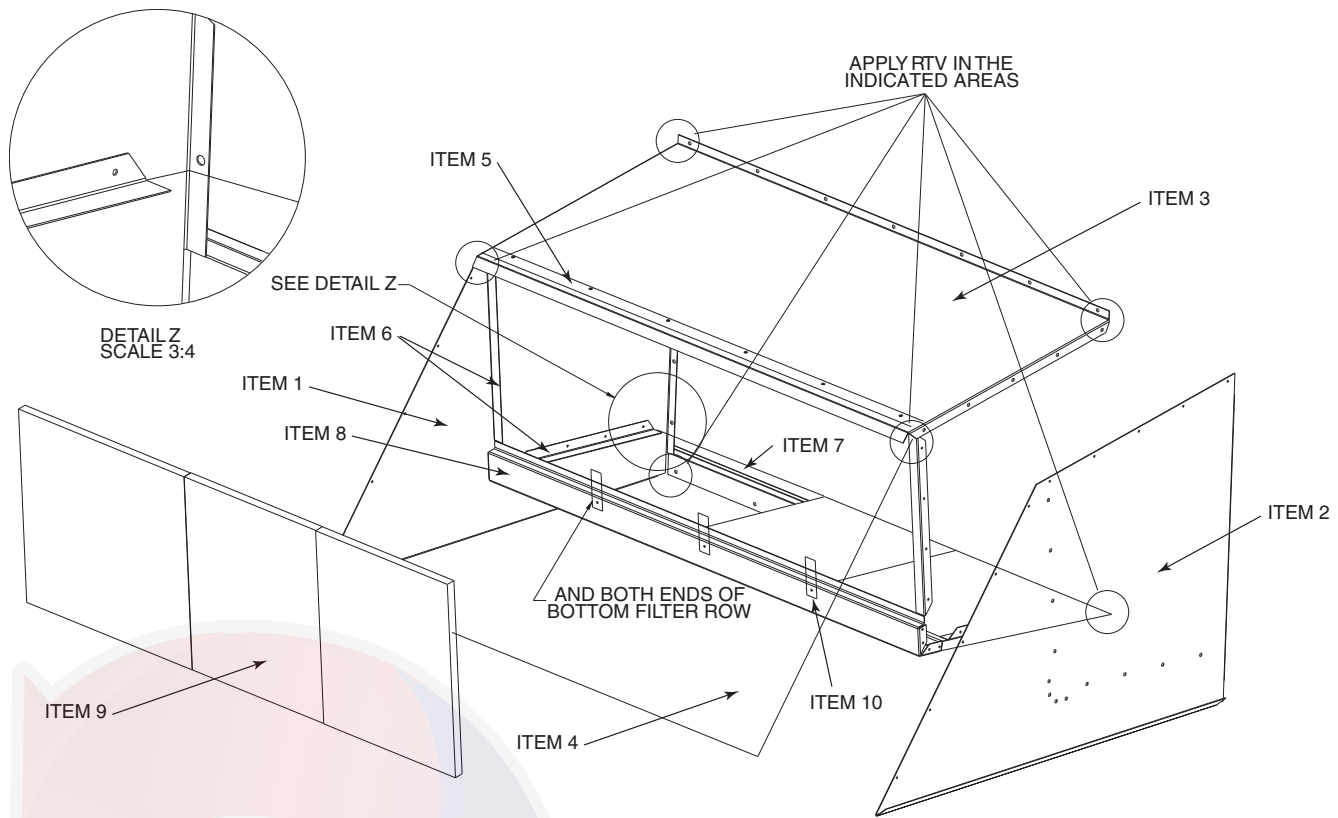


Fig. 37 — Large Economizer Hood Assembly

Step 11 — Route Field Wiring

UNIT SIZES 030-060

Field wiring can be brought into the unit through the basepan and roof curb or through the corner post in the side of the unit next to the control box.

A 3¹/₂-in. FPT coupling for field power and a 3³/₄-in. FPT coupling for 24 v control wiring are provided in the basepan. There are two 7⁷/₈-in. pilot holes in the corner post as shown on the certified drawings. Use these holes as pilot holes for making the hole for field-supplied conduit in the corner post for field power wiring.

⚠ CAUTION

Use care when drilling near condenser coil. Damage to unit could result.

If field power wiring is brought through the roof curb, route wiring out through one of the holes to the field-supplied disconnect and then back into the unit through the other hole. See Fig. 38 and 39 for recommended disconnect location.

If power wiring is brought through the side of the unit, route wiring from field-supplied disconnect through top hole into unit.

If control wiring is to be brought in through the side of the unit, a 7⁷/₈-in. diameter hole must be drilled in the corner post next to the control box.

UNIT SIZES 070-100

Field wiring is brought into the unit through the bottom of the control box. Wiring can be brought through the roof curb through field-supplied watertight connections. See Fig. 40.

A 4⁵/₃₂-in. hole for field power wiring and a 7⁷/₈-in. hole for 24 v control wiring are provided in the bottom of the control box. Field-supplied couplings must be used when routing wiring into the control box.

See Fig. 40 for recommended disconnect location.

Step 12 — Make Field Electrical Connections

IMPORTANT: The 50P3,P5 (variable air volume) units generate, use, and can radiate radio frequency energy. If units are not installed and used in accordance with these instructions, they may cause radio interference. They have been tested and found to comply with limits of a Class A computing device as defined by FCC (Federal Communications Commission) regulations, Subpart J of Part 15, which are designed to provide reasonable protection against such interference when operated in a commercial environment.

POWER WIRING

Units are factory wired for the voltage shown on the unit nameplate. The main terminal block is suitable for use with aluminum or copper wires. Maximum wire size is 3/0 AWG (American Wire Gage).

Units without Factory-Installed Disconnect

When installing units, provide a disconnect per NEC (National Electrical Code) of adequate size (MOCP [maximum overcurrent protection] of unit is on the informative plate). All field wiring must comply with NEC and all local codes. Size wire based on MCA (minimum circuit amps) on the unit informative plate. See Fig. 41 for power wiring connections to the unit power terminal block and equipment ground. Maximum wire size is two 500 MCM conductors per pole.

Units with Factory-Installed Disconnect

The factory-installed disconnect is an interlocking, door-type. The disconnect handle locks the door when it is in the ON position. The disconnect handle must be in the OFF position to open the control box door. The disconnect is located in the unit control box behind the control box door. See Fig. 42.

All field wiring must comply with NEC and all local codes. Wire must be sized based on MCA (minimum circuit amps) on the unit informative plate. See Fig. 43 for power wiring connections to the unit disconnect and equipment ground.

DISCONNECT SIZE	MAXIMUM WIRE SIZE (MCM)
250 Amps	300
400 Amps	600
600 Amps	600*

*Two conductors per pole.

Operating Voltage

Operating voltage to the compressor must be within the voltage range indicated on the unit nameplate. Voltages between phases must be balanced within 2%, and the current must be balanced within 10%. See Tables 13-35 for unit electrical data.

Use the following formula to determine the percent voltage imbalance.


$$\% \text{ Voltage Imbalance} = 100 \times \frac{\text{max voltage deviation from average voltage}}{\text{average voltage}}$$

Example: Supply voltage is 460-3-60.

AB = 452 v

BC = 464 v

AC = 455 v



$$\begin{aligned} \text{Average Voltage} &= \frac{452 + 464 + 455}{3} \\ &= \frac{1371}{3} \\ &= 457 \end{aligned}$$

Determine maximum deviation from average voltage:

(AB) 457 – 452 = 5 v

(BC) 464 – 457 = 7 v

(AC) 457 – 455 = 2 v

Maximum deviation is 7 v.

Determine percent voltage imbalance:

$$\begin{aligned} \% \text{ Voltage Imbalance} &= 100 \times \frac{7}{457} \\ &= 1.53\% \end{aligned}$$

This amount of phase imbalance is satisfactory as it is below the maximum allowable 2%.

IMPORTANT: If the supply voltage phase imbalance is more than 2%, contact local utility immediately.

Unit failure as a result of operation on improper line voltage or excessive phase imbalance constitutes abuse and may cause damage to electrical components.

(Text continued on page 169.)

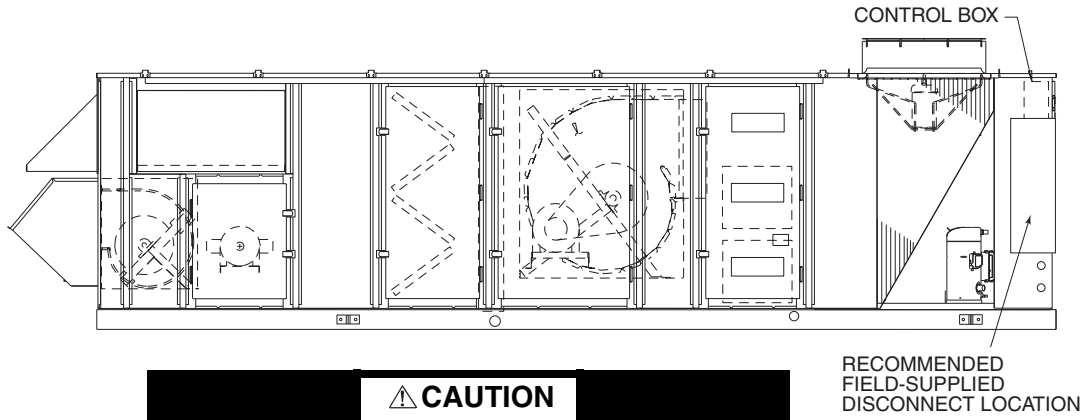


Fig. 38 — Disconnect Location — Size 030 and 035 Units

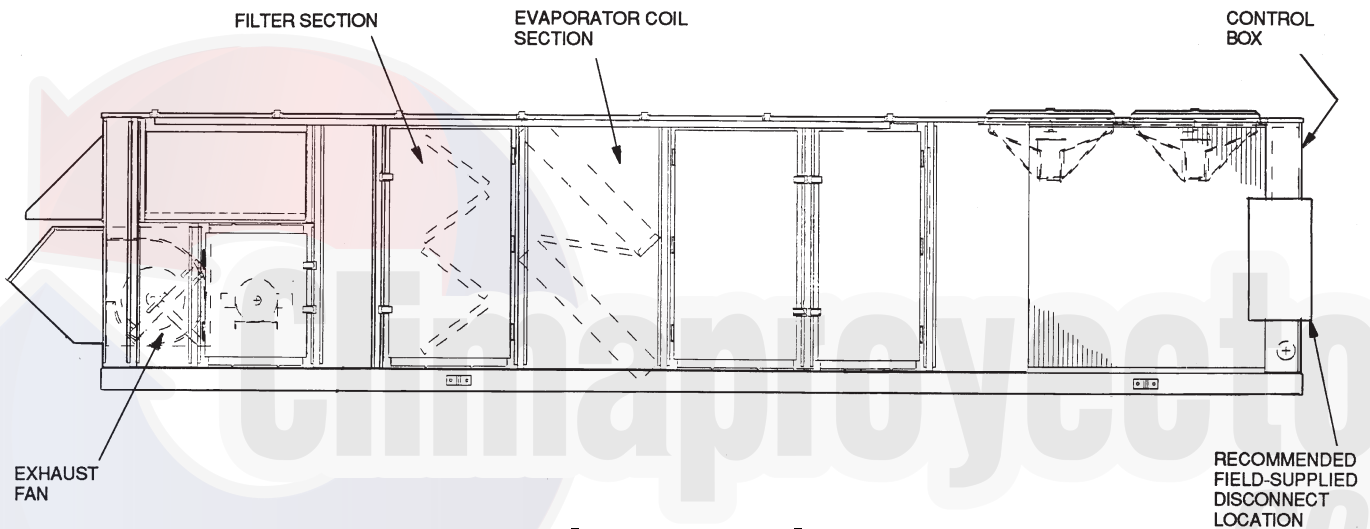


Fig. 39 — Disconnect Location — Size 040-060 Units

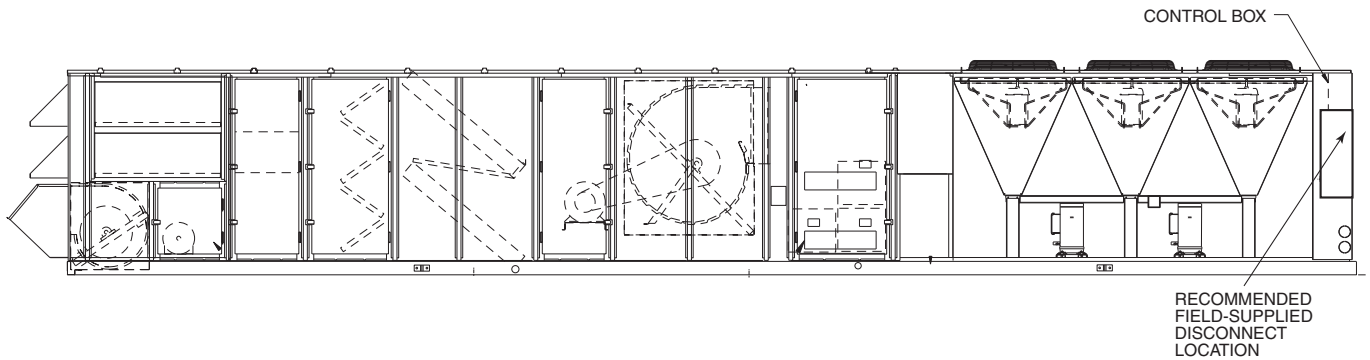


Fig. 40 — Disconnect Location — Size 070-100 Units

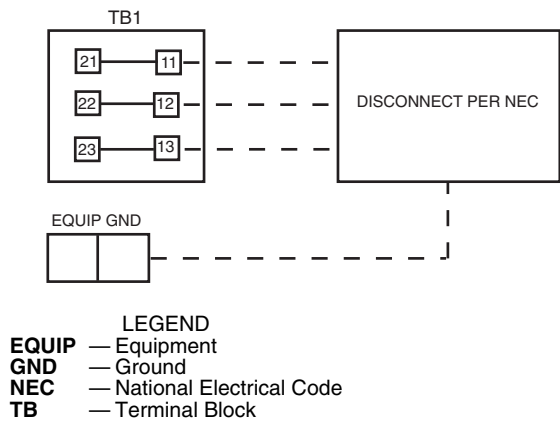


Fig. 41 — Field Power Wiring Connections

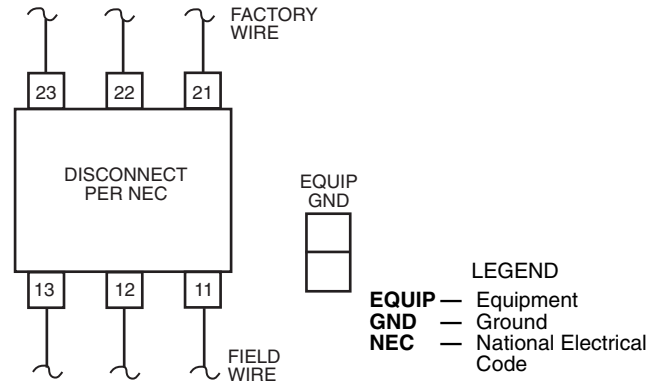


Fig. 43 — Field Power Wiring Connections for Factory-Installed Disconnect

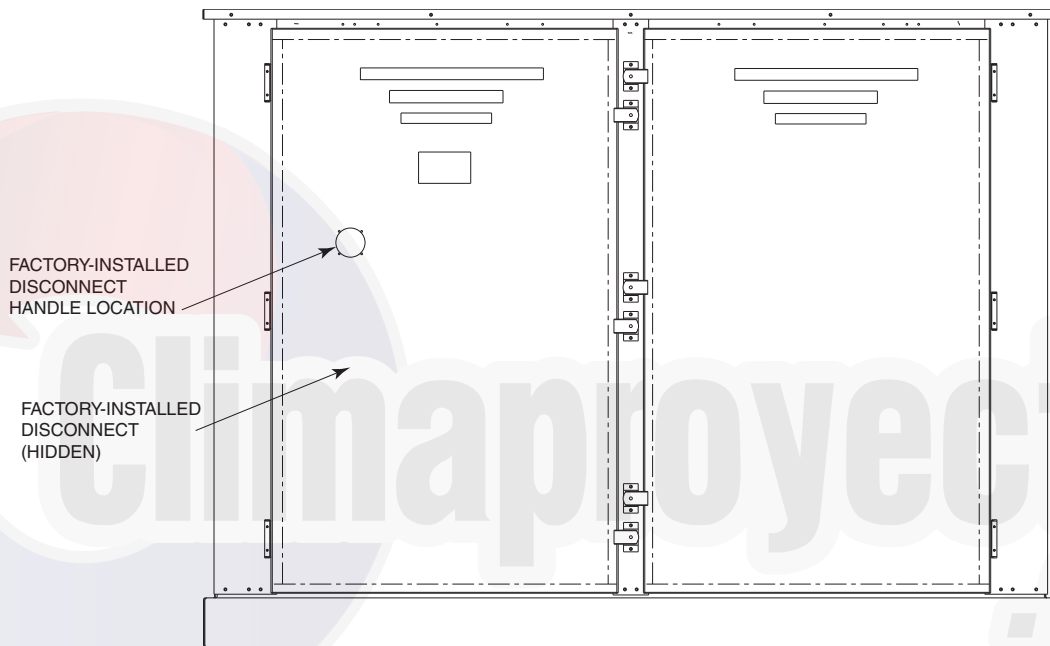


Fig. 42 — Factory-Installed Disconnect Location (End of Unit Shown)

Table 13 — Electrical Data — 50P 030 Units
208/230-3-60 (V-Ph-Hz)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		POWER EXHAUST			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
187	253	1	51.3	300	1	51.3	300	2	6.6 (ea)	10	30.8 / 28.0	2	—	— / —	—	—	152.8 / 150.6	200 / 200
															78.9 / 90.0	36 / 36	152.8 / 150.6	200 / 200
															157.7 / 182.0	72 / 72	188.0 / 209.5	225 / 250
															236.6 / 273.0	108 / 108	266.9 / 300.5	300 / 350
															—	—	174.0 / 169.8	225 / 200
															78.9 / 90.0	36 / 36	174.0 / 169.8	225 / 200
		157.7 / 182.0	72 / 72	214.5 / 233.5	250 / 250													
		236.6 / 273.0	108 / 108	293.4 / 324.5	300 / 350													
		—	—	186.2 / 181.0	225 / 225													
		78.9 / 90.0	36 / 36	186.2 / 181.0	225 / 225													
		157.7 / 182.0	72 / 72	229.7 / 247.5	250 / 250													
		236.6 / 273.0	108 / 108	308.6 / 338.5	350 / 350													
—	—	201.2 / 194.6	250 / 225															
78.9 / 90.0	36 / 36	201.2 / 195.0	250 / 225															
157.7 / 182.0	72 / 72	248.5 / 264.5	250 / 300															
236.6 / 273.0	108 / 108	327.4 / 355.5	350 / 400															
—	—	214.4 / 206.6	250 / 250															
78.9 / 90.0	36 / 36	214.4 / 210.0	250 / 250															
157.7 / 182.0	72 / 72	265.0 / 279.5	300 / 300															
236.6 / 273.0	108 / 108	343.9 / 370.5	350 / 400															
187	253	1	51.3	300	1	51.3	300	2	6.6 (ea)	10	30.8 / 28.0	2	—	— / —	—	—	159.4 / 156.6	200 / 200
															78.9 / 90.0	36 / 36	159.4 / 156.6	200 / 200
															157.7 / 182.0	72 / 72	196.2 / 217.0	250 / 250
															236.6 / 273.0	108 / 108	275.1 / 308.0	300 / 350
															—	—	180.6 / 175.8	225 / 225
															78.9 / 90.0	36 / 36	180.6 / 175.8	225 / 225
		157.7 / 182.0	72 / 72	222.7 / 241.0	250 / 250													
		236.6 / 273.0	108 / 108	301.6 / 332.0	350 / 350													
		—	—	192.8 / 187.0	225 / 225													
		78.9 / 90.0	36 / 36	192.8 / 187.0	225 / 225													
		157.7 / 182.0	72 / 72	238.0 / 255.0	250 / 300													
		236.6 / 273.0	108 / 108	316.9 / 346.0	350 / 350													
—	—	207.8 / 200.6	250 / 250															
78.9 / 90.0	36 / 36	207.8 / 202.5	250 / 250															
157.7 / 182.0	72 / 72	256.7 / 272.0	300 / 300															
236.6 / 273.0	108 / 108	335.6 / 363.0	350 / 400															
—	—	221.0 / 212.6	250 / 250															
78.9 / 90.0	36 / 36	221.0 / 217.5	250 / 250															
157.7 / 182.0	72 / 72	273.2 / 287.0	300 / 300															
236.6 / 273.0	108 / 108	352.1 / 378.0	400 / 400															
187	253	1	51.3	300	1	51.3	300	2	6.6 (ea)	15	46.2 / 42.0	2	—	— / —	—	—	174.8 / 170.6	225 / 200
															78.9 / 90.0	36 / 36	174.8 / 170.6	225 / 200
															157.7 / 182.0	72 / 72	215.5 / 234.5	250 / 250
															236.6 / 273.0	108 / 108	294.4 / 325.5	300 / 350
															—	—	196.0 / 189.8	225 / 225
															78.9 / 90.0	36 / 36	196.0 / 189.8	225 / 225
		157.7 / 182.0	72 / 72	242.0 / 258.5	250 / 300													
		236.6 / 273.0	108 / 108	320.9 / 349.5	350 / 350													
		—	—	208.2 / 201.0	250 / 250													
		78.9 / 90.0	36 / 36	208.2 / 203.0	250 / 250													
		157.7 / 182.0	72 / 72	257.2 / 272.5	300 / 300													
		236.6 / 273.0	108 / 108	336.1 / 363.5	350 / 400													
—	—	223.2 / 214.6	250 / 250															
78.9 / 90.0	36 / 36	223.2 / 220.0	250 / 250															
157.7 / 182.0	72 / 72	276.0 / 289.5	300 / 300															
236.6 / 273.0	108 / 108	354.9 / 380.5	400 / 400															
—	—	236.4 / 226.6	250 / 250															
78.9 / 90.0	36 / 36	236.4 / 235.0	250 / 250															
157.7 / 182.0	72 / 72	292.5 / 304.5	300 / 350															
236.6 / 273.0	108 / 108	371.4 / 395.5	400 / 400															

See page 169 for legend and notes.

Table 13 — Electrical Data — 50P 030 Units (cont)

208/230-3-60 (V-Ph-Hz) (cont)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		POWER EXHAUST			OPTIONAL ELECTRIC HEAT		POWER SUPPLY			
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR BRKR*		
187	253	1	51.3	300	1	51.3	300	2	6.6 (ea)	25	74.8 / 68.0	2	—	— / —	—	—	190.1/ 183.3	225/ 225		
															78.9/ 90.0	36/ 36	190.1/ 183.3	225/ 225		
															157.7/ 182.0	72/ 72	232.0/ 249.5	250/ 300		
															236.6/ 273.0	108/ 108	310.9/ 340.5	350/ 350		
															—	—	211.3/ 202.5	250/ 250		
															3	10.6 / 9.6	78.9/ 90.0	36/ 36	211.3/ 204.0	250/ 250
															157.7/ 182.0	72/ 72	258.5/ 273.5	300/ 300		
															236.6/ 273.0	108/ 108	337.4/ 364.5	350/ 400		
															—	—	223.5/ 213.7	250/ 250		
															5	16.7 / 15.2	78.9/ 90.0	36/ 36	223.5/ 218.0	250/ 250
															157.7/ 182.0	72/ 72	273.7/ 287.5	300/ 300		
															236.6/ 273.0	108/ 108	352.6/ 378.5	400/ 400		
		—	—	238.5/ 227.3	250/ 250															
		7.5	24.2 / 22.0	78.9/ 90.0	36/ 36	238.5/ 235.0	250/ 250													
		157.7/ 182.0	72/ 72	292.5/ 304.5	300/ 350															
		236.6/ 273.0	108/ 108	371.4/ 395.5	400/ 400															
		—	—	251.7/ 239.3	300/ 250															
		10	30.8 / 28.0	78.9/ 90.0	36/ 36	251.7/ 250.0	300/ 250													
		157.7/ 182.0	72/ 72	309.0/ 319.5	350/ 350															
		236.6/ 273.0	108/ 108	387.9/ 410.5	400/ 450															
		2	6.6 (ea)	25	74.8 / 68.0	2	—	— / —	—	—	209.3/ 200.8	250/ 250								
									78.9/ 90.0	36/ 36	209.3/ 200.8	250/ 250								
									157.7/ 182.0	72/ 72	251.2/ 267.0	300/ 300								
									236.6/ 273.0	108/ 108	330.1/ 358.0	400/ 400								
—	—								230.5/ 220.0	300/ 250										
3	10.6 / 9.6								78.9/ 90.0	36/ 36	230.5/ 221.5	300/ 250								
157.7/ 182.0	72/ 72								277.7/ 291.0	300/ 350										
236.6/ 273.0	108/ 108								356.6/ 382.0	400/ 400										
—	—								242.7/ 231.2	300/ 250										
5	16.7 / 15.2								78.9/ 90.0	36/ 36	242.7/ 235.5	300/ 250								
157.7/ 182.0	72/ 72								293.0/ 305.0	350/ 350										
236.6/ 273.0	108/ 108								371.9/ 396.0	400/ 450										
—	—	257.7/ 244.8	300/ 300																	
7.5	24.2 / 22.0	78.9/ 90.0	36/ 36	257.7/ 252.5	300/ 300															
157.7/ 182.0	72/ 72	311.7/ 322.0	350/ 350																	
236.6/ 273.0	108/ 108	390.6/ 413.0	450/ 450																	
—	—	270.9/ 256.8	300/ 300																	
10	30.8 / 28.0	78.9/ 90.0	36/ 36	270.9/ 267.5	300/ 300															
157.7/ 182.0	72/ 72	328.2/ 337.0	350/ 350																	
236.6/ 273.0	108/ 108	407.1/ 428.0	450/ 450																	
2	6.6 (ea)	30	88.0 / 80.0	2	—	— / —	—	—	225.8/ 215.8	300/ 250										
							78.9/ 90.0	36/ 36	225.8/ 215.8	300/ 250										
							157.7/ 182.0	72/ 72	267.7/ 282.0	350/ 350										
							236.6/ 273.0	108/ 108	346.6/ 373.0	400/ 450										
							—	—	247.0/ 235.0	300/ 300										
							3	10.6 / 9.6	78.9/ 90.0	36/ 36	247.0/ 236.5	300/ 300								
							157.7/ 182.0	72/ 72	294.2/ 306.0	350/ 350										
							236.6/ 273.0	108/ 108	373.1/ 397.0	450/ 450										
							—	—	259.2/ 246.2	300/ 300										
							5	16.7 / 15.2	78.9/ 90.0	36/ 36	259.2/ 250.5	300/ 300								
							157.7/ 182.0	72/ 72	309.5/ 320.0	350/ 350										
							236.6/ 273.0	108/ 108	388.4/ 411.0	450/ 450										
—	—	274.2/ 259.8	350/ 300																	
7.5	24.2 / 22.0	78.9/ 90.0	36/ 36	274.2/ 267.5	350/ 300															
157.7/ 182.0	72/ 72	328.2/ 337.0	400/ 400																	
236.6/ 273.0	108/ 108	407.1/ 428.0	450/ 450																	
—	—	287.4/ 271.8	350/ 350																	
10	30.8 / 28.0	78.9/ 90.0	36/ 36	287.4/ 282.5	350/ 350															
157.7/ 182.0	72/ 72	344.7/ 352.0	400/ 400																	
236.6/ 273.0	108/ 108	423.6/ 443.0	450/ 500																	

See page 169 for legend and notes.

Table 13 — Electrical Data — 50P 030 Units (cont)
380-3-60 (V-Ph-Hz)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		POWER EXHAUST			OPTIONAL ELECTRIC HEAT		POWER SUPPLY			
		No. A1			No. B1										FLA	kW			MCA	FUSE OR HACR BRKR*
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*		
342	418	1	26.9	139	1	26.9	139	2	3.9 (ea)	10	16.7	2	7 1/2	12.5	—	—	80.8	100		
															—	—	38.3	36	80.8	100
															—	—	76.8	72	92.4	110
															—	—	114.7	108	130.3	150
															—	—	—	—	88.8	110
															3	4.0	38.3	36	88.8	110
															—	—	76.8	72	102.4	125
															—	—	114.7	108	140.3	150
															5	9.1	—	—	99.0	125
															—	—	38.3	36	99.0	125
															—	—	76.8	72	115.2	125
															—	—	114.7	108	153.1	175
7.5	12.5	—	—	105.8	125															
—	—	38.3	36	105.8	125															
—	—	76.8	72	123.7	125															
—	—	114.7	108	161.6	175															
10	16.7	—	—	114.2	125															
—	—	38.3	36	114.2	125															
—	—	76.8	72	134.2	150															
—	—	114.7	108	172.1	175															
342	418	1	26.9	139	1	26.9	139	2	3.9 (ea)	10	16.7	2	10	16.7	—	—	85.0	110		
															—	—	38.3	36	85.0	110
															—	—	76.8	72	97.7	125
															—	—	114.7	108	135.6	150
															—	—	—	—	93.0	110
															3	4.0	38.3	36	93.0	110
															—	—	76.8	72	107.7	125
															—	—	114.7	108	145.6	150
															5	9.1	—	—	103.2	125
															—	—	38.3	36	103.2	125
															—	—	76.8	72	120.4	125
															—	—	114.7	108	158.3	175
7.5	12.5	—	—	110.0	125															
—	—	38.3	36	110.0	125															
—	—	76.8	72	128.9	150															
—	—	114.7	108	166.8	175															
10	16.7	—	—	118.4	125															
—	—	38.3	36	118.4	125															
—	—	76.8	72	139.4	150															
—	—	114.7	108	177.3	200															
342	418	1	26.9	139	1	26.9	139	2	3.9 (ea)	10	16.7	2	15	24.5	—	—	92.8	110		
															—	—	38.3	36	92.8	110
															—	—	76.8	72	107.4	125
															—	—	114.7	108	145.3	150
															—	—	—	—	100.8	125
															3	4.0	38.3	36	100.8	125
															—	—	76.8	72	117.4	125
															—	—	114.7	108	155.3	175
															5	9.1	—	—	111.0	125
															—	—	38.3	36	111.0	125
															—	—	76.8	72	130.2	150
															—	—	114.7	108	168.1	175
7.5	12.5	—	—	117.8	125															
—	—	38.3	36	117.8	125															
—	—	76.8	72	138.7	150															
—	—	114.7	108	176.6	200															
10	16.7	—	—	126.2	150															
—	—	38.3	36	126.2	150															
—	—	76.8	72	149.2	150															
—	—	114.7	108	187.1	200															

See page 169 for legend and notes.

Table 13 — Electrical Data — 50P 030 Units (cont)

380-3-60 (V-Ph-Hz) (cont)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		POWER EXHAUST			OPTIONAL ELECTRIC HEAT		POWER SUPPLY			
		No. A1			No. B1															
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*		
342	418	1	26.9	139	1	26.9	139	2	3.9 (ea)	25	38.0	2	—	—	—	—	99.1	125		
															38.3	36	99.1	125		
															76.8	72	114.3	125		
															114.7	108	152.2	175		
															—	—	107.1	125		
															3	4.0	38.3	36	107.1	125
															76.8	72	124.3	150		
															114.7	108	162.2	175		
															—	—	117.3	125		
															5	9.1	38.3	36	117.3	125
															76.8	72	137.1	150		
															114.7	108	175.0	200		
—	—	124.1	150																	
7.5	12.5	38.3	36	124.1	150															
76.8	72	145.6	150																	
114.7	108	183.5	200																	
—	—	132.5	150																	
10	16.7	38.3	36	132.5	150															
76.8	72	156.1	175																	
114.7	108	194.0	200																	
—	—	109.1	125																	
—	—	38.3	36	109.1	125															
—	—	76.8	72	124.3	150															
—	—	114.7	108	162.2	200															
—	—	117.1	150																	
3	4.0	38.3	36	117.1	150															
76.8	72	134.3	150																	
114.7	108	172.2	200																	
—	—	127.3	150																	
5	9.1	38.3	36	127.3	150															
76.8	72	147.1	175																	
114.7	108	185.0	200																	
—	—	134.1	150																	
7.5	12.5	38.3	36	134.1	150															
76.8	72	155.6	175																	
114.7	108	193.5	225																	
—	—	142.5	175																	
10	16.7	38.3	36	142.5	175															
76.8	72	166.1	175																	
114.7	108	204.0	225																	
—	—	116.0	150																	
—	—	38.3	36	116.0	150															
—	—	76.8	72	131.2	150															
—	—	114.7	108	169.1	200															
—	—	124.0	150																	
3	4.0	38.3	36	124.0	150															
76.8	72	141.2	175																	
114.7	108	179.1	200																	
—	—	134.2	175																	
5	9.1	38.3	36	134.2	175															
76.8	72	153.9	175																	
114.7	108	191.8	225																	
—	—	141.0	175																	
7.5	12.5	38.3	36	141.0	175															
76.8	72	162.4	175																	
114.7	108	200.3	225																	
—	—	149.4	175																	
10	16.7	38.3	36	149.4	175															
76.8	72	172.9	200																	
114.7	108	210.8	225																	

See page 169 for legend and notes.

Table 13 — Electrical Data — 50P 030 Units (cont)

460-3-60 (V-Ph-Hz)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		POWER EXHAUST			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
		No. A1			No. B1													
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
414	508	1	23.1	150	1	23.1	150	2	3.3 (ea)	10	14.0	2	—	—	—	—	69.6	90
															46.3	36	71.6	90
															93.0	72	106.8	125
															139.0	108	152.8	175
															—	—	79.2	100
															46.3	36	83.6	100
															93.0	72	118.8	125
															139.0	108	164.8	175
															—	—	84.8	100
															46.3	36	90.6	100
															93.0	72	125.8	150
															139.0	108	171.8	175
															—	—	91.6	110
															46.3	36	99.1	110
															93.0	72	134.3	150
															139.0	108	180.3	200
															—	—	97.6	110
															46.3	36	106.6	110
93.0	72	141.8	150															
139.0	108	187.8	200															
414	508	1	23.1	150	1	23.1	150	2	3.3 (ea)	10	14.0	2	—	—	—	—	72.6	90
															46.3	36	75.4	90
															93.0	72	110.5	125
															139.0	108	156.5	175
															—	—	82.2	100
															46.3	36	87.4	100
															93.0	72	122.5	125
															139.0	108	168.5	175
															—	—	87.8	110
															46.3	36	94.4	110
															93.0	72	129.5	150
															139.0	108	175.5	200
															—	—	94.6	110
															46.3	36	102.9	110
															93.0	72	138.0	150
															139.0	108	184.0	200
															—	—	100.6	110
															46.3	36	110.4	125
93.0	72	145.5	150															
139.0	108	191.5	200															
414	508	1	23.1	150	1	23.1	150	2	3.3 (ea)	10	14.0	2	—	—	—	—	79.6	100
															46.3	36	84.1	100
															93.0	72	119.3	125
															139.0	108	165.3	175
															—	—	89.2	110
															46.3	36	96.1	110
															93.0	72	131.3	150
															139.0	108	177.3	200
															—	—	94.8	110
															46.3	36	103.1	110
															93.0	72	138.3	150
															139.0	108	184.3	200
															—	—	101.6	110
															46.3	36	111.6	125
															93.0	72	146.8	150
															139.0	108	192.8	200
															—	—	107.6	125
															46.3	36	119.1	125
93.0	72	154.3	175															
139.0	108	200.3	225															

See page 169 for legend and notes.

Table 13 — Electrical Data — 50P 030 Units (cont)
460-3-60 (V-Ph-Hz) (cont)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		POWER EXHAUST			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
		No. A1			No. B1													
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
414	508	1	23.1	150	1	23.1	150	2	3.3 (ea)	25	34.0	2	—	—	—	—	86.6	110
															46.3	36	91.6	110
															93.0	72	126.8	150
															139.0	108	172.8	175
													3	4.8	—	—	96.2	110
															46.3	36	103.6	110
															93.0	72	138.8	150
															139.0	108	184.8	200
													5	7.6	—	—	101.8	125
															46.3	36	110.6	125
															93.0	72	145.8	150
															139.0	108	191.8	200
												7.5	11.0	—	—	108.6	125	
														46.3	36	119.1	125	
														93.0	72	154.3	175	
														139.0	108	200.3	225	
												10	14.0	—	—	114.6	125	
														46.3	36	126.6	150	
														93.0	72	161.8	175	
														139.0	108	207.8	225	
												2	—	—	—	—	95.3	125
															46.3	36	100.4	125
															93.0	72	135.5	150
															139.0	108	181.5	200
3	4.8	—	—	104.9	125													
		46.3	36	112.4	125													
		93.0	72	147.5	175													
		139.0	108	193.5	225													
5	7.6	—	—	110.5	125													
		46.3	36	119.4	125													
		93.0	72	154.5	175													
		139.0	108	200.5	225													
7.5	11.0	—	—	117.3	150													
		46.3	36	127.9	150													
		93.0	72	163.0	175													
		139.0	108	209.0	225													
10	14.0	—	—	123.3	150													
		46.3	36	135.4	150													
		93.0	72	170.5	175													
		139.0	108	216.5	225													
2	—	—	—	—	102.8	125												
			46.3	36	107.9	125												
			93.0	72	143.0	175												
			139.0	108	189.0	225												
	3	4.8	—	—	112.4	150												
			46.3	36	119.9	150												
			93.0	72	155.0	175												
			139.0	108	201.0	225												
	5	7.6	—	—	118.0	150												
			46.3	36	126.9	150												
			93.0	72	162.0	175												
			139.0	108	208.0	225												
7.5	11.0	—	—	124.8	150													
		46.3	36	135.4	150													
		93.0	72	170.5	200													
		139.0	108	216.5	250													
10	14.0	—	—	130.8	150													
		46.3	36	142.9	150													
		93.0	72	178.0	200													
		139.0	108	224.0	250													

See page 169 for legend and notes.

Table 13 — Electrical Data — 50P 030 Units (cont)
575-3-60 (V-Ph-Hz)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		POWER EXHAUST			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
		No. A1			No. B1													
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
518	632	1	19.9	109	1	19.9	109	2	2.6 (ea)	10	11.0	2	—	—	—	—	59.0	70
															36.0	36	59.0	70
															72.0	72	83.3	100
															108.0	108	119.3	125
													3	3.9	—	—	66.8	80
															36.0	36	66.8	80
															72.0	72	93.0	110
															108.0	108	129.0	150
													5	6.1	—	—	71.2	90
															36.0	36	71.5	90
															72.0	72	98.5	110
															108.0	108	134.5	150
												7.5	9.0	—	—	77.0	90	
														36.0	36	78.8	90	
														72.0	72	105.8	110	
														108.0	108	141.8	150	
												10	11.0	—	—	81.0	100	
														36.0	36	83.8	100	
														72.0	72	110.8	125	
														108.0	108	146.8	150	
												2	—	—	—	—	61.0	80
															36.0	36	61.0	80
															72.0	72	85.8	100
															108.0	108	121.8	125
3	3.9	—	—	68.8	80													
		36.0	36	68.8	80													
		72.0	72	95.5	110													
		108.0	108	131.5	150													
5	6.1	—	—	73.2	90													
		36.0	36	74.0	90													
		72.0	72	101.0	110													
		108.0	108	137.0	150													
7.5	9.0	—	—	79.0	90													
		36.0	36	81.3	90													
		72.0	72	108.3	125													
		108.0	108	144.3	150													
10	11.0	—	—	83.0	100													
		36.0	36	86.3	100													
		72.0	72	113.3	125													
		108.0	108	149.3	150													
2	—	—	—	—	67.0	80												
			36.0	36	67.0	80												
			72.0	72	93.3	110												
			108.0	108	129.3	150												
	3	3.9	—	—	74.8	90												
			36.0	36	76.0	90												
			72.0	72	103.0	110												
			108.0	108	139.0	150												
	5	6.1	—	—	79.2	90												
			36.0	36	81.5	90												
			72.0	72	108.5	125												
			108.0	108	144.5	150												
7.5	9.0	—	—	85.0	100													
		36.0	36	88.8	100													
		72.0	72	115.8	125													
		108.0	108	151.8	175													
10	11.0	—	—	89.0	100													
		36.0	36	93.8	100													
		72.0	72	120.8	125													
		108.0	108	156.8	175													

See page 169 for legend and notes.

Table 13 — Electrical Data — 50P 030 Units (cont)

575-3-60 (V-Ph-Hz) (cont)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		POWER EXHAUST			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
		No. A1			No. B1										FLA	kW		
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
518	632	1	19.9	109	1	19.9	109	2	2.6 (ea)	25	27.0	2	—	—	—	—	72.5	90
															36.0	36	72.5	90
															72.0	72	99.5	110
															108.0	108	135.5	150
													3	3.9	—	—	80.3	100
															36.0	36	82.3	100
															72.0	72	109.3	125
															108.0	108	145.3	150
													5	6.1	—	—	84.7	100
															36.0	36	87.8	100
															72.0	72	114.8	125
															108.0	108	150.8	175
												7.5	9.0	—	—	90.5	110	
														36.0	36	95.0	110	
														72.0	72	122.0	125	
														108.0	108	158.0	175	
												10	11.0	—	—	94.5	110	
														36.0	36	100.0	110	
														72.0	72	127.0	150	
														108.0	108	163.0	175	
												2	—	—	—	—	78.8	100
															36.0	36	78.8	100
															72.0	72	105.8	125
															108.0	108	141.8	150
3	3.9	—	—	86.6	110													
		36.0	36	88.5	110													
		72.0	72	115.5	125													
		108.0	108	151.5	175													
5	6.1	—	—	91.0	110													
		36.0	36	94.0	110													
		72.0	72	121.0	125													
		108.0	108	157.0	175													
7.5	9.0	—	—	96.8	110													
		36.0	36	101.3	110													
		72.0	72	128.3	150													
		108.0	108	164.3	175													
10	11.0	—	—	100.8	125													
		36.0	36	106.3	125													
		72.0	72	133.3	150													
		108.0	108	169.3	175													
2	—	—	—	—	85.0	110												
			36.0	36	85.0	110												
			72.0	72	112.0	125												
			108.0	108	148.0	175												
	3	3.9	—	—	92.8	110												
			36.0	36	94.8	110												
			72.0	72	121.8	150												
			108.0	108	157.8	175												
	5	6.1	—	—	97.2	125												
			36.0	36	100.3	125												
			72.0	72	127.3	150												
			108.0	108	163.3	175												
7.5	9.0	—	—	103.0	125													
		36.0	36	107.5	125													
		72.0	72	134.5	150													
		108.0	108	170.5	175													
10	11.0	—	—	107.0	125													
		36.0	36	112.5	125													
		72.0	72	139.5	150													
		108.0	108	175.5	200													

See page 169 for legend and notes.

Table 14 — Electrical Data — 50P030 Units with Optional Return Fan
208/230-3-60 (V-Ph-Hz)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		RETURN FAN			OPTIONAL ELECTRIC HEAT		POWER SUPPLY			
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR BRKR*		
187	253	1	51.3	300	1	51.3	300	2	6.6 (ea)	10	30.8 / 28.0	1	—	— / —	—	—	152.8/ 150.6	200/ 200		
															78.9/ 90.0	36/ 36	152.8/ 150.6	200/ 200		
															157.7/ 182.0	72/ 72	188.0/ 209.5	225/ 250		
															236.6/ 273.0	108/ 108	266.9/ 300.5	300/ 350		
															—	—	183.6/ 178.6	225/ 225		
															78.9/ 90.0	36/ 36	183.6/ 178.6	225/ 225		
															157.7/ 182.0	72/ 72	226.5/ 244.5	250/ 250		
															236.6/ 273.0	108/ 108	305.4/ 335.5	350/ 350		
															—	—	199.0/ 192.6	250/ 225		
															78.9/ 90.0	36/ 36	199.0/ 192.6	250/ 225		
															157.7/ 182.0	72/ 72	245.7/ 262.0	250/ 300		
															236.6/ 273.0	108/ 108	324.6/ 353.0	350/ 400		
		—	—	214.3/ 205.3	250/ 250															
		78.9/ 90.0	36/ 36	214.3/ 207.5	250/ 250															
		157.7/ 182.0	72/ 72	262.2/ 277.0	300/ 300															
		236.6/ 273.0	108/ 108	341.1/ 368.0	350/ 400															
		—	—	233.5/ 222.8	300/ 250															
		78.9/ 90.0	36/ 36	233.5/ 225.0	300/ 250															
		157.7/ 182.0	72/ 72	281.5/ 294.5	350/ 350															
		236.6/ 273.0	108/ 108	360.4/ 385.5	400/ 400															
		1	51.3	300	1	51.3	300	2	6.6 (ea)	10	30.8 / 28.0	1	—	—	—	— / —	—	—	159.4/ 156.6	200/ 200
																	78.9/ 90.0	36/ 36	159.4/ 156.6	200/ 200
																	157.7/ 182.0	72/ 72	196.2/ 217.0	250/ 250
																	236.6/ 273.0	108/ 108	275.1/ 308.0	300/ 350
—	—																190.2/ 184.6	225/ 225		
78.9/ 90.0	36/ 36																190.2/ 184.6	225/ 225		
157.7/ 182.0	72/ 72																234.7/ 252.0	250/ 300		
236.6/ 273.0	108/ 108																313.6/ 343.0	350/ 350		
—	—																205.6/ 198.6	250/ 225		
78.9/ 90.0	36/ 36																205.6/ 200.0	250/ 225		
157.7/ 182.0	72/ 72																254.0/ 269.5	300/ 300		
236.6/ 273.0	108/ 108																332.9/ 360.5	350/ 400		
—	—	220.9/ 211.3	250/ 250																	
78.9/ 90.0	36/ 36	220.9/ 215.0	250/ 250																	
157.7/ 182.0	72/ 72	270.5/ 284.5	300/ 300																	
236.6/ 273.0	108/ 108	349.4/ 375.5	400/ 400																	
—	—	240.1/ 228.8	300/ 250																	
78.9/ 90.0	36/ 36	240.1/ 232.5	300/ 250																	
157.7/ 182.0	72/ 72	289.7/ 302.0	350/ 350																	
236.6/ 273.0	108/ 108	368.6/ 393.0	400/ 450																	
1	51.3	300	1	51.3	300	2	6.6 (ea)	15	46.2 / 42.0	1	—	—	—	— / —	—	—	174.8/ 170.6	225/ 200		
															78.9/ 90.0	36/ 36	174.8/ 170.6	225/ 200		
															157.7/ 182.0	72/ 72	215.5/ 234.5	250/ 250		
															236.6/ 273.0	108/ 108	294.4/ 325.5	300/ 350		
															—	—	205.6/ 198.6	250/ 225		
															78.9/ 90.0	36/ 36	205.6/ 200.0	250/ 225		
															157.7/ 182.0	72/ 72	254.0/ 269.5	300/ 300		
															236.6/ 273.0	108/ 108	332.9/ 360.5	350/ 400		
															—	—	221.0/ 212.6	250/ 250		
															78.9/ 90.0	36/ 36	221.0/ 217.5	250/ 250		
															157.7/ 182.0	72/ 72	273.2/ 287.0	300/ 300		
															236.6/ 273.0	108/ 108	352.1/ 378.0	400/ 400		
—	—	236.3/ 225.3	250/ 250																	
78.9/ 90.0	36/ 36	236.3/ 232.5	250/ 250																	
157.7/ 182.0	72/ 72	289.7/ 302.0	300/ 350																	
236.6/ 273.0	108/ 108	368.6/ 393.0	400/ 400																	
—	—	255.5/ 242.8	300/ 300																	
78.9/ 90.0	36/ 36	255.5/ 250.0	300/ 300																	
157.7/ 182.0	72/ 72	309.0/ 319.5	350/ 350																	
236.6/ 273.0	108/ 108	387.9/ 410.5	450/ 450																	

See page 169 for legend and notes.

Table 14 — Electrical Data — 50P030 Units with Optional Return Fan (cont)
208/230-3-60 (V-Ph-Hz) (cont)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		RETURN FAN			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
187	253	1	51.3	300	1	51.3	300	2	6.6 (ea)	20	59.4 / 54.0	1	—	— / —	—	—	190.1/ 183.3	225/ 225
															78.9/ 90.0	36/ 36	190.1/ 183.3	225/ 225
															157.7/ 182.0	72/ 72	232.0/ 249.5	250/ 300
															236.6/ 273.0	108/ 108	310.9/ 340.5	350/ 350
															—	—	220.9/ 211.3	250/ 250
															78.9/ 90.0	36/ 36	220.9/ 215.0	250/ 250
		157.7/ 182.0	72/ 72	270.5/ 284.5	300/ 300													
		236.6/ 273.0	108/ 108	349.4/ 375.5	400/ 400													
		—	—	236.3/ 225.3	250/ 250													
		78.9/ 90.0	36/ 36	236.3/ 232.5	250/ 250													
		157.7/ 182.0	72/ 72	289.7/ 302.0	300/ 350													
		236.6/ 273.0	108/ 108	368.6/ 393.0	400/ 400													
—	—	249.5/ 237.3	300/ 250															
78.9/ 90.0	36/ 36	249.5/ 247.5	300/ 250															
157.7/ 182.0	72/ 72	306.2/ 317.0	350/ 350															
236.6/ 273.0	108/ 108	385.1/ 408.0	400/ 450															
—	—	268.7/ 254.8	300/ 300															
78.9/ 90.0	36/ 36	268.7/ 265.0	300/ 300															
157.7/ 182.0	72/ 72	325.5/ 334.5	350/ 350															
236.6/ 273.0	108/ 108	404.4/ 425.5	450/ 450															
—	—	209.3/ 200.8	250/ 250															
78.9/ 90.0	36/ 36	209.3/ 200.8	250/ 250															
157.7/ 182.0	72/ 72	251.2/ 267.0	300/ 300															
236.6/ 273.0	108/ 108	330.1/ 358.0	400/ 400															
—	—	240.1/ 228.8	300/ 250															
78.9/ 90.0	36/ 36	240.1/ 232.5	300/ 250															
157.7/ 182.0	72/ 72	289.7/ 302.0	350/ 350															
236.6/ 273.0	108/ 108	368.6/ 393.0	400/ 450															
—	—	255.5/ 242.8	300/ 300															
78.9/ 90.0	36/ 36	255.5/ 250.0	300/ 300															
157.7/ 182.0	72/ 72	309.0/ 319.5	350/ 350															
236.6/ 273.0	108/ 108	387.9/ 410.5	450/ 450															
—	—	268.7/ 254.8	300/ 300															
78.9/ 90.0	36/ 36	268.7/ 265.0	300/ 300															
157.7/ 182.0	72/ 72	325.5/ 334.5	350/ 350															
236.6/ 273.0	108/ 108	404.4/ 425.5	450/ 450															
—	—	284.1/ 268.8	350/ 300															
78.9/ 90.0	36/ 36	285.6/ 282.5	350/ 300															
157.7/ 182.0	72/ 72	344.7/ 352.0	400/ 400															
236.6/ 273.0	108/ 108	423.6/ 443.0	450/ 450															

See page 169 for legend and notes.

Table 14 — Electrical Data — 50P030 Units with Optional Return Fan (cont)
380-3-60 (V-Ph-Hz)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		RETURN FAN			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
		No. A1			No. B1													
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
342	418	1	26.9	139	1	26.9	139	2	3.9 (ea)	10	16.7	1	10	16.7	—	—	80.8	100
															38.3	36	80.8	100
															76.8	72	92.4	110
															114.7	108	130.3	150
															—	—	97.5	110
															38.3	36	97.5	110
															76.8	72	113.3	125
															114.7	108	151.2	175
															—	—	105.3	125
															38.3	36	105.3	125
															76.8	72	123.1	125
															114.7	108	161.0	175
										—	—	111.6	125					
										38.3	36	111.6	125					
										76.8	72	129.9	150					
										114.7	108	167.8	175					
										—	—	121.6	150					
										38.3	36	121.6	150					
										76.8	72	139.9	150					
										114.7	108	177.8	200					
										—	—	85.0	110					
										38.3	36	85.0	110					
										76.8	72	97.7	125					
										114.7	108	135.6	150					
—	—	101.7	125															
38.3	36	101.7	125															
76.8	72	118.6	125															
114.7	108	156.5	175															
—	—	109.5	125															
38.3	36	109.5	125															
76.8	72	128.3	150															
114.7	108	166.2	175															
—	—	115.8	125															
38.3	36	115.8	125															
76.8	72	135.2	150															
114.7	108	173.1	175															
—	—	125.8	150															
38.3	36	125.8	150															
76.8	72	145.2	175															
114.7	108	183.1	200															
—	—	92.8	110															
38.3	36	92.8	110															
76.8	72	107.4	125															
114.7	108	145.3	150															
—	—	109.5	125															
38.3	36	109.5	125															
76.8	72	128.3	150															
114.7	108	166.2	175															
—	—	117.3	125															
38.3	36	117.3	125															
76.8	72	138.1	150															
114.7	108	176.0	200															
—	—	123.6	150															
38.3	36	123.6	150															
76.8	72	144.9	150															
114.7	108	182.8	200															
—	—	133.6	150															
38.3	36	133.6	150															
76.8	72	154.9	175															
114.7	108	192.8	200															

See page 169 for legend and notes.

Table 14 — Electrical Data — 50P030 Units with Optional Return Fan (cont)
380-3-60 (V-Ph-Hz) (cont)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		RETURN FAN			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
		No. A1			No. B1			Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
342	418	1	26.9	139	1	26.9	139	2	3.9 (ea)	20	30	—	—	—	—	—	99.1	125
															38.3	36	99.1	125
															76.8	72	114.3	125
															114.7	108	152.2	175
															—	—	115.8	125
															38.3	36	115.8	125
												76.8	72	135.2	150			
												114.7	108	173.1	175			
												1	15	24.5	—	—	123.6	150
															38.3	36	123.6	150
															76.8	72	144.9	150
															114.7	108	182.8	200
															—	—	129.1	150
															38.3	36	129.1	150
76.8	72	151.8	175															
114.7	108	189.7	200															
25	38.0	—	—	139.1	175													
		38.3	36	139.1	175													
76.8	72	161.8	175															
114.7	108	199.7	225															
—	—	—	—	—	—	—	—	25	38.0	25	38.0	—	—	—	—	—	109.1	125
															38.3	36	109.1	125
															76.8	72	124.3	150
															114.7	108	162.2	200
															—	—	125.8	150
															38.3	36	125.8	150
												76.8	72	145.2	175			
												114.7	108	183.1	200			
												1	15	24.5	—	—	133.6	150
															38.3	36	133.6	150
76.8	72	154.9	175															
114.7	108	192.8	200															
20	30.0	—	—	139.1	175													
		38.3	36	139.1	175													
76.8	72	161.8	175															
114.7	108	199.7	225															
25	38.0	—	—	147.1	175													
		38.3	36	147.1	175													
76.8	72	171.8	200															
114.7	108	209.7	225															

See page 169 for legend and notes.

Table 14 — Electrical Data — 50P030 Units with Optional Return Fan (cont)
460-3-60 (V-Ph-Hz)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		RETURN FAN			OPTIONAL ELECTRIC HEAT		POWER SUPPLY			
		No. A1			No. B1															
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*		
414	508	1	23.1	150	1	23.1	150	2	3.3 (ea)	10	14.0	1	10	14.0	—	—	69.6	90		
															46.3	36	71.6	90		
															93.0	72	106.8	125		
															139.0	108	152.8	175		
															—	—	83.6	100		
															46.3	36	89.1	100		
															93.0	72	124.3	125		
															139.0	108	170.3	175		
															—	—	90.6	110		
															46.3	36	97.9	110		
															93.0	72	133.0	150		
															139.0	108	179.0	200		
		—	—	97.6	110															
		46.3	36	105.4	110															
		93.0	72	140.5	150															
		139.0	108	186.5	200															
		—	—	106.3	125															
		46.3	36	114.1	125															
		93.0	72	149.3	175															
		139.0	108	195.3	225															
		1	23.1	150	1	23.1	150	2	3.3 (ea)	10	14.0	10	14.0	1	10	14.0	—	—	72.6	90
																	46.3	36	75.4	90
																	93.0	72	110.5	125
																	139.0	108	156.5	175
—	—																86.6	100		
46.3	36																92.9	100		
93.0	72																128.0	150		
139.0	108																174.0	175		
—	—																93.6	110		
46.3	36																101.6	110		
93.0	72																136.8	150		
139.0	108																182.8	200		
—	—	100.6	125																	
46.3	36	109.1	125																	
93.0	72	144.3	150																	
139.0	108	190.3	200																	
—	—	109.3	125																	
46.3	36	117.9	125																	
93.0	72	153.0	175																	
139.0	108	199.0	225																	
1	23.1	150	1	23.1	150	2	3.3 (ea)	15	21.0	15	21.0	1	15	21.0	—	—	79.6	100		
															46.3	36	84.1	100		
															93.0	72	119.3	125		
															139.0	108	165.3	175		
															—	—	93.6	110		
															46.3	36	101.6	110		
															93.0	72	136.8	150		
															139.0	108	182.8	200		
															—	—	100.6	110		
															46.3	36	110.4	125		
															93.0	72	145.5	150		
															139.0	108	191.5	200		
—	—	107.6	125																	
46.3	36	117.9	125																	
93.0	72	153.0	175																	
139.0	108	199.0	200																	
—	—	116.3	150																	
46.3	36	126.6	150																	
93.0	72	161.8	175																	
139.0	108	207.8	225																	

See page 169 for legend and notes.

Table 14 — Electrical Data — 50P030 Units with Optional Return Fan (cont)
460-3-60 (V-Ph-Hz) (cont)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		RETURN FAN			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
		No. A1			No. B1													
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
414	508	1	23.1	150	1	23.1	150	2	3.3 (ea)	20	27.0	1	10	14.0	—	—	86.6	110
															46.3	36	91.6	110
															93.0	72	126.8	150
															139.0	108	172.8	175
															—	—	100.6	125
															46.3	36	109.1	125
		93.0	72	144.3	150													
		139.0	108	190.3	200													
		—	—	107.6	125													
		46.3	36	117.9	125													
		93.0	72	153.0	175													
		139.0	108	199.0	200													
—	—	113.6	125															
46.3	36	125.4	150															
93.0	72	160.5	175															
139.0	108	206.5	225															
—	—	122.3	150															
46.3	36	134.1	105															
93.0	72	169.3	175															
139.0	108	215.3	225															
—	—	95.3	125															
46.3	36	100.4	125															
93.0	72	135.5	150															
139.0	108	181.5	200															
—	—	109.3	125															
46.3	36	117.9	125															
93.0	72	153.0	175															
139.0	108	199.0	225															
—	—	116.3	150															
46.3	36	126.6	150															
93.0	72	161.8	175															
139.0	108	207.8	225															
—	—	122.3	150															
46.3	36	134.1	150															
93.0	72	169.3	175															
139.0	108	215.3	225															
—	—	129.3	150															
46.3	36	142.9	150															
93.0	72	178.0	200															
139.0	108	224.0	225															

See page 169 for legend and notes.

Table 14 — Electrical Data — 50P030 Units with Optional Return Fan (cont)
575-3-60 (V-Ph-Hz)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		RETURN FAN			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
		No. A1			No. B1										FLA	kW		
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
518	632	1	19.9	109	1	19.9	109	2	2.6 (ea)	7 1/2	9.0	1	10	11.0	—	—	59.0	70
															36.0	36	59.0	70
															72.0	72	83.3	100
															108.0	108	119.3	125
												—	—	70.0	80			
												36.0	36	70.0	80			
												72.0	72	97.0	110			
												108.0	108	133.0	150			
												—	—	76.0	90			
												36.0	36	77.5	90			
												72.0	72	104.5	110			
												108.0	108	140.5	150			
										—	—	81.5	100					
										36.0	36	83.8	100					
										72.0	72	110.8	125					
										108.0	108	146.8	150					
										—	—	87.8	110					
										36.0	36	90.0	110					
										72.0	72	117.0	125					
										108.0	108	153.0	175					
										—	—	61.0	80					
										36.0	36	61.0	80					
										72.0	72	85.8	100					
										108.0	108	121.8	125					
—	—	72.0	90															
36.0	36	72.5	90															
72.0	72	99.5	110															
108.0	108	135.5	150															
—	—	78.0	90															
36.0	36	80.0	90															
72.0	72	107.0	110															
108.0	108	143.0	150															
—	—	83.5	100															
36.0	36	86.3	100															
72.0	72	113.3	125															
108.0	108	149.3	150															
—	—	89.8	110															
36.0	36	92.5	110															
72.0	72	119.5	125															
108.0	108	155.5	175															
—	—	67.0	80															
36.0	36	67.0	80															
72.0	72	93.3	110															
108.0	108	129.3	150															
—	—	78.0	90															
36.0	36	80.0	90															
72.0	72	107.0	110															
108.0	108	143.0	150															
—	—	84.0	100															
36.0	36	87.5	100															
72.0	72	114.5	125															
108.0	108	150.5	175															
—	—	89.5	110															
36.0	36	93.8	110															
72.0	72	120.8	125															
108.0	108	156.8	175															
—	—	95.8	110															
36.0	36	100.0	110															
72.0	72	127.0	150															
108.0	108	163.0	175															

See page 169 for legend and notes.

Table 14 — Electrical Data — 50P030 Units with Optional Return Fan (cont)
575-3-60 (V-Ph-Hz) (cont)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		RETURN FAN			OPTIONAL ELECTRIC HEAT		POWER SUPPLY															
		No. A1			No. B1																											
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*														
518	632	1	19.9	109	1	19.9	109	2	2.6 (ea)	20	22.0	—	—	—	—	—	72.5	90														
															36.0	36	72.5	90														
															72.0	72	99.5	110														
															108.0	108	135.5	150														
												1	10	11.0	—	—	83.5	100														
															36.0	36	86.3	100														
															72.0	72	113.3	125														
															108.0	108	149.3	150														
												1	15	17.0	—	—	89.5	110														
															36.0	36	93.8	110														
															72.0	72	120.8	125														
															108.0	108	156.8	175														
										1	20	22.0	—	—	94.5	110																
													36.0	36	100.0	110																
													72.0	72	127.0	150																
													108.0	108	163.0	175																
										1	25	27.0	—	—	100.8	125																
													36.0	36	106.3	125																
													72.0	72	133.3	150																
													108.0	108	169.3	175																
										25	27.0	1	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—				
																													—	—	78.8	100
																													36.0	36	78.8	100
																													72.0	72	105.8	125
108.0	108	141.8	150																													
1	10	11.0	—	—	89.8	110																										
			36.0	36	92.5	110																										
			72.0	72	119.5	125																										
			108.0	108	155.5	175																										
1	15	17.0	—	—	95.8	110																										
			36.0	36	100.0	110																										
			72.0	72	127.0	150																										
			108.0	108	163.0	175																										
1	20	22.0	—	—	100.8	125																										
			36.0	36	106.3	125																										
			72.0	72	133.3	150																										
			108.0	108	169.3	175																										
1	25	27.0	—	—	105.8	125																										
			36.0	36	112.5	125																										
			72.0	72	139.5	150																										
			108.0	108	175.5	200																										

See page 169 for legend and notes.

Table 15 — Electrical Data — 50P 035 Units

208/230-3-60 (V-Ph-Hz)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		POWER EXHAUST			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
Min	Max	No. A1		No. B1		Qty	FLA	Qty	FLA	Qty	FLA	FLA	kW	MCA	FUSE OR HACR BRKR*			
		Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Qty	FLA	FLA	kW	MCA	FUSE OR HACR BRKR*			
187	253	1	55.8	340	1	55.8	340	2	6.6 (ea)	10	30.8/28.0	—	—	— / —	78.9/ 90.0	36/ 36	163.0/ 160.8	200/ 200
															157.7/ 182.0	72/ 72	163.0/ 160.8	200/ 200
															236.6/ 273.0	108/ 108	188.0/ 209.5	250/ 250
															—	—	266.9/ 300.5	300/ 350
															—	—	184.2/ 180.0	225/ 225
															78.9/ 90.0	36/ 36	184.2/ 180.0	225/ 225
															157.7/ 182.0	72/ 72	214.5/ 233.5	250/ 250
															236.6/ 273.0	108/ 108	293.4/ 324.5	350/ 350
															—	—	196.4/ 191.2	250/ 225
															78.9/ 90.0	36/ 36	196.4/ 191.2	250/ 225
															157.7/ 182.0	72/ 72	229.7/ 247.5	250/ 300
															236.6/ 273.0	108/ 108	308.6/ 338.5	350/ 350
—	—	211.4/ 204.8	250/ 250															
78.9/ 90.0	36/ 36	211.4/ 204.8	250/ 250															
157.7/ 182.0	72/ 72	248.5/ 264.5	300/ 300															
236.6/ 273.0	108/ 108	327.4/ 355.5	350/ 400															
—	—	224.6/ 216.8	250/ 250															
78.9/ 90.0	36/ 36	224.6/ 216.8	250/ 250															
157.7/ 182.0	72/ 72	265.0/ 279.5	300/ 300															
236.6/ 273.0	108/ 108	343.9/ 370.5	350/ 400															
—	—	169.6/ 166.8	225/ 200															
78.9/ 90.0	36/ 36	169.6/ 166.8	225/ 200															
157.7/ 182.0	72/ 72	196.2/ 217.0	250/ 250															
236.6/ 273.0	108/ 108	275.1/ 308.0	300/ 350															
—	—	190.8/ 186.0	225/ 225															
78.9/ 90.0	36/ 36	190.8/ 186.0	225/ 225															
157.7/ 182.0	72/ 72	222.7/ 241.0	250/ 250															
236.6/ 273.0	108/ 108	301.6/ 332.0	350/ 350															
—	—	203.0/ 197.2	250/ 250															
78.9/ 90.0	36/ 36	203.0/ 197.2	250/ 250															
157.7/ 182.0	72/ 72	238.0/ 255.0	250/ 300															
236.6/ 273.0	108/ 108	316.9/ 346.0	350/ 400															
—	—	218.0/ 210.8	250/ 250															
78.9/ 90.0	36/ 36	218.0/ 210.8	250/ 250															
157.7/ 182.0	72/ 72	256.7/ 272.0	300/ 300															
236.6/ 273.0	108/ 108	335.6/ 363.0	350/ 400															
—	—	231.2/ 222.8	250/ 250															
78.9/ 90.0	36/ 36	231.2/ 222.8	250/ 250															
157.7/ 182.0	72/ 72	273.2/ 287.0	300/ 300															
236.6/ 273.0	108/ 108	352.1/ 378.0	400/ 400															
—	—	185.0/ 180.8	225/ 225															
78.9/ 90.0	36/ 36	185.0/ 180.8	225/ 225															
157.7/ 182.0	72/ 72	215.5/ 234.5	250/ 250															
236.6/ 273.0	108/ 108	294.4/ 325.5	350/ 350															
—	—	206.2/ 200.0	250/ 250															
78.9/ 90.0	36/ 36	206.2/ 200.0	250/ 250															
157.7/ 182.0	72/ 72	242.0/ 258.5	250/ 300															
236.6/ 273.0	108/ 108	320.9/ 349.5	350/ 400															
—	—	218.4/ 211.2	250/ 250															
78.9/ 90.0	36/ 36	218.4/ 211.2	250/ 250															
157.7/ 182.0	72/ 72	257.2/ 272.5	300/ 300															
236.6/ 273.0	108/ 108	336.1/ 363.5	350/ 400															
—	—	233.4/ 224.8	250/ 250															
78.9/ 90.0	36/ 36	233.4/ 224.8	250/ 250															
157.7/ 182.0	72/ 72	276.0/ 289.5	300/ 300															
236.6/ 273.0	108/ 108	354.9/ 380.5	400/ 400															
—	—	246.6/ 236.8	300/ 250															
78.9/ 90.0	36/ 36	246.6/ 236.8	300/ 250															
157.7/ 182.0	72/ 72	292.5/ 304.5	300/ 350															
236.6/ 273.0	108/ 108	371.4/ 395.5	400/ 400															

See page 169 for legend and notes.

Table 15 — Electrical Data — 50P 035 Units (cont)

208/230-3-60 (V-Ph-Hz) (cont)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		POWER EXHAUST			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
Min	Max	No. A1		No. B1		Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR BRKR*		
		Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR BRKR*		
187	253	1	55.8	340	1	55.8	340	2	6.6 (ea)	25	74.8/68.0	2	— / —	—	199.1/ 192.8	250/ 225		
														78.9/ 90.0	36/ 36	199.1/ 192.8	250/ 225	
														157.7/ 182.0	72/ 72	232.0/ 249.5	250/ 300	
														236.6/ 273.0	108/ 108	310.9/ 340.5	350/ 350	
														—	—	220.3/ 212.0	250/ 250	
														78.9/ 90.0	36/ 36	220.3/ 212.0	250/ 250	
		157.7/ 182.0	72/ 72	258.5/ 273.5	300/ 300													
		236.6/ 273.0	108/ 108	337.4/ 364.5	350/ 400													
		—	—	232.5/ 223.2	250/ 250													
		78.9/ 90.0	36/ 36	232.5/ 223.2	250/ 250													
		157.7/ 182.0	72/ 72	273.7/ 287.5	300/ 300													
		236.6/ 273.0	108/ 108	352.6/ 378.5	400/ 400													
—	—	247.5/ 236.8	300/ 250															
78.9/ 90.0	36/ 36	247.5/ 236.8	300/ 250															
157.7/ 182.0	72/ 72	292.5/ 304.5	300/ 350															
236.6/ 273.0	108/ 108	371.4/ 395.5	400/ 400															
—	—	260.7/ 248.8	300/ 300															
78.9/ 90.0	36/ 36	260.7/ 250.0	300/ 300															
157.7/ 182.0	72/ 72	309.0/ 319.5	350/ 350															
236.6/ 273.0	108/ 108	387.9/ 410.5	400/ 450															
187	253	1	55.8	340	1	55.8	340	2	6.6 (ea)	25	74.8/68.0	2	— / —	—	218.3/ 209.8	250/ 250		
														78.9/ 90.0	36/ 36	218.3/ 209.8	250/ 250	
														157.7/ 182.0	72/ 72	251.2/ 267.0	300/ 300	
														236.6/ 273.0	108/ 108	330.1/ 358.0	400/ 400	
														—	—	239.5/ 229.0	300/ 250	
														78.9/ 90.0	36/ 36	239.5/ 229.0	300/ 250	
		157.7/ 182.0	72/ 72	277.7/ 291.0	300/ 350													
		236.6/ 273.0	108/ 108	356.6/ 382.0	400/ 400													
		—	—	251.7/ 240.2	300/ 300													
		78.9/ 90.0	36/ 36	251.7/ 240.2	300/ 300													
		157.7/ 182.0	72/ 72	293.0/ 305.0	350/ 350													
		236.6/ 273.0	108/ 108	371.9/ 396.0	400/ 450													
—	—	266.7/ 253.8	300/ 300															
78.9/ 90.0	36/ 36	266.7/ 253.8	300/ 300															
157.7/ 182.0	72/ 72	311.7/ 322.0	350/ 350															
236.6/ 273.0	108/ 108	390.6/ 413.0	450/ 450															
—	—	279.9/ 265.8	350/ 300															
78.9/ 90.0	36/ 36	279.9/ 267.5	350/ 300															
157.7/ 182.0	72/ 72	328.2/ 337.0	350/ 350															
236.6/ 273.0	108/ 108	407.1/ 428.0	450/ 450															
187	253	1	55.8	340	1	55.8	340	2	6.6 (ea)	25	74.8/68.0	2	— / —	—	234.8/ 224.8	300/ 300		
														78.9/ 90.0	36/ 36	234.8/ 224.8	300/ 300	
														157.7/ 182.0	72/ 72	267.7/ 282.0	350/ 350	
														236.6/ 273.0	108/ 108	346.6/ 373.0	400/ 450	
														—	—	256.0/ 244.0	300/ 300	
														78.9/ 90.0	36/ 36	256.0/ 244.0	300/ 300	
		157.7/ 182.0	72/ 72	294.2/ 306.0	350/ 350													
		236.6/ 273.0	108/ 108	373.1/ 397.0	450/ 450													
		—	—	268.2/ 255.2	350/ 300													
		78.9/ 90.0	36/ 36	268.2/ 255.2	350/ 300													
		157.7/ 182.0	72/ 72	309.5/ 320.0	350/ 350													
		236.6/ 273.0	108/ 108	388.4/ 411.0	450/ 450													
—	—	283.2/ 268.8	350/ 300															
78.9/ 90.0	36/ 36	283.2/ 268.8	350/ 300															
157.7/ 182.0	72/ 72	328.2/ 337.0	400/ 400															
236.6/ 273.0	108/ 108	407.1/ 428.0	450/ 450															
—	—	296.4/ 280.8	350/ 350															
78.9/ 90.0	36/ 36	296.4/ 282.5	350/ 350															
157.7/ 182.0	72/ 72	344.7/ 352.0	400/ 400															
236.6/ 273.0	108/ 108	423.6/ 443.0	450/ 500															

See page 169 for legend and notes.

Table 15 — Electrical Data — 50P 035 Units (cont)
380-3-60 (V-Ph-Hz)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		POWER EXHAUST			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
		No. A1			No. B1			Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
												—	—	—	—	—	98.4	125
															38.3	36	98.4	125
															76.8	72	98.4	125
															114.7	108	130.3	150
															—	—	106.4	125
													3	4.0	38.3	36	106.4	125
															76.8	72	106.4	125
															114.7	108	140.3	175
															—	—	116.6	150
															38.3	36	116.6	150
															76.8	72	116.6	150
															114.7	108	153.1	175
															—	—	123.4	150
															38.3	36	123.4	150
															76.8	72	123.7	150
															114.7	108	161.6	175
															—	—	131.8	150
															38.3	36	131.8	150
															76.8	72	134.2	150
															114.7	108	172.1	200
															—	—	102.6	125
															38.3	36	102.6	125
															76.8	72	102.6	125
															114.7	108	135.6	150
															—	—	110.6	125
															38.3	36	110.6	125
															76.8	72	110.6	125
															114.7	108	145.6	175
															—	—	120.8	150
342	418	1	34	196	1	34	196	2	4.7 (ea)	10	16.7				38.3	36	120.8	150
															76.8	72	120.8	150
															114.7	108	158.3	175
															—	—	127.6	150
															38.3	36	127.6	150
															76.8	72	128.9	150
															114.7	108	166.8	175
															—	—	136.0	150
															38.3	36	136.0	150
															76.8	72	139.4	150
															114.7	108	177.3	200
															—	—	110.4	125
															38.3	36	110.4	125
															76.8	72	110.4	125
															114.7	108	145.3	175
															—	—	118.4	150
															38.3	36	118.4	150
															76.8	72	118.4	150
															114.7	108	155.3	175
															—	—	128.6	150
															38.3	36	128.6	150
															76.8	72	130.2	150
															114.7	108	168.1	175
															—	—	135.4	150
															38.3	36	135.4	150
															76.8	72	138.7	150
															114.7	108	176.6	200
															—	—	143.8	175
															38.3	36	143.8	175
															76.8	72	149.2	175
															114.7	108	187.1	200

See page 169 for legend and notes.

Table 15 — Electrical Data — 50P 035 Units (cont)
380-3-60 (V-Ph-Hz) (cont)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		POWER EXHAUST			OPTIONAL ELECTRIC HEAT		POWER SUPPLY			
		No. A1			No. B1										FLA	kW			MCA	FUSE OR HACR BRKR*
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*		
342	418	1	34	196	1	34	196	2	4.7 (ea)	25	38.0	2	—	—	—	—	115.9	125		
															38.3	36	115.9	125		
															76.8	72	115.9	125		
															114.7	108	152.2	175		
															—	—	123.9	150		
															3	4.0	38.3	36	123.9	150
															76.8	72	124.3	150		
															114.7	108	162.2	175		
															—	—	134.1	150		
															5	9.1	38.3	36	134.1	150
															76.8	72	137.1	150		
															114.7	108	175.0	200		
—	—	140.9	150																	
7.5	12.5	38.3	36	140.9	150															
76.8	72	145.6	150																	
114.7	108	183.5	200																	
—	—	149.3	175																	
10	16.7	38.3	36	149.3	175															
76.8	72	156.1	175																	
114.7	108	194.0	200																	
—	—	124.9	150																	
—	—	38.3	36	124.9	150															
—	—	76.8	72	124.9	150															
—	—	114.7	108	162.2	200															
—	—	—	—	132.9	150															
—	—	3	4.0	38.3	36	132.9	150													
—	—	76.8	72	134.3	150															
—	—	114.7	108	172.2	200															
—	—	—	—	143.1	175															
—	—	5	9.1	38.3	36	143.1	175													
—	—	76.8	72	147.1	175															
—	—	114.7	108	185.0	200															
—	—	—	—	149.9	175															
—	—	7.5	12.5	38.3	36	149.9	175													
—	—	76.8	72	155.6	175															
—	—	114.7	108	193.5	225															
—	—	—	—	158.3	175															
—	—	10	16.7	38.3	36	158.3	175													
—	—	76.8	72	166.1	175															
—	—	114.7	108	204.0	225															
—	—	—	—	131.8	175															
—	—	—	—	38.3	36	131.8	175													
—	—	—	—	76.8	72	131.8	175													
—	—	—	—	114.7	108	169.1	200													
—	—	—	—	—	—	139.8	175													
—	—	3	4.0	38.3	36	139.8	175													
—	—	76.8	72	141.2	175															
—	—	114.7	108	179.1	200															
—	—	—	—	150.0	175															
—	—	5	9.1	38.3	36	150.0	175													
—	—	76.8	72	153.9	175															
—	—	114.7	108	191.8	225															
—	—	—	—	156.8	200															
—	—	7.5	12.5	38.3	36	156.8	200													
—	—	76.8	72	162.4	200															
—	—	114.7	108	200.3	225															
—	—	—	—	165.2	200															
—	—	10	16.7	38.3	36	165.2	200													
—	—	76.8	72	172.9	200															
—	—	114.7	108	210.8	225															

See page 169 for legend and notes.

Table 15 — Electrical Data — 50P 035 Units (cont)

460-3-60 (V-Ph-Hz)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		POWER EXHAUST			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
		No. A1			No. B1			Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
414	508	1	26.9	179	1	26.9	179	2	3.3 (ea)	10	14.0	2	3	4.8	—	—	78.1	100
															46.3	36	78.1	100
															93.0	72	106.8	125
															139.0	108	152.8	175
															—	—	87.7	110
															46.3	36	87.7	110
		93.0	72	118.8	125													
		139.0	108	164.8	175													
		—	—	93.3	110													
		46.3	36	93.3	110													
		93.0	72	125.8	150													
		139.0	108	171.8	175													
—	—	100.1	125															
46.3	36	100.1	125															
93.0	72	134.3	150															
139.0	108	180.3	200															
—	—	106.1	125															
46.3	36	106.6	125															
93.0	72	141.8	150															
139.0	108	187.8	200															
—	—	81.1	100															
46.3	36	81.1	100															
93.0	72	110.5	125															
139.0	108	156.5	175															
—	—	90.7	110															
46.3	36	90.7	110															
93.0	72	122.5	150															
139.0	108	168.5	175															
—	—	96.3	110															
46.3	36	96.3	110															
93.0	72	129.5	150															
139.0	108	175.5	200															
—	—	103.1	125															
46.3	36	103.1	125															
93.0	72	138.0	150															
139.0	108	184.0	200															
—	—	109.1	125															
46.3	36	110.4	125															
93.0	72	145.5	150															
139.0	108	191.5	200															
—	—	88.1	110															
46.3	36	88.1	110															
93.0	72	119.3	125															
139.0	108	165.3	175															
—	—	97.7	110															
46.3	36	97.7	110															
93.0	72	131.3	150															
139.0	108	177.3	200															
—	—	103.3	125															
46.3	36	103.3	125															
93.0	72	138.3	150															
139.0	108	184.3	200															
—	—	110.1	125															
46.3	36	111.6	125															
93.0	72	146.8	150															
139.0	108	192.8	200															
—	—	116.1	125															
46.3	36	119.1	125															
93.0	72	154.3	175															
139.0	108	200.3	225															

See page 169 for legend and notes.

Table 15 — Electrical Data — 50P 035 Units (cont)

460-3-60 (V-Ph-Hz) (cont)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		POWER EXHAUST			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
		No. A1			No. B1			Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
414	508	1	26.9	179	1	26.9	179	2	3.3 (ea)	25	34.0	2	—	—	—	—	94.2	110
															46.3	36	94.2	110
															93.0	72	126.8	150
															139.0	108	172.8	175
													—	—	103.8	125		
													3	4.8	46.3	36	103.8	125
													93.0	72	138.8	150		
													139.0	108	184.8	200		
													—	—	109.4	125		
													5	7.6	46.3	36	110.6	125
													93.0	72	145.8	150		
													139.0	108	191.8	200		
												—	—	116.2	125			
												7.5	11.0	46.3	36	119.1	125	
												93.0	72	154.3	175			
												139.0	108	200.3	225			
												—	—	122.2	125			
												10	14.0	46.3	36	126.6	150	
												93.0	72	161.8	175			
												139.0	108	207.8	225			
												2	—	—	—	—	102.9	125
															46.3	36	102.9	125
															93.0	72	135.5	150
															139.0	108	181.5	200
—	—	112.5	125															
3	4.8	46.3	36	112.5	125													
93.0	72	147.5	175															
139.0	108	193.5	225															
—	—	118.1	150															
5	7.6	46.3	36	119.4	150													
93.0	72	154.5	175															
139.0	108	200.5	225															
—	—	124.9	150															
7.5	11.0	46.3	36	127.9	150													
93.0	72	163.0	175															
139.0	108	209.0	225															
—	—	130.9	150															
10	14.0	46.3	36	135.4	150													
93.0	72	170.5	175															
139.0	108	216.5	225															
2	—	—	—	—	110.4	150												
			46.3	36	110.4	150												
			93.0	72	143.0	175												
			139.0	108	189.0	225												
	—	—	120.0	150														
	3	4.8	46.3	36	120.0	150												
	93.0	72	155.0	175														
	139.0	108	201.0	225														
	—	—	125.6	150														
	5	7.6	46.3	36	126.9	150												
	93.0	72	162.0	175														
	139.0	108	208.0	225														
—	—	132.4	150															
7.5	11.0	46.3	36	135.4	150													
93.0	72	170.5	200															
139.0	108	216.5	250															
—	—	138.4	175															
10	14.0	46.3	36	142.9	175													
93.0	72	178.0	200															
139.0	108	224.0	250															

See page 169 for legend and notes.

Table 15 — Electrical Data — 50P 035 Units (cont)

575-3-60 (V-Ph-Hz)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		POWER EXHAUST			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
		No. A1			No. B1										FLA	kW		
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
518	632	1	23.7	132	1	23.7	132	2	2.6 (ea)	10	11.0	2	—	—	—	—	67.5	90
															36.0	36	67.5	90
															72.0	72	83.3	110
															108.0	108	119.3	125
													3	3.9	—	—	75.3	90
															36.0	36	75.3	90
															72.0	72	93.0	110
															108.0	108	129.0	150
													5	6.1	—	—	79.7	100
															36.0	36	79.7	100
															72.0	72	98.5	110
															108.0	108	134.5	150
												7.5	9.0	—	—	85.5	100	
														36.0	36	85.5	100	
														72.0	72	105.8	125	
														108.0	108	141.8	150	
												10	11.0	—	—	89.5	110	
														36.0	36	89.5	110	
														72.0	72	110.8	125	
														108.0	108	146.8	150	
												2	—	—	—	—	69.5	90
															36.0	36	69.5	90
															72.0	72	85.8	110
															108.0	108	121.8	125
3	3.9	—	—	77.3	100													
		36.0	36	77.3	100													
		72.0	72	95.5	110													
		108.0	108	131.5	150													
5	6.1	—	—	81.7	100													
		36.0	36	81.7	100													
		72.0	72	101.0	110													
		108.0	108	137.0	150													
7.5	9.0	—	—	87.5	110													
		36.0	36	87.5	110													
		72.0	72	108.3	125													
		108.0	108	144.3	150													
10	11.0	—	—	91.5	110													
		36.0	36	91.5	110													
		72.0	72	113.3	125													
		108.0	108	149.3	150													
2	—	—	—	—	75.5	90												
			36.0	36	75.5	90												
			72.0	72	93.3	110												
			108.0	108	129.3	150												
	3	3.9	—	—	83.3	100												
			36.0	36	83.3	100												
			72.0	72	103.0	125												
			108.0	108	139.0	150												
	5	6.1	—	—	87.7	110												
			36.0	36	87.7	110												
			72.0	72	108.5	125												
			108.0	108	144.5	150												
7.5	9.0	—	—	93.5	110													
		36.0	36	93.5	110													
		72.0	72	115.8	125													
		108.0	108	151.8	175													
10	11.0	—	—	97.5	110													
		36.0	36	97.5	110													
		72.0	72	120.8	125													
		108.0	108	156.8	175													

See page 169 for legend and notes.

Table 15 — Electrical Data — 50P 035 Units (cont)

575-3-60 (V-Ph-Hz) (cont)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		POWER EXHAUST			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
		No. A1			No. B1			Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
518	632	1	23.7	132	1	23.7	132	2	2.6 (ea)	25	27.0	2	3	3.9	—	—	80.5	100
															36.0	36	80.5	100
															72.0	72	99.5	110
															108.0	108	135.5	150
															—	—	88.3	110
															36.0	36	88.3	110
															72.0	72	109.3	125
															108.0	108	145.3	150
															—	—	92.7	110
															36.0	36	92.7	110
															72.0	72	114.8	125
															108.0	108	150.8	175
												2	7.5	9.0	—	—	98.5	110
															36.0	36	98.5	110
															72.0	72	122.0	125
															108.0	108	158.0	175
															—	—	102.5	125
															36.0	36	102.5	125
												2	10	11.0	72.0	72	127.0	150
															108.0	108	163.0	175
															—	—	86.4	110
															36.0	36	86.4	110
															72.0	72	105.8	125
															108.0	108	141.8	150
2	3	3.9	—	—	94.2	110												
			36.0	36	94.2	110												
			72.0	72	115.5	125												
			108.0	108	151.5	175												
			—	—	98.6	125												
			36.0	36	98.6	125												
	2	7.5	9.0	72.0	72	121.0	125											
				108.0	108	157.0	175											
				—	—	104.4	125											
				36.0	36	104.4	125											
				72.0	72	128.3	150											
				108.0	108	164.3	175											
2	10	11.0	—	—	108.4	125												
			36.0	36	108.4	125												
			72.0	72	133.3	150												
			108.0	108	169.3	175												
			—	—	92.6	110												
			36.0	36	92.6	110												
2	3	3.9	72.0	72	112.0	125												
			108.0	108	148.0	175												
			—	—	100.4	125												
			36.0	36	100.4	125												
			72.0	72	121.8	150												
			108.0	108	157.8	175												
	2	5	6.1	—	—	104.8	125											
				36.0	36	104.8	125											
				72.0	72	127.3	150											
				108.0	108	163.3	175											
				—	—	110.6	125											
				36.0	36	110.6	125											
2	7.5	9.0	72.0	72	134.5	150												
			108.0	108	170.5	175												
			—	—	114.6	125												
			36.0	36	114.6	125												
			72.0	72	139.5	150												
			108.0	108	175.5	200												

See page 169 for legend and notes.

Table 16 — Electrical Data — 50P035 Units with Optional Return Fan

208/230-3-60 (V-Ph-Hz)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		RETURN FAN			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
Min	Max	No. A1		No. B1		Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*		
		Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*		
187	253	1	55.8	340	1	55.8	340	2	6.6 (ea)	10	30.8/28.0	— / —	— / —	— / —	163.0 / 160.8	200 / 200		
													78.9 / 90.0	36 / 36	163.0 / 160.8	200 / 200		
													157.7 / 182.0	72 / 72	188.0 / 209.5	250 / 250		
													236.6 / 273.0	108 / 108	266.9 / 300.5	300 / 350		
													10	30.8 / 28.0	— / —	— / —	193.8 / 188.8	225 / 225
															78.9 / 90.0	36 / 36	193.8 / 188.8	225 / 225
															157.7 / 182.0	72 / 72	226.5 / 244.5	250 / 300
															236.6 / 273.0	108 / 108	305.4 / 335.5	350 / 350
													15	46.2 / 42.0	— / —	— / —	209.2 / 202.8	250 / 250
															78.9 / 90.0	36 / 36	209.2 / 202.8	250 / 250
															157.7 / 182.0	72 / 72	245.7 / 262.0	250 / 300
															236.6 / 273.0	108 / 108	324.6 / 353.0	350 / 400
		20	59.4 / 54.0	— / —	— / —	223.3 / 214.8	250 / 250											
				78.9 / 90.0	36 / 36	223.3 / 214.8	250 / 250											
				157.7 / 182.0	72 / 72	262.2 / 277.0	300 / 300											
				236.6 / 273.0	108 / 108	341.1 / 368.0	350 / 400											
		25	74.8 / 68.0	— / —	— / —	242.5 / 231.8	300 / 250											
				78.9 / 90.0	36 / 36	242.5 / 231.8	300 / 250											
				157.7 / 182.0	72 / 72	281.5 / 294.5	350 / 350											
				236.6 / 273.0	108 / 108	360.4 / 385.5	400 / 400											
		1	55.8	340	1	55.8	340	2	6.6 (ea)	10	30.8/28.0	10	30.8/28.0	— / —	— / —	— / —	169.6 / 166.8	225 / 200
															78.9 / 90.0	36 / 36	169.6 / 166.8	225 / 200
															157.7 / 182.0	72 / 72	196.2 / 217.0	250 / 250
															236.6 / 273.0	108 / 108	275.1 / 308.0	300 / 350
10	30.8 / 28.0														— / —	— / —	200.4 / 194.8	250 / 250
															78.9 / 90.0	36 / 36	200.4 / 194.8	250 / 250
															157.7 / 182.0	72 / 72	234.7 / 252.0	250 / 300
															236.6 / 273.0	108 / 108	313.6 / 343.0	350 / 350
15	46.2 / 42.0														— / —	— / —	215.8 / 208.8	250 / 250
															78.9 / 90.0	36 / 36	215.8 / 208.8	250 / 250
															157.7 / 182.0	72 / 72	254.0 / 269.5	300 / 300
															236.6 / 273.0	108 / 108	332.9 / 360.5	350 / 400
20	59.4 / 54.0	— / —	— / —	229.9 / 220.8	250 / 250													
		78.9 / 90.0	36 / 36	229.9 / 220.8	250 / 250													
		157.7 / 182.0	72 / 72	270.5 / 284.5	300 / 300													
		236.6 / 273.0	108 / 108	349.4 / 375.5	400 / 400													
25	74.8 / 68.0	— / —	— / —	249.1 / 237.8	300 / 300													
		78.9 / 90.0	36 / 36	249.1 / 237.8	300 / 300													
		157.7 / 182.0	72 / 72	289.7 / 302.0	350 / 350													
		236.6 / 273.0	108 / 108	368.6 / 393.0	400 / 450													
1	55.8	340	1	55.8	340	2	6.6 (ea)	15	46.2/42.0	15	46.2/42.0	— / —	— / —	— / —	185.0 / 180.8	225 / 225		
													78.9 / 90.0	36 / 36	185.0 / 180.8	225 / 225		
													157.7 / 182.0	72 / 72	215.5 / 234.5	250 / 250		
													236.6 / 273.0	108 / 108	294.4 / 325.5	350 / 350		
													10	30.8 / 28.0	— / —	— / —	215.8 / 208.8	250 / 250
															78.9 / 90.0	36 / 36	215.8 / 208.8	250 / 250
															157.7 / 182.0	72 / 72	254.0 / 269.5	300 / 300
															236.6 / 273.0	108 / 108	332.9 / 360.5	350 / 400
													15	46.2 / 42.0	— / —	— / —	231.2 / 222.8	250 / 250
															78.9 / 90.0	36 / 36	231.2 / 222.8	250 / 250
															157.7 / 182.0	72 / 72	273.2 / 287.0	300 / 300
															236.6 / 273.0	108 / 108	352.1 / 378.0	400 / 400
20	59.4 / 54.0	— / —	— / —	245.3 / 234.8	300 / 250													
		78.9 / 90.0	36 / 36	245.3 / 234.8	300 / 250													
		157.7 / 182.0	72 / 72	289.7 / 302.0	300 / 350													
		236.6 / 273.0	108 / 108	368.6 / 393.0	400 / 400													
25	74.8 / 68.0	— / —	— / —	264.5 / 251.8	300 / 300													
		78.9 / 90.0	36 / 36	264.5 / 251.8	300 / 300													
		157.7 / 182.0	72 / 72	309.0 / 319.5	350 / 350													
		236.6 / 273.0	108 / 108	387.9 / 410.5	450 / 450													

See page 169 for legend and notes.

Table 16 — Electrical Data — 50P035 with Optional Return Fan (cont)
208/230-3-60 (V-Ph-Hz) (cont)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		RETURN FAN			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
Min	Max	No. A1			No. B1			Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
		Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)											
187	253	1	55.8	340	1	55.8	340	2	6.6 (ea)	20	59.4/54.0	1	—	—	— / —	— / —	199.1 / 192.8	250 / 225
															78.9 / 90.0	36 / 36	199.1 / 192.8	250 / 225
															157.7 / 182.0	72 / 72	232.0 / 249.5	250 / 300
															236.6 / 273.0	108 / 108	310.9 / 340.5	350 / 350
															— / —	— / —	229.9 / 220.8	250 / 250
															78.9 / 90.0	36 / 36	229.9 / 220.8	250 / 250
		157.7 / 182.0	72 / 72	270.5 / 284.5	300 / 300													
		236.6 / 273.0	108 / 108	349.4 / 375.5	400 / 400													
		— / —	— / —	245.3 / 234.8	300 / 250													
		78.9 / 90.0	36 / 36	245.3 / 234.8	300 / 250													
		157.7 / 182.0	72 / 72	289.7 / 302.0	300 / 350													
		236.6 / 273.0	108 / 108	368.6 / 393.0	400 / 400													
— / —	— / —	258.5 / 246.8	300 / 300															
78.9 / 90.0	36 / 36	258.5 / 247.5	300 / 300															
157.7 / 182.0	72 / 72	306.2 / 317.0	350 / 350															
236.6 / 273.0	108 / 108	385.1 / 408.0	400 / 450															
— / —	— / —	277.7 / 263.8	350 / 300															
78.9 / 90.0	36 / 36	277.7 / 265.0	350 / 300															
157.7 / 182.0	72 / 72	325.5 / 334.5	350 / 350															
236.6 / 273.0	108 / 108	404.4 / 425.5	450 / 450															
— / —	— / —	218.3 / 209.8	250 / 250															
78.9 / 90.0	36 / 36	218.3 / 209.8	250 / 250															
157.7 / 182.0	72 / 72	251.2 / 267.0	300 / 300															
236.6 / 273.0	108 / 108	330.1 / 358.0	400 / 400															
— / —	— / —	249.1 / 237.8	300 / 300															
78.9 / 90.0	36 / 36	249.1 / 237.8	300 / 300															
157.7 / 182.0	72 / 72	289.7 / 302.0	350 / 350															
236.6 / 273.0	108 / 108	368.6 / 393.0	400 / 450															
— / —	— / —	264.5 / 251.8	300 / 300															
78.9 / 90.0	36 / 36	264.5 / 251.8	300 / 300															
157.7 / 182.0	72 / 72	309.0 / 319.5	350 / 350															
236.6 / 273.0	108 / 108	387.9 / 410.5	450 / 450															
— / —	— / —	277.7 / 263.8	350 / 300															
78.9 / 90.0	36 / 36	277.7 / 265.0	350 / 300															
157.7 / 182.0	72 / 72	325.5 / 334.5	350 / 350															
236.6 / 273.0	108 / 108	404.4 / 425.5	450 / 450															
— / —	— / —	293.1 / 277.8	350 / 300															
78.9 / 90.0	36 / 36	293.1 / 282.5	350 / 300															
157.7 / 182.0	72 / 72	344.7 / 352.0	400 / 400															
236.6 / 273.0	108 / 108	423.6 / 443.0	450 / 450															

See page 169 for legend and notes.

Table 16 — Electrical Data — 50P035 with Optional Return Fan (cont)
380-3-60 (V-Ph-Hz)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		RETURN FAN			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
		No. A1			No. B1													
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
342	418	1	34	196	1	34	196	2	4.7 (ea)	10	16.7	1	—	—	—	—	98.4	125
															38.3	36	98.4	125
															76.8	72	98.4	125
															114.7	108	130.3	150
															—	—	115.1	125
															38.3	36	115.1	125
															76.8	72	115.1	125
															114.7	108	151.2	175
															—	—	122.9	150
															38.3	36	122.9	150
															76.8	72	123.1	150
															114.7	108	161.0	175
		—	—	128.4	150													
		38.3	36	128.4	150													
		76.8	72	129.9	150													
		114.7	108	167.8	175													
		—	—	137.4	175													
		38.3	36	137.4	175													
		76.8	72	139.9	175													
		114.7	108	177.8	200													
		—	—	102.6	125													
		38.3	36	102.6	125													
		76.8	72	102.6	125													
		114.7	108	135.6	150													
—	—	119.3	150															
38.3	36	119.3	150															
76.8	72	119.3	150															
114.7	108	156.5	175															
—	—	127.1	150															
38.3	36	127.1	150															
76.8	72	128.3	150															
114.7	108	166.2	175															
—	—	132.6	150															
38.3	36	132.6	150															
76.8	72	135.2	150															
114.7	108	173.1	200															
—	—	141.6	175															
38.3	36	141.6	175															
76.8	72	145.2	175															
114.7	108	183.1	200															
—	—	110.4	125															
38.3	36	110.4	125															
76.8	72	110.4	125															
114.7	108	145.3	175															
—	—	127.1	150															
38.3	36	127.1	150															
76.8	72	128.3	150															
114.7	108	166.2	175															
—	—	134.9	150															
38.3	36	134.9	150															
76.8	72	138.1	150															
114.7	108	176.0	200															
—	—	140.4	150															
38.3	36	140.4	150															
76.8	72	144.9	150															
114.7	108	182.8	200															
—	—	149.4	175															
38.3	36	149.4	175															
76.8	72	154.9	175															
114.7	108	192.8	200															

See page 169 for legend and notes.

Table 16 — Electrical Data — 50P035 with Optional Return Fan (cont)
380-3-60 (V-Ph-Hz) (cont)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		RETURN FAN			OPTIONAL ELECTRIC HEAT		POWER SUPPLY				
		No. A1			No. B1			Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*			
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)														
342	418	1	34	196	1	34	196	2	4.7 (ea)	20	30.0	1	—	—	—	—	—	115.9	125		
													—	—	—	38.3	36	115.9	125		
													—	—	—	76.8	72	115.9	125		
													—	—	—	114.7	108	152.2	175		
													10	16.7	—	—	—	—	—	132.6	150
															38.3	36	132.6	150			
															76.8	72	135.2	150			
															114.7	108	173.1	200			
													15	24.5	—	—	—	—	—	140.4	150
															38.3	36	140.4	150			
															76.8	72	144.9	150			
															114.7	108	182.8	200			
20	30.0	—	—	—	—	—	145.9	175													
		38.3	36	145.9	175																
		76.8	72	151.8	175																
		114.7	108	189.7	200																
25	38.0	—	—	—	—	—	154.9	175													
		38.3	36	154.9	175																
		76.8	72	161.8	175																
		114.7	108	199.7	225																
342	418	1	34	196	1	34	196	2	4.7 (ea)	25	38.0	1	—	—	—	—	—	124.9	150		
													—	—	—	38.3	36	124.9	150		
													—	—	—	76.8	72	124.9	150		
													—	—	—	114.7	108	162.2	200		
													10	16.7	—	—	—	—	—	141.6	175
															38.3	36	141.6	175			
															76.8	72	145.2	175			
															114.7	108	183.1	200			
													15	24.5	—	—	—	—	—	149.4	175
															38.3	36	149.4	175			
															76.8	72	154.9	175			
															114.7	108	192.8	200			
20	30.0	—	—	—	—	—	154.9	175													
		38.3	36	154.9	175																
		76.8	72	161.8	175																
		114.7	108	199.7	225																
25	38.0	—	—	—	—	—	162.9	200													
		38.3	36	162.9	200																
		76.8	72	171.8	200																
		114.7	108	209.7	225																

See page 169 for legend and notes.

Table 16 — Electrical Data — 50P035 with Optional Return Fan (cont)
460-3-60 (V-Ph-Hz)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		RETURN FAN			OPTIONAL ELECTRIC HEAT		POWER SUPPLY					
		No. A1			No. B1																	
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*				
414	508	1	26.9	179	1	26.9	179	2	3.3 (ea)	10	14.0	1	7 1/2	11.0	—	—	78.1	100				
															—	—	46.3	36	78.1	100		
															—	—	93.0	72	106.8	125		
															—	—	139.0	108	152.8	175		
															10	14.0	—	—	92.1	110		
															10	14.0	46.3	36	92.1	110		
															10	14.0	93.0	72	124.3	150		
															10	14.0	139.0	108	170.3	175		
															15	21.0	—	—	99.1	125		
															15	21.0	46.3	36	99.1	125		
															15	21.0	93.0	72	133.0	150		
															15	21.0	139.0	108	179.0	200		
		20	27.0	—	—	105.2	125															
		20	27.0	46.3	36	105.4	125															
		20	27.0	93.0	72	140.5	150															
		20	27.0	139.0	108	186.5	200															
		25	34.0	—	—	113.9	125															
		25	34.0	46.3	36	114.1	125															
		25	34.0	93.0	72	149.3	175															
		25	34.0	139.0	108	195.3	225															
		1	26.9	1	26.9	1	26.9	179	2	3.3 (ea)	10	14.0	1	10	14.0	1	—	—	81.1	100		
																	—	—	46.3	36	81.1	100
																	—	—	93.0	72	110.5	125
																	—	—	139.0	108	156.5	175
10	14.0																—	—	95.1	110		
10	14.0																46.3	36	95.1	110		
10	14.0																93.0	72	128.0	150		
10	14.0																139.0	108	174.0	200		
15	21.0																—	—	102.1	125		
15	21.0																46.3	36	102.1	125		
15	21.0																93.0	72	136.8	150		
15	21.0																139.0	108	182.8	200		
20	27.0	—	—	108.2	125																	
20	27.0	46.3	36	109.1	125																	
20	27.0	93.0	72	144.3	150																	
20	27.0	139.0	108	190.3	200																	
25	34.0	—	—	116.9	150																	
25	34.0	46.3	36	117.9	150																	
25	34.0	93.0	72	153.0	175																	
25	34.0	139.0	108	199.0	225																	
1	26.9	1	26.9	1	26.9	179	2	3.3 (ea)	15	21.0	1	15	21.0	1	—	—	88.1	110				
															—	—	46.3	36	88.1	110		
															—	—	93.0	72	119.3	125		
															—	—	139.0	108	165.3	175		
															10	14.0	—	—	102.1	125		
															10	14.0	46.3	36	102.1	125		
															10	14.0	93.0	72	136.8	150		
															10	14.0	139.0	108	182.8	200		
															15	21.0	—	—	109.1	125		
															15	21.0	46.3	36	110.4	125		
															15	21.0	93.0	72	145.5	150		
															15	21.0	139.0	108	191.5	200		
20	27.0	—	—	115.2	125																	
20	27.0	46.3	36	117.9	125																	
20	27.0	93.0	72	153.0	175																	
20	27.0	139.0	108	199.0	200																	
25	34.0	—	—	123.9	150																	
25	34.0	46.3	36	126.6	150																	
25	34.0	93.0	72	161.8	175																	
25	34.0	139.0	108	207.8	225																	

See page 169 for legend and notes.

Table 16 — Electrical Data — 50P035 with Optional Return Fan (cont)
460-3-60 (V-Ph-Hz) (cont)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		RETURN FAN			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
		No. A1			No. B1										FLA	kW		
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
414	508	1	26.9	179	1	26.9	179	2	3.3 (ea)	20	27.0	1	10	14.0	—	—	94.2	110
															46.3	36	94.2	110
															93.0	72	126.8	150
															139.0	108	172.8	175
															—	—	108.2	125
															46.3	36	109.1	125
															93.0	72	144.3	150
															139.0	108	190.3	200
															—	—	115.2	125
															46.3	36	117.9	125
															93.0	72	153.0	175
															139.0	108	199.0	200
															—	—	121.2	125
															46.3	36	125.4	150
93.0	72	160.5	175															
139.0	108	206.5	225															
—	—	129.9	150															
46.3	36	134.1	150															
93.0	72	169.3	175															
139.0	108	215.3	225															
—	—	102.9	125															
46.3	36	102.9	125															
93.0	72	135.5	150															
139.0	108	181.5	200															
—	—	116.9	150															
46.3	36	117.9	150															
93.0	72	153.0	175															
139.0	108	199.0	225															
—	—	123.9	150															
46.3	36	126.6	150															
93.0	72	161.8	175															
139.0	108	207.8	225															
—	—	129.9	150															
46.3	36	134.1	150															
93.0	72	169.3	175															
139.0	108	215.3	225															
—	—	136.9	150															
46.3	36	142.9	150															
93.0	72	178.0	200															
139.0	108	224.0	225															

See page 169 for legend and notes.

Table 16 — Electrical Data — 50P035 with Optional Return Fan (cont)
575-3-60 (V-Ph-Hz)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		RETURN FAN			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
		No. A1			No. B1										FLA	kW		
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
518	632	1	23.7	132	1	23.7	132	2	2.6 (ea)	10	11.0	1	7 1/2	9.0	—	—	67.5	90
															36.0	36	67.5	90
															72.0	72	83.3	110
															108.0	108	119.3	125
													—	—	78.5	100		
													36.0	36	78.5	100		
													72.0	72	97.0	110		
													108.0	108	133.0	150		
													—	—	84.5	100		
													36.0	36	84.5	100		
													72.0	72	104.5	125		
													108.0	108	140.5	150		
												—	—	89.5	110			
												36.0	36	89.5	110			
												72.0	72	110.8	125			
												108.0	108	146.8	150			
												—	—	95.4	110			
												36.0	36	95.4	110			
												72.0	72	117.0	125			
												108.0	108	153.0	175			
												—	—	69.5	90			
												36.0	36	69.5	90			
												72.0	72	85.8	110			
												108.0	108	121.8	125			
—	—	80.5	100															
36.0	36	80.5	100															
72.0	72	99.5	110															
108.0	108	135.5	150															
—	—	86.5	110															
36.0	36	86.5	110															
72.0	72	107.0	125															
108.0	108	143.0	150															
—	—	91.5	110															
36.0	36	91.5	110															
72.0	72	113.3	125															
108.0	108	149.3	150															
—	—	97.4	110															
36.0	36	97.4	110															
72.0	72	119.5	125															
108.0	108	155.5	175															
—	—	75.5	90															
36.0	36	75.5	90															
72.0	72	93.3	110															
108.0	108	129.3	150															
—	—	86.5	110															
36.0	36	86.5	110															
72.0	72	107.0	125															
108.0	108	143.0	150															
—	—	92.5	110															
36.0	36	92.5	110															
72.0	72	114.5	125															
108.0	108	150.5	175															
—	—	97.5	110															
36.0	36	97.5	110															
72.0	72	120.8	125															
108.0	108	156.8	175															
—	—	103.4	125															
36.0	36	103.4	125															
72.0	72	127.0	150															
108.0	108	163.0	175															

See page 169 for legend and notes.

Table 16 — Electrical Data — 50P035 with Optional Return Fan (cont)
575-3-60 (V-Ph-Hz) (cont)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		RETURN FAN			OPTIONAL ELECTRIC HEAT		POWER SUPPLY											
		No. A1			No. B1										FLA	kW												
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*										
518	632	1	23.7	132	1	23.7	132	2	2.6 (ea)	20	22.0	—	—	—	—	—	80.5	100										
															36.0	36	80.5	100										
															72.0	72	99.5	110										
															108.0	108	135.5	150										
												10	11.0	—	—	91.5	110											
														36.0	36	91.5	110											
														72.0	72	113.3	125											
														108.0	108	149.3	150											
												15	17.0	—	—	97.5	110											
														36.0	36	97.5	110											
														72.0	72	120.8	125											
														108.0	108	156.8	175											
										20	22.0	—	—	102.5	125													
												36.0	36	102.5	125													
												72.0	72	127.0	150													
												108.0	108	163.0	175													
										25	27.0	—	—	108.4	125													
												36.0	36	108.4	125													
												72.0	72	133.3	150													
												108.0	108	169.3	175													
										25	27.0	1	—	—	—	—	—	—	—	—	—	—	—	—	—	—	86.4	110
																									36.0	36	86.4	110
																									72.0	72	105.8	125
																									108.0	108	141.8	150
10	11.0	—	—	97.4	110																							
		36.0	36	97.4	110																							
		72.0	72	119.5	125																							
		108.0	108	155.5	175																							
15	17.0	—	—	103.4	125																							
		36.0	36	103.4	125																							
		72.0	72	127.0	150																							
		108.0	108	163.0	175																							
20	22.0	—	—	108.4	125																							
		36.0	36	108.4	125																							
		72.0	72	133.3	150																							
		108.0	108	169.3	175																							
25	27.0	—	—	113.4	125																							
		36.0	36	113.4	125																							
		72.0	72	139.5	150																							
		108.0	108	175.5	200																							

See page 169 for legend and notes.

Table 17 — Electrical Data — 50P 040 Units

208/230-3-60 (V-Ph-Hz)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		POWER EXHAUST			OPTIONAL ELECTRIC HEAT		POWER SUPPLY															
Min	Max	No. A1		No. B1		Qty	FLA	Qty	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*																
		Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*																
187	253	1	55.8	340	2	30.1	225	3	6.6 (ea)	10	30.8/28.0	7 1/2	24.2 / 22.0	2	3	10.6 / 9.6	— / —	78.9/ 90.0	157.7/ 182.0	236.6/ 273.0	36/ 36	72/ 72	108/ 108	174.0/ 171.8	225/ 225							
																	174.0/ 171.8	188.0/ 209.5	266.9/ 300.5	195.2/ 191.0	250/ 225											
																	195.2/ 191.0	214.5/ 233.5	293.4/ 324.5	207.4/ 202.2	250/ 250											
																	207.4/ 202.2	229.7/ 247.5	308.6/ 338.5	222.4/ 215.8	250/ 250											
																	222.4/ 215.8	248.5/ 264.5	327.4/ 355.5	222.4/ 215.8	250/ 250											
																	248.5/ 264.5	343.9/ 370.5	—	235.6/ 227.8	250/ 250											
		2	10	30.8 / 28.0	78.9/ 90.0	157.7/ 182.0	236.6/ 273.0	36/ 36	72/ 72	108/ 108	265.0/ 279.5	343.9/ 370.5	180.6/ 177.8	225/ 225	225/ 225	250/ 250	250/ 250	300/ 300	350/ 350	180.6/ 177.8	196.2/ 217.0	275.1/ 308.0	36/ 36	72/ 72	108/ 108	180.6/ 177.8	225/ 225					
																												180.6/ 177.8	196.2/ 217.0	275.1/ 308.0	201.8/ 197.0	250/ 250
																												201.8/ 197.0	222.7/ 241.0	301.6/ 332.0	214.0/ 208.2	250/ 250
																												222.7/ 241.0	316.9/ 346.0	—	229.0/ 221.8	250/ 250
																												229.0/ 221.8	256.7/ 272.0	335.6/ 363.0	229.0/ 221.8	250/ 250
																												256.7/ 272.0	352.1/ 378.0	—	242.2/ 233.8	250/ 250
3	15	46.2 / 42.0	78.9/ 90.0	157.7/ 182.0	236.6/ 273.0	36/ 36	72/ 72	108/ 108	273.2/ 287.0	352.1/ 378.0	196.0/ 191.8	250/ 225	250/ 225	250/ 250	250/ 250	300/ 300	350/ 350	196.0/ 191.8	215.5/ 234.5	294.4/ 325.5	36/ 36	72/ 72	108/ 108	196.0/ 191.8	250/ 225							
																										196.0/ 191.8	215.5/ 234.5	294.4/ 325.5	217.2/ 211.0	250/ 250		
																										217.2/ 211.0	242.0/ 258.5	320.9/ 349.5	229.4/ 222.2	250/ 250		
																										229.4/ 222.2	257.2/ 272.5	336.1/ 363.5	229.4/ 222.2	250/ 250		
																										257.2/ 272.5	336.1/ 363.5	—	244.4/ 235.8	300/ 250		
																										—	276.0/ 289.5	354.9/ 380.5	244.4/ 235.8	300/ 250		
4	20	58.8 / 54.0	78.9/ 90.0	157.7/ 182.0	236.6/ 273.0	36/ 36	72/ 72	108/ 108	292.5/ 304.5	371.4/ 395.5	257.6/ 247.8	300/ 300	300/ 300	300/ 300	300/ 300	350/ 350	257.6/ 247.8	292.5/ 304.5	371.4/ 395.5	36/ 36	72/ 72	108/ 108	257.6/ 247.8	300/ 300								
																									257.6/ 247.8	292.5/ 304.5	371.4/ 395.5	257.6/ 247.8	300/ 300			
																									292.5/ 304.5	300/ 300	—	244.4/ 235.8	300/ 250			
																									—	276.0/ 289.5	354.9/ 380.5	244.4/ 235.8	300/ 250			
																									276.0/ 289.5	354.9/ 380.5	—	257.6/ 247.8	300/ 300			
																									—	292.5/ 304.5	371.4/ 395.5	257.6/ 247.8	300/ 300			

See page 169 for legend and notes.

Table 17 — Electrical Data — 50P 040 Units (cont)

208/230-3-60 (V-Ph-Hz) (cont)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		POWER EXHAUST			OPTIONAL ELECTRIC HEAT		POWER SUPPLY		
Min	Max	No. A1		No. B1		Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR BRKR*			
		Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR BRKR*			
187	253	1	55.8	340	2	30.1	225	3	6.6 (ea)	25	74.8/68.0	2	—	—	— / —	78.9/ 90.0	36/ 36	210.1/ 203.8	250/ 250
																157.7/ 182.0	72/ 72	210.1/ 203.8	250/ 250
																236.6/ 273.0	108/ 108	232.0/ 249.5	250/ 300
																—	—	310.9/ 340.5	350/ 350
																—	—	231.3/ 223.0	250/ 250
																78.9/ 90.0	36/ 36	231.3/ 223.0	250/ 250
		157.7/ 182.0	72/ 72	258.5/ 273.5	300/ 300														
		236.6/ 273.0	108/ 108	337.4/ 364.5	350/ 400														
		—	—	243.5/ 234.2	300/ 250														
		78.9/ 90.0	36/ 36	243.5/ 234.2	300/ 250														
		157.7/ 182.0	72/ 72	273.7/ 287.5	300/ 300														
		236.6/ 273.0	108/ 108	352.6/ 378.5	400/ 400														
—	—	258.5/ 247.8	300/ 300																
78.9/ 90.0	36/ 36	258.5/ 247.8	300/ 300																
157.7/ 182.0	72/ 72	292.5/ 304.5	300/ 350																
236.6/ 273.0	108/ 108	371.4/ 395.5	400/ 400																
—	—	271.7/ 259.8	300/ 300																
78.9/ 90.0	36/ 36	271.7/ 259.8	300/ 300																
157.7/ 182.0	72/ 72	309.0/ 319.5	350/ 350																
236.6/ 273.0	108/ 108	387.9/ 410.5	400/ 450																
—	—	229.3/ 220.8	300/ 250																
78.9/ 90.0	36/ 36	229.3/ 220.8	300/ 250																
157.7/ 182.0	72/ 72	251.2/ 267.0	300/ 300																
236.6/ 273.0	108/ 108	330.1/ 358.0	400/ 400																
—	—	250.5/ 240.0	300/ 300																
78.9/ 90.0	36/ 36	250.5/ 240.0	300/ 300																
157.7/ 182.0	72/ 72	277.7/ 291.0	300/ 350																
236.6/ 273.0	108/ 108	356.6/ 382.0	400/ 400																
—	—	262.7/ 251.2	300/ 300																
78.9/ 90.0	36/ 36	262.7/ 251.2	300/ 300																
157.7/ 182.0	72/ 72	293.0/ 305.0	350/ 350																
236.6/ 273.0	108/ 108	371.9/ 396.0	400/ 450																
—	—	277.7/ 264.8	350/ 300																
78.9/ 90.0	36/ 36	277.7/ 264.8	350/ 300																
157.7/ 182.0	72/ 72	311.7/ 322.0	350/ 350																
236.6/ 273.0	108/ 108	390.6/ 413.0	450/ 450																
—	—	290.9/ 276.8	350/ 300																
78.9/ 90.0	36/ 36	290.9/ 276.8	350/ 300																
157.7/ 182.0	72/ 72	328.2/ 337.0	350/ 350																
236.6/ 273.0	108/ 108	407.1/ 428.0	450/ 450																
—	—	245.8/ 235.8	300/ 300																
78.9/ 90.0	36/ 36	245.8/ 235.8	300/ 300																
157.7/ 182.0	72/ 72	267.7/ 282.0	350/ 350																
236.6/ 273.0	108/ 108	346.6/ 373.0	400/ 450																
—	—	267.0/ 255.0	350/ 300																
78.9/ 90.0	36/ 36	267.0/ 255.0	350/ 300																
157.7/ 182.0	72/ 72	294.2/ 306.0	350/ 350																
236.6/ 273.0	108/ 108	373.1/ 397.0	450/ 450																
—	—	279.2/ 266.2	350/ 300																
78.9/ 90.0	36/ 36	279.2/ 266.2	350/ 300																
157.7/ 182.0	72/ 72	309.5/ 320.0	350/ 350																
236.6/ 273.0	108/ 108	388.4/ 411.0	450/ 450																
—	—	294.2/ 279.8	350/ 350																
78.9/ 90.0	36/ 36	294.2/ 279.8	350/ 350																
157.7/ 182.0	72/ 72	328.2/ 337.0	400/ 400																
236.6/ 273.0	108/ 108	407.1/ 428.0	450/ 450																
—	—	307.4/ 291.8	350/ 350																
78.9/ 90.0	36/ 36	307.4/ 291.8	350/ 350																
157.7/ 182.0	72/ 72	344.7/ 352.0	400/ 400																
236.6/ 273.0	108/ 108	423.6/ 443.0	450/ 500																

See page 169 for legend and notes.

Table 17 — Electrical Data — 50P 040 Units (cont)
380-3-60 (V-Ph-Hz)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		POWER EXHAUST			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
		No. A1			No. B1			Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
												—	—	—	—	—	105.1	125
															38.3	36	105.1	125
															76.8	72	105.1	125
															114.7	108	130.3	150
															—	—	113.1	125
													3	4.0	38.3	36	113.1	125
															76.8	72	113.1	125
															114.7	108	140.3	175
															—	—	123.3	150
															38.3	36	123.3	150
															76.8	72	123.3	150
															114.7	108	153.1	175
															—	—	130.1	150
															38.3	36	130.1	150
															76.8	72	130.1	150
															114.7	108	161.6	175
															—	—	138.5	150
															38.3	36	138.5	150
															76.8	72	138.5	150
															114.7	108	172.1	200
															—	—	109.3	125
															38.3	36	109.3	125
															76.8	72	109.3	125
															114.7	108	135.6	150
															—	—	117.3	150
															38.3	36	117.3	150
															76.8	72	117.3	150
															114.7	108	145.6	175
															—	—	127.5	150
342	418	1	34	196	2	19.2	140	3	3.9 (ea)	10	16.7				38.3	36	127.5	150
															76.8	72	127.5	150
															114.7	108	158.3	175
															—	—	134.3	150
															38.3	36	134.3	150
															76.8	72	134.3	150
															114.7	108	166.8	175
															—	—	142.7	175
															38.3	36	142.7	175
															76.8	72	142.7	175
															114.7	108	177.3	200
															—	—	117.1	150
															38.3	36	117.1	150
															76.8	72	117.1	150
															114.7	108	145.3	175
															—	—	125.1	150
															38.3	36	125.1	150
															76.8	72	125.1	150
															114.7	108	155.3	175
															—	—	135.3	150
															38.3	36	135.3	150
															76.8	72	135.3	150
															114.7	108	168.1	175
															—	—	142.1	175
															38.3	36	142.1	175
															76.8	72	142.1	175
															114.7	108	176.6	200
															—	—	150.5	175
															38.3	36	150.5	175
															76.8	72	150.5	175
															114.7	108	187.1	200

See page 169 for legend and notes.

Table 17 — Electrical Data — 50P 040 Units (cont)
380-3-60 (V-Ph-Hz) (cont)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		POWER EXHAUST			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
		No. A1			No. B1			Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
342	418	1	34	196	2	19.2	140	3	3.9 (ea)	25	38.0	2	3	4.0	—	—	122.6	150
															38.3	36	122.6	150
															76.8	72	122.6	150
															114.7	108	152.2	175
															—	—	130.6	150
															38.3	36	130.6	150
					76.8	72	130.6	150										
					114.7	108	162.2	175										
					—	—	140.8	150										
					38.3	36	140.8	150										
					76.8	72	140.8	150										
					114.7	108	175.0	200										
		—	—	147.6	175													
		38.3	36	147.6	175													
		76.8	72	147.6	175													
		114.7	108	183.5	200													
		—	—	156.0	175													
		38.3	36	156.0	175													
		76.8	72	156.1	175													
		114.7	108	194.0	200													
		—	—	131.6	150													
		38.3	36	131.6	150													
		76.8	72	131.6	150													
		114.7	108	162.2	200													
—	—	139.6	175															
38.3	36	139.6	175															
76.8	72	139.6	175															
114.7	108	172.2	200															
—	—	149.8	175															
38.3	36	149.8	175															
76.8	72	149.8	175															
114.7	108	185.0	200															
—	—	156.6	175															
38.3	36	156.6	175															
76.8	72	156.6	175															
114.7	108	193.5	225															
—	—	165.0	200															
38.3	36	165.0	200															
76.8	72	166.1	200															
114.7	108	204.0	225															
—	—	138.5	175															
38.3	36	138.5	175															
76.8	72	138.5	175															
114.7	108	169.1	200															
—	—	146.5	175															
38.3	36	146.5	175															
76.8	72	146.5	175															
114.7	108	179.1	200															
—	—	156.7	200															
38.3	36	156.7	200															
76.8	72	156.7	200															
114.7	108	191.8	225															
—	—	163.5	200															
38.3	36	163.5	200															
76.8	72	163.5	200															
114.7	108	200.3	225															
—	—	171.9	200															
38.3	36	171.9	200															
76.8	72	172.9	200															
114.7	108	210.8	225															

See page 169 for legend and notes.

Table 17 — Electrical Data — 50P 040 Units (cont)

460-3-60 (V-Ph-Hz)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		POWER EXHAUST			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
		No. A1			No. B1			Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
												—	—	—	—	—	87.9	110
															46.3	36	87.9	110
															93.0	72	106.8	125
															139.0	108	152.8	175
															—	—	97.5	110
													3	4.8	46.3	36	97.5	110
															93.0	72	118.8	125
															139.0	108	164.8	175
															—	—	103.1	125
															46.3	36	103.1	125
															93.0	72	125.8	150
															139.0	108	171.8	175
															—	—	109.9	125
															46.3	36	109.9	125
															93.0	72	134.3	150
															139.0	108	180.3	200
															—	—	115.9	125
															46.3	36	115.9	125
															93.0	72	141.8	150
															139.0	108	187.8	200
															—	—	90.9	110
															46.3	36	90.9	110
															93.0	72	110.5	125
															139.0	108	156.5	175
															—	—	100.5	125
															46.3	36	100.5	125
															93.0	72	122.5	150
															139.0	108	168.5	175
															—	—	106.1	125
															46.3	36	106.1	125
															93.0	72	129.5	150
															139.0	108	175.5	200
															—	—	112.9	125
															46.3	36	112.9	125
															93.0	72	138.0	150
															139.0	108	184.0	200
															—	—	118.9	125
															46.3	36	118.9	125
															93.0	72	145.5	150
															139.0	108	191.5	200
															—	—	97.9	110
															46.3	36	97.9	110
															93.0	72	119.3	125
															139.0	108	165.3	175
															—	—	107.5	125
															46.3	36	107.5	125
															93.0	72	131.3	150
															139.0	108	177.3	200
															—	—	113.1	125
															46.3	36	113.1	125
															93.0	72	138.3	150
															139.0	108	184.3	200
															—	—	119.9	125
															46.3	36	119.9	125
															93.0	72	146.8	150
															139.0	108	192.8	200
															—	—	125.9	150
															46.3	36	125.9	150
															93.0	72	154.3	175
															139.0	108	200.3	225

See page 169 for legend and notes.

Table 17 — Electrical Data — 50P 040 Units (cont)

460-3-60 (V-Ph-Hz) (cont)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		POWER EXHAUST			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
		No. A1			No. B1			Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
												—	—	—	—	—	104.0	125
															46.3	36	104.0	125
															93.0	72	126.8	150
															139.0	108	172.8	175
															—	—	113.6	125
													3	4.8	46.3	36	113.6	125
															93.0	72	138.8	150
															139.0	108	184.8	200
															—	—	119.2	125
															46.3	36	119.2	125
															93.0	72	145.8	150
															139.0	108	191.8	200
															—	—	126.0	150
															46.3	36	126.0	150
															93.0	72	154.3	175
															139.0	108	200.3	225
															—	—	132.0	150
															46.3	36	132.0	150
															93.0	72	161.8	175
															139.0	108	207.8	225
															—	—	112.7	125
															46.3	36	112.7	125
															93.0	72	135.5	150
															139.0	108	181.5	200
															—	—	122.3	150
															46.3	36	122.3	150
															93.0	72	147.5	175
															139.0	108	193.5	225
															—	—	127.9	150
414	508	1	26.9	179	2	16.7	114	3	3.3 (ea)	25	34.0				46.3	36	127.9	150
															93.0	72	154.5	175
															139.0	108	200.5	225
															—	—	134.7	150
															46.3	36	134.7	150
															93.0	72	163.0	175
															139.0	108	209.0	225
															—	—	140.7	150
															46.3	36	140.7	150
															93.0	72	170.5	175
															139.0	108	216.5	225
															—	—	120.2	150
															46.3	36	120.2	150
															93.0	72	143.0	175
															139.0	108	189.0	225
															—	—	129.8	150
															46.3	36	129.8	150
															93.0	72	155.0	175
															139.0	108	201.0	225
															—	—	135.4	175
															46.3	36	135.4	175
															93.0	72	162.0	175
															139.0	108	208.0	225
															—	—	142.2	175
															46.3	36	142.2	175
															93.0	72	170.5	200
															139.0	108	216.5	250
															—	—	148.2	175
															46.3	36	148.2	175
															93.0	72	178.0	200
															139.0	108	224.0	250

See page 169 for legend and notes.

Table 17 — Electrical Data — 50P 040 Units (cont)

575-3-60 (V-Ph-Hz)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		POWER EXHAUST			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
		No. A1			No. B1													
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
518	632	1	23.7	132	2	12.2	80	3	2.6 (ea)	10	11.0	2	3	11.0	—	—	70.8	90
															36.0	36	70.8	90
															72.0	72	83.3	110
															108.0	108	119.3	125
															—	—	78.6	100
															36.0	36	78.6	100
															72.0	72	93.0	110
															108.0	108	129.0	150
															—	—	83.0	100
															36.0	36	83.0	100
															72.0	72	98.5	110
															108.0	108	134.5	150
		—	—	88.8	110													
		36.0	36	88.8	110													
		72.0	72	105.8	125													
		108.0	108	141.8	150													
		—	—	92.8	110													
		36.0	36	92.8	110													
		72.0	72	110.8	125													
		108.0	108	146.8	150													
		—	—	72.8	90													
		36.0	36	72.8	90													
		72.0	72	85.8	110													
		108.0	108	121.8	125													
—	—	80.6	100															
36.0	36	80.6	100															
72.0	72	95.5	110															
108.0	108	131.5	150															
—	—	85.0	100															
36.0	36	85.0	100															
72.0	72	101.0	110															
108.0	108	137.0	150															
—	—	90.8	110															
36.0	36	90.8	110															
72.0	72	108.3	125															
108.0	108	144.3	150															
—	—	94.8	110															
36.0	36	94.8	110															
72.0	72	113.3	125															
108.0	108	149.3	150															
—	—	78.8	100															
36.0	36	78.8	100															
72.0	72	93.3	110															
108.0	108	129.3	150															
—	—	86.6	110															
36.0	36	86.6	110															
72.0	72	103.0	125															
108.0	108	139.0	150															
—	—	91.0	110															
36.0	36	91.0	110															
72.0	72	108.5	125															
108.0	108	144.5	150															
—	—	96.8	110															
36.0	36	96.8	110															
72.0	72	115.8	125															
108.0	108	151.8	175															
—	—	100.8	110															
36.0	36	100.8	110															
72.0	72	120.8	125															
108.0	108	156.8	175															

See page 169 for legend and notes.

Table 17 — Electrical Data — 50P 040 Units (cont)

575-3-60 (V-Ph-Hz) (cont)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		POWER EXHAUST			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
		No. A1			No. B1			Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
												—	—	—	—	—	83.8	100
															36.0	36	83.8	100
															72.0	72	99.5	110
															108.0	108	135.5	150
															—	—	91.6	110
													3	3.9	36.0	36	91.6	110
															72.0	72	109.3	125
															108.0	108	145.3	150
															—	—	96.0	110
															36.0	36	96.0	110
															72.0	72	114.8	125
															108.0	108	150.8	175
															—	—	101.8	125
															36.0	36	101.8	125
															72.0	72	122.0	125
															108.0	108	158.0	175
															—	—	105.8	125
															36.0	36	105.8	125
															72.0	72	127.0	150
															108.0	108	163.0	175
															—	—	89.7	110
															36.0	36	89.7	110
															72.0	72	105.8	125
															108.0	108	141.8	150
															—	—	97.5	110
															36.0	36	97.5	110
															72.0	72	115.5	125
															108.0	108	151.5	175
															—	—	101.9	125
518	632	1	23.7	132	2	12.2	80	3	2.6 (ea)	25	27.0				36.0	36	101.9	125
															72.0	72	121.0	125
															108.0	108	157.0	175
															—	—	107.7	125
															36.0	36	107.7	125
															72.0	72	128.3	150
															108.0	108	164.3	175
															—	—	111.7	125
															36.0	36	111.7	125
															72.0	72	133.3	150
															108.0	108	169.3	175
															—	—	95.9	125
															36.0	36	95.9	125
															72.0	72	112.0	125
															108.0	108	148.0	175
															—	—	103.7	125
															36.0	36	103.7	125
															72.0	72	121.8	150
															108.0	108	157.8	175
															—	—	108.1	125
															36.0	36	108.1	125
															72.0	72	127.3	150
															108.0	108	163.3	175
															—	—	113.9	125
															36.0	36	113.9	125
															72.0	72	134.5	150
															108.0	108	170.5	175
															—	—	117.9	125
															36.0	36	117.9	125
															72.0	72	139.5	150
															108.0	108	175.5	200

See page 169 for legend and notes.

Table 18 — Electrical Data — 50P040 Units with Optional Return Fan

208/230-3-60 (V-Ph-Hz)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		RETURN FAN			OPTIONAL ELECTRIC HEAT		POWER SUPPLY		
Min	Max	No. A1		No. B1		Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*			
		Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*			
187	253	1	55.8	340	2	30.1	225	3	6.6 (ea)	10	30.8/28.0	— / —	— / —	— / —	174.0 / 171.8	225 / 225			
													78.9 / 90.0	36 / 36	174.0 / 171.8	225 / 225			
													157.7 / 182.0	72 / 72	188.0 / 209.5	250 / 250			
													236.6 / 273.0	108 / 108	266.9 / 300.5	300 / 350			
													1	10	30.8 / 28.0	— / —	— / —	204.8 / 199.8	250 / 250
																78.9 / 90.0	36 / 36	204.8 / 199.8	250 / 250
																157.7 / 182.0	72 / 72	226.5 / 244.5	250 / 300
																236.6 / 273.0	108 / 108	305.4 / 335.5	350 / 350
													1	15	46.2 / 42.0	— / —	— / —	220.2 / 213.8	250 / 250
																78.9 / 90.0	36 / 36	220.2 / 213.8	250 / 250
																157.7 / 182.0	72 / 72	245.7 / 262.0	250 / 300
																236.6 / 273.0	108 / 108	324.6 / 353.0	350 / 400
		1	20	59.4 / 54.0	— / —	— / —	234.3 / 225.8	250 / 250											
					78.9 / 90.0	36 / 36	234.3 / 225.8	250 / 250											
					157.7 / 182.0	72 / 72	262.2 / 277.0	300 / 300											
					236.6 / 273.0	108 / 108	341.1 / 368.0	350 / 400											
		1	25	74.8 / 68.0	— / —	— / —	253.5 / 242.8	300 / 300											
					78.9 / 90.0	36 / 36	253.5 / 242.8	300 / 300											
					157.7 / 182.0	72 / 72	281.5 / 294.5	350 / 350											
					236.6 / 273.0	108 / 108	360.4 / 385.5	400 / 400											
		1	55.8	340	2	30.1	225	3	6.6 (ea)	10	30.8/28.0	— / —	— / —	— / —	— / —	180.6 / 177.8	225 / 225		
														78.9 / 90.0	36 / 36	180.6 / 177.8	225 / 225		
														157.7 / 182.0	72 / 72	196.2 / 217.0	250 / 250		
														236.6 / 273.0	108 / 108	275.1 / 308.0	300 / 350		
1	10													30.8 / 28.0	— / —	— / —	211.4 / 205.8	250 / 250	
															78.9 / 90.0	36 / 36	211.4 / 205.8	250 / 250	
															157.7 / 182.0	72 / 72	234.7 / 252.0	250 / 300	
															236.6 / 273.0	108 / 108	313.6 / 343.0	350 / 350	
1	15													46.2 / 42.0	— / —	— / —	226.8 / 219.8	250 / 250	
															78.9 / 90.0	36 / 36	226.8 / 219.8	250 / 250	
															157.7 / 182.0	72 / 72	254.0 / 269.5	300 / 300	
															236.6 / 273.0	108 / 108	332.9 / 360.5	350 / 400	
1	20	59.4 / 54.0	— / —	— / —	240.9 / 231.8	300 / 250													
			78.9 / 90.0	36 / 36	240.9 / 231.8	300 / 250													
			157.7 / 182.0	72 / 72	270.5 / 284.5	300 / 300													
			236.6 / 273.0	108 / 108	349.4 / 375.5	400 / 400													
1	25	74.8 / 68.0	— / —	— / —	260.1 / 248.8	300 / 300													
			78.9 / 90.0	36 / 36	260.1 / 248.8	300 / 300													
			157.7 / 182.0	72 / 72	289.7 / 302.0	350 / 350													
			236.6 / 273.0	108 / 108	368.6 / 393.0	400 / 450													
1	55.8	340	2	30.1	225	3	6.6 (ea)	15	46.2/42.0	— / —	— / —	— / —	— / —	196.0 / 191.8	250 / 225				
												78.9 / 90.0	36 / 36	196.0 / 191.8	250 / 225				
												157.7 / 182.0	72 / 72	215.5 / 234.5	250 / 250				
												236.6 / 273.0	108 / 108	294.4 / 325.5	350 / 350				
												1	10	30.8 / 28.0	— / —	— / —	226.8 / 219.8	250 / 250	
															78.9 / 90.0	36 / 36	226.8 / 219.8	250 / 250	
															157.7 / 182.0	72 / 72	254.0 / 269.5	300 / 300	
															236.6 / 273.0	108 / 108	332.9 / 360.5	350 / 400	
												1	15	46.2 / 42.0	— / —	— / —	242.2 / 233.8	250 / 250	
															78.9 / 90.0	36 / 36	242.2 / 233.8	250 / 250	
															157.7 / 182.0	72 / 72	273.2 / 287.0	300 / 300	
															236.6 / 273.0	108 / 108	352.1 / 378.0	400 / 400	
1	20	59.4 / 54.0	— / —	— / —	256.3 / 245.8	300 / 300													
			78.9 / 90.0	36 / 36	256.3 / 245.8	300 / 300													
			157.7 / 182.0	72 / 72	289.7 / 302.0	300 / 350													
			236.6 / 273.0	108 / 108	368.6 / 393.0	400 / 400													
1	25	74.8 / 68.0	— / —	— / —	275.5 / 262.8	350 / 300													
			78.9 / 90.0	36 / 36	275.5 / 262.8	350 / 300													
			157.7 / 182.0	72 / 72	309.0 / 319.5	350 / 350													
			236.6 / 273.0	108 / 108	387.9 / 410.5	450 / 450													

See page 169 for legend and notes.

Table 18 — Electrical Data — 50P040 Units with Optional Return Fan (cont)
208/230-3-60 (V-Ph-Hz) (cont)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		RETURN FAN			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
Min	Max	Qty	No. A1		No. B1		Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*	
			RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)											
187	253	1	55.8	340	2	30.1	225	3	6.6 (ea)	25	74.8/68.0	1	10	30.8 / 28.0	— / —	— / —	210.1 / 203.8	250 / 250
															78.9 / 90.0	36 / 36	210.1 / 203.8	250 / 250
															157.7 / 182.0	72 / 72	232.0 / 249.5	250 / 300
															236.6 / 273.0	108 / 108	310.9 / 340.5	350 / 350
															— / —	— / —	240.9 / 231.8	300 / 250
															78.9 / 90.0	36 / 36	240.9 / 231.8	300 / 250
															157.7 / 182.0	72 / 72	270.5 / 284.5	300 / 300
															236.6 / 273.0	108 / 108	349.4 / 375.5	400 / 400
															— / —	— / —	256.3 / 245.8	300 / 300
															78.9 / 90.0	36 / 36	256.3 / 245.8	300 / 300
															157.7 / 182.0	72 / 72	289.7 / 302.0	300 / 350
															236.6 / 273.0	108 / 108	368.6 / 393.0	400 / 400
		— / —	— / —	269.5 / 257.8	300 / 300													
		78.9 / 90.0	36 / 36	269.5 / 257.8	300 / 300													
		157.7 / 182.0	72 / 72	306.2 / 317.0	350 / 350													
		236.6 / 273.0	108 / 108	385.1 / 408.0	400 / 450													
		— / —	— / —	288.7 / 274.8	350 / 300													
		78.9 / 90.0	36 / 36	288.7 / 274.8	350 / 300													
		157.7 / 182.0	72 / 72	325.5 / 334.5	350 / 350													
		236.6 / 273.0	108 / 108	404.4 / 425.5	450 / 450													
		— / —	— / —	229.3 / 220.8	300 / 250													
		78.9 / 90.0	36 / 36	229.3 / 220.8	300 / 250													
		157.7 / 182.0	72 / 72	251.2 / 267.0	300 / 300													
		236.6 / 273.0	108 / 108	330.1 / 358.0	400 / 400													
— / —	— / —	260.1 / 248.8	300 / 300															
78.9 / 90.0	36 / 36	260.1 / 248.8	300 / 300															
157.7 / 182.0	72 / 72	289.7 / 302.0	350 / 350															
236.6 / 273.0	108 / 108	368.6 / 393.0	400 / 450															
— / —	— / —	275.5 / 262.8	350 / 300															
78.9 / 90.0	36 / 36	275.5 / 262.8	350 / 300															
157.7 / 182.0	72 / 72	309.0 / 319.5	350 / 350															
236.6 / 273.0	108 / 108	387.9 / 410.5	450 / 450															
— / —	— / —	288.7 / 274.8	350 / 300															
78.9 / 90.0	36 / 36	288.7 / 274.8	350 / 300															
157.7 / 182.0	72 / 72	325.5 / 334.5	350 / 350															
236.6 / 273.0	108 / 108	404.4 / 425.5	450 / 450															
— / —	— / —	304.1 / 288.8	350 / 350															
78.9 / 90.0	36 / 36	304.1 / 288.8	350 / 350															
157.7 / 182.0	72 / 72	344.7 / 352.0	400 / 400															
236.6 / 273.0	108 / 108	423.6 / 443.0	450 / 450															
— / —	— / —	245.8 / 235.8	300 / 300															
78.9 / 90.0	36 / 36	245.8 / 235.8	300 / 300															
157.7 / 182.0	72 / 72	267.7 / 282.0	350 / 350															
236.6 / 273.0	108 / 108	346.6 / 373.0	400 / 450															
— / —	— / —	276.6 / 263.8	350 / 300															
78.9 / 90.0	36 / 36	276.6 / 263.8	350 / 300															
157.7 / 182.0	72 / 72	306.2 / 317.0	350 / 350															
236.6 / 273.0	108 / 108	385.1 / 408.0	450 / 450															
— / —	— / —	292.0 / 277.8	350 / 350															
78.9 / 90.0	36 / 36	292.0 / 277.8	350 / 350															
157.7 / 182.0	72 / 72	325.5 / 334.5	400 / 400															
236.6 / 273.0	108 / 108	404.4 / 425.5	450 / 450															
— / —	— / —	305.2 / 289.8	350 / 350															
78.9 / 90.0	36 / 36	305.2 / 289.8	350 / 350															
157.7 / 182.0	72 / 72	342.0 / 349.5	400 / 400															
236.6 / 273.0	108 / 108	420.9 / 440.5	450 / 500															
— / —	— / —	320.6 / 303.8	400 / 350															
78.9 / 90.0	36 / 36	320.6 / 303.8	400 / 350															
157.7 / 182.0	72 / 72	361.2 / 367.0	400 / 400															
236.6 / 273.0	108 / 108	440.1 / 458.0	500 / 500															

See page 169 for legend and notes.

Table 18 — Electrical Data — 50P040 Units with Optional Return Fan (cont)
380-3-60 (V-Ph-Hz)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		RETURN FAN			OPTIONAL ELECTRIC HEAT		POWER SUPPLY			
		No. A1			No. B1															
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*		
342	418	1	34	196	2	19.2	140	3	3.9 (ea)	10	16.7	1	—	—	—	—	105.1	125		
															38.3	36	105.1	125		
															76.8	72	105.1	125		
															114.7	108	130.3	150		
															—	—	121.8	150		
															10	16.7	38.3	36	121.8	150
															76.8	72	121.8	150		
															114.7	108	151.2	175		
															—	—	129.6	150		
															15	24.5	38.3	36	129.6	150
															76.8	72	129.6	150		
															114.7	108	161.0	175		
		—	—	135.1	150															
		20	30	38.3	36	135.1	150													
		76.8	72	135.1	150															
		114.7	108	167.8	175															
		—	—	144.1	175															
		25	38	38.3	36	144.1	175													
		76.8	72	144.1	175															
		114.7	108	177.8	200															
		1	34	196	2	19.2	140	3	3	3.9 (ea)	10	16.7	1	—	—	—	—	109.3	125	
																38.3	36	109.3	125	
																76.8	72	109.3	125	
																114.7	108	135.6	150	
—	—															126.0	150			
10	16.7															38.3	36	126.0	150	
76.8	72															126.0	150			
114.7	108															156.5	175			
—	—															133.8	150			
15	24.5															38.3	36	133.8	150	
76.8	72															133.8	150			
114.7	108															166.2	175			
—	—	139.3	150																	
20	30	38.3	36	139.3	150															
76.8	72	139.3	150																	
114.7	108	173.1	200																	
—	—	148.3	175																	
25	38	38.3	36	148.3	175															
76.8	72	148.3	175																	
114.7	108	183.1	200																	
1	34	196	2	19.2	140	3	3	3.9 (ea)	10	16.7	1	—	—	—	—	117.1	150			
														38.3	36	117.1	150			
														76.8	72	117.1	150			
														114.7	108	145.3	175			
														—	—	133.8	150			
														10	16.7	38.3	36	133.8	150	
														76.8	72	133.8	150			
														114.7	108	166.2	175			
														—	—	141.6	175			
														15	24.5	38.3	36	141.6	175	
														76.8	72	141.6	175			
														114.7	108	176.0	200			
—	—	147.1	175																	
20	30	38.3	36	147.1	175															
76.8	72	147.1	175																	
114.7	108	182.8	200																	
—	—	156.1	175																	
25	38	38.3	36	156.1	175															
76.8	72	156.1	175																	
114.7	108	192.8	200																	

See page 169 for legend and notes.

Table 18 — Electrical Data — 50P040 Units with Optional Return Fan (cont)
 380-3-60 (V-Ph-Hz) (cont)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		RETURN FAN			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
		No. A1			No. B1													
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
342	418	1	34	196	2	19.2	140	3	3.9 (ea)	25	38.0	1	—	—	—	—	122.6	150
															38.3	36	122.6	150
															76.8	72	122.6	150
															114.7	108	152.2	175
															—	—	139.3	150
															38.3	36	139.3	150
					76.8	72	139.3	150										
					114.7	108	173.1	200										
					—	—	147.1	175										
					38.3	36	147.1	175										
					76.8	72	147.1	175										
					114.7	108	182.8	200										
		—	—	152.6	175													
		38.3	36	152.6	175													
		76.8	72	152.6	175													
		114.7	108	189.7	200													
		—	—	161.6	175													
		38.3	36	161.6	175													
		76.8	72	161.8	175													
		114.7	108	199.7	225													
		—	—	131.6	150													
		38.3	36	131.6	150													
		76.8	72	131.6	150													
		114.7	108	162.2	200													
—	—	148.3	175															
38.3	36	148.3	175															
76.8	72	148.3	175															
114.7	108	183.1	200															
—	—	156.1	175															
38.3	36	156.1	175															
76.8	72	156.1	175															
114.7	108	192.8	200															
—	—	161.6	175															
38.3	36	161.6	175															
76.8	72	161.8	175															
114.7	108	199.7	225															
—	—	169.6	200															
38.3	36	169.6	200															
76.8	72	171.8	200															
114.7	108	209.7	225															
—	—	138.5	175															
38.3	36	138.5	175															
76.8	72	138.5	175															
114.7	108	169.1	200															
—	—	155.2	175															
38.3	36	155.2	175															
76.8	72	155.2	175															
114.7	108	190.0	225															
—	—	163.0	200															
38.3	36	163.0	200															
76.8	72	163.0	200															
114.7	108	199.7	225															
—	—	168.5	200															
38.3	36	168.5	200															
76.8	72	168.7	200															
114.7	108	206.6	225															
—	—	176.5	200															
38.3	36	176.5	200															
76.8	72	178.7	200															
114.7	108	216.6	250															

See page 169 for legend and notes.

Table 18 — Electrical Data — 50P040 Units with Optional Return Fan (cont)
460-3-60 (V-Ph-Hz)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		RETURN FAN			OPTIONAL ELECTRIC HEAT		POWER SUPPLY						
		No. A1			No. B1			Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*					
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*					
414	508	1	26.9	179	2	16.7	114	3	3.3 (ea)	10	14.0	1	7 1/2	11.0	—	—	—	46.3	36	87.9	110		
															—	—	—	93.0	72	106.8	125		
															—	—	—	139.0	108	152.8	175		
															10	14	—	—	—	101.9	125		
															10	14	46.3	36	101.9	125			
															10	14	93.0	72	124.3	150			
															10	14	139.0	108	170.3	175			
															15	21	—	—	—	108.9	125		
															15	21	46.3	36	108.9	125			
															15	21	93.0	72	133.0	150			
															15	21	139.0	108	179.0	200			
															20	27	—	—	—	115.0	125		
		20	27	46.3	36	115.0	125																
		20	27	93.0	72	140.5	150																
		20	27	139.0	108	186.5	200																
		25	34	—	—	—	123.7	150															
		25	34	46.3	36	123.7	150																
		25	34	93.0	72	149.3	175																
		25	34	139.0	108	195.3	225																
		1	26.9	179	2	16.7	114	3	3.3 (ea)	10	14.0	10	14.0	1	7 1/2	11.0	—	—	—	46.3	36	90.9	110
																	—	—	—	93.0	72	110.5	125
																	—	—	—	139.0	108	156.5	175
																	10	14	—	—	—	104.9	125
																	10	14	46.3	36	104.9	125	
10	14																93.0	72	128.0	150			
10	14																139.0	108	174.0	200			
15	21																—	—	—	111.9	125		
15	21																46.3	36	111.9	125			
15	21																93.0	72	136.8	150			
15	21																139.0	108	182.8	200			
20	27																—	—	—	118.0	125		
20	27	46.3	36	118.0	125																		
20	27	93.0	72	144.3	150																		
20	27	139.0	108	190.3	200																		
25	34	—	—	—	126.7	150																	
25	34	46.3	36	126.7	150																		
25	34	93.0	72	153.0	175																		
25	34	139.0	108	199.0	225																		
1	26.9	179	2	16.7	114	3	3.3 (ea)	10	14.0	10	14.0	1	7 1/2	11.0	—	—	—	46.3	36	97.9	110		
															—	—	—	93.0	72	119.3	125		
															—	—	—	139.0	108	165.3	175		
															10	14	—	—	—	111.9	125		
															10	14	46.3	36	111.9	125			
															10	14	93.0	72	136.8	150			
															10	14	139.0	108	182.8	200			
															15	21	—	—	—	118.9	125		
															15	21	46.3	36	118.9	125			
															15	21	93.0	72	145.5	150			
															15	21	139.0	108	191.5	200			
															20	27	—	—	—	125.0	150		
20	27	46.3	36	125.0	150																		
20	27	93.0	72	153.0	175																		
20	27	139.0	108	199.0	200																		
25	34	—	—	—	133.7	150																	
25	34	46.3	36	133.7	150																		
25	34	93.0	72	161.8	175																		
25	34	139.0	108	207.8	225																		

See page 169 for legend and notes.

Table 18 — Electrical Data — 50P040 Units with Optional Return Fan (cont)
460-3-60 (V-Ph-Hz) (cont)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		RETURN FAN			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
		No. A1			No. B1													
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
414	508	1	26.9	179	2	16.7	114	3	3.3 (ea)	25	34.0	1	—	—	—	—	104.0	125
															46.3	36	104.0	125
															93.0	72	126.8	150
															139.0	108	172.8	175
															—	—	118.0	125
															46.3	36	118.0	125
					93.0	72	144.3	150										
					139.0	108	190.3	200										
					—	—	125.0	150										
					46.3	36	125.0	150										
					93.0	72	153.0	175										
					139.0	108	199.0	200										
		—	—	131.0	150													
		46.3	36	131.0	150													
		93.0	72	160.5	175													
		139.0	108	206.5	225													
		—	—	139.7	150													
		46.3	36	139.7	150													
		93.0	72	169.3	175													
		139.0	108	215.3	225													
		—	—	112.7	125													
		46.3	36	112.7	125													
		93.0	72	135.5	150													
		139.0	108	181.5	200													
—	—	126.7	150															
46.3	36	126.7	150															
93.0	72	153.0	175															
139.0	108	199.0	225															
—	—	133.7	150															
46.3	36	133.7	150															
93.0	72	161.8	175															
139.0	108	207.8	225															
—	—	139.7	150															
46.3	36	139.7	150															
93.0	72	169.3	175															
139.0	108	215.3	225															
—	—	146.7	175															
46.3	36	146.7	175															
93.0	72	178.0	200															
139.0	108	224.0	225															
—	—	120.2	150															
46.3	36	120.2	150															
93.0	72	143.0	175															
139.0	108	189.0	225															
—	—	134.2	150															
46.3	36	134.2	150															
93.0	72	160.5	175															
139.0	108	206.5	225															
—	—	141.2	175															
46.3	36	141.2	175															
93.0	72	169.3	200															
139.0	108	215.3	250															
—	—	147.2	175															
46.3	36	147.2	175															
93.0	72	176.8	200															
139.0	108	222.8	250															
—	—	154.2	175															
46.3	36	154.2	175															
93.0	72	185.5	200															
139.0	108	231.5	250															

See page 169 for legend and notes.

Table 18 — Electrical Data — 50P040 Units with Optional Return Fan (cont)
575-3-60 (V-Ph-Hz)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		RETURN FAN			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
		No. A1			No. B1													
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
518	632	1	23.7	132	2	12.2	80	3	2.6 (ea)	10	11.0	1	—	—	—	—	70.8	90
															36.0	36	70.8	90
															72.0	72	83.3	110
															108.0	108	119.3	125
															—	—	81.8	100
															36.0	36	81.8	100
															72.0	72	97.0	110
															108.0	108	133.0	150
															—	—	87.8	110
															36.0	36	87.8	110
															72.0	72	104.5	125
															108.0	108	140.5	150
		—	—	92.8	110													
		36.0	36	92.8	110													
		72.0	72	110.8	125													
		108.0	108	146.8	150													
		—	—	98.7	125													
		36.0	36	98.7	125													
		72.0	72	117.0	125													
		108.0	108	153.0	175													
		—	—	72.8	90													
		36.0	36	72.8	90													
		72.0	72	85.8	110													
		108.0	108	121.8	125													
—	—	83.8	100															
36.0	36	83.8	100															
72.0	72	99.5	110															
108.0	108	135.5	150															
—	—	89.8	110															
36.0	36	89.8	110															
72.0	72	107.0	125															
108.0	108	143.0	150															
—	—	94.8	110															
36.0	36	94.8	110															
72.0	72	113.3	125															
108.0	108	149.3	150															
—	—	100.7	125															
36.0	36	100.7	125															
72.0	72	119.5	125															
108.0	108	155.5	175															
—	—	78.8	100															
36.0	36	78.8	100															
72.0	72	93.3	110															
108.0	108	129.3	150															
—	—	89.8	110															
36.0	36	89.8	110															
72.0	72	107.0	125															
108.0	108	143.0	150															
—	—	95.8	110															
36.0	36	95.8	110															
72.0	72	114.5	125															
108.0	108	150.5	175															
—	—	100.8	110															
36.0	36	100.8	110															
72.0	72	120.8	125															
108.0	108	156.8	175															
—	—	106.7	125															
36.0	36	106.7	125															
72.0	72	127.0	150															
108.0	108	163.0	175															

See page 169 for legend and notes.

Table 18 — Electrical Data — 50P040 Units with Optional Return Fan (cont)
575-3-60 (V-Ph-Hz) (cont)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		RETURN FAN			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
		No. A1			No. B1													
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
518	632	1	23.7	132	2	12.2	80	3	2.6 (ea)	25	27.0	1	10	11	—	—	83.8	100
															36.0	36	83.8	100
															72.0	72	99.5	110
															108.0	108	135.5	150
															—	—	94.8	110
															36.0	36	94.8	110
															72.0	72	113.3	125
															108.0	108	149.3	150
															—	—	100.8	110
															36.0	36	100.8	110
															72.0	72	120.8	125
															108.0	108	156.8	175
		—	—	105.8	125													
		36.0	36	105.8	125													
		72.0	72	127.0	150													
		108.0	108	163.0	175													
		—	—	111.7	125													
		36.0	36	111.7	125													
		72.0	72	133.3	150													
		108.0	108	169.3	175													
		—	—	89.7	110													
		36.0	36	89.7	110													
		72.0	72	105.8	125													
		108.0	108	141.8	150													
—	—	100.7	125															
36.0	36	100.7	125															
72.0	72	119.5	125															
108.0	108	155.5	175															
—	—	106.7	125															
36.0	36	106.7	125															
72.0	72	127.0	150															
108.0	108	163.0	175															
—	—	111.7	125															
36.0	36	111.7	125															
72.0	72	133.3	150															
108.0	108	169.3	175															
—	—	116.7	125															
36.0	36	116.7	125															
72.0	72	139.5	150															
108.0	108	175.5	200															
—	—	95.9	125															
36.0	36	95.9	125															
72.0	72	112.0	125															
108.0	108	148.0	175															
—	—	106.9	125															
36.0	36	106.9	125															
72.0	72	125.8	150															
108.0	108	161.8	175															
—	—	112.9	125															
36.0	36	112.9	125															
72.0	72	133.3	150															
108.0	108	169.3	175															
—	—	117.9	125															
36.0	36	117.9	125															
72.0	72	139.5	150															
108.0	108	175.5	200															
—	—	122.9	150															
36.0	36	122.9	150															
72.0	72	145.8	150															
108.0	108	181.8	200															

See page 169 for legend and notes.

Table 19 — Electrical Data — 50P 050 Units
208/230-3-60 (V-Ph-Hz)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		POWER EXHAUST			OPTIONAL ELECTRIC HEAT		POWER SUPPLY			
Min	Max	No. A1		No. B1		Qty	FLA	Qty	FLA	Qty	FLA	FLA	kW	MCA	FUSE OR HACR BRKR*					
		Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Qty	FLA	FLA	kW	MCA	FUSE OR HACR BRKR*					
187	253	2	33.3	239	2	48.1	245	4	6.6 (ea)	10	30.8/28.0	7 1/2	24.2 / 22.0	2	3	10.6 / 9.6	—	—	225.4/ 223.2	250/ 250
																	78.9/ 90.0	36/ 36	225.4/ 223.2	250/ 250
																	157.7/ 182.0	72/ 72	225.4/ 223.2	250/ 250
																	236.6/ 273.0	108/ 108	266.9/ 300.5	300/ 350
																	—	—	246.6/ 242.4	250/ 250
																	78.9/ 90.0	36/ 36	246.6/ 242.4	250/ 250
		157.7/ 182.0	72/ 72	246.6/ 242.4	250/ 250															
		236.6/ 273.0	108/ 108	293.4/ 324.5	300/ 350															
		—	—	258.8/ 253.6	300/ 300															
		78.9/ 90.0	36/ 36	258.8/ 253.6	300/ 300															
		157.7/ 182.0	72/ 72	258.8/ 253.6	300/ 300															
		236.6/ 273.0	108/ 108	308.6/ 338.5	350/ 350															
—	—	273.8/ 267.2	300/ 300																	
78.9/ 90.0	36/ 36	273.8/ 267.2	300/ 300																	
157.7/ 182.0	72/ 72	273.8/ 267.2	300/ 300																	
236.6/ 273.0	108/ 108	327.4/ 355.5	350/ 400																	
—	—	287.0/ 279.2	300/ 300																	
78.9/ 90.0	36/ 36	287.0/ 279.2	300/ 300																	
157.7/ 182.0	72/ 72	287.0/ 279.5	300/ 300																	
236.6/ 273.0	108/ 108	343.9/ 370.5	350/ 400																	
—	—	232.0/ 229.2	250/ 250																	
78.9/ 90.0	36/ 36	232.0/ 229.2	250/ 250																	
157.7/ 182.0	72/ 72	232.0/ 229.2	250/ 250																	
236.6/ 273.0	108/ 108	275.1/ 308.0	300/ 350																	
—	—	253.2/ 248.4	300/ 250																	
78.9/ 90.0	36/ 36	253.2/ 248.4	300/ 250																	
157.7/ 182.0	72/ 72	253.2/ 248.4	300/ 250																	
236.6/ 273.0	108/ 108	301.6/ 332.0	350/ 350																	
—	—	265.4/ 259.6	300/ 300																	
78.9/ 90.0	36/ 36	265.4/ 259.6	300/ 300																	
157.7/ 182.0	72/ 72	265.4/ 259.6	300/ 300																	
236.6/ 273.0	108/ 108	316.9/ 346.0	350/ 350																	
—	—	280.4/ 273.2	300/ 300																	
78.9/ 90.0	36/ 36	280.4/ 273.2	300/ 300																	
157.7/ 182.0	72/ 72	280.4/ 273.2	300/ 300																	
236.6/ 273.0	108/ 108	335.6/ 363.0	350/ 400																	
—	—	293.6/ 285.2	300/ 300																	
78.9/ 90.0	36/ 36	293.6/ 285.2	300/ 300																	
157.7/ 182.0	72/ 72	293.6/ 287.0	300/ 300																	
236.6/ 273.0	108/ 108	352.1/ 378.0	400/ 400																	
—	—	247.4/ 243.2	250/ 250																	
78.9/ 90.0	36/ 36	247.4/ 243.2	250/ 250																	
157.7/ 182.0	72/ 72	247.4/ 243.2	250/ 250																	
236.6/ 273.0	108/ 108	294.4/ 325.5	300/ 350																	
—	—	268.6/ 262.4	300/ 300																	
78.9/ 90.0	36/ 36	268.6/ 262.4	300/ 300																	
157.7/ 182.0	72/ 72	268.6/ 262.4	300/ 300																	
236.6/ 273.0	108/ 108	320.9/ 349.5	350/ 350																	
—	—	280.8/ 273.6	300/ 300																	
78.9/ 90.0	36/ 36	280.8/ 273.6	300/ 300																	
157.7/ 182.0	72/ 72	280.8/ 273.6	300/ 300																	
236.6/ 273.0	108/ 108	336.1/ 363.5	350/ 400																	
—	—	295.8/ 287.2	300/ 300																	
78.9/ 90.0	36/ 36	295.8/ 287.2	300/ 300																	
157.7/ 182.0	72/ 72	295.8/ 289.5	300/ 300																	
236.6/ 273.0	108/ 108	354.9/ 380.5	400/ 400																	
—	—	309.0/ 299.2	350/ 300																	
78.9/ 90.0	36/ 36	309.0/ 299.2	350/ 300																	
157.7/ 182.0	72/ 72	309.0/ 304.5	350/ 350																	
236.6/ 273.0	108/ 108	371.4/ 395.5	400/ 400																	

See page 169 for legend and notes.

Table 19 — Electrical Data — 50P 050 Units (cont)
208/230-3-60 (V-Ph-Hz) (cont)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		POWER EXHAUST			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
187	253	2	33.3	239	2	48.1	245	4	6.6 (ea)	25	74.8/68.0	2	3	10.6 / 9.6	—	—	263.5/ 256.7	300/ 300
															78.9/ 90.0	36/ 36	263.5/ 256.7	300/ 300
															157.7/ 182.0	72/ 72	263.5/ 256.7	300/ 300
															236.6/ 273.0	108/ 108	310.9/ 340.5	350/ 350
															—	—	284.7/ 275.9	300/ 300
															78.9/ 90.0	36/ 36	284.7/ 275.9	300/ 300
		157.7/ 182.0	72/ 72	284.7/ 275.9	300/ 300													
		236.6/ 273.0	108/ 108	337.4/ 364.5	350/ 400													
		—	—	296.9/ 287.1	350/ 300													
		78.9/ 90.0	36/ 36	296.9/ 287.1	350/ 300													
		157.7/ 182.0	72/ 72	296.9/ 287.5	350/ 300													
		236.6/ 273.0	108/ 108	352.6/ 378.5	400/ 400													
—	—	311.9/ 300.7	350/ 350															
78.9/ 90.0	36/ 36	311.9/ 300.7	350/ 350															
157.7/ 182.0	72/ 72	311.9/ 304.5	350/ 350															
236.6/ 273.0	108/ 108	371.4/ 395.5	400/ 400															
—	—	325.1/ 312.7	350/ 350															
78.9/ 90.0	36/ 36	325.1/ 312.7	350/ 350															
157.7/ 182.0	72/ 72	325.1/ 319.5	350/ 350															
236.6/ 273.0	108/ 108	387.9/ 410.5	400/ 450															
—	—	282.7/ 274.2	350/ 300															
78.9/ 90.0	36/ 36	282.7/ 274.2	350/ 300															
157.7/ 182.0	72/ 72	282.7/ 274.2	350/ 300															
236.6/ 273.0	108/ 108	330.1/ 358.0	400/ 400															
—	—	303.9/ 293.4	350/ 350															
78.9/ 90.0	36/ 36	303.9/ 293.4	350/ 350															
157.7/ 182.0	72/ 72	303.9/ 293.4	350/ 350															
236.6/ 273.0	108/ 108	356.6/ 382.0	400/ 400															
—	—	316.1/ 304.6	350/ 350															
78.9/ 90.0	36/ 36	316.1/ 304.6	350/ 350															
157.7/ 182.0	72/ 72	316.1/ 305.0	350/ 350															
236.6/ 273.0	108/ 108	371.9/ 396.0	400/ 450															
—	—	331.1/ 318.2	400/ 350															
78.9/ 90.0	36/ 36	331.1/ 318.2	400/ 350															
157.7/ 182.0	72/ 72	331.1/ 322.0	400/ 350															
236.6/ 273.0	108/ 108	390.6/ 413.0	450/ 450															
—	—	344.3/ 330.2	400/ 350															
78.9/ 90.0	36/ 36	344.3/ 330.2	400/ 350															
157.7/ 182.0	72/ 72	344.3/ 337.0	400/ 350															
236.6/ 273.0	108/ 108	407.1/ 428.0	450/ 450															
—	—	299.2/ 289.2	350/ 350															
78.9/ 90.0	36/ 36	299.2/ 289.2	350/ 350															
157.7/ 182.0	72/ 72	299.2/ 289.2	350/ 350															
236.6/ 273.0	108/ 108	346.6/ 373.0	400/ 450															
—	—	320.4/ 308.4	400/ 350															
78.9/ 90.0	36/ 36	320.4/ 308.4	400/ 350															
157.7/ 182.0	72/ 72	320.4/ 308.4	400/ 350															
236.6/ 273.0	108/ 108	373.1/ 397.0	450/ 450															
—	—	332.6/ 319.6	400/ 350															
78.9/ 90.0	36/ 36	332.6/ 319.6	400/ 350															
157.7/ 182.0	72/ 72	332.6/ 320.0	400/ 350															
236.6/ 273.0	108/ 108	388.4/ 411.0	450/ 450															
—	—	347.6/ 333.2	400/ 400															
78.9/ 90.0	36/ 36	347.6/ 333.2	400/ 400															
157.7/ 182.0	72/ 72	347.6/ 337.0	400/ 400															
236.6/ 273.0	108/ 108	407.1/ 428.0	450/ 450															
—	—	360.8/ 345.2	400/ 400															
78.9/ 90.0	36/ 36	360.8/ 345.2	400/ 400															
157.7/ 182.0	72/ 72	360.8/ 352.0	400/ 400															
236.6/ 273.0	108/ 108	423.6/ 443.0	450/ 500															

See page 169 for legend and notes.

Table 19 — Electrical Data — 50P 050 Units (cont)
380-3-60 (V-Ph-Hz)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		POWER EXHAUST			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
		No. A1			No. B1													
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
342	418	2	23.7	145	2	23.7	145	4	3.9 (ea)	10	16.7	2	3	4.0	—	—	128.8	150
															38.3	36	128.8	150
															76.8	72	128.8	150
															114.7	108	130.3	150
															—	—	136.8	150
															38.3	36	136.8	150
															76.8	72	136.8	150
															114.7	108	140.3	150
															—	—	147.0	150
															38.3	36	147.0	150
															76.8	72	147.0	150
															114.7	108	153.1	175
		—	—	153.8	175													
		38.3	36	153.8	175													
		76.8	72	153.8	175													
		114.7	108	161.6	175													
		—	—	162.2	175													
		38.3	36	162.2	175													
		76.8	72	162.2	175													
		114.7	108	172.1	175													
		—	—	133.0	150													
		38.3	36	133.0	150													
		76.8	72	133.0	150													
		114.7	108	135.6	150													
—	—	141.0	150															
38.3	36	141.0	150															
76.8	72	141.0	150															
114.7	108	145.6	150															
—	—	151.2	175															
38.3	36	151.2	175															
76.8	72	151.2	175															
114.7	108	158.3	175															
—	—	158.0	175															
38.3	36	158.0	175															
76.8	72	158.0	175															
114.7	108	166.8	175															
—	—	166.4	175															
38.3	36	166.4	175															
76.8	72	166.4	175															
114.7	108	177.3	200															
—	—	141.0	150															
38.3	36	141.0	150															
76.8	72	141.0	150															
114.7	108	145.3	150															
—	—	149.0	150															
38.3	36	149.0	150															
76.8	72	149.0	150															
114.7	108	155.3	175															
—	—	159.2	175															
38.3	36	159.2	175															
76.8	72	159.2	175															
114.7	108	168.1	175															
—	—	166.0	175															
38.3	36	166.0	175															
76.8	72	166.0	175															
114.7	108	176.6	200															
—	—	174.4	175															
38.3	36	174.4	175															
76.8	72	174.4	175															
114.7	108	187.1	200															

See page 169 for legend and notes.

Table 19 — Electrical Data — 50P 050 Units (cont)
380-3-60 (V-Ph-Hz) (cont)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		POWER EXHAUST			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
		No. A1			No. B1			Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
342	418	2	23.7	145	2	23.7	145	4	3.9 (ea)	25	38.0	2	3	4.0	—	—	147.9	175
															38.3	36	147.9	175
															76.8	72	147.9	175
															114.7	108	152.2	175
															—	—	155.9	175
															38.3	36	155.9	175
															76.8	72	155.9	175
															114.7	108	162.2	175
															—	—	166.1	175
															38.3	36	166.1	175
															76.8	72	166.1	175
															114.7	108	175.0	200
		—	—	172.9	200													
		38.3	36	172.9	200													
		76.8	72	172.9	200													
		114.7	108	183.5	200													
		—	—	181.3	200													
		38.3	36	181.3	200													
		76.8	72	181.3	200													
		114.7	108	194.0	200													
		—	—	157.9	175													
		38.3	36	157.9	175													
		76.8	72	157.9	175													
		114.7	108	162.2	200													
—	—	165.9	200															
38.3	36	165.9	200															
76.8	72	165.9	200															
114.7	108	172.2	200															
—	—	176.1	200															
38.3	36	176.1	200															
76.8	72	176.1	200															
114.7	108	185.0	200															
—	—	182.9	200															
38.3	36	182.9	200															
76.8	72	182.9	200															
114.7	108	193.5	225															
—	—	191.3	225															
38.3	36	191.3	225															
76.8	72	191.3	225															
114.7	108	204.0	225															
—	—	164.8	200															
38.3	36	164.8	200															
76.8	72	164.8	200															
114.7	108	169.1	200															
—	—	172.8	200															
38.3	36	172.8	200															
76.8	72	172.8	200															
114.7	108	179.1	200															
—	—	183.0	225															
38.3	36	183.0	225															
76.8	72	183.0	225															
114.7	108	191.8	225															
—	—	189.8	225															
38.3	36	189.8	225															
76.8	72	189.8	225															
114.7	108	200.3	225															
—	—	198.2	225															
38.3	36	198.2	225															
76.8	72	198.2	225															
114.7	108	210.8	225															

See page 169 for legend and notes.

Table 19 — Electrical Data — 50P 050 Units (cont)

460-3-60 (V-Ph-Hz)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		POWER EXHAUST			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
		No. A1			No. B1													
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
414	508	2	17.9	125	2	18.6	125	4	3.3 (ea)	10	14.0	2	3	4.8	—	—	101.9	110
															46.3	36	101.9	110
															93.0	72	106.8	125
															139.0	108	152.8	175
															—	—	111.5	125
															46.3	36	111.5	125
		93.0	72	118.8	125													
		139.0	108	164.8	175													
		—	—	117.1	125													
		46.3	36	117.1	125													
		93.0	72	125.8	150													
		139.0	108	171.8	175													
—	—	123.9	125															
46.3	36	123.9	125															
93.0	72	134.3	150															
139.0	108	180.3	200															
—	—	129.9	150															
46.3	36	129.9	150															
93.0	72	141.8	150															
139.0	108	187.8	200															
—	—	104.9	110															
46.3	36	104.9	110															
93.0	72	110.5	125															
139.0	108	156.5	175															
—	—	114.5	125															
46.3	36	114.5	125															
93.0	72	122.5	125															
139.0	108	168.5	175															
—	—	120.1	125															
46.3	36	120.1	125															
93.0	72	129.5	150															
139.0	108	175.5	200															
—	—	126.9	150															
46.3	36	126.9	150															
93.0	72	138.0	150															
139.0	108	184.0	200															
—	—	132.9	150															
46.3	36	132.9	150															
93.0	72	145.5	150															
139.0	108	191.5	200															
—	—	112.5	125															
46.3	36	112.5	125															
93.0	72	119.3	125															
139.0	108	165.3	175															
—	—	122.1	125															
46.3	36	122.1	125															
93.0	72	131.3	150															
139.0	108	177.3	200															
—	—	127.7	150															
46.3	36	127.7	150															
93.0	72	138.3	150															
139.0	108	184.3	200															
—	—	134.5	150															
46.3	36	134.5	150															
93.0	72	146.8	150															
139.0	108	192.8	200															
—	—	140.5	150															
46.3	36	140.5	150															
93.0	72	154.3	175															
139.0	108	200.3	225															

See page 169 for legend and notes.

Table 19 — Electrical Data — 50P 050 Units (cont)

460-3-60 (V-Ph-Hz) (cont)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		POWER EXHAUST			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
		No. A1			No. B1			Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
												—	—	—	—	—	120.0	125
															46.3	36	120.0	125
															93.0	72	126.8	150
															139.0	108	172.8	175
															—	—	129.6	150
													3	4.8	46.3	36	129.6	150
															93.0	72	138.8	150
															139.0	108	184.8	200
															—	—	135.2	150
															46.3	36	135.2	150
															93.0	72	145.8	150
															139.0	108	191.8	200
															—	—	142.0	150
															46.3	36	142.0	150
															93.0	72	154.3	175
															139.0	108	200.3	225
															—	—	148.0	150
															46.3	36	148.0	150
															93.0	72	161.8	175
															139.0	108	207.8	225
															—	—	128.7	150
															46.3	36	128.7	150
															93.0	72	135.5	150
															139.0	108	181.5	200
															—	—	138.3	150
															46.3	36	138.3	150
															93.0	72	147.5	175
															139.0	108	193.5	225
															—	—	143.9	175
414	508	2	17.9	125	2	18.6	125	4	3.3 (ea)	25	34.0				46.3	36	143.9	175
															93.0	72	154.5	175
															139.0	108	200.5	225
															—	—	150.7	175
															46.3	36	150.7	175
															93.0	72	163.0	175
															139.0	108	209.0	225
															—	—	156.7	175
															46.3	36	156.7	175
															93.0	72	170.5	175
															139.0	108	216.5	225
															—	—	136.2	175
															46.3	36	136.2	175
															93.0	72	143.0	175
															139.0	108	189.0	225
															—	—	145.8	175
															46.3	36	145.8	175
															93.0	72	155.0	175
															139.0	108	201.0	225
															—	—	151.4	175
															46.3	36	151.4	175
															93.0	72	162.0	175
															139.0	108	208.0	225
															—	—	158.2	175
															46.3	36	158.2	175
															93.0	72	170.5	200
															139.0	108	216.5	250
															—	—	164.2	200
															46.3	36	164.2	200
															93.0	72	178.0	200
															139.0	108	224.0	250

See page 169 for legend and notes.

Table 19 — Electrical Data — 50P 050 Units (cont)

575-3-60 (V-Ph-Hz)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		POWER EXHAUST			OPTIONAL ELECTRIC HEAT		POWER SUPPLY											
		No. A1			No. B1																							
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*										
518	632	2	12.8	80	2	14.7	100	4	2.6 (ea)	7 1/2	9.0	2	—	—	—	—	78.1	90										
															36.0	36	78.1	90										
															72.0	72	83.3	90										
															108.0	108	119.3	125										
													—	—	85.9	100												
													3	3.9	36.0	36	85.9	100										
													72.0	72	93.0	100												
													108.0	108	129.0	150												
													—	—	90.3	100												
													5	6.1	36.0	36	90.3	100										
													72.0	72	98.5	110												
													108.0	108	134.5	150												
										—	—	96.1	110															
										7.5	9.0	36.0	36	96.1	110													
										72.0	72	105.8	110															
										108.0	108	141.8	150															
										—	—	100.1	110															
										10	11.0	36.0	36	100.1	110													
										72.0	72	110.8	125															
										108.0	108	146.8	150															
										10	11.0	2	—	—	—	—	—	4	2.6 (ea)	10	11.0	2	—	—	—	—	80.1	90
																									36.0	36	80.1	90
																									72.0	72	85.8	100
																									108.0	108	121.8	125
—	—	87.9	100																									
3	3.9	36.0	36	87.9	100																							
72.0	72	95.5	100																									
108.0	108	131.5	150																									
—	—	92.3	100																									
5	6.1	36.0	36	92.3	100																							
72.0	72	101.0	110																									
108.0	108	137.0	150																									
—	—	98.1	110																									
7.5	9.0	36.0	36	98.1	110																							
72.0	72	108.3	110																									
108.0	108	144.3	150																									
—	—	102.1	110																									
10	11.0	36.0	36	102.1	110																							
72.0	72	113.3	125																									
108.0	108	149.3	150																									
15	17.0	2	—	—	—	—	—	4	2.6 (ea)	15	17.0	2	—	—	—	—	86.7	100										
															36.0	36	86.7	100										
															72.0	72	93.3	110										
															108.0	108	129.3	150										
													—	—	94.5	110												
													3	3.9	36.0	36	94.5	110										
													72.0	72	103.0	110												
													108.0	108	139.0	150												
													—	—	98.9	110												
													5	6.1	36.0	36	98.9	110										
													72.0	72	108.5	110												
													108.0	108	144.5	150												
—	—	104.7	110																									
7.5	9.0	36.0	36	104.7	110																							
72.0	72	115.8	125																									
108.0	108	151.8	175																									
—	—	108.7	125																									
10	11.0	36.0	36	108.7	125																							
72.0	72	120.8	125																									
108.0	108	156.8	175																									

See page 169 for legend and notes.

Table 19 — Electrical Data — 50P 050 Units (cont)

575-3-60 (V-Ph-Hz) (cont)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		POWER EXHAUST			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
		No. A1			No. B1			Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
518	632	2	12.8	80	2	14.7	100	4	2.6 (ea)	25	27.0	2	3	3.9	—	—	92.9	110
															36.0	36	92.9	110
															72.0	72	99.5	110
															108.0	108	135.5	150
															—	—	100.7	110
															36.0	36	100.7	110
															72.0	72	109.3	125
															108.0	108	145.3	150
															—	—	105.1	125
															36.0	36	105.1	125
															72.0	72	114.8	125
															108.0	108	150.8	175
		—	—	110.9	125													
		36.0	36	110.9	125													
		72.0	72	122.0	125													
		108.0	108	158.0	175													
		—	—	114.9	125													
		36.0	36	114.9	125													
		72.0	72	127.0	150													
		108.0	108	163.0	175													
		—	—	99.2	125													
		36.0	36	99.2	125													
		72.0	72	105.8	125													
		108.0	108	141.8	150													
—	—	107.0	125															
36.0	36	107.0	125															
72.0	72	115.5	125															
108.0	108	151.5	175															
—	—	111.4	125															
36.0	36	111.4	125															
72.0	72	121.0	125															
108.0	108	157.0	175															
—	—	117.2	125															
36.0	36	117.2	125															
72.0	72	128.3	150															
108.0	108	164.3	175															
—	—	121.2	125															
36.0	36	121.2	125															
72.0	72	133.3	150															
108.0	108	169.3	175															
—	—	105.4	125															
36.0	36	105.4	125															
72.0	72	112.0	125															
108.0	108	148.0	175															
—	—	113.2	125															
36.0	36	113.2	125															
72.0	72	121.8	150															
108.0	108	157.8	175															
—	—	117.6	125															
36.0	36	117.6	125															
72.0	72	127.3	150															
108.0	108	163.3	175															
—	—	123.4	150															
36.0	36	123.4	150															
72.0	72	134.5	150															
108.0	108	170.5	175															
—	—	127.4	150															
36.0	36	127.4	150															
72.0	72	139.5	150															
108.0	108	175.5	200															

See page 169 for legend and notes.

Table 20 — Electrical Data — 50P050 Units with Optional Return Fan

208/230-3-60 (V-Ph-Hz)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		RETURN FAN			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
Min	Max	Qty	No. A1		No. B1		Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*	
			RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)											
187	253	2	33.3	239	2	48.1	245	4	6.6 (ea)	10	30.8/28.0	1	7 1/2	24.2 / 22.0	— / —	— / —	225.4 / 223.2	250 / 250
															78.9 / 90.0	36 / 36	225.4 / 223.2	250 / 250
															157.7 / 182.0	72 / 72	225.4 / 223.2	250 / 250
															236.6 / 273.0	108 / 108	266.9 / 300.5	300 / 350
															— / —	— / —	256.2 / 251.2	300 / 300
															78.9 / 90.0	36 / 36	256.2 / 251.2	300 / 300
					157.7 / 182.0	72 / 72	256.2 / 251.2	300 / 300										
					236.6 / 273.0	108 / 108	305.4 / 335.5	350 / 350										
					— / —	— / —	271.6 / 265.2	300 / 300										
					78.9 / 90.0	36 / 36	271.6 / 265.2	300 / 300										
					157.7 / 182.0	72 / 72	271.6 / 265.2	300 / 300										
					236.6 / 273.0	108 / 108	324.6 / 353.0	350 / 400										
		— / —	— / —	287.7 / 278.7	300 / 300													
		78.9 / 90.0	36 / 36	287.7 / 278.7	300 / 300													
		157.7 / 182.0	72 / 72	287.7 / 278.7	300 / 300													
		236.6 / 273.0	108 / 108	341.1 / 368.0	350 / 400													
		— / —	— / —	306.9 / 296.2	350 / 350													
		78.9 / 90.0	36 / 36	306.9 / 296.2	350 / 350													
		157.7 / 182.0	72 / 72	306.9 / 296.2	350 / 350													
		236.6 / 273.0	108 / 108	360.4 / 385.5	400 / 400													
		— / —	— / —	232.0 / 229.2	250 / 250													
		78.9 / 90.0	36 / 36	232.0 / 229.2	250 / 250													
		157.7 / 182.0	72 / 72	232.0 / 229.2	250 / 250													
		236.6 / 273.0	108 / 108	275.1 / 308.0	300 / 350													
— / —	— / —	262.8 / 257.2	300 / 300															
78.9 / 90.0	36 / 36	262.8 / 257.2	300 / 300															
157.7 / 182.0	72 / 72	262.8 / 257.2	300 / 300															
236.6 / 273.0	108 / 108	313.6 / 343.0	350 / 350															
— / —	— / —	278.2 / 271.2	300 / 300															
78.9 / 90.0	36 / 36	278.2 / 271.2	300 / 300															
157.7 / 182.0	72 / 72	278.2 / 271.2	300 / 300															
236.6 / 273.0	108 / 108	332.9 / 360.5	350 / 400															
— / —	— / —	294.3 / 284.7	350 / 300															
78.9 / 90.0	36 / 36	294.3 / 284.7	350 / 300															
157.7 / 182.0	72 / 72	294.3 / 284.7	350 / 300															
236.6 / 273.0	108 / 108	349.4 / 375.5	400 / 400															
— / —	— / —	313.5 / 302.2	350 / 350															
78.9 / 90.0	36 / 36	313.5 / 302.2	350 / 350															
157.7 / 182.0	72 / 72	313.5 / 302.2	350 / 350															
236.6 / 273.0	108 / 108	368.6 / 393.0	400 / 450															
— / —	— / —	247.4 / 243.2	250 / 250															
78.9 / 90.0	36 / 36	247.4 / 243.2	250 / 250															
157.7 / 182.0	72 / 72	247.4 / 243.2	250 / 250															
236.6 / 273.0	108 / 108	294.4 / 325.5	300 / 350															
— / —	— / —	278.2 / 271.2	300 / 300															
78.9 / 90.0	36 / 36	278.2 / 271.2	300 / 300															
157.7 / 182.0	72 / 72	278.2 / 271.2	300 / 300															
236.6 / 273.0	108 / 108	332.9 / 360.5	350 / 400															
— / —	— / —	293.6 / 285.2	300 / 300															
78.9 / 90.0	36 / 36	293.6 / 285.2	300 / 300															
157.7 / 182.0	72 / 72	293.6 / 287.0	300 / 300															
236.6 / 273.0	108 / 108	352.1 / 378.0	400 / 400															
— / —	— / —	309.7 / 298.7	350 / 350															
78.9 / 90.0	36 / 36	309.7 / 298.7	350 / 350															
157.7 / 182.0	72 / 72	309.7 / 302.0	350 / 350															
236.6 / 273.0	108 / 108	368.6 / 393.0	400 / 400															
— / —	— / —	328.9 / 316.2	400 / 350															
78.9 / 90.0	36 / 36	328.9 / 316.2	400 / 350															
157.7 / 182.0	72 / 72	328.9 / 319.5	400 / 350															
236.6 / 273.0	108 / 108	387.9 / 410.5	450 / 450															

See page 169 for legend and notes.

Table 20 — Electrical Data — 50P050 Units with Optional Return Fan (cont)
208/230-3-60 (V-Ph-Hz) (cont)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		RETURN FAN			OPTIONAL ELECTRIC HEAT		POWER SUPPLY			
Min	Max	No. A1			No. B1			Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*		
		Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)													
187	253	2	33.3	239	2	48.1	245	4	6.6 (ea)	25	74.8/68.0	1	—	—	— / —	— / —	263.5 / 256.7	300 / 300		
															78.9 / 90.0	36 / 36	263.5 / 256.7	300 / 300		
															157.7 / 182.0	72 / 72	263.5 / 256.7	300 / 300		
															236.6 / 273.0	108 / 108	310.9 / 340.5	350 / 350		
															10	30.8 / 28.0	— / —	— / —	294.3 / 284.7	350 / 300
																	78.9 / 90.0	36 / 36	294.3 / 284.7	350 / 300
																	157.7 / 182.0	72 / 72	294.3 / 284.7	350 / 300
																	236.6 / 273.0	108 / 108	349.4 / 375.5	400 / 400
															15	46.2 / 42.0	— / —	— / —	309.7 / 298.7	350 / 350
																	78.9 / 90.0	36 / 36	309.7 / 298.7	350 / 350
																	157.7 / 182.0	72 / 72	309.7 / 302.0	350 / 350
																	236.6 / 273.0	108 / 108	368.6 / 393.0	400 / 400
		20	59.4 / 54.0	— / —	— / —	322.9 / 310.7	350 / 350													
				78.9 / 90.0	36 / 36	322.9 / 310.7	350 / 350													
				157.7 / 182.0	72 / 72	322.9 / 317.0	350 / 350													
				236.6 / 273.0	108 / 108	385.1 / 408.0	400 / 450													
		25	74.8 / 68.0	— / —	— / —	342.1 / 328.2	400 / 350													
				78.9 / 90.0	36 / 36	342.1 / 328.2	400 / 350													
				157.7 / 182.0	72 / 72	342.1 / 334.5	400 / 350													
				236.6 / 273.0	108 / 108	404.4 / 425.5	450 / 450													
		2	33.3	239	2	48.1	245	4	6.6 (ea)	25	74.8/68.0	30	88.0/80.0	1	—	—	— / —	— / —	282.7 / 274.2	350 / 300
																	78.9 / 90.0	36 / 36	282.7 / 274.2	350 / 300
																	157.7 / 182.0	72 / 72	282.7 / 274.2	350 / 300
																	236.6 / 273.0	108 / 108	330.1 / 358.0	400 / 400
10	30.8 / 28.0																— / —	— / —	313.5 / 302.2	350 / 350
																	78.9 / 90.0	36 / 36	313.5 / 302.2	350 / 350
																	157.7 / 182.0	72 / 72	313.5 / 302.2	350 / 350
																	236.6 / 273.0	108 / 108	368.6 / 393.0	400 / 450
15	46.2 / 42.0																— / —	— / —	328.9 / 316.2	400 / 350
																	78.9 / 90.0	36 / 36	328.9 / 316.2	400 / 350
																	157.7 / 182.0	72 / 72	328.9 / 319.5	400 / 350
																	236.6 / 273.0	108 / 108	387.9 / 410.5	450 / 450
20	59.4 / 54.0	— / —	— / —	342.1 / 328.2	400 / 350															
		78.9 / 90.0	36 / 36	342.1 / 328.2	400 / 350															
		157.7 / 182.0	72 / 72	342.1 / 334.5	400 / 350															
		236.6 / 273.0	108 / 108	404.4 / 425.5	450 / 450															
25	74.8 / 68.0	— / —	— / —	357.5 / 342.2	400 / 400															
		78.9 / 90.0	36 / 36	357.5 / 342.2	400 / 400															
		157.7 / 182.0	72 / 72	357.5 / 352.0	400 / 400															
		236.6 / 273.0	108 / 108	423.6 / 443.0	450 / 450															
2	33.3	239	2	48.1	245	4	6.6 (ea)	25	74.8/68.0	30	88.0/80.0	1	—	—	— / —	— / —	299.2 / 289.2	350 / 350		
															78.9 / 90.0	36 / 36	299.2 / 289.2	350 / 350		
															157.7 / 182.0	72 / 72	299.2 / 289.2	350 / 350		
															236.6 / 273.0	108 / 108	346.6 / 373.0	400 / 450		
															10	30.8 / 28.0	— / —	— / —	330.0 / 317.2	400 / 350
																	78.9 / 90.0	36 / 36	330.0 / 317.2	400 / 350
																	157.7 / 182.0	72 / 72	330.0 / 317.2	400 / 350
																	236.6 / 273.0	108 / 108	385.1 / 408.0	450 / 450
															15	46.2 / 42.0	— / —	— / —	345.4 / 331.2	400 / 400
																	78.9 / 90.0	36 / 36	345.4 / 331.2	400 / 400
																	157.7 / 182.0	72 / 72	345.4 / 334.5	400 / 400
																	236.6 / 273.0	108 / 108	404.4 / 425.5	450 / 450
20	59.4 / 54.0	— / —	— / —	358.6 / 343.2	400 / 400															
		78.9 / 90.0	36 / 36	358.6 / 343.2	400 / 400															
		157.7 / 182.0	72 / 72	358.6 / 349.5	400 / 400															
		236.6 / 273.0	108 / 108	420.9 / 440.5	450 / 500															
25	74.8 / 68.0	— / —	— / —	374.0 / 357.2	450 / 400															
		78.9 / 90.0	36 / 36	374.0 / 357.2	450 / 400															
		157.7 / 182.0	72 / 72	374.0 / 367.0	450 / 400															
		236.6 / 273.0	108 / 108	440.1 / 458.0	500 / 500															

See page 169 for legend and notes.

Table 20 — Electrical Data — 50P050 Units with Optional Return Fan (cont)
380-3-60 (V-Ph-Hz)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		RETURN FAN			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
		No. A1			No. B1													
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
												—	—	—	—	—	128.8	150
															38.3	36	128.8	150
															76.8	72	128.8	150
															114.7	108	130.3	150
															—	—	145.5	150
													10	16.7	38.3	36	145.5	150
															76.8	72	145.5	150
															114.7	108	151.2	175
															—	—	153.5	175
															38.3	36	153.5	175
															76.8	72	153.5	175
															114.7	108	161.0	175
															—	—	160.4	175
															38.3	36	160.4	175
															76.8	72	160.4	175
															114.7	108	167.8	175
															—	—	170.4	200
															38.3	36	170.4	200
															76.8	72	170.4	200
															114.7	108	177.8	200
															—	—	133.0	150
															38.3	36	133.0	150
															76.8	72	133.0	150
															114.7	108	135.6	150
															—	—	149.7	150
															38.3	36	149.7	150
															76.8	72	149.7	150
															114.7	108	156.5	175
															—	—	157.7	175
															38.3	36	157.7	175
															76.8	72	157.7	175
															114.7	108	166.2	175
															—	—	164.6	175
															38.3	36	164.6	175
															76.8	72	164.6	175
															114.7	108	173.1	175
															—	—	174.6	200
															38.3	36	174.6	200
															76.8	72	174.6	200
															114.7	108	183.1	200
															—	—	141.0	150
															38.3	36	141.0	150
															76.8	72	141.0	150
															114.7	108	145.3	150
															—	—	157.7	175
															38.3	36	157.7	175
															76.8	72	157.7	175
															114.7	108	166.2	175
															—	—	165.5	175
															38.3	36	165.5	175
															76.8	72	165.5	175
															114.7	108	176.0	200
															—	—	172.4	200
															38.3	36	172.4	200
															76.8	72	172.4	200
															114.7	108	182.8	200
															—	—	182.4	200
															38.3	36	182.4	200
															76.8	72	182.4	200
															114.7	108	192.8	200

See page 169 for legend and notes.

Table 20 — Electrical Data — 50P050 Units with Optional Return Fan (cont)
380-3-60 (V-Ph-Hz) (cont)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		RETURN FAN			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
		No. A1			No. B1													
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
342	418	2	23.7	145	2	23.7	145	4	3.9 (ea)	25	38.0	1	—	—	—	—	147.9	175
															38.3	36	147.9	175
															76.8	72	147.9	175
															114.7	108	152.2	175
															—	—	164.6	175
															38.3	36	164.6	175
															76.8	72	164.6	175
															114.7	108	173.1	175
															—	—	172.4	200
															38.3	36	172.4	200
															76.8	72	172.4	200
															114.7	108	182.8	200
		—	—	177.9	200													
		38.3	36	177.9	200													
		76.8	72	177.9	200													
		114.7	108	189.7	200													
		—	—	187.9	225													
		38.3	36	187.9	225													
		76.8	72	187.9	225													
		114.7	108	199.7	225													
		—	—	157.9	175													
		38.3	36	157.9	175													
		76.8	72	157.9	175													
		114.7	108	162.2	200													
—	—	174.6	200															
38.3	36	174.6	200															
76.8	72	174.6	200															
114.7	108	183.1	200															
—	—	182.4	200															
38.3	36	182.4	200															
76.8	72	182.4	200															
114.7	108	192.8	200															
—	—	187.9	225															
38.3	36	187.9	225															
76.8	72	187.9	225															
114.7	108	199.7	225															
—	—	195.9	225															
38.3	36	195.9	225															
76.8	72	195.9	225															
114.7	108	209.7	225															
—	—	164.8	200															
38.3	36	164.8	200															
76.8	72	164.8	200															
114.7	108	169.1	200															
—	—	181.5	200															
38.3	36	181.5	200															
76.8	72	181.5	200															
114.7	108	190.0	225															
—	—	189.3	225															
38.3	36	189.3	225															
76.8	72	189.3	225															
114.7	108	199.7	225															
—	—	194.8	225															
38.3	36	194.8	225															
76.8	72	194.8	225															
114.7	108	206.6	225															
—	—	202.8	225															
38.3	36	202.8	225															
76.8	72	202.8	225															
114.7	108	216.6	250															

See page 169 for legend and notes.

Table 20 — Electrical Data — 50P050 Units with Optional Return Fan (cont)
460-3-60 (V-Ph-Hz)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		RETURN FAN			OPTIONAL ELECTRIC HEAT		POWER SUPPLY									
		No. A1			No. B1																					
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*								
414	508	2	17.9	125	2	18.6	125	4	3.3 (ea)	10	14.0	1	7 1/2	11.0	—	—	—	—	101.9	110						
															—	—	—	—	46.3	36	101.9	110				
															—	—	—	—	93.0	72	106.8	125				
															—	—	—	—	139.0	108	152.8	175				
															10	14	—	—	—	—	115.9	125				
																	—	—	—	—	46.3	36	115.9	125		
																	—	—	—	—	93.0	72	124.3	125		
															15	21	—	—	—	—	123.5	125				
																	—	—	—	—	46.3	36	123.5	125		
																	—	—	—	—	93.0	72	133.0	150		
															20	27	—	—	—	—	139.0	200				
																	—	—	—	—	46.3	36	139.0	200		
		—	—	—	—	93.0	72	140.5	150																	
		25	34	—	—	—	—	186.5	200																	
				—	—	—	—	46.3	36	186.5	200															
				—	—	—	—	93.0	72	149.3	175															
		2	17.9	125	2	18.6	125	4	3.3 (ea)	10	14.0	15	21.0	1	7 1/2	11.0	—	—	—	—	104.9	110				
																	—	—	—	—	46.3	36	104.9	110		
																	—	—	—	—	93.0	72	110.5	125		
																	—	—	—	—	139.0	108	156.5	175		
																	10	14	—	—	—	—	118.9	125		
																			—	—	—	—	46.3	36	118.9	125
																			—	—	—	—	93.0	72	128.0	150
																	15	21	—	—	—	—	174.0	175		
—	—																		—	—	46.3	36	174.0	175		
—	—																		—	—	93.0	72	182.8	200		
20	27																—	—	—	—	190.3	200				
																	—	—	—	—	46.3	36	190.3	200		
		—	—	—	—	93.0	72	144.3	150																	
25	34	—	—	—	—	142.7	175																			
		—	—	—	—	46.3	36	142.7	175																	
		—	—	—	—	93.0	72	153.0	175																	
2	17.9	125	2	18.6	125	4	3.3 (ea)	10	14.0	15	21.0	1	7 1/2	11.0	—	—	—	—	112.5	125						
															—	—	—	—	46.3	36	112.5	125				
															—	—	—	—	93.0	72	119.3	125				
															—	—	—	—	139.0	108	165.3	175				
															10	14	—	—	—	—	126.5	150				
																	—	—	—	—	46.3	36	126.5	150		
																	—	—	—	—	93.0	72	136.8	150		
															15	21	—	—	—	—	182.8	200				
																	—	—	—	—	46.3	36	182.8	200		
																	—	—	—	—	93.0	72	149.3	175		
															20	27	—	—	—	—	199.0	200				
																	—	—	—	—	46.3	36	199.0	200		
—	—	—	—	93.0	72	153.0	175																			
25	34	—	—	—	—	149.7	175																			
		—	—	—	—	46.3	36	149.7	175																	
		—	—	—	—	93.0	72	161.8	175																	
—	—	—	—	139.0	108	207.8	225																			

See page 169 for legend and notes.

Table 20 — Electrical Data — 50P050 Units with Optional Return Fan (cont)
460-3-60 (V-Ph-Hz) (cont)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		RETURN FAN			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
		No. A1			No. B1										FLA	kW		
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
414	508	2	17.9	125	2	18.6	125	4	3.3 (ea)	20	27.0	1	10	14	—	—	120.0	125
															46.3	36	120.0	125
															93.0	72	126.8	150
															139.0	108	172.8	175
															—	—	134.0	150
															46.3	36	134.0	150
															93.0	72	144.3	150
															139.0	108	190.3	200
															—	—	141.0	150
															46.3	36	141.0	150
															93.0	72	153.0	175
															139.0	108	199.0	200
										—	—	147.0	150					
										46.3	36	147.0	150					
										93.0	72	160.5	175					
										139.0	108	206.5	225					
										—	—	155.7	175					
										46.3	36	155.7	175					
										93.0	72	169.3	175					
										139.0	108	215.3	225					
										—	—	128.7	150					
										46.3	36	128.7	150					
										93.0	72	135.5	150					
										139.0	108	181.5	200					
—	—	142.7	175															
46.3	36	142.7	175															
93.0	72	153.0	175															
139.0	108	199.0	225															
—	—	149.7	175															
46.3	36	149.7	175															
93.0	72	161.8	175															
139.0	108	207.8	225															
—	—	155.7	175															
46.3	36	155.7	175															
93.0	72	169.3	175															
139.0	108	215.3	225															
—	—	162.7	175															
46.3	36	162.7	175															
93.0	72	178.0	200															
139.0	108	224.0	225															
—	—	136.2	175															
46.3	36	136.2	175															
93.0	72	143.0	175															
139.0	108	189.0	225															
—	—	150.2	175															
46.3	36	150.2	175															
93.0	72	160.5	175															
139.0	108	206.5	225															
—	—	157.2	175															
46.3	36	157.2	175															
93.0	72	169.3	200															
139.0	108	215.3	250															
—	—	163.2	200															
46.3	36	163.2	200															
93.0	72	176.8	200															
139.0	108	222.8	250															
—	—	170.2	200															
46.3	36	170.2	200															
93.0	72	185.5	200															
139.0	108	231.5	250															

See page 169 for legend and notes.

Table 20 — Electrical Data — 50P050 Units with Optional Return Fan (cont)
575-3-60 (V-Ph-Hz)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		RETURN FAN			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
		No. A1			No. B1													
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
518	632	2	12.8	80	2	14.7	100	4	2.6 (ea)	7 1/2	9.0	1	—	—	—	—	78.1	90
															36.0	36	78.1	90
															72.0	72	83.3	90
															108.0	108	119.3	125
															—	—	89.1	100
															36.0	36	89.1	100
															72.0	72	97.0	110
															108.0	108	133.0	150
															—	—	95.7	110
															36.0	36	95.7	110
															72.0	72	104.5	110
															108.0	108	140.5	150
										—	—	101.9	110					
										36.0	36	101.9	110					
										72.0	72	110.8	125					
										108.0	108	146.8	150					
										—	—	108.2	125					
										36.0	36	108.2	125					
										72.0	72	117.0	125					
										108.0	108	153.0	175					
										—	—	80.1	90					
										36.0	36	80.1	90					
										72.0	72	85.8	100					
										108.0	108	121.8	125					
—	—	91.1	100															
36.0	36	91.1	100															
72.0	72	99.5	110															
108.0	108	135.5	150															
—	—	97.7	110															
36.0	36	97.7	110															
72.0	72	107.0	110															
108.0	108	143.0	150															
—	—	103.9	125															
36.0	36	103.9	125															
72.0	72	113.3	125															
108.0	108	149.3	150															
—	—	110.2	125															
36.0	36	110.2	125															
72.0	72	119.5	125															
108.0	108	155.5	175															
—	—	86.7	100															
36.0	36	86.7	100															
72.0	72	93.3	110															
108.0	108	129.3	150															
—	—	97.7	110															
36.0	36	97.7	110															
72.0	72	107.0	110															
108.0	108	143.0	150															
—	—	103.7	110															
36.0	36	103.7	110															
72.0	72	114.5	125															
108.0	108	150.5	175															
—	—	109.9	125															
36.0	36	109.9	125															
72.0	72	120.8	125															
108.0	108	156.8	175															
—	—	116.2	125															
36.0	36	116.2	125															
72.0	72	127.0	150															
108.0	108	163.0	175															

See page 169 for legend and notes.

Table 20 — Electrical Data — 50P050 Units with Optional Return Fan (cont)
575-3-60 (V-Ph-Hz) (cont)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		RETURN FAN			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
		No. A1			No. B1													
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
518	632	2	12.8	80	2	14.7	100	4	2.6 (ea)	25	27.0	1	—	—	—	—	92.9	110
															36.0	36	92.9	110
															72.0	72	99.5	110
															108.0	108	135.5	150
													10	11.0	—	—	103.9	125
															36.0	36	103.9	125
															72.0	72	113.3	125
															108.0	108	149.3	150
													15	17.0	—	—	109.9	125
															36.0	36	109.9	125
															72.0	72	120.8	125
															108.0	108	156.8	175
												20	22.0	—	—	114.9	125	
														36.0	36	114.9	125	
														72.0	72	127.0	150	
														108.0	108	163.0	175	
												25	27.0	—	—	121.2	125	
														36.0	36	121.2	125	
														72.0	72	133.3	150	
														108.0	108	169.3	175	
												1	—	—	—	—	99.2	125
															36.0	36	99.2	125
															72.0	72	105.8	125
															108.0	108	141.8	150
10	11.0	—	—	110.2	125													
		36.0	36	110.2	125													
		72.0	72	119.5	125													
		108.0	108	155.5	175													
15	17.0	—	—	116.2	125													
		36.0	36	116.2	125													
		72.0	72	127.0	150													
		108.0	108	163.0	175													
20	22.0	—	—	121.2	125													
		36.0	36	121.2	125													
		72.0	72	133.3	150													
		108.0	108	169.3	175													
25	27.0	—	—	126.2	150													
		36.0	36	126.2	150													
		72.0	72	139.5	150													
		108.0	108	175.5	200													
1	—	—	—	—	105.4	125												
			36.0	36	105.4	125												
			72.0	72	112.0	125												
			108.0	108	148.0	175												
	10	11.0	—	—	116.4	125												
			36.0	36	116.4	125												
			72.0	72	125.8	150												
			108.0	108	161.8	175												
	15	17.0	—	—	122.4	150												
			36.0	36	122.4	150												
			72.0	72	133.3	150												
			108.0	108	169.3	175												
20	22.0	—	—	127.4	150													
		36.0	36	127.4	150													
		72.0	72	139.5	150													
		108.0	108	175.5	200													
25	27.0	—	—	132.4	150													
		36.0	36	132.4	150													
		72.0	72	145.8	150													
		108.0	108	181.8	200													

See page 169 for legend and notes.

Table 21 — Electrical Data — 50P 055 Units

208/230-3-60 (V-Ph-Hz)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		POWER EXHAUST			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
187	253	2	48.1	245	2	48.1	245	4	6.6 (ea)	15	46.2 / 42.0	—	—	— / —	—	—	277.0/ 272.8	300/ 300
															78.9/ 90.0	36/ 36	277.0/ 272.8	300/ 300
															157.7/ 182.0	72/ 72	277.0/ 272.8	300/ 300
															236.6/ 273.0	108/ 108	294.4/ 325.5	300/ 350
															—	—	310.4/ 303.2	350/ 350
															78.9/ 90.0	36/ 36	310.4/ 303.2	350/ 350
		157.7/ 182.0	72/ 72	310.4/ 303.2	350/ 350													
		236.6/ 273.0	108/ 108	336.1/ 363.5	350/ 400													
		—	—	325.4/ 316.8	350/ 350													
		78.9/ 90.0	36/ 36	325.4/ 316.8	350/ 350													
		157.7/ 182.0	72/ 72	325.4/ 316.8	350/ 350													
		236.6/ 273.0	108/ 108	354.9/ 380.5	400/ 400													
—	—	338.6/ 328.8	350/ 350															
78.9/ 90.0	36/ 36	338.6/ 328.8	350/ 350															
157.7/ 182.0	72/ 72	338.6/ 328.8	350/ 350															
236.6/ 273.0	108/ 108	371.4/ 395.5	400/ 400															
—	—	293.1/ 286.3	350/ 300															
78.9/ 90.0	36/ 36	293.1/ 286.3	350/ 300															
157.7/ 182.0	72/ 72	293.1/ 286.3	350/ 300															
236.6/ 273.0	108/ 108	310.9/ 340.5	350/ 350															
—	—	326.5/ 316.7	350/ 350															
78.9/ 90.0	36/ 36	326.5/ 316.7	350/ 350															
157.7/ 182.0	72/ 72	326.5/ 316.7	350/ 350															
236.6/ 273.0	108/ 108	352.6/ 378.5	400/ 400															
—	—	341.5/ 330.3	400/ 350															
78.9/ 90.0	36/ 36	341.5/ 330.3	400/ 350															
157.7/ 182.0	72/ 72	341.5/ 330.3	400/ 350															
236.6/ 273.0	108/ 108	371.4/ 395.5	400/ 400															
—	—	354.7/ 342.3	400/ 350															
78.9/ 90.0	36/ 36	354.7/ 342.3	400/ 350															
157.7/ 182.0	72/ 72	354.7/ 342.3	400/ 350															
236.6/ 273.0	108/ 108	387.9/ 410.5	400/ 450															
—	—	312.3/ 303.8	350/ 350															
78.9/ 90.0	36/ 36	312.3/ 303.8	350/ 350															
157.7/ 182.0	72/ 72	312.3/ 303.8	350/ 350															
236.6/ 273.0	108/ 108	330.1/ 358.0	400/ 400															
—	—	345.7/ 334.2	400/ 400															
78.9/ 90.0	36/ 36	345.7/ 334.2	400/ 400															
157.7/ 182.0	72/ 72	345.7/ 334.2	400/ 400															
236.6/ 273.0	108/ 108	371.9/ 396.0	400/ 450															
—	—	360.7/ 347.8	400/ 400															
78.9/ 90.0	36/ 36	360.7/ 347.8	400/ 400															
157.7/ 182.0	72/ 72	360.7/ 347.8	400/ 400															
236.6/ 273.0	108/ 108	390.6/ 413.0	450/ 450															
—	—	373.9/ 359.8	400/ 400															
78.9/ 90.0	36/ 36	373.9/ 359.8	400/ 400															
157.7/ 182.0	72/ 72	373.9/ 359.8	400/ 400															
236.6/ 273.0	108/ 108	407.1/ 428.0	450/ 450															

See page 169 for legend and notes.

Table 21 — Electrical Data — 50P 055 Units (cont)
 208/230-3-60 (V-Ph-Hz) (cont)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		POWER EXHAUST			OPTIONAL ELECTRIC HEAT		POWER SUPPLY			
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*		
187	253	2	48.1	245	2	48.1	245	4	6.6 (ea)	30	88/80	—	—	— / —	78.9/ 90.0	36/ 36	328.8/ 318.8	400/ 350		
															157.7/ 182.0	72/ 72	328.8/ 318.8	400/ 350		
															236.6/ 273.0	108/ 108	346.6/ 373.0	400/ 450		
															—	—	362.2/ 349.2	450/ 400		
															78.9/ 90.0	36/ 36	362.2/ 349.2	450/ 400		
															157.7/ 182.0	72/ 72	362.2/ 349.2	450/ 400		
		236.6/ 273.0	108/ 108	388.4/ 411.0	450/ 450															
		2	48.1	245	2	48.1	245	4	6.6 (ea)	30	88/80	2	7.5	24.2 / 22.0	—	—	78.9/ 90.0	36/ 36	377.2/ 362.8	450/ 400
																	157.7/ 182.0	72/ 72	377.2/ 362.8	450/ 400
																	236.6/ 273.0	108/ 108	407.1/ 428.0	450/ 450
																	—	—	377.2/ 362.8	450/ 400
																	78.9/ 90.0	36/ 36	390.4/ 374.8	450/ 450
157.7/ 182.0	72/ 72																390.4/ 374.8	450/ 450		
236.6/ 273.0	108/ 108	423.6/ 443.0	450/ 500																	
2	48.1	245	2	48.1	245	4	6.6 (ea)	40	114/104	—	—	— / —	—	—	78.9/ 90.0	36/ 36	361.3/ 348.8	450/ 450		
															157.7/ 182.0	72/ 72	361.3/ 348.8	450/ 450		
															236.6/ 273.0	108/ 108	379.1/ 403.0	450/ 500		
															—	—	394.7/ 379.2	500/ 450		
															78.9/ 90.0	36/ 36	394.7/ 379.2	500/ 450		
															157.7/ 182.0	72/ 72	394.7/ 379.2	500/ 450		
236.6/ 273.0	108/ 108	420.9/ 441.0	500/ 500																	
2	48.1	245	2	48.1	245	4	6.6 (ea)	40	114/104	2	7.5	24.2 / 22.0	—	—	78.9/ 90.0	36/ 36	409.7/ 392.8	500/ 450		
															157.7/ 182.0	72/ 72	409.7/ 392.8	500/ 450		
															236.6/ 273.0	108/ 108	439.6/ 458.0	500/ 500		
															—	—	422.9/ 404.8	500/ 500		
															78.9/ 90.0	36/ 36	422.9/ 404.8	500/ 500		
															157.7/ 182.0	72/ 72	422.9/ 404.8	500/ 500		
236.6/ 273.0	108/ 108	456.1/ 473.0	500/ 500																	

See page 169 for legend and notes.

Table 21 — Electrical Data — 50P 055 Units (cont)

380-3-60 (V-Ph-Hz)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		POWER EXHAUST			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
		No. A1			No. B1			Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
342	418	2	23.7	145	2	23.7	145	4	3.9 (ea)	15	24.5	2	5	9.1	—	—	141.0	150
															38.3	36	141.0	150
															76.8	72	141.0	150
															114.7	108	145.3	150
															—	—	159.2	175
															38.3	36	159.2	175
		76.8	72	159.2	175													
		114.7	108	168.1	175													
		—	—	166.0	175													
		38.3	36	166.0	175													
		76.8	72	166.0	175													
		114.7	108	176.6	200													
—	—	174.4	175															
38.3	36	174.4	175															
76.8	72	174.4	175															
114.7	108	187.1	200															
—	—	147.9	175															
38.3	36	147.9	175															
76.8	72	147.9	175															
114.7	108	152.2	175															
—	—	166.1	175															
38.3	36	166.1	175															
76.8	72	166.1	175															
114.7	108	175.0	200															
—	—	172.9	200															
38.3	36	172.9	200															
76.8	72	172.9	200															
114.7	108	183.5	200															
—	—	181.3	200															
38.3	36	181.3	200															
76.8	72	181.3	200															
114.7	108	194.0	200															
—	—	157.9	175															
38.3	36	157.9	175															
76.8	72	157.9	175															
114.7	108	162.2	200															
—	—	176.1	200															
38.3	36	176.1	200															
76.8	72	176.1	200															
114.7	108	185.0	200															
—	—	182.9	200															
38.3	36	182.9	200															
76.8	72	182.9	200															
114.7	108	193.5	225															
—	—	191.3	225															
38.3	36	191.3	225															
76.8	72	191.3	225															
114.7	108	204.0	225															

See page 169 for legend and notes.

Table 21 — Electrical Data — 50P 055 Units (cont)
 380-3-60 (V-Ph-Hz) (cont)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		POWER EXHAUST			OPTIONAL ELECTRIC HEAT		POWER SUPPLY				
		No. A1			No. B1			Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*			
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)														
342	418	2	23.7	145	2	23.7	145	4	3.9 (ea)	30	43.5	2	—	—	—	—	164.8	200			
															38.3	36	164.8	200			
															76.8	72	164.8	200			
															114.7	108	169.1	200			
															—	—	183.0	225			
															38.3	36	183.0	225			
		76.8	72	183.0	225																
		114.7	108	191.8	225																
		—	—	189.8	225																
		38.3	36	189.8	225																
		76.8	72	189.8	225																
		114.7	108	200.3	225																
2	7.5	12.5	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—				
																		—	—	198.2	225
																		38.3	36	198.2	225
																		76.8	72	198.2	225
																		114.7	108	210.8	225
																		—	—	180.7	225
38.3	36	180.7	225																		
76.8	72	180.7	225																		
114.7	108	185.0	225																		
2	5	9.1	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—				
																		—	—	198.9	250
																		38.3	36	198.9	250
																		76.8	72	198.9	250
																		114.7	108	207.7	250
																		—	—	205.7	250
38.3	36	205.7	250																		
76.8	72	205.7	250																		
114.7	108	216.2	250																		
2	7.5	12.5	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—				
																		—	—	214.1	250
																		38.3	36	214.1	250
																		76.8	72	214.1	250
114.7	108	226.7	250																		

See page 169 for legend and notes.

Table 21 — Electrical Data — 50P 055 Units (cont)

460-3-60 (V-Ph-Hz)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		POWER EXHAUST			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
		No. A1			No. B1			Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
414	508	2	18.6	125	2	18.6	125	4	3.3 (ea)	15	21.0	2	5	7.6	—	—	113.9	125
															46.3	36	113.9	125
															93.0	72	119.3	125
															139.0	108	165.3	175
															—	—	129.1	150
															46.3	36	129.1	150
		93.0	72	138.3	150													
		139.0	108	184.3	200													
		—	—	135.9	150													
		46.3	36	135.9	150													
		93.0	72	146.8	150													
		139.0	108	192.8	200													
—	—	141.9	150															
46.3	36	141.9	150															
93.0	72	154.3	175															
139.0	108	200.3	225															
—	—	121.4	125															
46.3	36	121.4	125															
93.0	72	126.8	150															
139.0	108	172.8	175															
—	—	136.6	150															
46.3	36	136.6	150															
93.0	72	145.8	150															
139.0	108	191.8	200															
—	—	143.4	150															
46.3	36	143.4	150															
93.0	72	154.3	175															
139.0	108	200.3	225															
—	—	149.4	175															
46.3	36	149.4	175															
93.0	72	161.8	175															
139.0	108	207.8	225															
—	—	130.1	150															
46.3	36	130.1	150															
93.0	72	135.5	150															
139.0	108	181.5	200															
—	—	145.3	175															
46.3	36	145.3	175															
93.0	72	154.5	175															
139.0	108	200.5	225															
—	—	152.1	175															
46.3	36	152.1	175															
93.0	72	163.0	175															
139.0	108	209.0	225															
—	—	158.1	175															
46.3	36	158.1	175															
93.0	72	170.5	175															
139.0	108	216.5	225															

See page 169 for legend and notes.

Table 21 — Electrical Data — 50P 055 Units (cont)
460-3-60 (V-Ph-Hz) (cont)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		POWER EXHAUST			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
		No. A1			No. B1			Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
414	508	2	18.6	125	2	18.6	125	4	3.3 (ea)	30	40.0	2	5	7.6	—	—	137.6	175
															46.3	36	137.6	175
															93.0	72	143.0	175
															139.0	108	189.0	225
															—	—	152.8	175
															46.3	36	152.8	175
		93.0	72	162.0	175													
		139.0	108	208.0	225													
		2	7.5	11.0	—	—	159.6	175										
					46.3	36	159.6	175										
					93.0	72	170.5	200										
					139.0	108	216.5	250										
10	14.0				—	—	165.6	200										
					46.3	36	165.6	200										
93.0	72	178.0	200															
139.0	108	224.0	250															
414	508	2	18.6	125	2	18.6	125	4	3.3 (ea)	40	52.0	2	5	7.6	—	—	152.6	200
															46.3	36	152.6	200
															93.0	72	158.0	200
															139.0	108	204.0	250
															—	—	167.8	200
															46.3	36	167.8	200
		93.0	72	177.0	225													
		139.0	108	223.0	250													
		2	7.5	11.0	—	—	174.6	225										
					46.3	36	174.6	225										
					93.0	72	185.5	225										
					139.0	108	231.5	250										
10	14.0				—	—	180.6	225										
					46.3	36	180.6	225										
93.0	72	193.0	225															
139.0	108	239.0	250															

See page 169 for legend and notes.

Table 21 — Electrical Data — 50P 055 Units (cont)

575-3-60 (V-Ph-Hz)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		POWER EXHAUST			OPTIONAL ELECTRIC HEAT		POWER SUPPLY			
		No. A1			No. B1			Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*		
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)													
518	632	2	14.7	100	2	14.7	100	4	2.6 (ea)	20	22.0	2	7.5	9.0	—	—	90.5	100		
															36.0	36	90.5	100		
															72.0	72	93.3	110		
															108.0	108	129.3	150		
															—	—	102.7	110		
															5	6.1	36.0	36	102.7	110
															72.0	72	108.5	110		
															108.0	108	144.5	150		
															—	—	108.5	125		
															7.5	9.0	36.0	36	108.5	125
															72.0	72	115.8	125		
															108.0	108	151.8	175		
		—	—	112.5	125															
		10	11.0	36.0	36	112.5	125													
		72.0	72	120.8	125															
		108.0	108	156.8	175															
		2	14.7	100	2	14.7	100	4	2.6 (ea)	20	22.0	2	7.5	9.0	—	—	96.7	110		
															36.0	36	96.7	110		
															72.0	72	99.5	110		
															108.0	108	135.5	150		
															—	—	108.9	125		
															5	6.1	36.0	36	108.9	125
															72.0	72	114.8	125		
															108.0	108	150.8	175		
—	—														114.7	125				
7.5	9.0														36.0	36	114.7	125		
72.0	72														122.0	125				
108.0	108														158.0	175				
—	—	118.7	125																	
10	11.0	36.0	36	118.7	125															
72.0	72	127.0	150																	
108.0	108	163.0	175																	
2	14.7	100	2	14.7	100	4	2.6 (ea)	20	22.0	2	7.5	9.0	—	—	103.0	125				
													36.0	36	103.0	125				
													72.0	72	105.8	125				
													108.0	108	141.8	150				
													—	—	115.2	125				
													5	6.1	36.0	36	115.2	125		
													72.0	72	121.0	125				
													108.0	108	157.0	175				
													—	—	121.0	125				
													7.5	9.0	36.0	36	121.0	125		
													72.0	72	128.3	150				
													108.0	108	164.3	175				
—	—	125.0	150																	
10	11.0	36.0	36	125.0	150															
72.0	72	133.3	150																	
108.0	108	169.3	175																	

See page 169 for legend and notes.

Table 21 — Electrical Data — 50P 055 Units (cont)

575-3-60 (V-Ph-Hz) (cont)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		POWER EXHAUST			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
		No. A1			No. B1													
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
518	632	2	14.7	100	2	14.7	100	4	2.6 (ea)	30	32.0	2	5	6.1	—	—	109.2	125
															36.0	36	109.2	125
															72.0	72	112.0	125
															108.0	108	148.0	175
															—	—	121.4	150
															36.0	36	121.4	150
		72.0	72	127.3	150													
		108.0	108	163.3	175													
		2	7.5	9.0	—	—	127.2	150										
					36.0	36	127.2	150										
					72.0	72	134.5	150										
					108.0	108	170.5	175										
10	11.0				—	—	131.2	150										
					36.0	36	131.2	150										
2	14.7	2	14.7	100	2	14.7	100	4	2.6 (ea)	40	41.0	2	5	6.1	—	—	120.5	150
															36.0	36	120.5	150
															72.0	72	123.3	150
															108.0	108	159.3	200
															—	—	132.7	150
															36.0	36	132.7	150
		72.0	72	138.5	175													
		108.0	108	174.5	200													
		2	7.5	9.0	—	—	138.5	175										
					36.0	36	138.5	175										
					72.0	72	145.8	175										
					108.0	108	181.8	200										
10	11.0				—	—	142.5	175										
					36.0	36	142.5	175										
2	7.5	9.0	72.0	72	150.8	175												
			108.0	108	186.8	200												

See page 169 for legend and notes.

Table 22 — Electrical Data — 50P055 Units with Optional Return Fan
208/230-3-60 (V-Ph-Hz)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		RETURN FAN			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
Min	Max	No. A1			No. B1			Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
		Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)											
187	253	2	48.1	245	2	48.1	245	4	6.6 (ea)	20	59.4 / 54.0	1	—	— / —	— / —	— / —	277.0 / 272.8	300 / 300
															78.9 / 90.0	36 / 36	277.0 / 272.8	300 / 300
															157.7 / 182.0	72 / 72	277.0 / 272.8	300 / 300
															236.6 / 273.0	108 / 108	294.4 / 325.5	300 / 350
															— / —	— / —	323.2 / 314.8	350 / 350
															78.9 / 90.0	36 / 36	323.2 / 314.8	350 / 350
															157.7 / 182.0	72 / 72	323.2 / 314.8	350 / 350
															236.6 / 273.0	108 / 108	352.1 / 378.0	400 / 400
															— / —	— / —	339.3 / 328.3	350 / 350
															78.9 / 90.0	36 / 36	339.3 / 328.3	350 / 350
															157.7 / 182.0	72 / 72	339.3 / 328.3	350 / 350
															236.6 / 273.0	108 / 108	368.6 / 393.0	400 / 400
		— / —	— / —	358.5 / 345.8	400 / 400													
		78.9 / 90.0	36 / 36	358.5 / 345.8	400 / 400													
		157.7 / 182.0	72 / 72	358.5 / 345.8	400 / 400													
		236.6 / 273.0	108 / 108	387.9 / 410.5	450 / 450													
		— / —	— / —	375.0 / 360.8	450 / 400													
		78.9 / 90.0	36 / 36	375.0 / 360.8	450 / 400													
		157.7 / 182.0	72 / 72	375.0 / 360.8	450 / 400													
		236.6 / 273.0	108 / 108	404.4 / 425.5	450 / 450													
		— / —	— / —	293.1 / 286.3	350 / 300													
		78.9 / 90.0	36 / 36	293.1 / 286.3	350 / 300													
		157.7 / 182.0	72 / 72	293.1 / 286.3	350 / 300													
		236.6 / 273.0	108 / 108	310.9 / 340.5	350 / 350													
— / —	— / —	339.3 / 328.3	350 / 350															
78.9 / 90.0	36 / 36	339.3 / 328.3	350 / 350															
157.7 / 182.0	72 / 72	339.3 / 328.3	350 / 350															
236.6 / 273.0	108 / 108	368.6 / 393.0	400 / 400															
— / —	— / —	352.5 / 340.3	400 / 350															
78.9 / 90.0	36 / 36	352.5 / 340.3	400 / 350															
157.7 / 182.0	72 / 72	352.5 / 340.3	400 / 350															
236.6 / 273.0	108 / 108	385.1 / 408.0	400 / 450															
— / —	— / —	371.7 / 357.8	400 / 400															
78.9 / 90.0	36 / 36	371.7 / 357.8	400 / 400															
157.7 / 182.0	72 / 72	371.7 / 357.8	400 / 400															
236.6 / 273.0	108 / 108	404.4 / 425.5	450 / 450															
— / —	— / —	388.2 / 372.8	450 / 450															
78.9 / 90.0	36 / 36	388.2 / 372.8	450 / 450															
157.7 / 182.0	72 / 72	388.2 / 372.8	450 / 450															
236.6 / 273.0	108 / 108	420.9 / 440.5	450 / 500															
— / —	— / —	312.3 / 303.8	350 / 350															
78.9 / 90.0	36 / 36	312.3 / 303.8	350 / 350															
157.7 / 182.0	72 / 72	312.3 / 303.8	350 / 350															
236.6 / 273.0	108 / 108	330.1 / 358.0	400 / 400															
— / —	— / —	358.5 / 345.8	400 / 400															
78.9 / 90.0	36 / 36	358.5 / 345.8	400 / 400															
157.7 / 182.0	72 / 72	358.5 / 345.8	400 / 400															
236.6 / 273.0	108 / 108	387.9 / 410.5	450 / 450															
— / —	— / —	371.7 / 357.8	400 / 400															
78.9 / 90.0	36 / 36	371.7 / 357.8	400 / 400															
157.7 / 182.0	72 / 72	371.7 / 357.8	400 / 400															
236.6 / 273.0	108 / 108	404.4 / 425.5	450 / 450															
— / —	— / —	387.1 / 371.8	450 / 400															
78.9 / 90.0	36 / 36	387.1 / 371.8	450 / 400															
157.7 / 182.0	72 / 72	387.1 / 371.8	450 / 400															
236.6 / 273.0	108 / 108	423.6 / 443.0	450 / 450															
— / —	— / —	403.6 / 386.8	450 / 450															
78.9 / 90.0	36 / 36	403.6 / 386.8	450 / 450															
157.7 / 182.0	72 / 72	403.6 / 386.8	450 / 450															
236.6 / 273.0	108 / 108	440.1 / 458.0	500 / 500															

See page 169 for legend and notes.

Table 22 — Electrical Data — 50P055 Units with Optional Return Fan (cont)
 208/230-3-60 (V-Ph-Hz) (cont)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		RETURN FAN			OPTIONAL ELECTRIC HEAT		POWER SUPPLY		
Min	Max	No. A1		No. B1		Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*			
		Qty	RLA (ea)	LRA (ea)	Qty												RLA (ea)	LRA (ea)	
187	253	2	48.1	245	2	48.1	245	4	6.6 (ea)	30	88/80	1	—	—	— / —	— / —	328.8 / 318.8	400 / 350	
																78.9 / 90.0	36 / 36	328.8 / 318.8	400 / 350
																157.7 / 182.0	72 / 72	328.8 / 318.8	400 / 350
																236.6 / 273.0	108 / 108	346.6 / 373.0	400 / 450
																— / —	— / —	375.0 / 360.8	450 / 400
																78.9 / 90.0	36 / 36	375.0 / 360.8	450 / 400
		157.7 / 182.0	72 / 72	375.0 / 360.8	450 / 400														
		236.6 / 273.0	108 / 108	404.4 / 425.5	450 / 450														
		— / —	— / —	388.2 / 372.8	450 / 450														
		78.9 / 90.0	36 / 36	388.2 / 372.8	450 / 450														
		157.7 / 182.0	72 / 72	388.2 / 372.8	450 / 450														
		236.6 / 273.0	108 / 108	420.9 / 440.5	450 / 500														
— / —	— / —	403.6 / 386.8	450 / 450																
78.9 / 90.0	36 / 36	403.6 / 386.8	450 / 450																
157.7 / 182.0	72 / 72	403.6 / 386.8	450 / 450																
236.6 / 273.0	108 / 108	440.1 / 458.0	500 / 500																
— / —	— / —	416.8 / 398.8	500 / 450																
78.9 / 90.0	36 / 36	416.8 / 398.8	500 / 450																
157.7 / 182.0	72 / 72	416.8 / 398.8	500 / 450																
236.6 / 273.0	108 / 108	456.6 / 473.0	500 / 500																
— / —	— / —	361.3 / 348.8	450 / 450																
78.9 / 90.0	36 / 36	361.3 / 348.8	450 / 450																
157.7 / 182.0	72 / 72	361.3 / 348.8	450 / 450																
236.6 / 273.0	108 / 108	379.1 / 403.0	450 / 500																
— / —	— / —	407.5 / 390.8	500 / 450																
78.9 / 90.0	36 / 36	407.5 / 390.8	500 / 450																
157.7 / 182.0	72 / 72	407.5 / 390.8	500 / 450																
236.6 / 273.0	108 / 108	436.9 / 455.5	500 / 500																
— / —	— / —	420.7 / 402.8	500 / 500																
78.9 / 90.0	36 / 36	420.7 / 402.8	500 / 500																
157.7 / 182.0	72 / 72	420.7 / 402.8	500 / 500																
236.6 / 273.0	108 / 108	453.4 / 470.5	500 / 500																
— / —	— / —	436.1 / 416.8	500 / 500																
78.9 / 90.0	36 / 36	436.1 / 416.8	500 / 500																
157.7 / 182.0	72 / 72	436.1 / 416.8	500 / 500																
236.6 / 273.0	108 / 108	472.6 / 488.0	500 / 500																
— / —	— / —	449.3 / 428.8	500 / 500																
78.9 / 90.0	36 / 36	449.3 / 428.8	500 / 500																
157.7 / 182.0	72 / 72	449.3 / 428.8	500 / 500																
236.6 / 273.0	108 / 108	489.1 / 503.0	500 / 600																

See page 169 for legend and notes.

Table 22 — Electrical Data — 50P055 Units with Optional Return Fan (cont)
380-3-60 (V-Ph-Hz)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		RETURN FAN			OPTIONAL ELECTRIC HEAT		POWER SUPPLY				
		No. A1			No. B1																
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*			
342	418	2	23.7	145	2	23.7	145	4	3.9 (ea)	20	30.0	1	15	24.5	—	—	—	141.0	150		
															—	—	—	141.0	150		
															—	—	—	141.0	150		
															—	—	—	145.3	150		
															—	—	—	165.5	175		
															15	24.5	38.3	36	165.5	175	
															—	—	—	165.5	175		
															—	—	—	176.0	200		
															—	—	—	172.4	200		
															20	30.0	38.3	36	172.4	200	
															—	—	—	172.4	200		
															—	—	—	182.8	200		
		25	38.0	38.3	36	182.4	200														
		—	—	—	182.4	200															
		—	—	—	182.4	200															
		—	—	—	192.8	200															
		30	43.5	38.3	36	189.3	225														
		—	—	—	189.3	225															
		—	—	—	189.3	225															
		—	—	—	199.7	225															
		2	23.7	145	2	23.7	2	23.7	145	4	3.9 (ea)	20	30.0	1	15	24.5	—	—	—	147.9	175
																	—	—	—	147.9	175
																	—	—	—	147.9	175
																	—	—	—	152.2	175
—	—																—	172.4	200		
15	24.5																38.3	36	172.4	200	
—	—																—	172.4	200		
—	—																—	182.8	200		
—	—																—	177.9	200		
20	30.0																38.3	36	177.9	200	
—	—																—	177.9	200		
—	—																—	189.7	200		
25	38.0	38.3	36	187.9	225																
—	—	—	187.9	225																	
—	—	—	187.9	225																	
—	—	—	199.7	225																	
30	43.5	38.3	36	194.8	225																
—	—	—	194.8	225																	
—	—	—	194.8	225																	
—	—	—	206.6	225																	
2	23.7	145	2	23.7	2	23.7	145	4	3.9 (ea)	25	38.0	1	15	24.5	—	—	—	157.9	175		
															—	—	—	157.9	175		
															—	—	—	157.9	175		
															—	—	—	162.2	200		
															—	—	—	182.4	200		
															15	24.5	38.3	36	182.4	200	
															—	—	—	182.4	200		
															—	—	—	192.8	200		
															—	—	—	187.9	225		
															20	30.0	38.3	36	187.9	225	
															—	—	—	187.9	225		
															—	—	—	199.7	225		
25	38.0	38.3	36	195.9	225																
—	—	—	195.9	225																	
—	—	—	195.9	225																	
—	—	—	209.7	225																	
30	43.5	38.3	36	202.8	225																
—	—	—	202.8	225																	
—	—	—	202.8	225																	
—	—	—	216.6	250																	

See page 169 for legend and notes.

Table 22 — Electrical Data — 50P055 Units with Optional Return Fan (cont)
380-3-60 (V-Ph-Hz) (cont)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		RETURN FAN			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
		No. A1			No. B1													
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
342	418	2	23.7	145	2	23.7	145	4	3.9 (ea)	30	43.5	1	—	—	—	—	164.8	200
															38.3	36	164.8	200
															76.8	72	164.8	200
															114.7	108	169.1	200
															—	—	189.3	225
															38.3	36	189.3	225
															76.8	72	189.3	225
															114.7	108	199.7	225
															—	—	194.8	225
															38.3	36	194.8	225
															76.8	72	194.8	225
															114.7	108	206.6	225
															—	—	202.8	225
															38.3	36	202.8	225
76.8	72	202.8	225															
114.7	108	216.6	250															
—	—	208.3	250															
38.3	36	208.3	250															
76.8	72	208.3	250															
114.7	108	223.5	250															
—	—	180.7	225															
38.3	36	180.7	225															
76.8	72	180.7	225															
114.7	108	185.0	225															
—	—	205.2	250															
38.3	36	205.2	250															
76.8	72	205.2	250															
114.7	108	215.6	250															
—	—	210.7	250															
38.3	36	210.7	250															
76.8	72	210.7	250															
114.7	108	222.5	250															
—	—	218.7	250															
38.3	36	218.7	250															
76.8	72	218.7	250															
114.7	108	232.5	250															
—	—	224.2	250															
38.3	36	224.2	250															
76.8	72	224.2	250															
114.7	108	239.3	250															

See page 169 for legend and notes.

Table 22 — Electrical Data — 50P055 Units with Optional Return Fan (cont)
460-3-60 (V-Ph-Hz)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		RETURN FAN			OPTIONAL ELECTRIC HEAT		POWER SUPPLY																																		
		No. A1			No. B1			Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*																																	
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)																																												
414	508	2	18.6	125	2	18.6	125	4	3.3 (ea)	20	27.0	1	15	21.0	1	15	21.0	46.3	36	113.9	125	113.9	125	113.9	125	119.3	125	165.3	175																						
																														139.0	108	134.9	150																		
																																		134.9	150																
																																				145.5	150														
																																						191.5	200												
																																								142.4	150										
																																										142.4	150								
																																												153.0	175						
																																														199.0	200				
																																																151.1	175		
																																																		151.1	175
		207.8	225																																																
				158.6	175																																														
						158.6	175																																												
								169.3	200																																										
										215.3	250																																								
												121.4	125																																						
														121.4	125																																				
																126.8	150																																		
																		172.8	175																																
																				142.4	150																														
																						142.4	150																												
																								153.0	175																										
199.0	200																																																		
		148.4	175																																																
				148.4	175																																														
						160.5	175																																												
								206.5	225																																										
										157.1	175																																								
												157.1	175																																						
														169.3	175																																				
																215.3	225																																		
																		164.6	200																																
																				164.6	200																														
																						176.8	200																												
222.8	250																																																		
		130.1	150																																																
				130.1	150																																														
						135.5	150																																												
								181.5	200																																										
										151.1	175																																								
												151.1	175																																						
														161.8	175																																				
																207.8	225																																		
																		157.1	175																																
																				157.1	175																														
																						169.3	175																												
215.3	225																																																		
		164.1	175																																																
				164.1	175																																														
						178.0	200																																												
								224.0	225																																										
										171.6	200																																								
												171.6	200																																						
														185.5	200																																				
																231.5	250																																		

See page 169 for legend and notes.

Table 22 — Electrical Data — 50P055 Units with Optional Return Fan (cont)
 460-3-60 (V-Ph-Hz) (cont)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		RETURN FAN			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
		No. A1			No. B1													
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
414	508	2	18.6	125	2	18.6	125	4	3.3 (ea)	30	40.0	1	—	—	—	—	137.6	175
															46.3	36	137.6	175
															93.0	72	143.0	175
															139.0	108	189.0	225
															—	—	158.6	175
															46.3	36	158.6	175
															93.0	72	169.3	200
															139.0	108	215.3	250
															—	—	164.6	200
															46.3	36	164.6	200
															93.0	72	176.8	200
															139.0	108	222.8	250
		—	—	171.6	200													
		46.3	36	171.6	200													
		93.0	72	185.5	200													
		139.0	108	231.5	250													
		—	—	177.6	200													
		46.3	36	177.6	200													
		93.0	72	193.0	200													
		139.0	108	239.0	250													
		2	18.6	125	2	18.6	125	4	3.3 (ea)	40	52.0	1	—	—	—	—	152.6	200
															46.3	36	152.6	200
															93.0	72	158.0	200
															139.0	108	204.0	250
—	—														173.6	225		
46.3	36														173.6	225		
93.0	72														184.3	225		
139.0	108														230.3	250		
—	—														179.6	225		
46.3	36														179.6	225		
93.0	72														191.8	225		
139.0	108														237.8	250		
—	—	186.6	225															
46.3	36	186.6	225															
93.0	72	200.5	225															
139.0	108	246.5	250															
—	—	192.6	225															
46.3	36	192.6	225															
93.0	72	208.0	250															
139.0	108	254.0	300															

See page 169 for legend and notes.

Table 22 — Electrical Data — 50P055 Units with Optional Return Fan (cont)
575-3-60 (V-Ph-Hz)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		RETURN FAN			OPTIONAL ELECTRIC HEAT		POWER SUPPLY							
		No. A1			No. B1																			
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*						
518	632	2	14.7	100	2	14.7	100	4	2.6 (ea)	20	22.0	1	15	17.0	—	—	—	90.5	100					
															—	—	—	36.0	36	90.5	100			
															—	—	—	72.0	72	93.3	110			
															—	—	—	108.0	108	129.3	150			
															—	—	—	—	—	107.5	110			
															15	17.0	36.0	36	107.5	110				
															—	—	—	72.0	72	114.5	125			
															—	—	—	108.0	108	150.5	175			
															—	—	—	—	—	113.7	125			
															20	22.0	36.0	36	113.7	125				
															—	—	—	72.0	72	120.8	125			
															—	—	—	108.0	108	156.8	175			
		—	—	—	—	—	120.0	125																
		25	27.0	36.0	36	120.0	125																	
		—	—	—	72.0	72	127.0	150																
		—	—	—	108.0	108	163.0	175																
		—	—	—	—	—	126.2	150																
		30	32.0	36.0	36	126.2	150																	
		—	—	—	72.0	72	133.3	150																
		—	—	—	108.0	108	169.3	175																
		2	14.7	100	2	14.7	100	4	2.6 (ea)	20	22.0	1	20	22.0	1	25	27.0	—	—	—	96.7	110		
																		—	—	—	36.0	36	96.7	110
																		—	—	—	72.0	72	99.5	110
																		—	—	—	108.0	108	135.5	150
—	—																	—	—	—	113.7	125		
15	17.0																	36.0	36	113.7	125			
—	—																	—	72.0	72	120.8	125		
—	—																	—	108.0	108	156.8	175		
—	—																	—	—	—	118.7	125		
20	22.0																	36.0	36	118.7	125			
—	—																	—	72.0	72	127.0	150		
—	—																	—	108.0	108	163.0	175		
—	—	—	—	—	125.0	150																		
25	27.0	36.0	36	125.0	150																			
—	—	—	72.0	72	133.3	150																		
—	—	—	108.0	108	169.3	175																		
—	—	—	—	—	131.2	150																		
30	32.0	36.0	36	131.2	150																			
—	—	—	72.0	72	139.5	150																		
—	—	—	108.0	108	175.5	200																		
2	14.7	100	2	14.7	100	4	2.6 (ea)	25	27.0	1	25	27.0	1	30	32.0	—	—	—	103.0	125				
																—	—	—	36.0	36	103.0	125		
																—	—	—	72.0	72	105.8	125		
																—	—	—	108.0	108	141.8	150		
																—	—	—	—	—	120.0	125		
																15	17.0	36.0	36	120.0	125			
																—	—	—	72.0	72	127.0	150		
																—	—	—	108.0	108	163.0	175		
																—	—	—	—	—	125.0	150		
																20	22.0	36.0	36	125.0	150			
																—	—	—	72.0	72	133.3	150		
																—	—	—	108.0	108	169.3	175		
—	—	—	—	—	130.0	150																		
25	27.0	36.0	36	130.0	150																			
—	—	—	72.0	72	139.5	150																		
—	—	—	108.0	108	175.5	200																		
—	—	—	—	—	136.2	150																		
30	32.0	36.0	36	136.2	150																			
—	—	—	72.0	72	145.8	150																		
—	—	—	108.0	108	181.8	200																		

See page 169 for legend and notes.

Table 22 — Electrical Data — 50P055 Units with Optional Return Fan (cont)
575-3-60 (V-Ph-Hz) (cont)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		RETURN FAN			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
		No. A1			No. B1													
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
518	632	2	14.7	100	2	14.7	100	4	2.6 (ea)	30	32.0	—	—	—	—	—	109.2	125
															36.0	36	109.2	125
															72.0	72	112.0	125
															108.0	108	148.0	175
												—	—	126.2	150			
												36.0	36	126.2	150			
												72.0	72	133.3	150			
												108.0	108	169.3	175			
												—	—	131.2	150			
												36.0	36	131.2	150			
												72.0	72	139.5	150			
												108.0	108	175.5	200			
										—	—	136.2	150					
										36.0	36	136.2	150					
										72.0	72	145.8	150					
										108.0	108	181.8	200					
										—	—	141.2	150					
										36.0	36	141.2	150					
										72.0	72	152.0	175					
										108.0	108	188.0	200					
										—	—	120.5	150					
										36.0	36	120.5	150					
										72.0	72	123.3	150					
										108.0	108	159.3	200					
—	—	137.5	175															
36.0	36	137.5	175															
72.0	72	144.5	175															
108.0	108	180.5	200															
—	—	142.5	175															
36.0	36	142.5	175															
72.0	72	150.8	175															
108.0	108	186.8	200															
—	—	147.5	175															
36.0	36	147.5	175															
72.0	72	157.0	175															
108.0	108	193.0	225															
—	—	152.5	175															
36.0	36	152.5	175															
72.0	72	163.3	175															
108.0	108	199.3	225															

See page 169 for legend and notes.

Table 23 — Electrical Data — 50P 060 Units

208/230-3-60 (V-Ph-Hz)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		POWER EXHAUST			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
187	253	2	51.3	300	2	51.3	300	4	6.6 (ea)	15	46.2 / 42.0	—	—	— / —	78.9/ 90.0	36/ 36	290.6/ 286.4	300/ 300
															157.7/ 182.0	72/ 72	290.6/ 286.4	300/ 300
															236.6/ 273.0	108/ 108	294.4/ 325.5	300/ 350
															—	—	324.0/ 316.8	350/ 350
															78.9/ 90.0	36/ 36	324.0/ 316.8	350/ 350
															157.7/ 182.0	72/ 72	324.0/ 316.8	350/ 350
															236.6/ 273.0	108/ 108	336.1/ 363.5	350/ 400
															—	—	339.0/ 330.4	350/ 350
															78.9/ 90.0	36/ 36	339.0/ 330.4	350/ 350
															157.7/ 182.0	72/ 72	339.0/ 330.4	350/ 350
															236.6/ 273.0	108/ 108	354.9/ 380.5	400/ 400
															—	—	352.2/ 342.4	400/ 350
															78.9/ 90.0	36/ 36	352.2/ 342.4	400/ 350
															157.7/ 182.0	72/ 72	352.2/ 342.4	400/ 350
															236.6/ 273.0	108/ 108	371.4/ 395.5	400/ 400
															—	—	305.9/ 299.1	350/ 350
															78.9/ 90.0	36/ 36	305.9/ 299.1	350/ 350
															157.7/ 182.0	72/ 72	305.9/ 299.1	350/ 350
															236.6/ 273.0	108/ 108	310.9/ 340.5	350/ 350
															—	—	339.3/ 329.5	350/ 350
															78.9/ 90.0	36/ 36	339.3/ 329.5	350/ 350
															157.7/ 182.0	72/ 72	339.3/ 329.5	350/ 350
															236.6/ 273.0	108/ 108	352.6/ 378.5	400/ 400
															—	—	354.3/ 343.1	400/ 350
78.9/ 90.0	36/ 36	354.3/ 343.1	400/ 350															
157.7/ 182.0	72/ 72	354.3/ 343.1	400/ 350															
236.6/ 273.0	108/ 108	371.4/ 395.5	400/ 400															
—	—	367.5/ 355.1	400/ 400															
78.9/ 90.0	36/ 36	367.5/ 355.1	400/ 400															
157.7/ 182.0	72/ 72	367.5/ 355.1	400/ 400															
236.6/ 273.0	108/ 108	387.9/ 410.5	400/ 450															
—	—	325.1/ 316.6	350/ 350															
78.9/ 90.0	36/ 36	325.1/ 316.6	350/ 350															
157.7/ 182.0	72/ 72	325.1/ 316.6	350/ 350															
236.6/ 273.0	108/ 108	330.1/ 358.0	400/ 400															
—	—	358.5/ 347.0	400/ 400															
78.9/ 90.0	36/ 36	358.5/ 347.0	400/ 400															
157.7/ 182.0	72/ 72	358.5/ 347.0	400/ 400															
236.6/ 273.0	108/ 108	371.9/ 396.0	400/ 450															
—	—	373.5/ 360.6	400/ 400															
78.9/ 90.0	36/ 36	373.5/ 360.6	400/ 400															
157.7/ 182.0	72/ 72	373.5/ 360.6	400/ 400															
236.6/ 273.0	108/ 108	390.6/ 413.0	450/ 450															
—	—	386.7/ 372.6	450/ 400															
78.9/ 90.0	36/ 36	386.7/ 372.6	450/ 400															
157.7/ 182.0	72/ 72	386.7/ 372.6	450/ 400															
236.6/ 273.0	108/ 108	407.1/ 428.0	450/ 450															

See page 169 for legend and notes.

Table 23 — Electrical Data — 50P 060 Units (cont)
208/230-3-60 (V-Ph-Hz) (cont)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		POWER EXHAUST			OPTIONAL ELECTRIC HEAT		POWER SUPPLY			
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*		
187	253	2	51.3	300	2	51.3	300	4	6.6 (ea)	30	88/80	—	—	— / —	78.9/ 90.0	36/ 36	341.6/ 331.6	400/ 400		
															157.7/ 182.0	72/ 72	341.6/ 331.6	400/ 400		
															236.6/ 273.0	108/ 108	346.6/ 373.0	400/ 450		
															—	—	375.0/ 362.0	450/ 400		
															78.9/ 90.0	36/ 36	375.0/ 362.0	450/ 400		
															157.7/ 182.0	72/ 72	375.0/ 362.0	450/ 400		
		236.6/ 273.0	108/ 108	388.4/ 411.0	450/ 450															
		2	51.3	300	2	51.3	300	4	6.6 (ea)	30	88/80	2	7.5	24.2 / 22.0	—	—	78.9/ 90.0	36/ 36	390.0/ 375.6	450/ 450
																	157.7/ 182.0	72/ 72	390.0/ 375.6	450/ 450
																	236.6/ 273.0	108/ 108	407.1/ 428.0	450/ 450
																	—	—	403.2/ 387.6	450/ 450
																	78.9/ 90.0	36/ 36	403.2/ 387.6	450/ 450
157.7/ 182.0	72/ 72																403.2/ 387.6	450/ 450		
236.6/ 273.0	108/ 108	423.6/ 443.0	450/ 500																	
2	51.3	300	2	51.3	300	4	6.6 (ea)	40	114/104	—	—	— / —	—	—	78.9/ 90.0	36/ 36	374.1/ 361.6	450/ 450		
															157.7/ 182.0	72/ 72	374.1/ 361.6	450/ 450		
															236.6/ 273.0	108/ 108	379.1/ 403.0	450/ 500		
															—	—	407.5/ 392.0	500/ 450		
															78.9/ 90.0	36/ 36	407.5/ 392.0	500/ 450		
															157.7/ 182.0	72/ 72	407.5/ 392.0	500/ 450		
236.6/ 273.0	108/ 108	420.9/ 441.0	500/ 500																	
2	51.3	300	2	51.3	300	4	6.6 (ea)	40	114/104	2	7.5	24.2 / 22.0	—	—	78.9/ 90.0	36/ 36	422.5/ 405.6	500/ 500		
															157.7/ 182.0	72/ 72	422.5/ 405.6	500/ 500		
															236.6/ 273.0	108/ 108	439.6/ 458.0	500/ 500		
															—	—	435.7/ 417.6	500/ 500		
															78.9/ 90.0	36/ 36	435.7/ 417.6	500/ 500		
															157.7/ 182.0	72/ 72	435.7/ 417.6	500/ 500		
236.6/ 273.0	108/ 108	456.1/ 473.0	500/ 500																	

See page 169 for legend and notes.

Table 23 — Electrical Data — 50P 060 Units (cont)
380-3-60 (V-Ph-Hz)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		POWER EXHAUST			OPTIONAL ELECTRIC HEAT		POWER SUPPLY													
		No. A1			No. B1			Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*												
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*												
342	418	2	26.9	139	2	26.9	139	4	3.9 (ea)	15	24.5	—	—	—	—	—	154.4	175												
												2	5	9.1	38.3	36	154.4	175												
															76.8	72	154.4	175												
															114.7	108	154.4	175												
												2	7.5	12.5	—	—	172.6	175												
															38.3	36	172.6	175												
															76.8	72	172.6	175												
												2	10	16.7	—	—	172.6	175												
															38.3	36	179.4	200												
															76.8	72	179.4	200												
												342	418	2	26.9	139	2	26.9	139	4	3.9 (ea)	20	30.0	—	—	—	—	—	160.7	175
																								2	5	9.1	38.3	36	160.7	175
76.8	72	160.7	175																											
114.7	108	160.7	175																											
2	7.5	12.5	—	—	178.9	200																								
			38.3	36	178.9	200																								
			76.8	72	178.9	200																								
2	10	16.7	—	—	178.9	200																								
			38.3	36	185.7	200																								
			76.8	72	185.7	200																								
342	418	2	26.9	139	2	26.9	139	4	3.9 (ea)	25	38.0													—	—	—	—	—	185.7	200
																								2	5	9.1	38.3	36	185.7	200
												76.8	72	185.7	200															
												114.7	108	185.7	200															
												2	7.5	12.5	—	—	194.1	200												
															38.3	36	194.1	200												
															76.8	72	194.1	200												
												2	10	16.7	—	—	194.1	200												
															38.3	36	170.7	200												
															76.8	72	170.7	200												
												342	418	2	26.9	139	2	26.9	139	4	3.9 (ea)	25	38.0	—	—	—	—	—	170.7	200
																								2	5	9.1	38.3	36	170.7	200
76.8	72	170.7	200																											
114.7	108	170.7	200																											
2	7.5	12.5	—	—	188.9	225																								
			38.3	36	188.9	225																								
			76.8	72	188.9	225																								
2	10	16.7	—	—	188.9	225																								
			38.3	36	195.7	225																								
			76.8	72	195.7	225																								
2	10	16.7	—	—	195.7	225																								
			38.3	36	204.1	225																								
			76.8	72	204.1	225																								
2	10	16.7	—	—	204.1	225																								
			38.3	36	204.1	225																								
			76.8	72	204.1	225																								
2	10	16.7	—	—	204.1	225																								
			38.3	36	204.1	225																								
			76.8	72	204.1	225																								

See page 169 for legend and notes.

Table 23 — Electrical Data — 50P 060 Units (cont)
380-3-60 (V-Ph-Hz) (cont)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		POWER EXHAUST			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
		No. A1			No. B1													
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
342	418	2	26.9	139	2	26.9	139	4	3.9 (ea)	30	43.5	2	5	9.1	—	—	177.6	200
															38.3	36	177.6	200
															76.8	72	177.6	200
															114.7	108	177.6	200
															—	—	195.8	225
															38.3	36	195.8	225
															76.8	72	195.8	225
															114.7	108	195.8	225
															—	—	202.6	225
															38.3	36	202.6	225
															76.8	72	202.6	225
															114.7	108	202.6	225
—	—	211.0	250															
38.3	36	211.0	250															
76.8	72	211.0	250															
114.7	108	211.0	250															
—	—	193.5	225															
38.3	36	193.5	225															
76.8	72	193.5	225															
114.7	108	193.5	225															
—	—	211.7	250															
38.3	36	211.7	250															
76.8	72	211.7	250															
114.7	108	211.7	250															
—	—	218.5	250															
38.3	36	218.5	250															
76.8	72	218.5	250															
114.7	108	218.5	250															
—	—	226.9	250															
38.3	36	226.9	250															
76.8	72	226.9	250															
114.7	108	226.9	250															

See page 169 for legend and notes.

Table 23 — Electrical Data — 50P 060 Units (cont)

460-3-60 (V-Ph-Hz)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		POWER EXHAUST			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
		No. A1			No. B1			Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
414	508	2	23.1	150	2	23.1	150	4	3.3 (ea)	15	21.0	—	—	—	—	—	132.4	150
															46.3	36	132.4	150
															93.0	72	132.4	150
															139.0	108	165.3	175
															—	—	147.6	150
															46.3	36	147.6	150
					93.0	72	147.6	150										
					139.0	108	184.3	200										
					—	—	154.4	175										
					46.3	36	154.4	175										
					93.0	72	154.4	175										
					139.0	108	192.8	200										
			—	—	160.4	175												
			46.3	36	160.4	175												
			93.0	72	160.4	175												
			139.0	108	200.3	225												
			—	—	160.4	175												
			46.3	36	160.4	175												
			93.0	72	160.4	175												
			139.0	108	200.3	225												
			—	—	167.4	175												
			46.3	36	167.4	175												
			93.0	72	167.4	175												
			139.0	108	207.8	225												
			—	—	167.4	175												
			46.3	36	167.4	175												
			93.0	72	167.4	175												
			139.0	108	207.8	225												
			—	—	176.1	200												
			46.3	36	176.1	200												
			93.0	72	176.1	200												
			139.0	108	216.5	225												
			—	—	148.1	175												
			46.3	36	148.1	175												
			93.0	72	148.1	175												
			139.0	108	181.5	200												
			—	—	163.3	175												
			46.3	36	163.3	175												
			93.0	72	163.3	175												
			139.0	108	200.5	225												
			—	—	170.1	200												
			46.3	36	170.1	200												
			93.0	72	170.1	200												
			139.0	108	209.0	225												
			—	—	176.1	200												
			46.3	36	176.1	200												
			93.0	72	176.1	200												
			139.0	108	216.5	225												

See page 169 for legend and notes.

Table 23 — Electrical Data — 50P 060 Units (cont)
460-3-60 (V-Ph-Hz) (cont)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		POWER EXHAUST			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
		No. A1			No. B1			Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
414	508	2	23.1	150	2	23.1	150	4	3.3 (ea)	30	40.0	2	5	7.6	—	—	155.6	175
															46.3	36	155.6	175
															93.0	72	155.6	175
															139.0	108	189.0	225
															—	—	170.8	200
															46.3	36	170.8	200
		93.0	72	170.8	200													
		139.0	108	208.0	225													
		—	—	177.6	200													
		46.3	36	177.6	200													
		93.0	72	177.6	200													
		139.0	108	216.5	250													
—	—	183.6	200															
46.3	36	183.6	200															
93.0	72	183.6	200															
139.0	108	224.0	250															
—	—	170.6	200															
46.3	36	170.6	200															
93.0	72	170.6	200															
139.0	108	204.0	250															
—	—	185.8	225															
46.3	36	185.8	225															
93.0	72	185.8	225															
139.0	108	223.0	250															
—	—	192.6	225															
46.3	36	192.6	225															
93.0	72	192.6	225															
139.0	108	231.5	250															
—	—	198.6	250															
46.3	36	198.6	250															
93.0	72	198.6	250															
139.0	108	239.0	250															

See page 169 for legend and notes.

Table 23 — Electrical Data — 50P 060 Units (cont)

575-3-60 (V-Ph-Hz)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		POWER EXHAUST			OPTIONAL ELECTRIC HEAT		POWER SUPPLY				
		No. A1			No. B1			Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*			
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)														
518	632	2	19.9	109	2	19.9	109	4	2.6 (ea)	15	17.0	—	—	—	—	—	112.0	125			
															36.0	36	112.0	125			
															72.0	72	112.0	125			
															108.0	108	129.3	150			
															—	—	124.2	125			
															5	6.1	36.0	36	124.2	125	
															72.0	72	124.2	125			
															108.0	108	144.5	150			
															—	—	130.0	150			
															2	7.5	9.0	36.0	36	130.0	150
															72.0	72	130.0	150			
															108.0	108	151.8	175			
															—	—	134.0	150			
															10	11.0	36.0	36	134.0	150	
															72.0	72	134.0	150			
															108.0	108	156.8	175			
															—	—	—	—	117.5	125	
															36.0	36	117.5	125			
72.0	72	117.5	125																		
108.0	108	135.5	150																		
—	—	129.7	150																		
2	5	6.1	36.0	36	129.7	150															
72.0	72	129.7	150																		
108.0	108	150.8	175																		
—	—	135.5	150																		
2	7.5	9.0	36.0	36	135.5	150															
72.0	72	135.5	150																		
108.0	108	158.0	175																		
—	—	139.5	150																		
10	11.0	36.0	36	139.5	150																
72.0	72	139.5	150																		
108.0	108	163.0	175																		
—	—	—	—	123.8	150																
36.0	36	123.8	150																		
72.0	72	123.8	150																		
108.0	108	141.8	150																		
—	—	136.0	150																		
2	5	6.1	36.0	36	136.0	150															
72.0	72	136.0	150																		
108.0	108	157.0	175																		
—	—	141.8	150																		
2	7.5	9.0	36.0	36	141.8	150															
72.0	72	141.8	150																		
108.0	108	164.3	175																		
—	—	145.8	150																		
10	11.0	36.0	36	145.8	150																
72.0	72	145.8	150																		
108.0	108	169.3	175																		

See page 169 for legend and notes.

Table 23 — Electrical Data — 50P 060 Units (cont)

575-3-60 (V-Ph-Hz) (cont)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		POWER EXHAUST			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
		No. A1			No. B1			Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
518	632	2	19.9	109	2	19.9	109	4	2.6 (ea)	30	32.0	2	5	6.1	—	—	130.0	150
															36.0	36	130.0	150
															72.0	72	130.0	150
															108.0	108	148.0	175
															—	—	142.2	150
															36.0	36	142.2	150
		72.0	72	142.2	150													
		108.0	108	163.3	175													
		2	7.5	9.0	—	—	148.0	175										
					36.0	36	148.0	175										
					72.0	72	148.0	175										
					108.0	108	170.5	175										
—	—				152.0	175												
36.0	36				152.0	175												
72.0	72	152.0	175															
108.0	108	175.5	200															
518	632	2	19.9	109	2	19.9	109	4	2.6 (ea)	40	41.0	2	5	6.1	—	—	141.3	175
															36.0	36	141.3	175
															72.0	72	141.3	175
															108.0	108	159.3	200
															—	—	153.5	175
															36.0	36	153.5	175
		72.0	72	153.5	175													
		108.0	108	174.5	200													
		2	7.5	9.0	—	—	159.3	200										
					36.0	36	159.3	200										
					72.0	72	159.3	200										
					108.0	108	181.8	200										
—	—				163.3	200												
36.0	36				163.3	200												
72.0	72	163.3	200															
108.0	108	186.8	200															

See page 169 for legend and notes.

Table 24 — Electrical Data — 50P060 Units with Optional Return Fan

208/230-3-60 (V-Ph-Hz)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		RETURN FAN			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
Min	Max	Qty	No. A1		No. B1		Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*	
			RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)											
187	253	2	51.3	300	2	51.3	300	4	6.6 (ea)	20	59.4 / 54.0	1	15	46.2 / 42.0	— / —	— / —	290.6 / 286.4	300 / 300
															78.9 / 90.0	36 / 36	290.6 / 286.4	300 / 300
															157.7 / 182.0	72 / 72	290.6 / 286.4	300 / 300
															236.6 / 273.0	108 / 108	294.4 / 325.5	300 / 350
															— / —	— / —	336.8 / 328.4	350 / 350
															78.9 / 90.0	36 / 36	336.8 / 328.4	350 / 350
					157.7 / 182.0	72 / 72	336.8 / 328.4	350 / 350										
					236.6 / 273.0	108 / 108	352.1 / 378.0	400 / 400										
					— / —	— / —	352.1 / 341.1	400 / 350										
					78.9 / 90.0	36 / 36	352.1 / 341.1	400 / 350										
					157.7 / 182.0	72 / 72	352.1 / 341.1	400 / 350										
					236.6 / 273.0	108 / 108	368.6 / 393.0	400 / 400										
		— / —	— / —	371.3 / 358.6	400 / 400													
		78.9 / 90.0	36 / 36	371.3 / 358.6	400 / 400													
		157.7 / 182.0	72 / 72	371.3 / 358.6	400 / 400													
		236.6 / 273.0	108 / 108	387.9 / 410.5	450 / 450													
		— / —	— / —	387.8 / 373.6	450 / 450													
		78.9 / 90.0	36 / 36	387.8 / 373.6	450 / 450													
		157.7 / 182.0	72 / 72	387.8 / 373.6	450 / 450													
		236.6 / 273.0	108 / 108	404.4 / 425.5	450 / 450													
		— / —	— / —	305.9 / 299.1	350 / 350													
		78.9 / 90.0	36 / 36	305.9 / 299.1	350 / 350													
		157.7 / 182.0	72 / 72	305.9 / 299.1	350 / 350													
		236.6 / 273.0	108 / 108	310.9 / 340.5	350 / 350													
— / —	— / —	352.1 / 341.1	400 / 350															
78.9 / 90.0	36 / 36	352.1 / 341.1	400 / 350															
157.7 / 182.0	72 / 72	352.1 / 341.1	400 / 350															
236.6 / 273.0	108 / 108	368.6 / 393.0	400 / 400															
— / —	— / —	365.3 / 353.1	400 / 400															
78.9 / 90.0	36 / 36	365.3 / 353.1	400 / 400															
157.7 / 182.0	72 / 72	365.3 / 353.1	400 / 400															
236.6 / 273.0	108 / 108	385.1 / 408.0	400 / 450															
— / —	— / —	384.5 / 370.6	450 / 400															
78.9 / 90.0	36 / 36	384.5 / 370.6	450 / 400															
157.7 / 182.0	72 / 72	384.5 / 370.6	450 / 400															
236.6 / 273.0	108 / 108	404.4 / 425.5	450 / 450															
— / —	— / —	401.0 / 385.6	450 / 450															
78.9 / 90.0	36 / 36	401.0 / 385.6	450 / 450															
157.7 / 182.0	72 / 72	401.0 / 385.6	450 / 450															
236.6 / 273.0	108 / 108	420.9 / 440.5	450 / 500															
— / —	— / —	325.1 / 316.6	350 / 350															
78.9 / 90.0	36 / 36	325.1 / 316.6	350 / 350															
157.7 / 182.0	72 / 72	325.1 / 316.6	350 / 350															
236.6 / 273.0	108 / 108	330.1 / 358.0	400 / 400															
— / —	— / —	371.3 / 358.6	400 / 400															
78.9 / 90.0	36 / 36	371.3 / 358.6	400 / 400															
157.7 / 182.0	72 / 72	371.3 / 358.6	400 / 400															
236.6 / 273.0	108 / 108	387.9 / 410.5	450 / 450															
— / —	— / —	384.5 / 370.6	450 / 400															
78.9 / 90.0	36 / 36	384.5 / 370.6	450 / 400															
157.7 / 182.0	72 / 72	384.5 / 370.6	450 / 400															
236.6 / 273.0	108 / 108	404.4 / 425.5	450 / 450															
— / —	— / —	399.9 / 384.6	450 / 450															
78.9 / 90.0	36 / 36	399.9 / 384.6	450 / 450															
157.7 / 182.0	72 / 72	399.9 / 384.6	450 / 450															
236.6 / 273.0	108 / 108	423.6 / 443.0	450 / 450															
— / —	— / —	416.4 / 399.6	500 / 450															
78.9 / 90.0	36 / 36	416.4 / 399.6	500 / 450															
157.7 / 182.0	72 / 72	416.4 / 399.6	500 / 450															
236.6 / 273.0	108 / 108	440.1 / 458.0	500 / 500															

See page 169 for legend and notes.

Table 24 — Electrical Data — 50P060 Units with Optional Return Fan (cont)
208/230-3-60 (V-Ph-Hz) (cont)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		RETURN FAN			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
Min	Max	No. A1			No. B1			Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
		Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)											
187	253	2	51.3	300	2	51.3	300	4	6.6 (ea)	30	88/80	1	—	—	— / —	— / —	341.6 / 331.6	400 / 400
															78.9 / 90.0	36 / 36	341.6 / 331.6	400 / 400
															157.7 / 182.0	72 / 72	341.6 / 331.6	400 / 400
															236.6 / 273.0	108 / 108	346.6 / 373.0	400 / 450
															— / —	— / —	387.8 / 373.6	450 / 450
															78.9 / 90.0	36 / 36	387.8 / 373.6	450 / 450
															157.7 / 182.0	72 / 72	387.8 / 373.6	450 / 450
															236.6 / 273.0	108 / 108	404.4 / 425.5	450 / 450
															— / —	— / —	401.0 / 385.6	450 / 450
															78.9 / 90.0	36 / 36	401.0 / 385.6	450 / 450
															157.7 / 182.0	72 / 72	401.0 / 385.6	450 / 450
															236.6 / 273.0	108 / 108	420.9 / 440.5	450 / 500
— / —	— / —	416.4 / 399.6	500 / 450															
78.9 / 90.0	36 / 36	416.4 / 399.6	500 / 450															
157.7 / 182.0	72 / 72	416.4 / 399.6	500 / 450															
236.6 / 273.0	108 / 108	440.1 / 458.0	500 / 500															
— / —	— / —	429.6 / 411.6	500 / 450															
78.9 / 90.0	36 / 36	429.6 / 411.6	500 / 450															
157.7 / 182.0	72 / 72	429.6 / 411.6	500 / 450															
236.6 / 273.0	108 / 108	456.6 / 473.0	500 / 500															
— / —	— / —	374.1 / 361.6	450 / 450															
78.9 / 90.0	36 / 36	374.1 / 361.6	450 / 450															
157.7 / 182.0	72 / 72	374.1 / 361.6	450 / 450															
236.6 / 273.0	108 / 108	379.1 / 403.0	450 / 500															
— / —	— / —	420.3 / 403.6	500 / 500															
78.9 / 90.0	36 / 36	420.3 / 403.6	500 / 500															
157.7 / 182.0	72 / 72	420.3 / 403.6	500 / 500															
236.6 / 273.0	108 / 108	436.9 / 455.5	500 / 500															
— / —	— / —	433.5 / 415.6	500 / 500															
78.9 / 90.0	36 / 36	433.5 / 415.6	500 / 500															
157.7 / 182.0	72 / 72	433.5 / 415.6	500 / 500															
236.6 / 273.0	108 / 108	453.4 / 470.5	500 / 500															
— / —	— / —	448.9 / 429.6	500 / 500															
78.9 / 90.0	36 / 36	448.9 / 429.6	500 / 500															
157.7 / 182.0	72 / 72	448.9 / 429.6	500 / 500															
236.6 / 273.0	108 / 108	472.6 / 488.0	500 / 500															
— / —	— / —	462.1 / 441.6	500 / 500															
78.9 / 90.0	36 / 36	462.1 / 441.6	500 / 500															
157.7 / 182.0	72 / 72	462.1 / 441.6	500 / 500															
236.6 / 273.0	108 / 108	489.1 / 503.0	500 / 600															

See page 169 for legend and notes.

Table 24 — Electrical Data — 50P060 Units with Optional Return Fan (cont)
380-3-60 (V-Ph-Hz)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		RETURN FAN			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
		No. A1			No. B1													
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
342	418	2	26.9	139	2	26.9	139	4	3.9 (ea)	20	30.0	1	15	24.5	—	—	154.4	175
															38.3	36	154.4	175
															76.8	72	154.4	175
															114.7	108	154.4	175
													—	—	178.9	200		
													38.3	36	178.9	200		
													76.8	72	178.9	200		
													114.7	108	178.9	200		
													—	—	185.2	200		
													38.3	36	185.2	200		
													76.8	72	185.2	200		
													114.7	108	185.2	200		
												—	—	195.2	225			
												38.3	36	195.2	225			
												76.8	72	195.2	225			
												114.7	108	195.2	225			
												—	—	202.1	225			
												38.3	36	202.1	225			
												76.8	72	202.1	225			
												114.7	108	202.1	225			
												—	—	160.7	175			
												38.3	36	160.7	175			
												76.8	72	160.7	175			
												114.7	108	160.7	175			
—	—	185.2	200															
38.3	36	185.2	200															
76.8	72	185.2	200															
114.7	108	185.2	200															
—	—	190.7	200															
38.3	36	190.7	200															
76.8	72	190.7	200															
114.7	108	190.7	200															
—	—	200.7	225															
38.3	36	200.7	225															
76.8	72	200.7	225															
114.7	108	200.7	225															
—	—	207.6	250															
38.3	36	207.6	250															
76.8	72	207.6	250															
114.7	108	207.6	250															
—	—	170.7	200															
38.3	36	170.7	200															
76.8	72	170.7	200															
114.7	108	170.7	200															
—	—	195.2	225															
38.3	36	195.2	225															
76.8	72	195.2	225															
114.7	108	195.2	225															
—	—	200.7	225															
38.3	36	200.7	225															
76.8	72	200.7	225															
114.7	108	200.7	225															
—	—	208.7	225															
38.3	36	208.7	225															
76.8	72	208.7	225															
114.7	108	209.7	225															
—	—	215.6	250															
38.3	36	215.6	250															
76.8	72	215.6	250															
114.7	108	216.6	250															

See page 169 for legend and notes.

Table 24 — Electrical Data — 50P060 Units with Optional Return Fan (cont)
380-3-60 (V-Ph-Hz) (cont)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		RETURN FAN			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
		No. A1			No. B1													
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
342	418	2	26.9	139	2	26.9	139	4	3.9 (ea)	30	43.5	1	—	—	—	—	177.6	200
															38.3	36	177.6	200
															76.8	72	177.6	200
															114.7	108	177.6	200
															—	—	202.1	225
															38.3	36	202.1	225
															76.8	72	202.1	225
															114.7	108	202.1	225
															—	—	207.6	250
															38.3	36	207.6	250
															76.8	72	207.6	250
															114.7	108	207.6	250
—	—	215.6	250															
38.3	36	215.6	250															
76.8	72	215.6	250															
114.7	108	216.6	250															
—	—	221.1	250															
38.3	36	221.1	250															
76.8	72	221.1	250															
114.7	108	223.5	250															
—	—	193.5	225															
38.3	36	193.5	225															
76.8	72	193.5	225															
114.7	108	193.5	225															
—	—	218.0	250															
38.3	36	218.0	250															
76.8	72	218.0	250															
114.7	108	218.0	250															
—	—	223.5	250															
38.3	36	223.5	250															
76.8	72	223.5	250															
114.7	108	223.5	250															
—	—	231.5	250															
38.3	36	231.5	250															
76.8	72	231.5	250															
114.7	108	232.5	250															
—	—	237.0	250															
38.3	36	237.0	250															
76.8	72	237.0	250															
114.7	108	239.3	250															
										40	56.2	1	—	—	—	—	193.5	225
													15	24.5	—	—	218.0	250
													20	30.0	38.3	36	223.5	250
													25	38.0	76.8	72	223.5	250
													30	43.5	114.7	108	223.5	250
															—	—	231.5	250
															38.3	36	231.5	250
															76.8	72	231.5	250
															114.7	108	232.5	250
															—	—	237.0	250
															38.3	36	237.0	250
															76.8	72	237.0	250
															114.7	108	239.3	250

See page 169 for legend and notes.

Table 24 — Electrical Data — 50P060 Units with Optional Return Fan (cont)
460-3-60 (V-Ph-Hz)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		RETURN FAN			OPTIONAL ELECTRIC HEAT		POWER SUPPLY		
		No. A1			No. B1			Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*	
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*	
414	508	2	23.1	150	2	23.1	150	4	3.3 (ea)	20	27.0	1	15	21.0	—	—	—	132.4	150
															46.3	36	132.4	150	
															93.0	72	132.4	150	
															139.0	108	165.3	175	
															—	—	—	153.4	175
															46.3	36	153.4	175	
															93.0	72	153.4	175	
															139.0	108	191.5	200	
															—	—	—	160.4	175
															46.3	36	160.4	175	
															93.0	72	160.4	175	
															139.0	108	199.0	200	
		—	—	—	169.1	200													
		46.3	36	169.1	200														
		93.0	72	169.1	200														
		139.0	108	207.8	225														
		—	—	—	176.6	200													
		46.3	36	176.6	200														
		93.0	72	176.6	200														
		139.0	108	215.3	250														
		—	—	—	139.4	150													
		46.3	36	139.4	150														
		93.0	72	139.4	150														
		139.0	108	172.8	175														
—	—	—	160.4	175															
46.3	36	160.4	175																
93.0	72	160.4	175																
139.0	108	199.0	200																
—	—	—	166.4	175															
46.3	36	166.4	175																
93.0	72	166.4	175																
139.0	108	206.5	225																
—	—	—	175.1	200															
46.3	36	175.1	200																
93.0	72	175.1	200																
139.0	108	215.3	225																
—	—	—	182.6	200															
46.3	36	182.6	200																
93.0	72	182.6	200																
139.0	108	222.8	250																
—	—	—	148.1	175															
46.3	36	148.1	175																
93.0	72	148.1	175																
139.0	108	181.5	200																
—	—	—	169.1	200															
46.3	36	169.1	200																
93.0	72	169.1	200																
139.0	108	207.8	225																
—	—	—	175.1	200															
46.3	36	175.1	200																
93.0	72	175.1	200																
139.0	108	215.3	225																
—	—	—	182.1	200															
46.3	36	182.1	200																
93.0	72	182.1	200																
139.0	108	224.0	225																
—	—	—	189.6	225															
46.3	36	189.6	225																
93.0	72	189.6	225																
139.0	108	231.5	250																

See page 169 for legend and notes.

Table 24 — Electrical Data — 50P060 Units with Optional Return Fan (cont)
 460-3-60 (V-Ph-Hz) (cont)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		RETURN FAN			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
		No. A1			No. B1													
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
414	508	2	23.1	150	2	23.1	150	4	3.3 (ea)	30	40.0	1	15	21.0	—	—	155.6	175
															46.3	36	155.6	175
															93.0	72	155.6	175
															139.0	108	189.0	225
															—	—	176.6	200
															46.3	36	176.6	200
															93.0	72	176.6	200
															139.0	108	215.3	250
															—	—	182.6	200
															46.3	36	182.6	200
															93.0	72	182.6	200
															139.0	108	222.8	250
		—	—	189.6	225													
		46.3	36	189.6	225													
		93.0	72	189.6	225													
		139.0	108	231.5	250													
		—	—	195.6	225													
		46.3	36	195.6	225													
		93.0	72	195.6	225													
		139.0	108	239.0	250													
		—	—	170.6	200													
		46.3	36	170.6	200													
		93.0	72	170.6	200													
		139.0	108	204.0	250													
—	—	191.6	225															
46.3	36	191.6	225															
93.0	72	191.6	225															
139.0	108	230.3	250															
—	—	197.6	225															
46.3	36	197.6	225															
93.0	72	197.6	225															
139.0	108	237.8	250															
—	—	204.6	250															
46.3	36	204.6	250															
93.0	72	204.6	250															
139.0	108	246.5	250															
—	—	210.6	250															
46.3	36	210.6	250															
93.0	72	210.6	250															
139.0	108	254.0	300															

See page 169 for legend and notes.

Table 24 — Electrical Data — 50P060 Units with Optional Return Fan (cont)
575-3-60 (V-Ph-Hz)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		RETURN FAN			OPTIONAL ELECTRIC HEAT		POWER SUPPLY						
		No. A1			No. B1																		
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*					
518	632	2	19.9	109	2	19.9	109	4	2.6 (ea)	20	22.0	1	15	17.0	—	—	—	112.0	125				
															—	—	—	36.0	36	112.0	125		
															—	—	—	72.0	72	112.0	125		
															—	—	—	108.0	108	129.3	150		
															—	—	—	—	—	129.0	150		
															15	17.0	36.0	36	129.0	150			
															—	—	—	72.0	72	129.0	150		
															—	—	—	108.0	108	150.5	175		
															—	—	—	—	—	134.5	150		
															20	22.0	36.0	36	134.5	150			
															—	—	—	72.0	72	134.5	150		
															—	—	—	108.0	108	156.8	175		
		—	—	—	—	—	140.8	150															
		25	27.0	36.0	36	140.8	150																
		—	—	—	72.0	72	140.8	150															
		—	—	—	108.0	108	163.0	175															
		—	—	—	—	—	147.0	175															
		30	32.0	36.0	36	147.0	175																
		—	—	—	72.0	72	147.0	175															
		—	—	—	108.0	108	169.3	175															
		2	19.9	109	2	19.9	109	4	2.6 (ea)	20	22.0	20	22.0	1	15	17.0	—	—	—	117.5	125		
																	—	—	—	36.0	36	117.5	125
																	—	—	—	72.0	72	117.5	125
																	—	—	—	108.0	108	135.5	150
—	—																—	—	—	134.5	150		
15	17.0																36.0	36	134.5	150			
—	—																—	72.0	72	134.5	150		
—	—																—	108.0	108	156.8	175		
—	—																—	—	—	139.5	150		
20	22.0																36.0	36	139.5	150			
—	—																—	72.0	72	139.5	150		
—	—																—	108.0	108	163.0	175		
—	—	—	—	—	145.8	150																	
25	27.0	36.0	36	145.8	150																		
—	—	—	72.0	72	145.8	150																	
—	—	—	108.0	108	169.3	175																	
—	—	—	—	—	152.0	175																	
30	32.0	36.0	36	152.0	175																		
—	—	—	72.0	72	152.0	175																	
—	—	—	108.0	108	175.5	200																	
2	19.9	109	2	19.9	109	4	2.6 (ea)	20	22.0	25	27.0	1	15	17.0	—	—	—	123.8	150				
															—	—	—	36.0	36	123.8	150		
															—	—	—	72.0	72	123.8	150		
															—	—	—	108.0	108	141.8	150		
															—	—	—	—	—	140.8	150		
															15	17.0	36.0	36	140.8	150			
															—	—	—	72.0	72	140.8	150		
															—	—	—	108.0	108	163.0	175		
															—	—	—	—	—	145.8	150		
															20	22.0	36.0	36	145.8	150			
															—	—	—	72.0	72	145.8	150		
															—	—	—	108.0	108	169.3	175		
—	—	—	—	—	150.8	175																	
25	27.0	36.0	36	150.8	175																		
—	—	—	72.0	72	150.8	175																	
—	—	—	108.0	108	175.5	200																	
—	—	—	—	—	157.0	175																	
30	32.0	36.0	36	157.0	175																		
—	—	—	72.0	72	157.0	175																	
—	—	—	108.0	108	181.8	200																	

See page 169 for legend and notes.

Table 24 — Electrical Data — 50P060 Units with Optional Return Fan (cont)
575-3-60 (V-Ph-Hz) (cont)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		RETURN FAN			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
		No. A1			No. B1													
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
518	632	2	19.9	109	2	19.9	109	4	2.6 (ea)	30	32.0	—	—	—	—	—	130.0	150
															36.0	36	130.0	150
															72.0	72	130.0	150
															108.0	108	148.0	175
															—	—	147.0	175
															36.0	36	147.0	175
												72.0	72	147.0	175			
												108.0	108	169.3	175			
												—	—	152.0	175			
												36.0	36	152.0	175			
												72.0	72	152.0	175			
												108.0	108	175.5	200			
										—	—	157.0	175					
										36.0	36	157.0	175					
										72.0	72	157.0	175					
										108.0	108	181.8	200					
										—	—	162.0	175					
										36.0	36	162.0	175					
										72.0	72	162.0	175					
										108.0	108	188.0	200					
										—	—	141.3	175					
										36.0	36	141.3	175					
										72.0	72	141.3	175					
										108.0	108	159.3	200					
—	—	158.3	175															
36.0	36	158.3	175															
72.0	72	158.3	175															
108.0	108	180.5	200															
—	—	163.3	200															
36.0	36	163.3	200															
72.0	72	163.3	200															
108.0	108	186.8	200															
—	—	168.3	200															
36.0	36	168.3	200															
72.0	72	168.3	200															
108.0	108	193.0	225															
—	—	173.3	200															
36.0	36	173.3	200															
72.0	72	173.3	200															
108.0	108	199.3	225															

See page 169 for legend and notes.

Table 25 — Electrical Data — 50P 070 Units

208/230-3-60 (V-Ph-Hz)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		POWER EXHAUST			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
187	253	2	51.3	300	2	55.8	340	4	6.6 (ea)	20	59.4/54.0	2	7.5	24.2 / 22.0	—	—	300.8/ 296.6	350/ 350
															78.9/ 90.0	36/ 36	300.8/ 296.6	350/ 350
															157.7/ 182.0	72/ 72	300.8/ 296.6	350/ 350
															236.6/ 273.0	108/ 108	300.8/ 325.5	350/ 350
															—	—	334.2/ 327.0	350/ 350
															78.9/ 90.0	36/ 36	334.2/ 327.0	350/ 350
					157.7/ 182.0	72/ 72	334.2/ 327.0	350/ 350										
					236.6/ 273.0	108/ 108	336.1/ 363.5	350/ 400										
					—	—	349.2/ 340.6	400/ 350										
					78.9/ 90.0	36/ 36	349.2/ 340.6	400/ 350										
					157.7/ 182.0	72/ 72	349.2/ 340.6	400/ 350										
					236.6/ 273.0	108/ 108	354.9/ 380.5	400/ 400										
		—	—	362.4/ 352.6	400/ 400													
		78.9/ 90.0	36/ 36	362.4/ 352.6	400/ 400													
		157.7/ 182.0	72/ 72	362.4/ 352.6	400/ 400													
		236.6/ 273.0	108/ 108	371.4/ 395.5	400/ 400													
		—	—	314.9/ 308.6	350/ 350													
		78.9/ 90.0	36/ 36	314.9/ 308.6	350/ 350													
		157.7/ 182.0	72/ 72	314.9/ 308.6	350/ 350													
		236.6/ 273.0	108/ 108	314.9/ 340.5	350/ 350													
		—	—	348.3/ 339.0	400/ 350													
		78.9/ 90.0	36/ 36	348.3/ 339.0	400/ 350													
		157.7/ 182.0	72/ 72	348.3/ 339.0	400/ 350													
		236.6/ 273.0	108/ 108	352.6/ 378.5	400/ 400													
—	—	363.3/ 352.6	400/ 400															
78.9/ 90.0	36/ 36	363.3/ 352.6	400/ 400															
157.7/ 182.0	72/ 72	363.3/ 352.6	400/ 400															
236.6/ 273.0	108/ 108	371.4/ 395.5	400/ 400															
—	—	376.5/ 364.6	400/ 400															
78.9/ 90.0	36/ 36	376.5/ 364.6	400/ 400															
157.7/ 182.0	72/ 72	376.5/ 364.6	400/ 400															
236.6/ 273.0	108/ 108	387.9/ 410.5	400/ 450															
—	—	334.1/ 325.6	400/ 350															
78.9/ 90.0	36/ 36	334.1/ 325.6	400/ 350															
157.7/ 182.0	72/ 72	334.1/ 325.6	400/ 350															
236.6/ 273.0	108/ 108	334.1/ 358.0	400/ 400															
—	—	367.5/ 356.0	400/ 400															
78.9/ 90.0	36/ 36	367.5/ 356.0	400/ 400															
157.7/ 182.0	72/ 72	367.5/ 356.0	400/ 400															
236.6/ 273.0	108/ 108	371.9/ 396.0	400/ 450															
—	—	382.5/ 369.6	450/ 400															
78.9/ 90.0	36/ 36	382.5/ 369.6	450/ 400															
157.7/ 182.0	72/ 72	382.5/ 369.6	450/ 400															
236.6/ 273.0	108/ 108	390.6/ 413.0	450/ 450															
—	—	395.7/ 381.6	450/ 400															
78.9/ 90.0	36/ 36	395.7/ 381.6	450/ 400															
157.7/ 182.0	72/ 72	395.7/ 381.6	450/ 400															
236.6/ 273.0	108/ 108	407.1/ 428.0	450/ 450															

See page 169 for legend and notes.

Table 25 — Electrical Data — 50P 070 Units (cont)
208/230-3-60 (V-Ph-Hz) (cont)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		POWER EXHAUST			OPTIONAL ELECTRIC HEAT		POWER SUPPLY			
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*		
187	253	2	51.3	300	2	55.8	340	4	6.6 (ea)	30	88/80	—	—	— / —	78.9/ 90.0	36/ 36	350.6/ 340.6	400/ 400		
															157.7/ 182.0	72/ 72	350.6/ 340.6	400/ 400		
															236.6/ 273.0	108/ 108	350.6/ 373.0	400/ 450		
															—	—	384.0/ 371.0	450/ 450		
															78.9/ 90.0	36/ 36	384.0/ 371.0	450/ 450		
															157.7/ 182.0	72/ 72	384.0/ 371.0	450/ 450		
		236.6/ 273.0	108/ 108	388.4/ 411.0	450/ 450															
		2	51.3	300	2	55.8	340	4	6.6 (ea)	30	88/80	30	88/80	2	7.5	24.2 / 22.0	78.9/ 90.0	36/ 36	399.0/ 384.6	450/ 450
																	157.7/ 182.0	72/ 72	399.0/ 384.6	450/ 450
																	236.6/ 273.0	108/ 108	407.1/ 428.0	450/ 450
																	—	—	412.2/ 396.6	500/ 450
																	78.9/ 90.0	36/ 36	412.2/ 396.6	500/ 450
157.7/ 182.0	72/ 72																412.2/ 396.6	500/ 450		
236.6/ 273.0	108/ 108	423.6/ 443.0	500/ 500																	
2	51.3	300	2	55.8	340	4	6.6 (ea)	40	114/104	40	114/104	—	—	— / —	78.9/ 90.0	36/ 36	383.1/ 370.6	450/ 450		
															157.7/ 182.0	72/ 72	383.1/ 370.6	450/ 450		
															236.6/ 273.0	108/ 108	383.1/ 403.0	450/ 500		
															—	—	416.5/ 401.0	500/ 500		
															78.9/ 90.0	36/ 36	416.5/ 401.0	500/ 500		
															157.7/ 182.0	72/ 72	416.5/ 401.0	500/ 500		
236.6/ 273.0	108/ 108	420.9/ 441.0	500/ 500																	
2	51.3	300	2	55.8	340	4	6.6 (ea)	40	114/104	40	114/104	2	7.5	24.2 / 22.0	78.9/ 90.0	36/ 36	431.5/ 414.6	500/ 500		
															157.7/ 182.0	72/ 72	431.5/ 414.6	500/ 500		
															236.6/ 273.0	108/ 108	439.6/ 458.0	500/ 500		
															—	—	444.7/ 426.6	500/ 500		
															78.9/ 90.0	36/ 36	444.7/ 426.6	500/ 500		
															157.7/ 182.0	72/ 72	444.7/ 426.6	500/ 500		
236.6/ 273.0	108/ 108	456.1/ 473.0	500/ 500																	

See page 169 for legend and notes.

Table 25 — Electrical Data — 50P 070 Units (cont)
380-3-60 (V-Ph-Hz)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		POWER EXHAUST			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
		No. A1			No. B1			Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
342	418	2	26.9	139	2	34	196	4	3.9 (ea)	15	24.5	2	5	9.1	—	—	170.4	200
															38.3	36	170.4	200
															76.8	72	170.4	200
															114.7	108	170.4	200
															—	—	188.6	200
															38.3	36	188.6	200
															76.8	72	188.6	200
															114.7	108	188.6	200
															—	—	195.4	225
															38.3	36	195.4	225
															76.8	72	195.4	225
															114.7	108	195.4	225
342	418	2	26.9	139	2	34	196	4	3.9 (ea)	20	30.0	2	7.5	12.5	—	—	203.8	225
															38.3	36	203.8	225
															76.8	72	203.8	225
															114.7	108	203.8	225
															—	—	203.8	225
															38.3	36	203.8	225
															76.8	72	203.8	225
															114.7	108	203.8	225
															—	—	209.3	225
															38.3	36	209.3	225
															76.8	72	209.3	225
															114.7	108	209.3	225
342	418	2	26.9	139	2	34	196	4	3.9 (ea)	25	38.0	2	10	16.7	—	—	218.3	250
															38.3	36	218.3	250
															76.8	72	218.3	250
															114.7	108	218.3	250
															—	—	218.3	250
															38.3	36	218.3	250
															76.8	72	218.3	250
															114.7	108	218.3	250
															—	—	218.3	250
															38.3	36	218.3	250
															76.8	72	218.3	250
															114.7	108	218.3	250

See page 169 for legend and notes.

Table 25 — Electrical Data — 50P 070 Units (cont)
 380-3-60 (V-Ph-Hz) (cont)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		POWER EXHAUST			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
		No. A1			No. B1			Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)											
342	418	2	26.9	139	2	34	196	4	3.9 (ea)	30	43.5	2	5	9.1	—	—	191.8	225
															38.3	36	191.8	225
															76.8	72	191.8	225
															114.7	108	191.8	225
															—	—	210.0	250
															38.3	36	210.0	250
		76.8	72	210.0	250													
		114.7	108	210.0	250													
		—	—	216.8	250													
		38.3	36	216.8	250													
		76.8	72	216.8	250													
		114.7	108	216.8	250													
—	—	225.2	250															
38.3	36	225.2	250															
76.8	72	225.2	250															
114.7	108	225.2	250															
—	—	207.7	250															
38.3	36	207.7	250															
76.8	72	207.7	250															
114.7	108	207.7	250															
—	—	225.9	250															
38.3	36	225.9	250															
76.8	72	225.9	250															
114.7	108	225.9	250															
—	—	232.7	250															
38.3	36	232.7	250															
76.8	72	232.7	250															
114.7	108	232.7	250															
—	—	241.1	250															
38.3	36	241.1	250															
76.8	72	241.1	250															
114.7	108	241.1	250															

See page 169 for legend and notes.

Table 25 — Electrical Data — 50P 070 Units (cont)

460-3-60 (V-Ph-Hz)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		POWER EXHAUST			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
		No. A1			No. B1			Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
414	508	2	23.1	150	2	26.9	179	4	3.3 (ea)	15	21.0	—	—	—	—	—	140.9	150
												—	—	—	46.3	36	140.9	150
												—	—	—	93.0	72	140.9	150
												—	—	—	139.0	108	165.3	175
												5	7.6	—	—	—	156.1	175
												5	7.6	46.3	36	156.1	175	
		93.0	72	156.1	175													
		139.0	108	184.3	200													
		2	7.5	11.0	—	—	162.9	175										
		2	7.5	11.0	46.3	36	162.9	175										
		2	7.5	11.0	93.0	72	162.9	175										
		2	7.5	11.0	139.0	108	192.8	200										
10	14.0	—	—	—	168.9	175												
10	14.0	46.3	36	168.9	175													
10	14.0	93.0	72	168.9	175													
10	14.0	139.0	108	200.3	225													
414	508	2	23.1	150	2	26.9	179	4	3.3 (ea)	20	27.0	—	—	—	—	—	147.0	150
												—	—	—	46.3	36	147.0	150
												—	—	—	93.0	72	147.0	150
												—	—	—	139.0	108	172.8	175
												5	7.6	—	—	—	162.2	175
												5	7.6	46.3	36	162.2	175	
		93.0	72	162.2	175													
		139.0	108	191.8	200													
		2	7.5	11.0	—	—	169.0	175										
		2	7.5	11.0	46.3	36	169.0	175										
		2	7.5	11.0	93.0	72	169.0	175										
		2	7.5	11.0	139.0	108	200.3	225										
10	14.0	—	—	—	175.0	200												
10	14.0	46.3	36	175.0	200													
10	14.0	93.0	72	175.0	200													
10	14.0	139.0	108	207.8	225													
414	508	2	23.1	150	2	26.9	179	4	3.3 (ea)	25	34.0	—	—	—	—	—	155.7	175
												—	—	—	46.3	36	155.7	175
												—	—	—	93.0	72	155.7	175
												—	—	—	139.0	108	181.5	200
												5	7.6	—	—	—	170.9	200
												5	7.6	46.3	36	170.9	200	
		93.0	72	170.9	200													
		139.0	108	200.5	225													
		2	7.5	11.0	—	—	177.7	200										
		2	7.5	11.0	46.3	36	177.7	200										
		2	7.5	11.0	93.0	72	177.7	200										
		2	7.5	11.0	139.0	108	209.0	225										
10	14.0	—	—	—	183.7	200												
10	14.0	46.3	36	183.7	200													
10	14.0	93.0	72	183.7	200													
10	14.0	139.0	108	216.5	225													

See page 169 for legend and notes.

Table 25 — Electrical Data — 50P 070 Units (cont)
460-3-60 (V-Ph-Hz) (cont)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		POWER EXHAUST			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
		No. A1			No. B1			Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
414	508	2	23.1	150	2	26.9	179	4	3.3 (ea)	30	40.0	2	5	7.6	—	—	163.2	200
															46.3	36	163.2	200
															93.0	72	163.2	200
															139.0	108	189.0	225
															—	—	178.4	200
															46.3	36	178.4	200
		93.0	72	178.4	200													
		139.0	108	208.0	225													
		—	—	185.2	225													
		46.3	36	185.2	225													
		93.0	72	185.2	225													
		139.0	108	216.5	250													
—	—	191.2	225															
46.3	36	191.2	225															
93.0	72	191.2	225															
139.0	108	224.0	250															
—	—	178.2	225															
46.3	36	178.2	225															
93.0	72	178.2	225															
139.0	108	204.0	250															
—	—	193.4	225															
46.3	36	193.4	225															
93.0	72	193.4	225															
139.0	108	223.0	250															
—	—	200.2	250															
46.3	36	200.2	250															
93.0	72	200.2	250															
139.0	108	231.5	250															
—	—	206.2	250															
46.3	36	206.2	250															
93.0	72	206.2	250															
139.0	108	239.0	250															

See page 169 for legend and notes.

Table 25 — Electrical Data — 50P 070 Units (cont)

575-3-60 (V-Ph-Hz)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		POWER EXHAUST			OPTIONAL ELECTRIC HEAT		POWER SUPPLY			
		No. A1			No. B1			Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*		
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*		
518	632	2	19.9	109	2	23.7	132	4	2.6 (ea)	15	17.0	—	—	—	—	—	120.5	125		
															36.0	36	120.5	125		
															72.0	72	120.5	125		
															108.0	108	129.3	150		
												2	5	6.1	—	—	132.7	150		
															36.0	36	132.7	150		
															72.0	72	132.7	150		
															108.0	108	144.5	150		
												2	7.5	9.0	—	—	138.5	150		
															36.0	36	138.5	150		
															72.0	72	138.5	150		
															108.0	108	151.8	175		
		2	10	11.0	—	—	142.5	150												
					36.0	36	142.5	150												
					72.0	72	142.5	150												
					108.0	108	156.8	175												
		2	19.9	109	2	23.7	132	4	2.6 (ea)	20	22.0	20	22.0	—	—	—	—	—	125.5	150
																	36.0	36	125.5	150
																	72.0	72	125.5	150
																	108.0	108	135.5	150
														2	5	6.1	—	—	137.7	150
																	36.0	36	137.7	150
																	72.0	72	137.7	150
																	108.0	108	150.8	175
2	7.5													9.0	—	—	143.5	150		
															36.0	36	143.5	150		
															72.0	72	143.5	150		
															108.0	108	158.0	175		
2	10	11.0	—	—	147.5	150														
			36.0	36	147.5	150														
			72.0	72	147.5	150														
			108.0	108	163.0	175														
2	19.9	109	2	23.7	132	4	2.6 (ea)	25	27.0	25	27.0	—	—	—	—	—	131.4	150		
															36.0	36	131.4	150		
															72.0	72	131.4	150		
															108.0	108	141.8	150		
												2	5	6.1	—	—	143.6	150		
															36.0	36	143.6	150		
															72.0	72	143.6	150		
															108.0	108	157.0	175		
												2	7.5	9.0	—	—	149.4	175		
															36.0	36	149.4	175		
															72.0	72	149.4	175		
															108.0	108	164.3	175		
2	10	11.0	—	—	153.4	175														
			36.0	36	153.4	175														
			72.0	72	153.4	175														
			108.0	108	169.3	175														

See page 169 for legend and notes.

Table 25 — Electrical Data — 50P 070 Units (cont)

575-3-60 (V-Ph-Hz) (cont)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		POWER EXHAUST			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
		No. A1			No. B1			Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
518	632	2	19.9	109	2	23.7	132	4	2.6 (ea)	30	32.0	2	5	6.1	—	—	137.6	150
															36.0	36	137.6	150
															72.0	72	137.6	150
															108.0	108	148.0	175
															—	—	149.8	175
															36.0	36	149.8	175
		72.0	72	149.8	175													
		108.0	108	163.3	175													
		2	7.5	9.0	—	—	155.6	175										
					36.0	36	155.6	175										
					72.0	72	155.6	175										
					108.0	108	170.5	175										
—	—				159.6	175												
36.0	36				159.6	175												
72.0	72	159.6	175															
108.0	108	175.5	200															
518	632	2	19.9	109	2	23.7	132	4	2.6 (ea)	40	41.0	2	5	6.1	—	—	148.9	175
															36.0	36	148.9	175
															72.0	72	148.9	175
															108.0	108	159.3	200
															—	—	161.1	200
															36.0	36	161.1	200
		72.0	72	161.1	200													
		108.0	108	174.5	200													
		2	7.5	9.0	—	—	166.9	200										
					36.0	36	166.9	200										
					72.0	72	166.9	200										
					108.0	108	181.8	200										
—	—				170.9	200												
36.0	36				170.9	200												
72.0	72	170.9	200															
108.0	108	186.8	200															

See page 169 for legend and notes.

Table 26 — Electrical Data — 50P070 Units with Optional Return Fan
208/230-3-60 (V-Ph-Hz)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		RETURN FAN			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
Min	Max	No. A1			No. B1			Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
		Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)											
187	253	2	51.3	300	2	55.8	340	4	6.6 (ea)	20	59.4/54.0	1	15	46.2 / 42.0	— / —	— / —	300.8 / 296.6	350 / 350
															78.9 / 90.0	36 / 36	300.8 / 296.6	350 / 350
															157.7 / 182.0	72 / 72	300.8 / 296.6	350 / 350
															236.6 / 273.0	108 / 108	300.8 / 325.5	350 / 350
															— / —	— / —	347.0 / 338.6	400 / 350
															78.9 / 90.0	36 / 36	347.0 / 338.6	400 / 350
															157.7 / 182.0	72 / 72	347.0 / 338.6	400 / 350
															236.6 / 273.0	108 / 108	352.1 / 378.0	400 / 400
															— / —	— / —	361.1 / 350.6	400 / 400
															78.9 / 90.0	36 / 36	361.1 / 350.6	400 / 400
															157.7 / 182.0	72 / 72	361.1 / 350.6	400 / 400
															236.6 / 273.0	108 / 108	368.6 / 393.0	400 / 400
		— / —	— / —	380.3 / 367.6	450 / 400													
		78.9 / 90.0	36 / 36	380.3 / 367.6	450 / 400													
		157.7 / 182.0	72 / 72	380.3 / 367.6	450 / 400													
		236.6 / 273.0	108 / 108	387.9 / 410.5	450 / 450													
		— / —	— / —	396.8 / 382.6	450 / 450													
		78.9 / 90.0	36 / 36	396.8 / 382.6	450 / 450													
		157.7 / 182.0	72 / 72	396.8 / 382.6	450 / 450													
		236.6 / 273.0	108 / 108	404.4 / 425.5	450 / 450													
		2	51.3	300	2	55.8	340	4	6.6 (ea)	20	59.4/54.0	1	25	74.8 / 68.0	— / —	— / —	314.9 / 308.6	350 / 350
															78.9 / 90.0	36 / 36	314.9 / 308.6	350 / 350
															157.7 / 182.0	72 / 72	314.9 / 308.6	350 / 350
															236.6 / 273.0	108 / 108	314.9 / 340.5	350 / 350
— / —	— / —														361.1 / 350.6	400 / 400		
78.9 / 90.0	36 / 36														361.1 / 350.6	400 / 400		
157.7 / 182.0	72 / 72														361.1 / 350.6	400 / 400		
236.6 / 273.0	108 / 108														368.6 / 393.0	400 / 400		
— / —	— / —														374.3 / 362.6	400 / 400		
78.9 / 90.0	36 / 36														374.3 / 362.6	400 / 400		
157.7 / 182.0	72 / 72														374.3 / 362.6	400 / 400		
236.6 / 273.0	108 / 108														385.1 / 408.0	400 / 450		
— / —	— / —	393.5 / 379.6	450 / 400															
78.9 / 90.0	36 / 36	393.5 / 379.6	450 / 400															
157.7 / 182.0	72 / 72	393.5 / 379.6	450 / 400															
236.6 / 273.0	108 / 108	404.4 / 425.5	450 / 450															
— / —	— / —	410.0 / 394.6	450 / 450															
78.9 / 90.0	36 / 36	410.0 / 394.6	450 / 450															
157.7 / 182.0	72 / 72	410.0 / 394.6	450 / 450															
236.6 / 273.0	108 / 108	420.9 / 440.5	450 / 500															
2	51.3	300	2	55.8	340	4	6.6 (ea)	20	59.4/54.0	1	30	88.0 / 80.0	— / —	— / —	334.1 / 325.6	400 / 350		
													78.9 / 90.0	36 / 36	334.1 / 325.6	400 / 350		
													157.7 / 182.0	72 / 72	334.1 / 325.6	400 / 350		
													236.6 / 273.0	108 / 108	334.1 / 358.0	400 / 400		
													— / —	— / —	380.3 / 367.6	450 / 400		
													78.9 / 90.0	36 / 36	380.3 / 367.6	450 / 400		
													157.7 / 182.0	72 / 72	380.3 / 367.6	450 / 400		
													236.6 / 273.0	108 / 108	387.9 / 410.5	450 / 450		
													— / —	— / —	393.5 / 379.6	450 / 400		
													78.9 / 90.0	36 / 36	393.5 / 379.6	450 / 400		
													157.7 / 182.0	72 / 72	393.5 / 379.6	450 / 400		
													236.6 / 273.0	108 / 108	404.4 / 425.5	450 / 450		
— / —	— / —	408.9 / 393.6	450 / 450															
78.9 / 90.0	36 / 36	408.9 / 393.6	450 / 450															
157.7 / 182.0	72 / 72	408.9 / 393.6	450 / 450															
236.6 / 273.0	108 / 108	423.6 / 443.0	450 / 450															
— / —	— / —	425.4 / 408.6	500 / 450															
78.9 / 90.0	36 / 36	425.4 / 408.6	500 / 450															
157.7 / 182.0	72 / 72	425.4 / 408.6	500 / 450															
236.6 / 273.0	108 / 108	440.1 / 458.0	500 / 500															

See page 169 for legend and notes.

Table 26 — Electrical Data — 50P070 Units with Optional Return Fan (cont)
208/230-3-60 (V-Ph-Hz) (cont)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		RETURN FAN			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
Min	Max	No. A1			No. B1			Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
		Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)											
187	253	2	51.3	300	2	55.8	340	4	6.6 (ea)	30	88/80	1	—	—	— / —	— / —	350.6 / 340.6	400 / 400
															78.9 / 90.0	36 / 36	350.6 / 340.6	400 / 400
															157.7 / 182.0	72 / 72	350.6 / 340.6	400 / 400
															236.6 / 273.0	108 / 108	350.6 / 373.0	400 / 450
															— / —	— / —	396.8 / 382.6	450 / 450
															78.9 / 90.0	36 / 36	396.8 / 382.6	450 / 450
															157.7 / 182.0	72 / 72	396.8 / 382.6	450 / 450
															236.6 / 273.0	108 / 108	404.4 / 425.5	450 / 450
															— / —	— / —	410.0 / 394.6	450 / 450
															78.9 / 90.0	36 / 36	410.0 / 394.6	450 / 450
															157.7 / 182.0	72 / 72	410.0 / 394.6	450 / 450
															236.6 / 273.0	108 / 108	420.9 / 440.5	450 / 500
— / —	— / —	425.4 / 408.6	500 / 450															
78.9 / 90.0	36 / 36	425.4 / 408.6	500 / 450															
157.7 / 182.0	72 / 72	425.4 / 408.6	500 / 450															
236.6 / 273.0	108 / 108	440.1 / 458.0	500 / 500															
— / —	— / —	438.6 / 420.6	500 / 500															
78.9 / 90.0	36 / 36	438.6 / 420.6	500 / 500															
157.7 / 182.0	72 / 72	438.6 / 420.6	500 / 500															
236.6 / 273.0	108 / 108	456.6 / 473.0	500 / 500															
— / —	— / —	383.1 / 370.6	450 / 450															
78.9 / 90.0	36 / 36	383.1 / 370.6	450 / 450															
157.7 / 182.0	72 / 72	383.1 / 370.6	450 / 450															
236.6 / 273.0	108 / 108	383.1 / 403.0	450 / 500															
— / —	— / —	429.3 / 412.6	500 / 500															
78.9 / 90.0	36 / 36	429.3 / 412.6	500 / 500															
157.7 / 182.0	72 / 72	429.3 / 412.6	500 / 500															
236.6 / 273.0	108 / 108	436.9 / 455.5	500 / 500															
— / —	— / —	442.5 / 424.6	500 / 500															
78.9 / 90.0	36 / 36	442.5 / 424.6	500 / 500															
157.7 / 182.0	72 / 72	442.5 / 424.6	500 / 500															
236.6 / 273.0	108 / 108	453.4 / 470.5	500 / 500															
— / —	— / —	457.9 / 438.6	500 / 500															
78.9 / 90.0	36 / 36	457.9 / 438.6	500 / 500															
157.7 / 182.0	72 / 72	457.9 / 438.6	500 / 500															
236.6 / 273.0	108 / 108	472.6 / 488.0	500 / 500															
— / —	— / —	471.1 / 450.6	500 / 500															
78.9 / 90.0	36 / 36	471.1 / 450.6	500 / 500															
157.7 / 182.0	72 / 72	471.1 / 450.6	500 / 500															
236.6 / 273.0	108 / 108	489.1 / 503.0	500 / 600															

See page 169 for legend and notes.

Table 26 — Electrical Data — 50P070 Units with Optional Return Fan (cont)
380-3-60 (V-Ph-Hz)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		RETURN FAN			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
		No. A1			No. B1													
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
																	170.4	200
												—	—	—	38.3	36	170.4	200
															76.8	72	170.4	200
															114.7	108	170.4	200
															—	—	194.9	225
										15	24.5	1	15	24.5	38.3	36	194.9	225
															76.8	72	194.9	225
															114.7	108	194.9	225
															—	—	200.4	225
										15	24.5	1	20	30.0	38.3	36	200.4	225
															76.8	72	200.4	225
															114.7	108	200.4	225
															—	—	209.4	225
															38.3	36	209.4	225
															76.8	72	209.4	225
															114.7	108	209.4	225
															—	—	216.3	250
															38.3	36	216.3	250
															76.8	72	216.3	250
															114.7	108	216.3	250
															—	—	175.9	200
															38.3	36	175.9	200
															76.8	72	175.9	200
															114.7	108	175.9	200
															—	—	200.4	225
															38.3	36	200.4	225
															76.8	72	200.4	225
															114.7	108	200.4	225
															—	—	205.9	225
															38.3	36	205.9	225
															76.8	72	205.9	225
															114.7	108	205.9	225
															—	—	214.9	250
															38.3	36	214.9	250
															76.8	72	214.9	250
															114.7	108	214.9	250
															—	—	221.8	250
															38.3	36	221.8	250
															76.8	72	221.8	250
															114.7	108	221.8	250
															—	—	184.9	200
															38.3	36	184.9	200
															76.8	72	184.9	200
															114.7	108	184.9	200
															—	—	209.4	225
															38.3	36	209.4	225
															76.8	72	209.4	225
															114.7	108	209.4	225
															—	—	214.9	250
															38.3	36	214.9	250
															76.8	72	214.9	250
															114.7	108	214.9	250
															—	—	222.9	250
															38.3	36	222.9	250
															76.8	72	222.9	250
															114.7	108	222.9	250
															—	—	229.8	250
															38.3	36	229.8	250
															76.8	72	229.8	250
															114.7	108	229.8	250

See page 169 for legend and notes.

Table 26 — Electrical Data — 50P070 Units with Optional Return Fan (cont)
 380-3-60 (V-Ph-Hz) (cont)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		RETURN FAN			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
		No. A1			No. B1													
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
342	418	2	26.9	139	2	34	196	4	3.9 (ea)	30	43.5	1	—	—	—	—	191.8	225
															38.3	36	191.8	225
															76.8	72	191.8	225
															114.7	108	191.8	225
															—	—	216.3	250
															38.3	36	216.3	250
															76.8	72	216.3	250
															114.7	108	216.3	250
															—	—	221.8	250
															38.3	36	221.8	250
															76.8	72	221.8	250
															114.7	108	221.8	250
															—	—	229.8	250
															38.3	36	229.8	250
76.8	72	229.8	250															
114.7	108	229.8	250															
—	—	235.3	250															
38.3	36	235.3	250															
76.8	72	235.3	250															
114.7	108	235.3	250															
—	—	207.7	250															
38.3	36	207.7	250															
76.8	72	207.7	250															
114.7	108	207.7	250															
—	—	232.2	250															
38.3	36	232.2	250															
76.8	72	232.2	250															
114.7	108	232.2	250															
—	—	237.7	250															
38.3	36	237.7	250															
76.8	72	237.7	250															
114.7	108	237.7	250															
—	—	245.7	300															
38.3	36	245.7	300															
76.8	72	245.7	300															
114.7	108	245.7	300															
—	—	251.2	300															
38.3	36	251.2	300															
76.8	72	251.2	300															
114.7	108	251.2	300															

See page 169 for legend and notes.

Table 26 — Electrical Data — 50P070 Units with Optional Return Fan (cont)
460-3-60 (V-Ph-Hz)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		RETURN FAN			OPTIONAL ELECTRIC HEAT		POWER SUPPLY		
		No. A1			No. B1														
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*	
414	508	2	23.1	150	2	26.9	179	4	3.3 (ea)	20	27.0	1	15	21.0	—	—	—	140.9	150
															46.3	36	140.9	150	
															93.0	72	140.9	150	
															139.0	108	165.3	175	
															—	—	—	161.9	175
															46.3	36	161.9	175	
															93.0	72	161.9	175	
															139.0	108	191.5	200	
															—	—	—	168.0	175
															46.3	36	168.0	175	
															93.0	72	168.0	175	
															139.0	108	199.0	200	
		—	—	—	176.7	200													
		46.3	36	176.7	200														
		93.0	72	176.7	200														
		139.0	108	207.8	225														
		—	—	—	184.2	200													
		46.3	36	184.2	200														
		93.0	72	184.2	200														
		139.0	108	215.3	250														
		—	—	—	147.0	150													
		46.3	36	147.0	150														
		93.0	72	147.0	150														
		139.0	108	172.8	175														
—	—	—	168.0	175															
46.3	36	168.0	175																
93.0	72	168.0	175																
139.0	108	199.0	200																
—	—	—	174.0	200															
46.3	36	174.0	200																
93.0	72	174.0	200																
139.0	108	206.5	225																
—	—	—	182.7	200															
46.3	36	182.7	200																
93.0	72	182.7	200																
139.0	108	215.3	225																
—	—	—	190.2	225															
46.3	36	190.2	225																
93.0	72	190.2	225																
139.0	108	222.8	250																
—	—	—	155.7	175															
46.3	36	155.7	175																
93.0	72	155.7	175																
139.0	108	181.5	200																
—	—	—	176.7	200															
46.3	36	176.7	200																
93.0	72	176.7	200																
139.0	108	207.8	225																
—	—	—	182.7	200															
46.3	36	182.7	200																
93.0	72	182.7	200																
139.0	108	215.3	225																
—	—	—	189.7	200															
46.3	36	189.7	200																
93.0	72	189.7	200																
139.0	108	224.0	225																
—	—	—	197.2	225															
46.3	36	197.2	225																
93.0	72	197.2	225																
139.0	108	231.5	250																

See page 169 for legend and notes.

Table 26 — Electrical Data — 50P070 Units with Optional Return Fan (cont)
 460-3-60 (V-Ph-Hz) (cont)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		RETURN FAN			OPTIONAL ELECTRIC HEAT		POWER SUPPLY											
		No. A1			No. B1																							
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*										
414	508	2	23.1	150	2	26.9	179	4	3.3 (ea)	30	40.0	—	—	—	—	—	163.2	200										
															46.3	36	163.2	200										
															93.0	72	163.2	200										
															139.0	108	189.0	225										
												—	—	184.2	200													
												15	21.0	46.3	36	184.2	200											
												93.0	72	184.2	200													
												139.0	108	215.3	250													
												—	—	190.2	225													
												20	27.0	46.3	36	190.2	225											
												93.0	72	190.2	225													
												139.0	108	222.8	250													
										—	—	197.2	225															
										25	34.0	46.3	36	197.2	225													
										93.0	72	197.2	225															
										139.0	108	231.5	250															
										—	—	203.2	225															
										30	40.0	46.3	36	203.2	225													
										93.0	72	203.2	225															
										139.0	108	239.0	250															
										—	—	178.2	225															
										40	52.0	1	—	—	—	—	—	4	3.3 (ea)	40	52.0	—	—	—	—	—	178.2	225
																									46.3	36	178.2	225
																									93.0	72	178.2	225
139.0	108	204.0	250																									
—	—	199.2	250																									
15	21.0	46.3	36	199.2	250																							
93.0	72	199.2	250																									
139.0	108	230.3	250																									
—	—	205.2	250																									
20	27.0	46.3	36	205.2	250																							
93.0	72	205.2	250																									
139.0	108	237.8	250																									
—	—	212.2	250																									
25	34.0	46.3	36	212.2	250																							
93.0	72	212.2	250																									
139.0	108	246.5	250																									
—	—	218.2	250																									
30	40.0	46.3	36	218.2	250																							
93.0	72	218.2	250																									
139.0	108	254.0	300																									

See page 169 for legend and notes.

Table 26 — Electrical Data — 50P070 Units with Optional Return Fan (cont)
575-3-60 (V-Ph-Hz)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		RETURN FAN			OPTIONAL ELECTRIC HEAT		POWER SUPPLY		
		No. A1			No. B1														
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*	
518	632	2	19.9	109	2	23.7	132	4	2.6 (ea)	20	22.0	1	15	17.0	—	—	—	120.5	125
															36.0	36	120.5	125	
															72.0	72	120.5	125	
															108.0	108	129.3	150	
															—	—	—	137.5	150
															36.0	36	137.5	150	
															72.0	72	137.5	150	
															108.0	108	150.5	175	
															—	—	—	142.5	150
															36.0	36	142.5	150	
															72.0	72	142.5	150	
															108.0	108	156.8	175	
		—	—	—	148.4	175													
		36.0	36	148.4	175														
		72.0	72	148.4	175														
		108.0	108	163.0	175														
		—	—	—	154.6	175													
		36.0	36	154.6	175														
		72.0	72	154.6	175														
		108.0	108	169.3	175														
		—	—	—	125.5	150													
		36.0	36	125.5	150														
		72.0	72	125.5	150														
		108.0	108	135.5	150														
—	—	—	142.5	150															
36.0	36	142.5	150																
72.0	72	142.5	150																
108.0	108	156.8	175																
—	—	—	147.5	150															
36.0	36	147.5	150																
72.0	72	147.5	150																
108.0	108	163.0	175																
—	—	—	153.4	175															
36.0	36	153.4	175																
72.0	72	153.4	175																
108.0	108	169.3	175																
—	—	—	159.6	175															
36.0	36	159.6	175																
72.0	72	159.6	175																
108.0	108	175.5	200																
—	—	—	131.4	150															
36.0	36	131.4	150																
72.0	72	131.4	150																
108.0	108	141.8	150																
—	—	—	148.4	175															
36.0	36	148.4	175																
72.0	72	148.4	175																
108.0	108	163.0	175																
—	—	—	153.4	175															
36.0	36	153.4	175																
72.0	72	153.4	175																
108.0	108	169.3	175																
—	—	—	158.4	175															
36.0	36	158.4	175																
72.0	72	158.4	175																
108.0	108	175.5	200																
—	—	—	164.6	175															
36.0	36	164.6	175																
72.0	72	164.6	175																
108.0	108	181.8	200																

See page 169 for legend and notes.

Table 26 — Electrical Data — 50P070 Units with Optional Return Fan (cont)
575-3-60 (V-Ph-Hz) (cont)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		RETURN FAN			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
		No. A1			No. B1													
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
518	632	2	19.9	109	2	23.7	132	4	2.6 (ea)	30	32.0	—	—	—	—	—	137.6	125
															36.0	36	137.6	125
															72.0	72	137.6	125
															108.0	108	148.0	150
															—	—	154.6	150
															36.0	36	154.6	150
												72.0	72	154.6	150			
												108.0	108	169.3	175			
												—	—	159.6	150			
												36.0	36	159.6	150			
												72.0	72	159.6	150			
												108.0	108	175.5	175			
										—	—	164.6	175					
										36.0	36	164.6	175					
										72.0	72	164.6	175					
										108.0	108	181.8	175					
										—	—	169.6	175					
										36.0	36	169.6	175					
										72.0	72	169.6	175					
										108.0	108	188.0	175					
										—	—	148.9	150					
										36.0	36	148.9	150					
										72.0	72	148.9	150					
										108.0	108	159.3	150					
—	—	165.9	150															
36.0	36	165.9	150															
72.0	72	165.9	150															
108.0	108	180.5	175															
—	—	170.9	150															
36.0	36	170.9	150															
72.0	72	170.9	150															
108.0	108	186.8	175															
—	—	175.9	175															
36.0	36	175.9	175															
72.0	72	175.9	175															
108.0	108	193.0	175															
—	—	180.9	175															
36.0	36	180.9	175															
72.0	72	180.9	175															
108.0	108	199.3	200															

See page 169 for legend and notes.

Table 27 — Electrical Data — 50P 075 Units
(without Optional High-Capacity Power Exhaust or Optional Return Fan)
 460-3-60 (V-Ph-Hz)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		POWER EXHAUST			OPTIONAL ELECTRIC HEAT		POWER SUPPLY															
		No. A1			No. B1																											
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*														
414	508	2	26.9	179	2	26.9	179	4	3.3 (ea)	30	40.0	—	—	—	—	—	170.8	200														
															130.0	108	180.0	200														
															260.0	216	310.0	350														
															2	5	7.6	130.0	108	186.0	225											
																260.0	216	199.0	225													
																329.0	350															
												7.5	11.0	130.0	108	192.8	225															
														260.0	216	207.5	225															
														337.5	350																	
												10	14.0	—	—	198.8	225															
														130.0	108	215.0	225															
														260.0	216	345.0	350															
										40	52.0	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—				
																													130.0	108	185.8	225
																													260.0	216	195.0	225
												2	5	7.6	—	—	201.0	250														
															130.0	108	214.0	250														
															260.0	216	344.0	350														
										7.5	11.0	—	—	207.8	250																	
												130.0	108	222.5	250																	
												260.0	216	352.5	400																	
										10	14.0	—	—	213.8	250																	
												130.0	108	230.0	250																	
												260.0	216	360.0	400																	
50	65.0	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—														
																			130.0	108	202.1	250										
																			260.0	216	211.3	250										
		2	5	7.6	—	—	217.3	250																								
					130.0	108	230.3	250																								
					260.0	216	360.3	400																								
7.5	11.0	—	—	224.1	250																											
		130.0	108	238.8	250																											
		260.0	216	368.8	400																											
10	14.0	—	—	230.1	250																											
		130.0	108	246.3	300																											
		260.0	216	376.3	400																											
60	77.0	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—														
																			130.0	108	217.1	250										
																			260.0	216	226.3	300										
		2	5	7.6	—	—	232.3	300																								
					130.0	108	245.3	300																								
					260.0	216	375.3	400																								
7.5	11.0	—	—	239.1	300																											
		130.0	108	253.8	300																											
		260.0	216	383.8	450																											
10	14.0	—	—	245.1	300																											
		130.0	108	261.3	300																											
		260.0	216	391.3	450																											
75	96.0	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—														
																			130.0	108	240.8	300										
																			260.0	216	250.0	300										
		2	5	7.6	—	—	256.0	350																								
					130.0	108	269.0	350																								
					260.0	216	399.0	450																								
7.5	11.0	—	—	262.8	350																											
		130.0	108	277.5	350																											
		260.0	216	407.5	450																											
10	14.0	—	—	268.8	350																											
		130.0	108	285.0	350																											
		260.0	216	415.0	500																											

See page 169 for legend and notes.

**Table 27 — Electrical Data — 50P 075 Units
(without Optional High-Capacity Power Exhaust or Optional Return Fan) (cont)**
575-3-60 (V-Ph-Hz)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		POWER EXHAUST			OPTIONAL ELECTRIC HEAT		POWER SUPPLY			
		No. A1			No. B1															
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*		
518	632	2	23.7	132	2	23.7	132	4	2.6 (ea)	30	32.0	—	—	—	—	—	145.2	175		
												2	5	6.1	—	—	157.4	175		
													7.5	9.0	—	—	163.2	175		
													10	11.0	—	—	167.2	175		
												—	—	—	—	—	—	156.5	175	
												40	41.0	2	5	6.1	—	—	168.7	200
										7.5	9.0				—	—	174.5	200		
										10	11.0				—	—	178.5	200		
										—	—			—	—	—	—	170.2	200	
										50	52.0			2	5	6.1	—	—	182.4	225
															7.5	9.0	—	—	188.2	225
												10	11.0		—	—	192.2	225		
												—	—	—	—	—	—	182.7	225	
												60	62.0	2	5	6.1	—	—	194.9	250
															7.5	9.0	—	—	200.7	250
										10	11.0				—	—	204.7	250		
										—	—			—	—	—	—	201.5	250	
										75	77.0			2	5	6.1	—	—	213.7	250
7.5	9.0	—	—	219.5	250															
10	11.0	—	—	223.5	300															

See page 169 for legend and notes.



**Table 28 — Electrical Data — 50P 075 Units
(with Optional High-Capacity Power Exhaust)**
460-3-60 (V-Ph-Hz)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		POWER EXHAUST			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
		No. A1,A2			No. B1,B2										FLA	kW		
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
414	508	2	26.9	179	2	26.9	179	4	3.3 (ea)	30	40.0	2	10	14.0	— 130.0 260.0	— 108 216	198.8 215.0 345.0	225 225 350
													15	21.0	— 130.0 260.0	— 108 216	212.8 232.5 362.5	250 250 400
													20	27.0	— 130.0 260.0	— 108 216	224.8 247.5 377.5	250 250 400
													25	34.0	— 130.0 260.0	— 108 216	238.8 265.0 395.0	250 300 400
													30	40.0	— 130.0 260.0	— 108 216	250.8 280.0 410.0	300 300 450
													10	14.0	— 130.0 260.0	— 108 216	213.8 230.0 360.0	250 250 400
													15	21.0	— 130.0 260.0	— 108 216	227.8 247.5 377.5	250 250 400
													20	27.0	— 130.0 260.0	— 108 216	239.8 262.5 392.5	250 300 400
													25	34.0	— 130.0 260.0	— 108 216	253.8 280.0 410.0	300 300 450
										30	40.0	— 130.0 260.0	— 108 216	265.8 295.0 425.0	300 300 450			
										50	65.0	2	10	14.0	— 130.0 260.0	— 108 216	230.1 246.3 376.3	250 300 400
													15	21.0	— 130.0 260.0	— 108 216	244.1 263.8 393.8	300 300 400
													20	27.0	— 130.0 260.0	— 108 216	256.1 278.8 408.8	300 300 450
													25	34.0	— 130.0 260.0	— 108 216	270.1 296.3 426.3	300 300 450
													30	40.0	— 130.0 260.0	— 108 216	282.1 311.3 441.3	300 350 450

See page 169 for legend and notes.

**Table 28 — Electrical Data — 50P2 075 Units
(with Optional High-Capacity Power Exhaust) (cont)**
460-3-60 (V-Ph-Hz) (cont)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		POWER EXHAUST			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
		No. A1,A2			No. B1,B2													
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
414	508	2	26.9	179	2	26.9	179	4	3.3 (ea)	60	77.0	2	10	14.0	—	—	245.1	300
													15	21.0	130.0	108	261.3	300
															260.0	216	391.3	450
													20	27.0	—	—	259.1	300
															130.0	108	278.8	300
															260.0	216	408.8	450
		25	34.0	—	—	271.1	300											
				130.0	108	293.8	350											
				260.0	216	423.8	450											
		30	40.0	—	—	285.1	350											
				130.0	108	311.3	350											
				260.0	216	441.3	500											
										75	96.0	2	10	14.0	—	—	268.8	350
													15	21.0	130.0	108	285.0	350
															260.0	216	415.0	500
													20	27.0	—	—	282.8	350
															130.0	108	302.5	350
															260.0	216	432.5	500
		25	34.0	—	—	294.8	350											
				130.0	108	317.5	400											
				260.0	216	447.5	500											
		30	40.0	—	—	308.8	400											
				130.0	108	335.0	400											
				260.0	216	465.0	500											
													320.8	—	—	320.8	400	
														130.0	108	350.0	400	
														260.0	216	480.0	500	

575-3-60 (V-Ph-Hz)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		POWER EXHAUST			OPTIONAL ELECTRIC HEAT		POWER SUPPLY											
		No. A1,A2			No. B1,B2																							
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*										
518	632	2	23.7	132	2	23.7	132	4	2.6 (ea)	30	32.0	2	10	11.0	—	—	167.2	175										
													15	17.0	—	—	179.2	200										
													20	22.0	—	—	189.2	200										
													25	27.0	—	—	199.2	225										
													30	32.0	—	—	209.2	225										
										40	41.0	2								40	41.0	2	10	11.0	—	—	178.5	200
																							15	17.0	—	—	190.5	225
																							20	22.0	—	—	200.5	225
																							25	27.0	—	—	210.5	250
																							30	32.0	—	—	220.5	250
		50	52.0	2								50	52.0	2	10	11.0	—	—	192.2	225								
															15	17.0	—	—	204.2	250								
															20	22.0	—	—	214.2	250								
															25	27.0	—	—	224.2	250								
															30	32.0	—	—	234.2	250								
		60	62.0	2								60	62.0	2	10	11.0	—	—	204.7	250								
															15	17.0	—	—	216.7	250								
															20	22.0	—	—	226.7	250								
															25	27.0	—	—	236.7	250								
															30	32.0	—	—	246.7	300								
75	77.0	2								75	77.0	2	10	11.0	—	—	223.5	300										
													15	17.0	—	—	235.5	300										
													20	22.0	—	—	245.5	300										
													25	27.0	—	—	255.5	300										
													30	32.0	—	—	265.5	300										

See page 169 for legend and notes.

Table 29 — Electrical Data — 50P 075 Units (with Optional Return Fan)
460-3-60 (V-Ph-Hz)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		RETURN FAN			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
		No. A1,A2			No. B1,B2													
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
414	508	2	26.9	179	2	26.9	179	4	3.3 (ea)	30	40.0	1	20	27.0	—	—	197.8	225
													20	27.0	130.0	108	213.8	225
													20	27.0	260.0	216	343.8	350
													25	34.0	—	—	204.8	225
												25	34.0	130.0	108	222.5	250	
												25	34.0	260.0	216	352.5	400	
												30	40.0	—	—	210.8	250	
												30	40.0	130.0	108	230.0	250	
												30	40.0	260.0	216	360.0	400	
												40	52.0	—	—	225.8	250	
												40	52.0	130.0	108	245.0	250	
												40	52.0	260.0	216	375.0	400	
										40	52.0	1	20	27.0	—	—	212.8	250
													20	27.0	130.0	108	228.8	250
													20	27.0	260.0	216	358.8	400
													25	34.0	—	—	219.8	250
										25	34.0	130.0	108	237.5	250			
										25	34.0	260.0	216	367.5	400			
										30	40.0	—	—	225.8	250			
										30	40.0	130.0	108	245.0	250			
30	40.0	260.0	216	375.0	400													
40	52.0	—	—	237.8	250													
40	52.0	130.0	108	260.0	300													
40	52.0	260.0	216	390.0	400													
50	65.0	1	20	27.0	—	—	229.1	250										
			20	27.0	130.0	108	245.0	300										
			20	27.0	260.0	216	375.0	400										
			25	34.0	—	—	236.1	300										
		25	34.0	130.0	108	253.8	300											
		25	34.0	260.0	216	383.8	400											
		30	40.0	—	—	242.1	300											
		30	40.0	130.0	108	261.3	300											
		30	40.0	260.0	216	391.3	400											
		40	52.0	—	—	254.1	300											
		40	52.0	130.0	108	276.3	300											
		40	52.0	260.0	216	406.3	450											
60	77.0	1	20	27.0	—	—	244.1	300										
			20	27.0	130.0	108	260.0	300										
			20	27.0	260.0	216	390.0	450										
			25	34.0	—	—	251.1	300										
25	34.0	130.0	108	268.8	300													
25	34.0	260.0	216	398.8	450													
30	40.0	—	—	257.1	300													
30	40.0	130.0	108	276.3	300													
30	40.0	260.0	216	406.3	450													
40	52.0	—	—	269.1	300													
40	52.0	130.0	108	291.3	350													
40	52.0	260.0	216	421.3	450													
75	96.0	1	20	27.0	—	—	267.8	350										
			20	27.0	130.0	108	283.8	350										
			20	27.0	260.0	216	413.8	500										
			25	34.0	—	—	274.8	350										
25	34.0	130.0	108	292.5	350													
25	34.0	260.0	216	422.5	500													
30	40.0	—	—	280.8	350													
30	40.0	130.0	108	300.0	350													
30	40.0	260.0	216	430.0	500													
40	52.0	—	—	292.8	350													
40	52.0	130.0	108	315.0	350													
40	52.0	260.0	216	445.0	500													

See page 169 for legend and notes.

Table 29 — Electrical Data — 50P 075 Units (with Optional Return Fan) (cont)
575-3-60 (V-Ph-Hz)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		RETURN FAN			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
		No. A1,A2			No. B1,B2													
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
518	632	2	23.7	132	2	23.7	132	4	2.6 (ea)	30	32.0	1	20	22.0	—	—	167.2	175
													25	27.0	—	—	172.2	200
													30	32.0	—	—	177.2	200
													40	41.0	—	—	188.5	225
										40	41.0	1	20	22.0	—	—	178.5	200
													25	27.0	—	—	183.5	200
													30	32.0	—	—	188.5	225
													40	41.0	—	—	197.5	225
										50	52.0	1	20	22.0	—	—	192.2	225
													25	27.0	—	—	197.2	225
													30	32.0	—	—	202.2	250
													40	41.0	—	—	211.2	250
										60	62.0	1	20	22.0	—	—	204.7	250
													25	27.0	—	—	209.7	250
													30	32.0	—	—	214.7	250
													40	41.0	—	—	223.7	250
										75	77.0	1	20	22.0	—	—	223.5	300
													25	27.0	—	—	228.5	300
													30	32.0	—	—	233.5	300
													40	41.0	—	—	242.5	300

See page 169 for legend and notes.



Table 30 — Electrical Data — 50P 090 Units
(without Optional High-Capacity Power Exhaust or Optional Return Fan)
 460-3-60 (V-Ph-Hz)


VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		POWER EXHAUST			OPTIONAL ELECTRIC HEAT		POWER SUPPLY																		
		No. A1			No. B1																														
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*																	
414	508	3	23.1	150	3	23.1	150	6	3.3 (ea)	30	40.0	—	—	—	—	—	208.4	225																	
															130.0	108	208.4	225																	
															260.0	216	310.0	350																	
															2	5	7.6	—	—	223.6	250														
																		130.0	108	223.6	250														
																		260.0	216	329.0	350														
												7.5	11.0	—	—	—	230.4	250																	
															130.0	108	230.4	250																	
															260.0	216	337.5	350																	
												10	14.0	—	—	—	236.4	250																	
															130.0	108	236.4	250																	
															260.0	216	345.0	350																	
										40	52.0	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—							
																													130.0	108	223.4	250			
																													260.0	216	325.0	350			
																													2	5	7.6	—	—	238.6	250
																																130.0	108	238.6	250
																																260.0	216	344.0	350
												7.5	11.0	—	—	—	245.4	250																	
															130.0	108	245.4	250																	
															260.0	216	352.5	400																	
												10	14.0	—	—	—	251.4	300																	
															130.0	108	251.4	300																	
															260.0	216	360.0	400																	
50	65.0	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—																	
																			130.0	108	239.7	300													
																			260.0	216	341.3	400													
																			2	5	7.6	—	—	254.9	300										
																						130.0	108	254.9	300										
																						260.0	216	360.3	400										
		7.5	11.0	—	—	—	261.7	300																											
					130.0	108	261.7	300																											
					260.0	216	368.8	400																											
		10	14.0	—	—	—	267.7	300																											
					130.0	108	267.7	300																											
					260.0	216	376.3	400																											
60	77.0	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—																	
																			130.0	108	254.7	300													
																			260.0	216	356.3	400													
																			2	5	7.6	—	—	269.9	300										
																						130.0	108	269.9	300										
																						260.0	216	375.3	400										
		7.5	11.0	—	—	—	276.7	350																											
					130.0	108	276.7	350																											
					260.0	216	383.8	450																											
		10	14.0	—	—	—	282.7	350																											
					130.0	108	282.7	350																											
					260.0	216	391.3	450																											
75	96.0	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—																	
																			130.0	108	278.4	350													
																			260.0	216	380.0	450													
																			2	5	7.6	—	—	293.6	350										
																						130.0	108	293.6	350										
																						260.0	216	399.0	450										
		7.5	11.0	—	—	—	300.4	350																											
					130.0	108	300.4	350																											
					260.0	216	407.5	450																											
		10	14.0	—	—	—	306.4	400																											
					130.0	108	306.4	400																											
					260.0	216	415.0	500																											

See page 169 for legend and notes.

Table 30 — Electrical Data — 50P 090 Units
(without Optional High-Capacity Power Exhaust or Optional Return Fan) (cont)
 575-3-60 (V-Ph-Hz)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		POWER EXHAUST			OPTIONAL ELECTRIC HEAT		POWER SUPPLY		
		No. A1			No. B1														
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*	
518	632	3	19.9	109	3	19.9	109	6	2.6 (ea)	30	32.0	—	—	—	—	—	175.0	200	
												2	5	6.1	—	—	187.2	200	
													7.5	9.0	—	—	193.0	200	
													10	11.0	—	—	197.0	225	
												—	—	—	—	—	—	186.3	225
												2	5	6.1	—	—	198.5	225	
										7.5	9.0		—	—	204.3	225			
										10	11.0		—	—	208.3	225			
										—	—	—	—	—	—	200.0	250		
										2	5	6.1	—	—	212.2	250			
											7.5	9.0	—	—	218.0	250			
											10	11.0	—	—	222.0	250			
										—	—	—	—	—	—	212.5	250		
										2	5	6.1	—	—	224.7	250			
											7.5	9.0	—	—	230.5	250			
											10	11.0	—	—	234.5	250			
										—	—	—	—	—	—	231.3	300		
										2	5	6.1	—	—	243.5	300			
7.5	9.0	—	—	249.3	300														
10	11.0	—	—	253.3	300														

See page 169 for legend and notes.

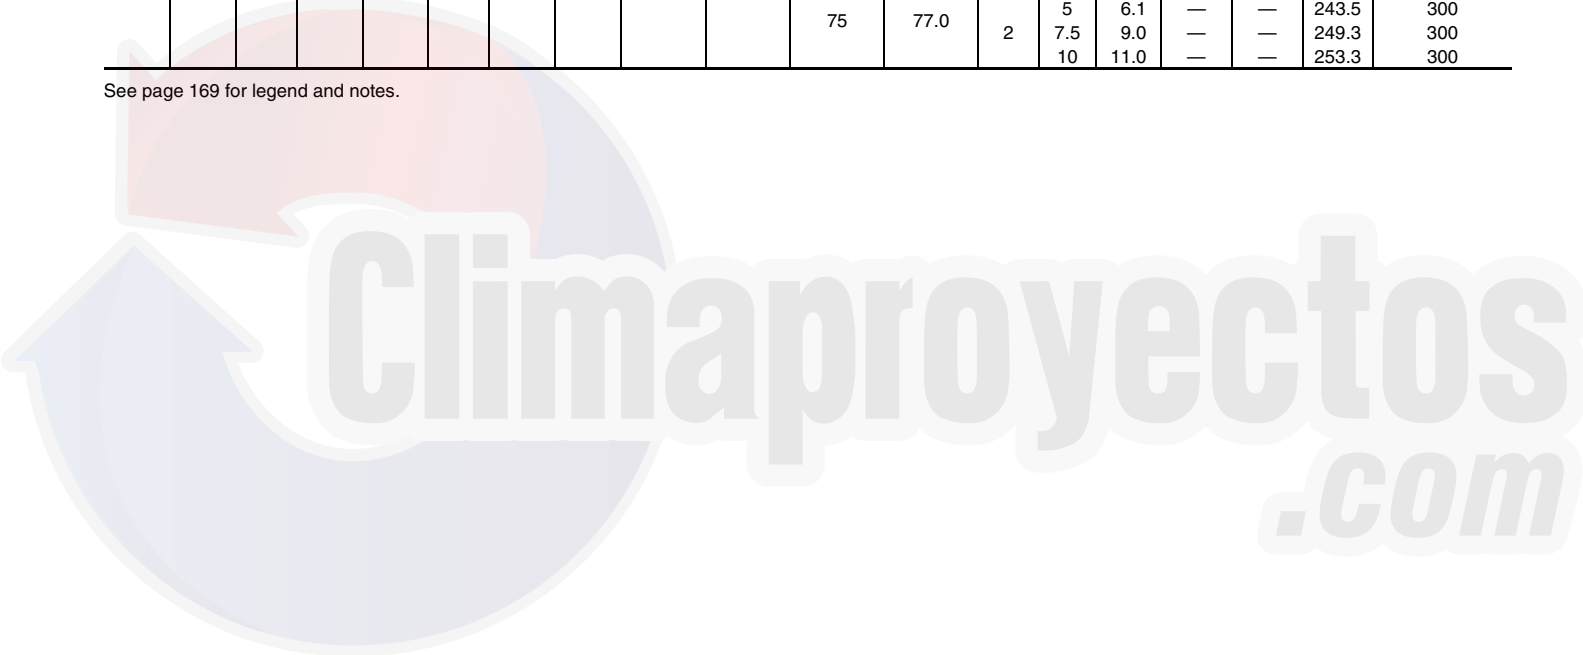

**Table 31 — Electrical Data — 50P 090 Units
(with Optional High-Capacity Power Exhaust)**
460-3-60 (V-Ph-Hz)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		POWER EXHAUST			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
		No. A1,A2,A3			No. B1,B2,B3													
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
414	508	3	23.1	150	3	23.1	150	6	3.3 (ea)	30	40.0	2	10	14.0	— 130.0 260.0	— 108 216	236.4 236.4 345.0	250 250 350
													15	21.0	— 130.0 260.0	— 108 216	250.4 250.4 362.5	300 300 400
													20	27.0	— 130.0 260.0	— 108 216	262.4 262.4 377.5	300 300 400
													25	34.0	— 130.0 260.0	— 108 216	276.4 276.4 395.0	300 300 400
													30	40.0	— 130.0 260.0	— 108 216	288.4 288.4 410.0	300 300 450
													10	14.0	— 130.0 260.0	— 108 216	251.4 251.4 360.0	300 300 400
													15	21.0	— 130.0 260.0	— 108 216	265.4 265.4 377.5	300 300 400
													20	27.0	— 130.0 260.0	— 108 216	277.4 277.4 392.5	300 300 400
													25	34.0	— 130.0 260.0	— 108 216	291.4 291.4 410.0	300 300 450
													30	40.0	— 130.0 260.0	— 108 216	303.4 303.4 425.0	350 350 450
										10	14.0	— 130.0 260.0	— 108 216	267.7 267.7 376.3	300 300 400			
										15	21.0	— 130.0 260.0	— 108 216	281.7 281.7 393.8	300 300 400			
										20	27.0	— 130.0 260.0	— 108 216	293.7 293.7 408.8	350 350 450			
										25	34.0	— 130.0 260.0	— 108 216	307.7 307.7 426.3	350 350 450			
										30	40.0	— 130.0 260.0	— 108 216	319.7 319.7 441.3	350 350 450			

See page 169 for legend and notes.

**Table 31 — Electrical Data — 50P 090 Units
(with Optional High-Capacity Power Exhaust) (cont)**

460-3-60 (V-Ph-Hz) (cont)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		POWER EXHAUST			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
		No. A1,A2,A3			No. B1,B2,B3													
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
414	508	3	23.1	150	3	23.1	150	6	3.3 (ea)	60	77.0	2	10	14.0	—	—	282.7	350
															130.0	108	282.7	350
															260.0	216	391.3	450
													15	21.0	—	—	296.7	350
															130.0	108	296.7	350
															260.0	216	408.8	450
		20	27.0	—	—	308.7	350											
				130.0	108	308.7	350											
				260.0	216	423.8	450											
		25	34.0	—	—	322.7	350											
				130.0	108	322.7	350											
				260.0	216	441.3	500											
30	40.0	—	—	334.7	400													
		130.0	108	334.7	400													
		260.0	216	456.3	500													
										75	96.0	2	10	14.0	—	—	306.4	400
															130.0	108	306.4	400
															260.0	216	415.0	500
													15	21.0	—	—	320.4	400
															130.0	108	320.4	400
															260.0	216	432.5	500
		20	27.0	—	—	332.4	400											
				130.0	108	332.4	400											
				260.0	216	447.5	500											
		25	34.0	—	—	346.4	400											
				130.0	108	346.4	400											
				260.0	216	465.0	500											
30	40.0	—	—	358.4	450													
		130.0	108	358.4	450													
		260.0	216	480.0	500													

575-3-60 (V-Ph-Hz)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		POWER EXHAUST			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
		No. A1,A2,A3			No. B1,B2,B3													
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
518	632	3	19.9	109	3	19.9	109	6	2.6 (ea)	30	32.0	2	10	11.0	—	—	197.0	225
													15	17.0	—	—	209.0	225
													20	22.0	—	—	219.0	250
													25	27.0	—	—	229.0	250
													30	32.0	—	—	239.0	250
										40	41.0	2	10	11.0	—	—	208.3	225
													15	17.0	—	—	220.3	250
													20	22.0	—	—	230.3	250
													25	27.0	—	—	240.3	250
													30	32.0	—	—	250.3	300
		50	52.0	2	10	11.0	—	—	222.0	250								
					15	17.0	—	—	234.0	250								
					20	22.0	—	—	244.0	250								
					25	27.0	—	—	254.0	300								
					30	32.0	—	—	264.0	300								
		60	62.0	2	10	11.0	—	—	234.5	250								
					15	17.0	—	—	246.5	300								
					20	22.0	—	—	256.5	300								
					25	27.0	—	—	266.5	300								
					30	32.0	—	—	276.5	300								
75	77.0	2	10	11.0	—	—	253.3	300										
			15	17.0	—	—	265.3	300										
			20	22.0	—	—	275.3	350										
			25	27.0	—	—	285.3	350										
			30	32.0	—	—	295.3	350										

See page 169 for legend and notes.

Table 32 — Electrical Data — 50P 090 Units (with Optional Return Fan)
460-3-60 (V-Ph-Hz)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		RETURN FAN			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
		No. A1,A2,A3			No. B1,B2,B3													
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
414	508	3	23.1	150	3	23.1	150	6	3.3 (ea)	30	40.0	1	20	27.0	—	—	235.4	250
													20	27.0	130.0	108	235.4	250
													20	27.0	260.0	216	343.8	350
													25	34.0	—	—	242.4	250
													25	34.0	130.0	108	242.4	250
													25	34.0	260.0	216	352.5	400
													30	40.0	—	—	248.4	250
													30	40.0	130.0	108	248.4	250
													30	40.0	260.0	216	360.0	400
													40	52.0	—	—	263.4	300
													40	52.0	130.0	108	263.4	300
													40	52.0	260.0	216	375.0	400
										40	52.0	1	20	27.0	—	—	250.4	300
													20	27.0	130.0	108	250.4	300
													20	27.0	260.0	216	358.8	400
													25	34.0	—	—	257.4	300
													25	34.0	130.0	108	257.4	300
													25	34.0	260.0	216	367.5	400
													30	40.0	—	—	263.4	300
													30	40.0	130.0	108	263.4	300
50	65.0	1	20	27.0	—	—	275.4	300										
			20	27.0	130.0	108	275.4	300										
			20	27.0	260.0	216	390.0	400										
			25	34.0	—	—	273.7	300										
			25	34.0	130.0	108	273.7	300										
			25	34.0	260.0	216	383.8	400										
			30	40.0	—	—	279.7	300										
			30	40.0	130.0	108	279.7	300										
60	77.0	1	20	27.0	—	—	291.7	350										
			20	27.0	130.0	108	291.7	350										
			20	27.0	260.0	216	406.3	450										
			25	34.0	—	—	281.7	350										
			25	34.0	130.0	108	281.7	350										
			25	34.0	260.0	216	398.8	450										
			30	40.0	—	—	294.7	350										
			30	40.0	130.0	108	294.7	350										
75	96.0	1	20	27.0	—	—	306.7	350										
			20	27.0	130.0	108	306.7	350										
			20	27.0	260.0	216	421.3	450										
			25	34.0	—	—	305.4	400										
			25	34.0	130.0	108	305.4	400										
			25	34.0	260.0	216	413.8	500										
			30	40.0	—	—	312.4	400										
			30	40.0	130.0	108	312.4	400										
40	52.0	1	20	27.0	—	—	318.4	400										
			20	27.0	130.0	108	318.4	400										
			20	27.0	260.0	216	430.0	500										
			40	52.0	—	—	330.4	400										
40	52.0	130.0	108	330.4	400													
40	52.0	260.0	216	445.0	500													

See page 169 for legend and notes.

Table 32 — Electrical Data — 50P 090 Units (with Optional Return Fan) (cont)
575-3-60 (V-Ph-Hz)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		RETURN FAN			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
		No. A1,A2,A3			No. B1,B2,B3													
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
518	632	3	19.9	109	3	19.9	109	6	2.6 (ea)	30	32.0	1	20	22.0	—	—	197.0	225
													25	27.0	—	—	202.0	225
													30	32.0	—	—	207.0	225
													40	41.0	—	—	218.3	250
										40	41.0	1	20	22.0	—	—	208.3	225
													25	27.0	—	—	213.3	250
													30	32.0	—	—	218.3	250
													40	41.0	—	—	227.3	250
										50	52.0	1	20	22.0	—	—	222.0	250
													25	27.0	—	—	227.0	250
													30	32.0	—	—	232.0	250
													40	41.0	—	—	241.0	250
										60	62.0	1	20	22.0	—	—	234.5	250
													25	27.0	—	—	239.5	300
													30	32.0	—	—	244.5	300
													40	41.0	—	—	253.5	300
										75	77.0	1	20	22.0	—	—	253.3	300
													25	27.0	—	—	258.3	300
													30	32.0	—	—	263.3	300
													40	41.0	—	—	272.3	300

See page 169 for legend and notes.



Table 33 — Electrical Data — 50P 100 Units
(without Optional High-Capacity Power Exhaust or Optional Return Fan)
 460-3-60 (V-Ph-Hz)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		POWER EXHAUST			OPTIONAL ELECTRIC HEAT		POWER SUPPLY				
		No. A1,A2,A3			No. B1,B2,B3																
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*			
414	508	3	23.1	1150	3	26.9	179	6	3.3 (ea)	30	40.0	1	—	—	—	—	219.8	250			
															130.0	108	219.8	250			
															260.0	216	310.0	350			
															2	5	7.6	—	—	235.0	250
																		130.0	108	235.0	250
																		260.0	216	329.0	350
												7.5	11.0	—	—	—	241.8	250			
															130.0	108	241.8	250			
															260.0	216	337.5	350			
												10	14.0	—	—	—	247.8	250			
															130.0	108	247.8	250			
															260.0	216	345.0	350			
										40	52.0	1	—	—	—	—	234.8	250			
															130.0	108	234.8	250			
															260.0	216	325.0	350			
												2	5	7.6	—	—	250.0	300			
															130.0	108	250.0	300			
															260.0	216	344.0	350			
										7.5	11.0	—	—	—	256.8	300					
													130.0	108	256.8	300					
													260.0	216	352.5	400					
										10	14.0	—	—	—	262.8	300					
													130.0	108	262.8	300					
													260.0	216	360.0	400					
50	65.0	1	—	—	—	—	251.1	300													
					130.0	108	251.1	300													
					260.0	216	341.3	400													
		2	5	7.6	—	—	266.3	300													
					130.0	108	266.3	300													
					260.0	216	360.3	400													
		7.5	11.0	—	—	—	273.1	300													
					130.0	108	273.1	300													
					260.0	216	368.8	400													
10	14.0	—	—	—	279.1	300															
			130.0	108	279.1	300															
			260.0	216	376.3	400															
60	77.0	1	—	—	—	—	266.1	300													
					130.0	108	266.1	300													
					260.0	216	356.3	400													
		2	5	7.6	—	—	281.3	350													
					130.0	108	281.3	350													
					260.0	216	375.3	400													
7.5	11.0	—	—	—	288.1	350															
			130.0	108	288.1	350															
			260.0	216	383.8	450															
10	14.0	—	—	—	294.1	350															
			130.0	108	294.1	350															
			260.0	216	391.3	450															
75	96.0	1	—	—	—	—	289.8	350													
					130.0	108	289.8	350													
					260.0	216	380.0	450													
		2	5	7.6	—	—	305.0	400													
					130.0	108	305.0	400													
					260.0	216	399.0	450													
7.5	11.0	—	—	—	311.8	400															
			130.0	108	311.8	400															
			260.0	216	407.5	450															
10	14.0	—	—	—	317.8	400															
			130.0	108	317.8	400															
			260.0	216	415.0	500															

See page 169 for legend and notes.

Table 33 — Electrical Data — 50P 100 Units
(without Optional High-Capacity Power Exhaust or Optional Return Fan) (cont)
 575-3-60 (V-Ph-Hz)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		POWER EXHAUST			OPTIONAL ELECTRIC HEAT		POWER SUPPLY		
		No. A1,A2,A3			No. B1,B2,B3														
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*	
518	632	3	19.9	109	3	23.7	132	6	2.6 (ea)	30	32.0	—	—	—	—	—	186.4	200	
												2	5	6.1	—	—	198.6	225	
													7.5	9.0	—	—	204.4	225	
													10	11.0	—	—	208.4	225	
												—	—	—	—	—	—	197.7	225
												2	5	6.1	—	—	209.9	250	
										7.5	9.0		—	—	215.7	250			
										10	11.0		—	—	219.7	250			
										—	—	—	—	—	—	211.4	250		
										2	5	6.1	—	—	223.6	250			
											7.5	9.0	—	—	229.4	250			
											10	11.0	—	—	233.4	250			
										—	—	—	—	—	—	223.9	250		
										2	5	6.1	—	—	236.1	250			
											7.5	9.0	—	—	241.9	300			
											10	11.0	—	—	245.9	300			
										—	—	—	—	—	—	242.7	300		
										2	5	6.1	—	—	254.9	300			
7.5	9.0	—	—	260.7	300														
10	11.0	—	—	264.7	300														

See page 169 for legend and notes.



**Table 34 — Electrical Data — 50P 100 Units
(with Optional High-Capacity Power Exhaust)**
460-3-60 (V-Ph-Hz)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		POWER EXHAUST			OPTIONAL ELECTRIC HEAT		POWER SUPPLY															
		No. A1,A2,A3			No. B1,B2,B3																											
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*														
414	508	3	23.1	1150	3	26.9	179	6	3.3 (ea)	30	40.0	—	—	—	—	—	219.8	250														
															130.0	108	219.8	250														
															260.0	216	310.0	350														
															2	5	7.6	—	—	235.0	250											
																		130.0	108	235.0	250											
																		260.0	216	329.0	350											
												7.5	11.0	—	—	—	241.8	250														
															130.0	108	241.8	250														
															260.0	216	337.5	350														
												10	14.0	—	—	—	247.8	250														
															130.0	108	247.8	250														
															260.0	216	345.0	350														
										40	52.0	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—				
																													130.0	108	234.8	250
																													260.0	216	325.0	350
												2	5	7.6	—	—	250.0	300														
															130.0	108	250.0	300														
															260.0	216	344.0	350														
										7.5	11.0	—	—	—	256.8	300																
													130.0	108	256.8	300																
													260.0	216	352.5	400																
										10	14.0	—	—	—	262.8	300																
													130.0	108	262.8	300																
													260.0	216	360.0	400																
50	65.0	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—														
																			130.0	108	251.1	300										
																			260.0	216	341.3	400										
		2	5	7.6	—	—	266.3	300																								
					130.0	108	266.3	300																								
					260.0	216	360.3	400																								
7.5	11.0	—	—	—	273.1	300																										
			130.0	108	273.1	300																										
			260.0	216	368.8	400																										
10	14.0	—	—	—	279.1	300																										
			130.0	108	279.1	300																										
			260.0	216	376.3	400																										
60	77.0	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—														
																			130.0	108	266.1	300										
																			260.0	216	356.3	400										
		2	5	7.6	—	—	281.3	350																								
					130.0	108	281.3	350																								
					260.0	216	375.3	400																								
7.5	11.0	—	—	—	288.1	350																										
			130.0	108	288.1	350																										
			260.0	216	383.8	450																										
10	14.0	—	—	—	294.1	350																										
			130.0	108	294.1	350																										
			260.0	216	391.3	450																										
75	96.0	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—														
																			130.0	108	289.8	350										
																			260.0	216	380.0	450										
		2	5	7.6	—	—	305.0	400																								
					130.0	108	305.0	400																								
					260.0	216	399.0	450																								
7.5	11.0	—	—	—	311.8	400																										
			130.0	108	311.8	400																										
			260.0	216	407.5	450																										
10	14.0	—	—	—	317.8	400																										
			130.0	108	317.8	400																										
			260.0	216	415.0	500																										

See page 169 for legend and notes.

**Table 34 — Electrical Data — 50P 100 Units
(with Optional High-Capacity Power Exhaust) (cont)**
575-3-60 (V-Ph-Hz)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		POWER EXHAUST			OPTIONAL ELECTRIC HEAT		POWER SUPPLY		
		No. A1,A2,A3			No. B1,B2,B3														
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*	
518	632	3	19.9	109	3	23.7	132	6	2.6 (ea)	30	32.0	—	—	—	—	—	186.4	200	
												2	5	6.1	—	—	198.6	225	
													7.5	9.0	—	—	204.4	225	
													10	11.0	—	—	208.4	225	
												—	—	—	—	—	—	197.7	225
												2	5	6.1	—	—	209.9	250	
										7.5	9.0		—	—	215.7	250			
										10	11.0		—	—	219.7	250			
										—	—	—	—	—	—	211.4	250		
										2	5	6.1	—	—	223.6	250			
											7.5	9.0	—	—	229.4	250			
											10	11.0	—	—	233.4	250			
										—	—	—	—	—	—	223.9	250		
										2	5	6.1	—	—	236.1	250			
											7.5	9.0	—	—	241.9	300			
											10	11.0	—	—	245.9	300			
										—	—	—	—	—	—	242.7	300		
										2	5	6.1	—	—	254.9	300			
7.5	9.0	—	—	260.7	300														
10	11.0	—	—	264.7	300														

See page 169 for legend and notes.



Table 35 — Electrical Data — 50P 100 Units (with Optional Return Fan)
460-3-60 (V-Ph-Hz)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		RETURN FAN			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
		No. A1,A2,A3			No. B1,B2,B3													
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
414	508	3	23.1	150	3	26.9	179	6	3.3 (ea)	30	40.0	1	20	27.0	—	—	246.8	250
													20	27.0	130.0	108	246.8	250
													20	27.0	260.0	216	343.8	350
													25	34.0	—	—	253.8	300
												25	34.0	130.0	108	253.8	300	
												25	34.0	260.0	216	352.5	400	
												30	40.0	—	—	259.8	300	
												30	40.0	130.0	108	259.8	300	
												30	40.0	260.0	216	360.0	400	
												40	52.0	—	—	274.8	300	
												40	52.0	130.0	108	274.8	300	
												40	52.0	260.0	216	375.0	400	
										20	27.0	130.0	108	261.8	300			
										20	27.0	260.0	216	358.8	400			
										25	34.0	—	—	268.8	300			
										25	34.0	130.0	108	268.8	300			
										25	34.0	260.0	216	367.5	400			
										30	40.0	—	—	274.8	300			
										30	40.0	130.0	108	274.8	300			
										30	40.0	260.0	216	375.0	400			
40	52.0	—	—	286.8	300													
40	52.0	130.0	108	286.8	300													
40	52.0	260.0	216	390.0	400													
20	27.0	130.0	108	278.1	300													
20	27.0	260.0	216	375.0	400													
25	34.0	—	—	285.1	350													
25	34.0	130.0	108	285.1	350													
25	34.0	260.0	216	383.8	400													
30	40.0	—	—	291.1	350													
30	40.0	130.0	108	291.1	350													
30	40.0	260.0	216	391.3	400													
40	52.0	—	—	303.1	350													
40	52.0	130.0	108	303.1	350													
40	52.0	260.0	216	406.3	450													
20	27.0	130.0	108	293.1	350													
20	27.0	260.0	216	390.0	450													
25	34.0	—	—	300.1	350													
25	34.0	130.0	108	300.1	350													
25	34.0	260.0	216	398.8	450													
30	40.0	—	—	306.1	350													
30	40.0	130.0	108	306.1	350													
30	40.0	260.0	216	406.3	450													
40	52.0	—	—	318.1	350													
40	52.0	130.0	108	318.1	350													
40	52.0	260.0	216	421.3	450													
20	27.0	130.0	108	316.8	400													
20	27.0	260.0	216	413.8	500													
25	34.0	—	—	323.8	400													
25	34.0	130.0	108	323.8	400													
25	34.0	260.0	216	422.5	500													
30	40.0	—	—	329.8	400													
30	40.0	130.0	108	329.8	400													
30	40.0	260.0	216	430.0	500													
40	52.0	—	—	341.8	400													
40	52.0	130.0	108	341.8	400													
40	52.0	260.0	216	445.0	500													

See page 169 for legend and notes.

Table 35 — Electrical Data — 50P 100 Units (with Optional Return Fan) (cont)
575-3-60 (V-Ph-Hz)

VOLTAGE RANGE		COMPRESSOR						CONDENSER FAN MOTOR		EVAPORATOR FAN MOTOR		RETURN FAN			OPTIONAL ELECTRIC HEAT		POWER SUPPLY	
		No. A1,A2,A3			No. B1,B2,B3													
Min	Max	Qty	RLA (ea)	LRA (ea)	Qty	RLA (ea)	LRA (ea)	Qty	FLA	Hp	FLA	Qty	Hp (ea)	FLA (ea)	FLA	kW	MCA	FUSE OR HACR BRKR*
518	632	3	19.9	109	3	23.7	132	6	2.6 (ea)	30	32.0	1	20	22.0	—	—	208.4	225
													25	27.0	—	—	213.4	225
													30	32.0	—	—	218.4	250
													40	41.0	—	—	229.7	250
										40	41.0	1	20	22.0	—	—	219.7	250
													25	27.0	—	—	224.7	250
													30	32.0	—	—	229.7	250
													40	41.0	—	—	238.7	250
										50	52.0	1	20	22.0	—	—	233.4	250
													25	27.0	—	—	238.4	250
													30	32.0	—	—	243.4	250
													40	41.0	—	—	252.4	300
										60	62.0	1	20	22.0	—	—	245.9	300
													25	27.0	—	—	250.9	300
													30	32.0	—	—	255.9	300
													40	41.0	—	—	264.9	300
										75	77.0	1	20	22.0	—	—	264.7	300
													25	27.0	—	—	269.7	300
													30	32.0	—	—	274.7	350
													40	41.0	—	—	283.7	350


MULTIPLICATION FACTORS

HEATER kW RATING (VOLTS)	VOLTAGE DISTRIBUTION V-3-60	MULTIPLICATION FACTOR
230	200	0.756
	208	0.818
	230	1.000
	240	1.089
380	360	0.897
	380	1.000
	400	1.108
460	440	0.914
	460	1.000
	480	1.089
575	550	0.915
	575	1.000
	600	1.089

Electric heaters are tested and ETL approved at maximum total external static pressure of 1.9 in. wg.

LEGEND

- FLA** — Full Load Amps
- HACR** — Heating, Air Conditioning and Refrigeration
- Hp** — Nominal Horsepower
- LRA** — Locked Rotor Amps
- MCA** — Minimum Circuit Amps (for wire sizing)
- RLA** — Rated Load Amps



* Used to determine minimum disconnect per NEC (National Electrical Code).
NOTE: Electric resistance heaters are rated at 230-v (for 208/230-v use), 380-v, 460-v, and 575-v. To determine heater capacity (kW) at other unit operating voltage, multiply heater nominal capacity by appropriate multiplier at right.

Step 13 — Connect Air Pressure Tubing

Before options such as the variable frequency drive (VFD) and/or modulating power exhaust can operate properly, the pneumatic tubing for pressure sensing must be installed. Use fire-retardant plenum tubing (field-supplied). All control devices use 1/4-in. tubing. Tubing must be run from the appropriate sensing location (in the duct or in the building space) to the control device location in the unit.

VARIABLE FREQUENCY DRIVE

The tubing for the duct pressure (DP) control option should sample supply duct pressure approximately 2/3 of the way out from the unit in the main trunk duct, at a location where a constant duct pressure is desired.

The duct pressure is sensed by a pressure transducer. The pressure transducer output is directed to the unit control module. On all sizes, the DP transducer is located in the unit auxiliary control box. See Fig. 44 and 45 for auxiliary control box location. See Fig. 46 and 47 for auxiliary control box details. Use a nominal 1/4-in. plastic tubing.

Refer to appropriate base unit Controls and Troubleshooting book for instructions on adjusting set points for duct pressure controls.

MODULATING POWER EXHAUST

The tubing for the building pressure (BP) control (achieved via the modulating power exhaust option) should sample building pressure in the area near the entrance lobby (or other appropriate and sensitive location) so that location is controlled as closely to design pressures as possible.

These units use a pressure transducer for sensing building pressure. The BP transducer is located in the unit auxiliary control box. See Fig. 44 and 45 for auxiliary control box location. See Fig. 46 and 47 for auxiliary control box details. Use a nominal 1/4-in. plastic tubing.

For instructions on adjusting BP control set points, refer to the Controls and Troubleshooting book.

HIGH-CAPACITY POWER EXHAUST

The tubing for the building pressure (BP) control (achieved via the high-capacity power exhaust package) should sample building pressure in the area near the entrance lobby (or other appropriate and sensitive location) so that location is controlled as closely to the design pressures as possible.

These units use a pressure transducer for sensing building pressure (BP). The pressure transducer output is directed to the unit control module. The BP transducer is located in the unit auxiliary control box. See Fig. 45 for auxiliary control box location. See Fig. 47 for auxiliary control box details. Use a nominal 1/4-in. plastic tubing.

For instructions on adjusting BP control set points, refer to Controls and Troubleshooting book.

RETURN/EXHAUST POWER EXHAUST

The tubing for the building pressure control (achieved via the return/exhaust power exhaust option) should sample building pressure in the area near the entrance lobby (or other appropriate and sensitive location) so that location is controlled as closely to design pressures as possible.

The units use a pressure transducer for sensing building pressure. The BP transducer is located in the unit auxiliary control box. See Fig. 45 for auxiliary control box location. See Fig. 48 for auxiliary control box details. Use a nominal 1/4-in. plastic tubing.

For instructions on adjusting BP control set points refer to the Controls and Troubleshooting book.

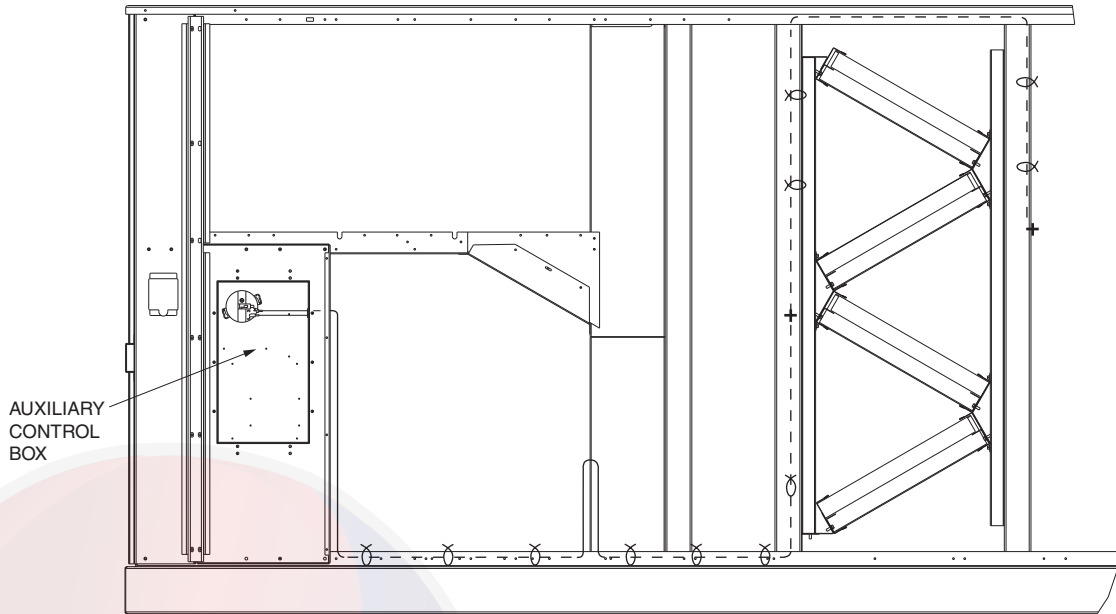


Fig. 44 — Auxiliary Control Box Location (Sizes 030-050)


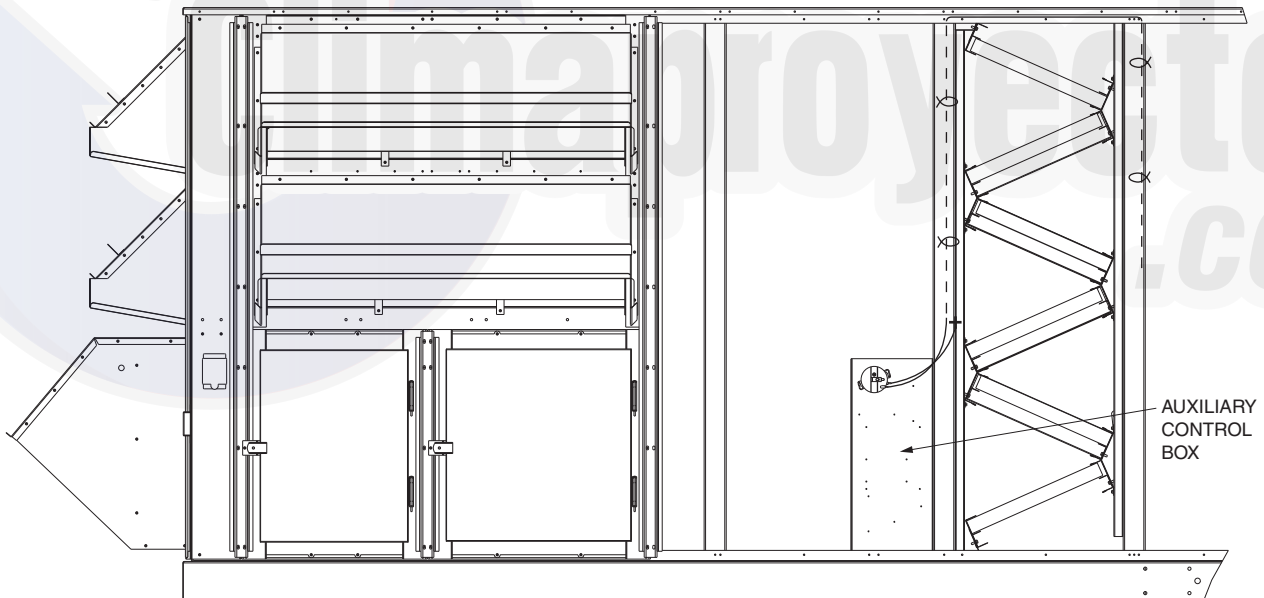



Fig. 45 — Auxiliary Control Box Location (Sizes 055-100)

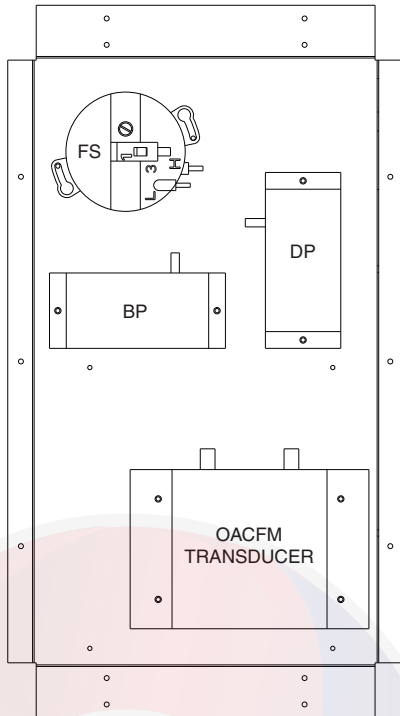

LEGEND

- BP — Building Pressure Transducer
- DP — Duct Pressure Transducer
- FS — Filter Switch
- OACFM — Outdoor Air Cfm Sensor Transducer


**Fig. 46 — Auxiliary Control Box Details
(Sizes 030-050)**

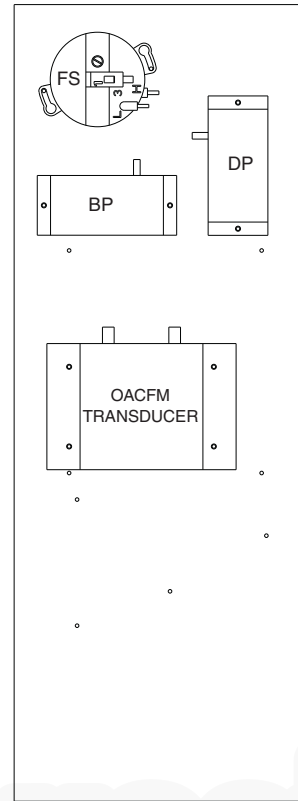

LEGEND

- BP — Building Pressure Transducer
- DP — Duct Pressure Transducer
- FS — Filter Switch
- OACFM — Outdoor Air Cfm Sensor Transducer

**Fig. 47 — Auxiliary Control Box Details
(Sizes 055-100 without Return Fan)**

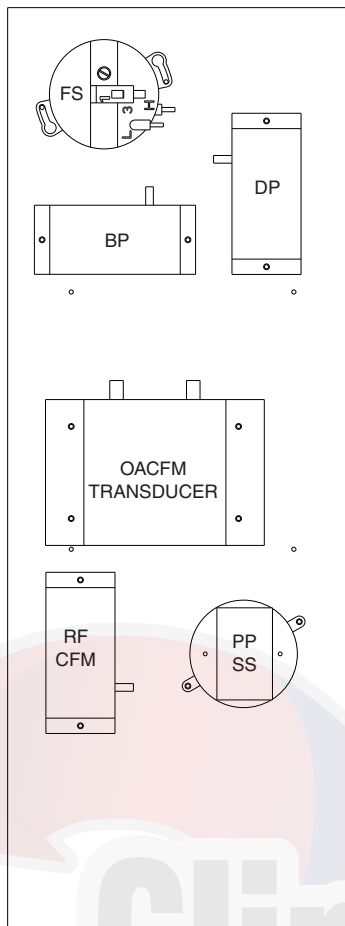

LEGEND

- BP — Building Pressure Transducer
- DP — Duct Pressure Transducer
- FS — Filter Switch
- OACFM — Outdoor Air Cfm Sensor Transducer
- PPSS — Plenum Pressure Safety Switch
- RFCFM — Return Fan Cfm Sensor Transducer

Fig. 48 — Auxiliary Control Box Details (Units with Optional Return Fan)

Step 14 — Supply-Fan Shipping Brackets

Supply-fan shipping brackets (4 per unit) must be removed from each corner of the fan sled before starting unit.

UNIT SIZES 030-050

1. To remove brackets, raise fan sled by turning adjusting bolt counterclockwise until spring is compressed slightly.
2. Remove screws holding shipping bracket to unit cross rail.
3. Remove shipping bracket (top of bracket is slotted so that it will slide out).
4. After removing all shipping brackets, level fan sled using the adjusting screws. On all 4 corners, dimension from cross rail to fan sled should be as shown in Fig. 49.

UNIT SIZES 055-070

To remove shipping brackets, remove the 6 screws holding each bracket to the cross rail. There are 8 brackets per unit. See Fig. 50. After removing all shipping brackets, level fan sled using the adjusting screws. On all 4 corners dimension from cross rail to fan sled should be as shown in Fig. 50.

UNIT SIZES 075-100

To remove shipping brackets, remove 6 screws holding each bracket to the cross rail. There are 4 brackets per unit. See Fig. 51. After removing all shipping brackets, level fan sled using the adjusting screws. On all 4 corners dimension from cross rail to fan sled should be as shown in Fig. 51.

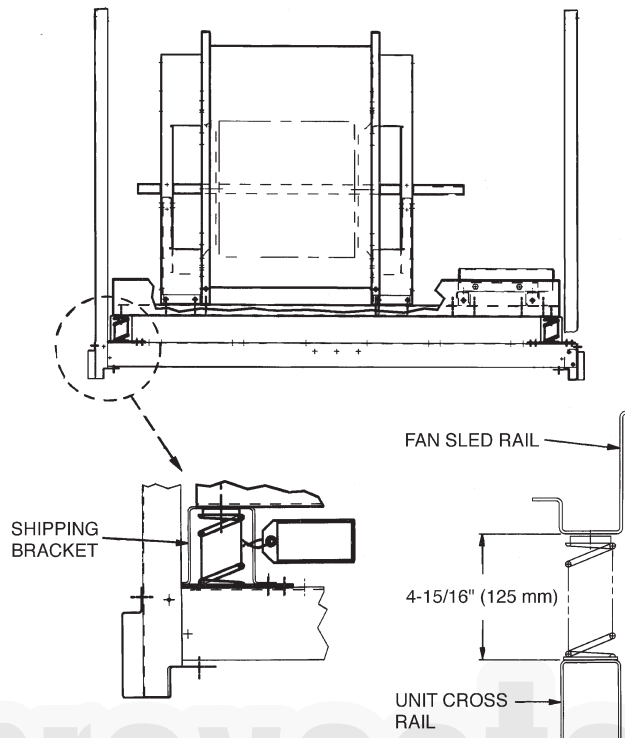


Fig. 49 — Shipping Brackets; Size 030-050 Units

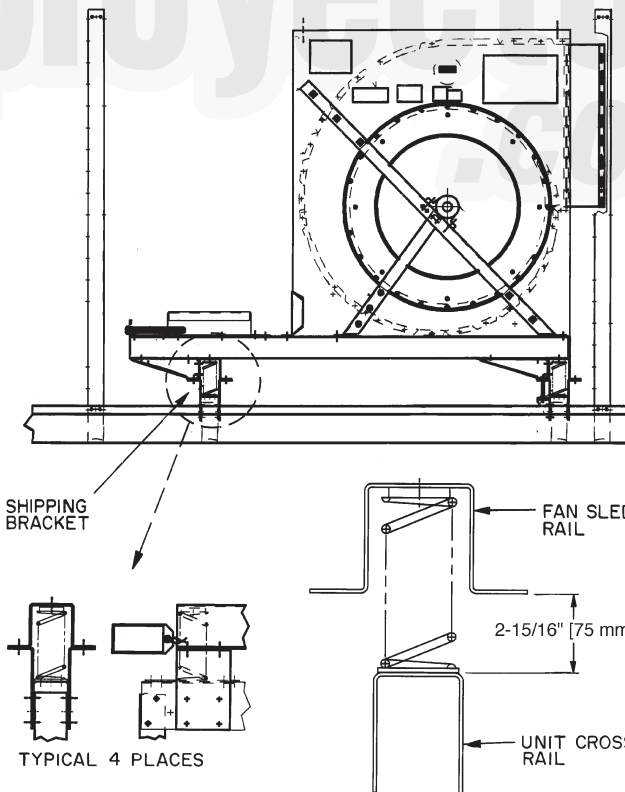


Fig. 50 — Shipping Brackets; Size 055-070 Units

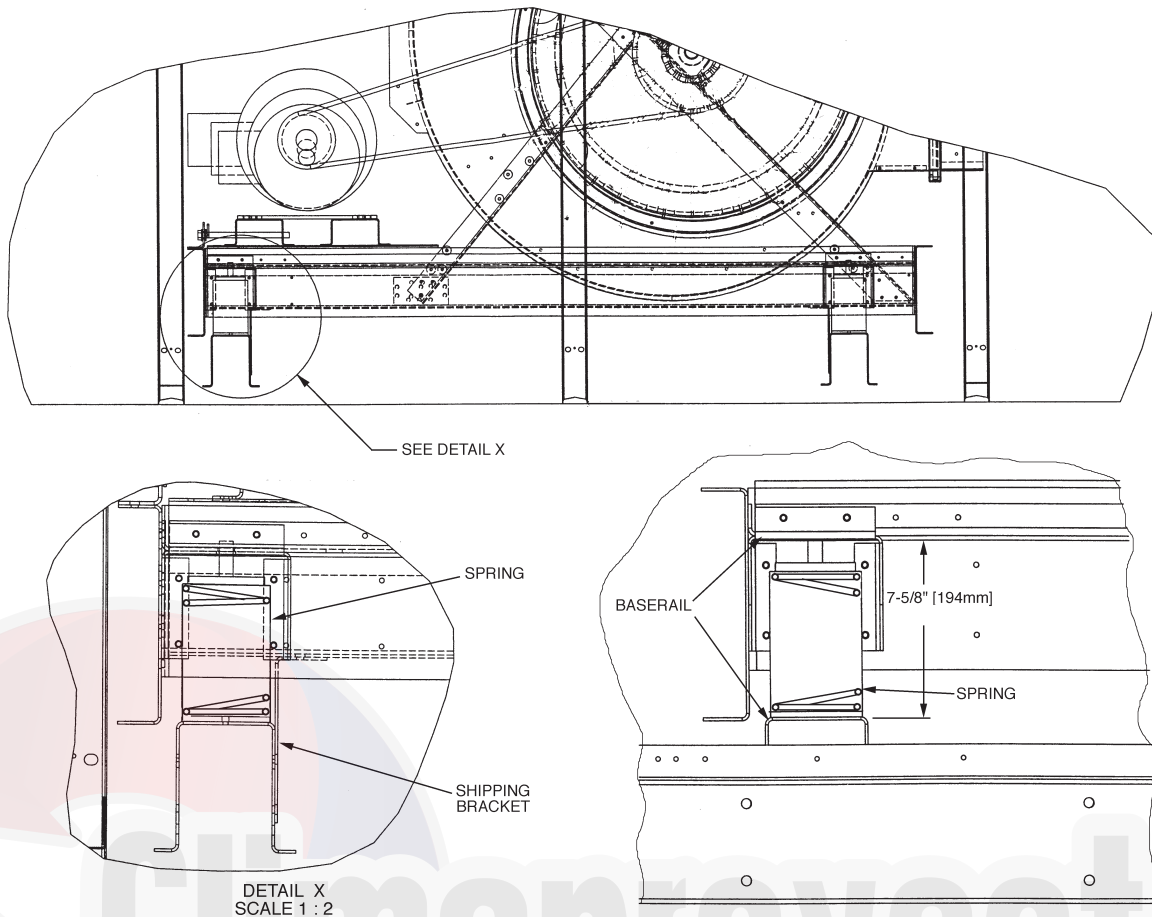


Fig. 51 — Shipping Brackets (Sizes 075-100)

Step 15 — Remove Optional Return/Exhaust-Fan Shipping Brackets

The optional factory-installed return/exhaust fan has shipping brackets that must be removed from each corner of the fan sled before starting unit.

To remove shipping brackets, remove 2 screws holding each bracket to the cross rail. There are 4 brackets per unit.

After removing all shipping brackets, level the fan using the adjusting screws. On all 4 corners dimension from cross rail to fan sled should be as shown in Fig. 52.

Step 16 — Install Supply-Air Thermistors (Optional SCR Electric Heat Units Only)

Supply-air thermistors are a field-installed, factory-provided component. Three supply-air thermistors are shipped with optional SCR (Silicon Controlled Rectifier) electric heat units inside the unit control box. Thermistor wires must be connected to the SCB (staged heat control board) in the unit control box. See Table 36.

The supply-air thermistors should be located in the supply duct with the following criteria:

- downstream of the electric heater element
- equally spaced as far as possible from the electric heater element
- a duct location where none of the supply air thermistors are within sight of the electric heater element
- a duct location with good mixed supply air portion of the unit.

Step 17 — Greenspeed/Low Ambient Control (Optional)

The Greenspeed®/low ambient control is using a motor speed control device (VFD) which adjusts condenser fan motor speed in response to varying discharging refrigerant pressure. A properly applied Greenspeed/low ambient control extends the operating range of air-conditioning systems and permits operation at lower outdoor ambient temperatures.

Table 36 — Supply-Air Thermistor Designations

THERMISTOR	PIN CONNECTION POINT	FUNCTION AND LOCATION	PART NO.
		Thermistors	
SAT1	J8 – 1,2 (SCB)	Supply-Air Thermistor (SAT) — Inserted into supply duct underneath the electric heater elements (factory-provided, field-installed)	HH79NZ033
SAT2	J8 – 3,4 (SCB)	Supply-Air Thermistor (SAT) — Inserted into supply duct underneath the electric heater elements (factory-provided, field-installed)	
SAT3	J8 – 5,6 (SCB)	Supply-Air Thermistor (SAT) — Inserted into supply duct underneath the electric heater elements (factory-provided, field-installed)	

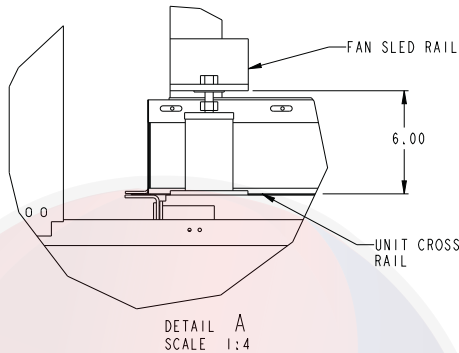
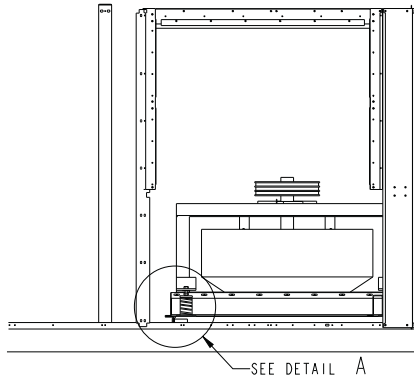


Fig. 52 — Return/Exhaust Fan Shipping Brackets

The optional Greenspeed/low ambient controls are factory-installed. Field-fabricated and installed wind baffles are also required for units in areas with prevailing winds of more than 5 mph and where temperatures drop below 32°F. The Greenspeed/low ambient control permits operation of the unit to an ambient temperature of -20°F. The control regulates the speed of two to four 3-phase fan motors depending on unit size. Fan motor replacement on most units is not necessary.

INSTALL FIELD-FABRICATED WIND BAFFLES

⚠ WARNING

To avoid the possibility of electrical shock, open all disconnects before installing or servicing this accessory.

On size 040-060 units, in areas with prevailing winds of more than 5 mph and where temperatures drop below 32°F, wind baffles must be field fabricated to ensure proper cooling cycle operation at low-ambient temperatures with Greenspeed/low ambient controls. Wind baffles are not needed on size 030, 035, and 070-100 units. See Fig. 53 for baffle details. Use 20-gage galvanized sheet metal, or similar corrosion-resistant material for the baffles. Use field-supplied screws to attach baffles to unit. Screws should be 1/4-in. diameter or larger. Screws should not be more than 1/2-inch in length. Drill required screw holes for mounting baffles.

⚠ CAUTION

To avoid damage to refrigerant coils, electrical components, and wiring use extreme care when drilling screw holes and screwing in fasteners.

Step 18 — Install Unit Accessories

For applications requiring accessories, the following packages are available:

All units:

- barometric relief
- electric heaters
- space temperature sensor
- CO₂ sensor
- space temperature sensor with CO₂ sensor
- relative humidity sensor
- airflow switch
- filter switch
- smoke detector

All vertical return/supply units:

- electric heat

Refer to the individual accessory installation instructions in each accessory package for information on installing accessories.

CONTROLS INSTALLATION

Constant Volume (CV) Units

The 50P2,P4 units may be used in applications with additional control features, options, or accessories. Refer to the appropriate accessory installation instructions for more information on installing that accessory. Control options and accessories available for CV units are:

- thermostats
- enthalpy sensor
- enthalpy switch
- relative humidity sensor
- CEM (controls expansion module)
- Navigator™ hand-held display

CONTROL WIRING

The unit can be controlled with a Carrier-approved accessory electro-mechanical or electronic thermostat that has two stages of cooling, two stages of heating control, and an output for fan control. The thermostat may also include time of day scheduling or use scheduling routines built into the *ComfortLink* controls.


Install the thermostat according to the installation instructions shipped with the accessory thermostat. Locate thermostat assembly on a solid interior wall to sense average temperature. Route thermostat cable or equivalent leads of colored wire from subbase terminals through conduit into the low voltage connections in the main control box. For thermostat TB201 connections, see Fig. 54.

NOTE: For wire runs up to 50 ft, use no. 18 AWG (American Wire Gage) insulated wire (35°C minimum). For over 75 ft, use no. 14 AWG insulated wire (35°C minimum). All wire larger than no. 18 AWG cannot be directly connected at the thermostat and will require a junction box and splice at the thermostat.



Variable Air Volume (VAV) Units

The 50P3,P5 units may be used in applications with additional control features, options, or accessories. Refer to the appropriate accessory installation instructions for more information on installing that accessory. Refer to the Controls and Troubleshooting manual for more information concerning installation and configuration of options and accessories. Control options and accessories available for VAV units are:

- enthalpy sensor
- enthalpy switch
- relative humidity sensor
- CEM (controls expansion module)
- Navigator hand-held display

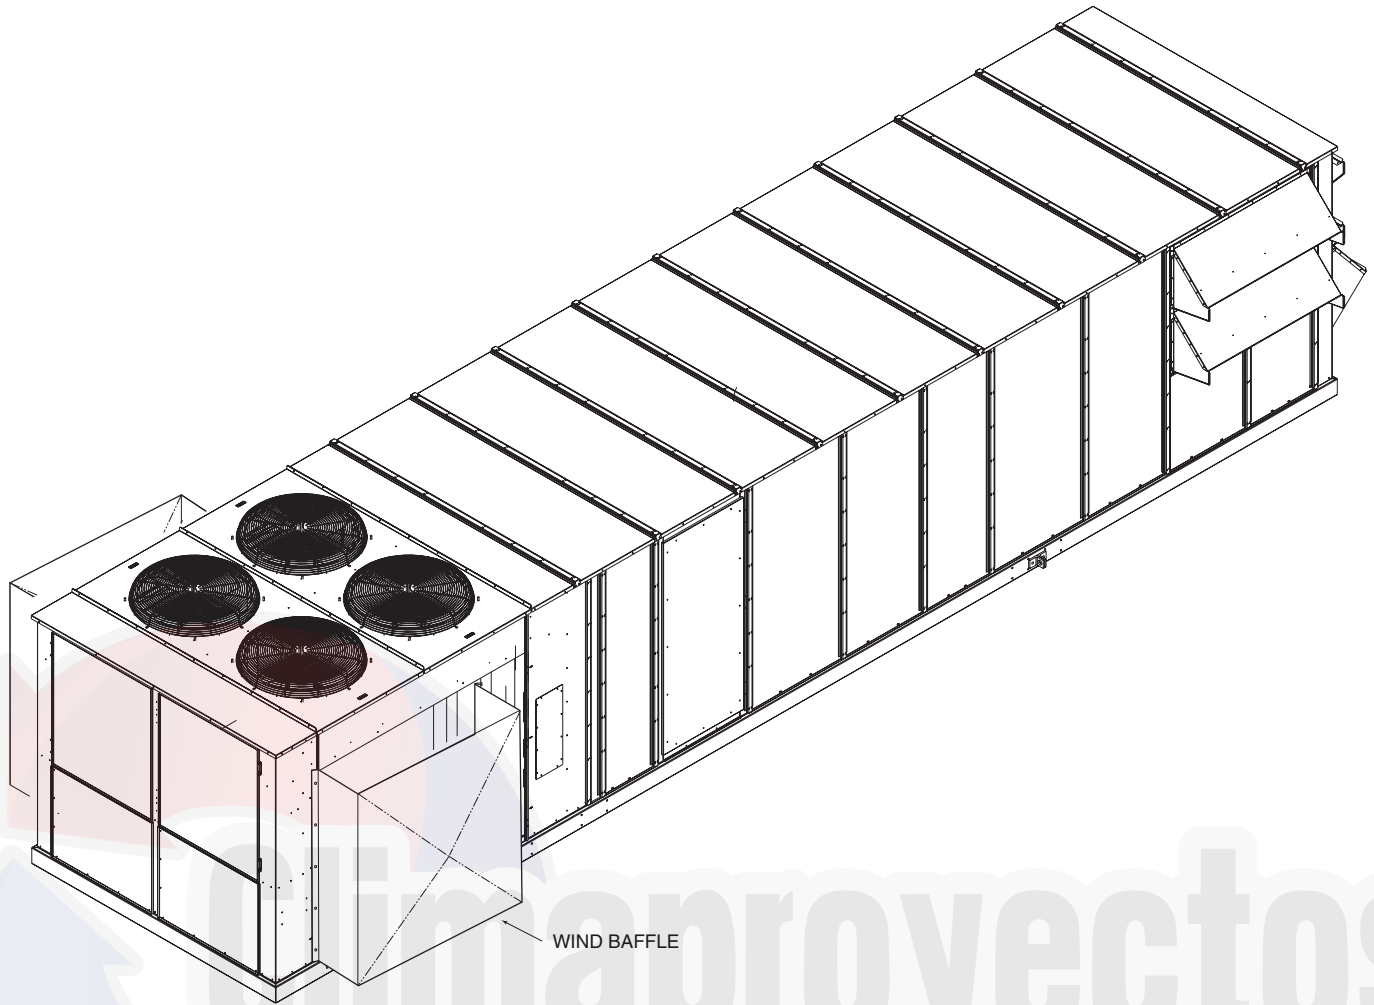

BAFFLE INSTALLATION LOCATION (SIZES 050 AND 060 SHOWN)

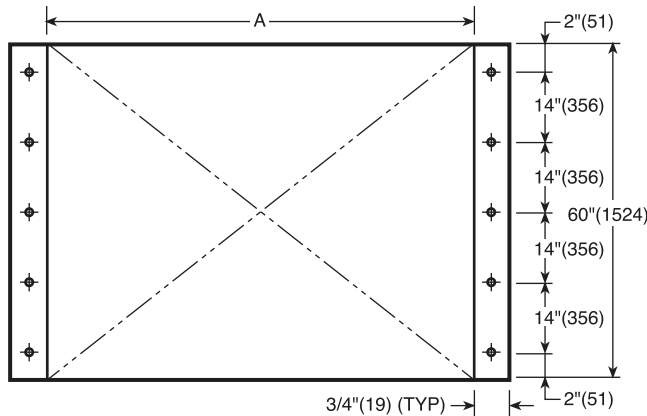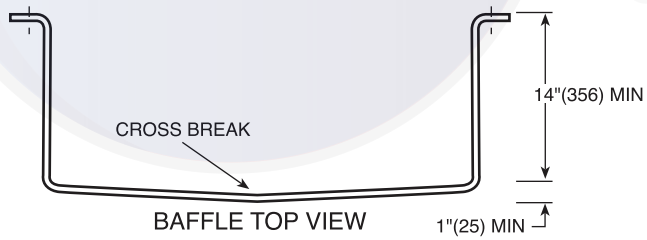

UNIT SIZE	QUANTITY	DIMENSION "A"	
		in.	mm
030,035	Not Used	—	—
040-060	2	78.125 ± 0.125	1984 ± 3
070-100	Not Used	—	—

NOTE: 50P030, 035, and 070-100 units do not require baffles.

Fig. 53 — Wind Baffle Details

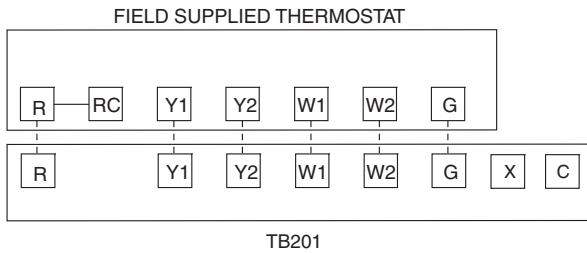


Fig. 54 — Field Control Thermostat Wiring

VAV CONTROL WIRING

The recommended types of control wiring are shown below:

MANUFACTURER	PART NO.	
	Regular Wiring	Plenum Wiring
Alpha	1895	—
American	A21451	A48301
Belden	8205	884421
Columbia	D6451	—
Manhattan	M13402	M64430
Quabik	6130	—

SENSORS

Sensors mounted external to the unit should be wired using single twisted pairs of 20 AWG (American Wire Gage) conductor cable rated for the application, except for the T-56 accessory sensor which requires 3-conductor cable.

HUMIDITY CONTROL AND HOT WATER AND STEAM VALVES

These devices require 20 AWG twisted pair conductor cables rated for the application for the 4 to 20 mA signal.

SPACE TEMPERATURE SENSOR (T-55)

The space temperature sensor (P/N 33ZCT55SPT), if used, is wired to terminals in the unit main control box. To connect the space temperature sensor, see Fig. 55.

SPACE TEMPERATURE SENSOR (T-56)

The space temperature sensor (P/N 33ZCT56SPT) wires are connected to terminals in the unit main control box. To connect the space temperature sensor, see Fig. 55.

COMMUNICATING SPACE TEMPERATURE SENSOR (T-58)

The communicating space temperature sensor (P/N 33ZCT58SPT) is wired to the CCN connections on TB201.

SPACE TEMPERATURE AVERAGING

Applications that require averaging using multiple space temperature sensors can be satisfied using either 4 or 9 sensors as shown in Fig. 56.

NOTE: Only Carrier sensors may be used for standard T-55 space averaging. Sensors must be used in multiples of 1, 4, and 9 only, with total sensors wiring not to exceed 1000 ft.

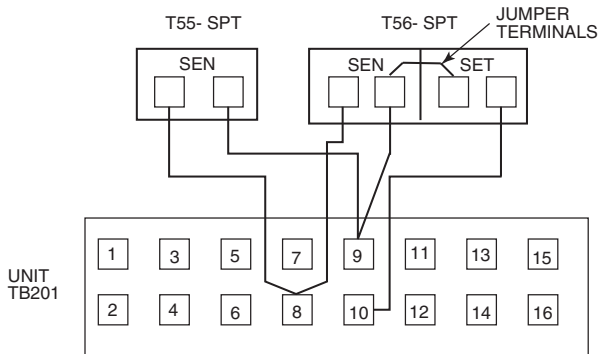


Fig. 55 — T-55 or T-56 Wiring

NOTE: Do not use T-56 sensors for space temperature averaging because the 5-degree offset function will not work in a multiple sensor application.

HEAT INTERLOCK RELAY (VAV UNITS ONLY — NOT NECESSARY FOR DIGITAL AIR VOLUME APPLICATIONS)

Variable air volume (VAV) units using morning warm-up and/or occupied heating require that room terminals be controlled to a position that provides the minimum required heating cfm or greater when the unit goes into Heating mode. The HIR (heat interlock relay) function is provided for this control. When the unit goes into Heating mode, the HIR is energized to provide switch closure or opening (depending on how the field-supplied power source is set up) to open the room terminals. The field connections for the HIR are at TB201, terminals 9 and 10. See Fig. 57.

Option and Accessory Control Wiring

The P Series units may be used in applications with additional control features, options, or accessories. Refer to the Controls and Troubleshooting manual for more information concerning installation and configuration of options and accessories. Figures 57-67 contain wiring information on the following features:

- Heat interlock relay (Fig. 57)
- Outdoor air enthalpy switch (Fig. 58)
- CO₂ space sensor (Fig. 59)
- Filter status switch (Fig. 60)
- Fan status switch (Fig. 61)
- Space humidity sensor (Fig. 62)
- Return air humidity sensor (Fig. 62)
- Return air CO₂ sensor (Fig. 63)
- Return/supply air smoke detector (Fig. 64)
- Smoke control — fire shutdown (Fig. 65)
- Smoke control — purge (Fig. 66)
- Smoke control — evacuation (Fig. 66)
- Smoke control — pressurization (Fig. 66)
- CCN connections (Fig. 67)



Carrier Comfort Network® Interface

The 50P Series units can be connected to the CCN system if desired. The communication bus wiring is supplied and installed in the field. It consists of shielded, 3-conductor cable with shield wire.

The system elements are connected to the communication bus in a daisy chain arrangement. The positive pin of each system element communication connector must be wired to the positive pins of the system element on either side of it, the negative pins must be wired to the negative pins, and the signal pins must be wired to common pins. Wiring connections for the CCN system should be made at the terminal block using the screw terminals. The board also contains an RJ14 CCN plug that can be used to connect a field service computer. There is also another RJ14 LEN connection that is used to download software or connect to a Navigator™ device.

NOTE: Conductors and drain wire must be 20 AWG minimum stranded, tinned copper. Individual conductors must be insulated with PVC, PVC/nylon, vinyl, Teflon¹, or polyethylene. An aluminum/polyester 100% foil shield and an outer jacket of PVC, PVC/nylon, chrome vinyl, or Teflon with a minimum operating temperature range of -4 to 140°F (-20°C to 60°C) is required. See Table 37 for cables that meet the requirements.

1. Teflon is a registered trademark of DuPont.

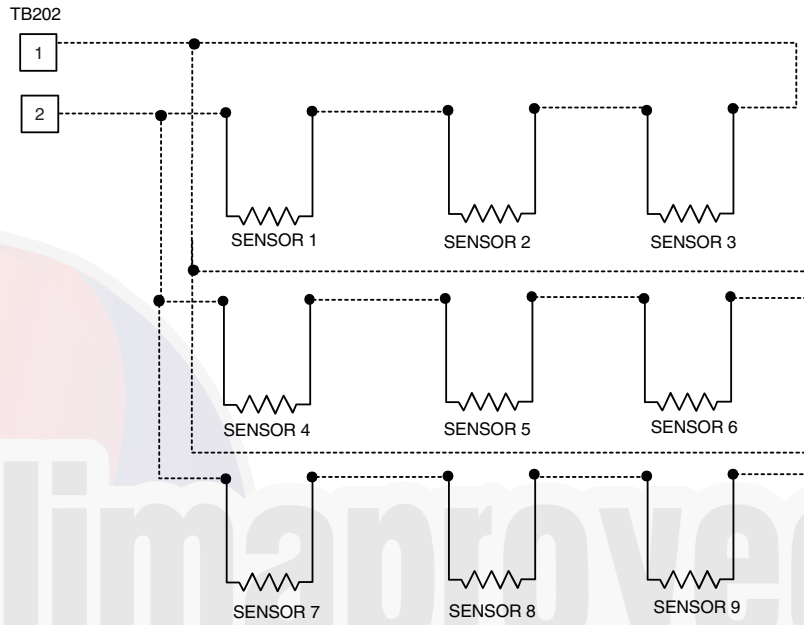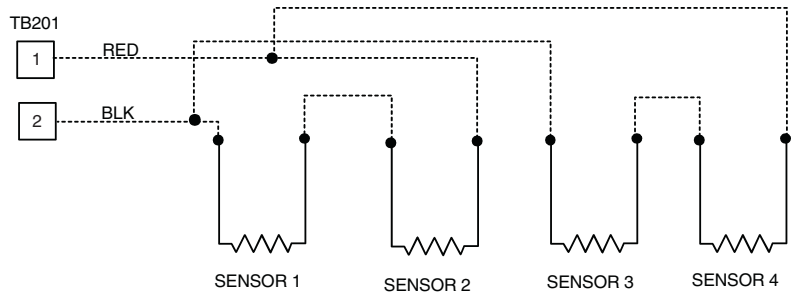

NOTE: Use T-55 sensor only.

Fig. 56 — Space Temperature Averaging Wiring

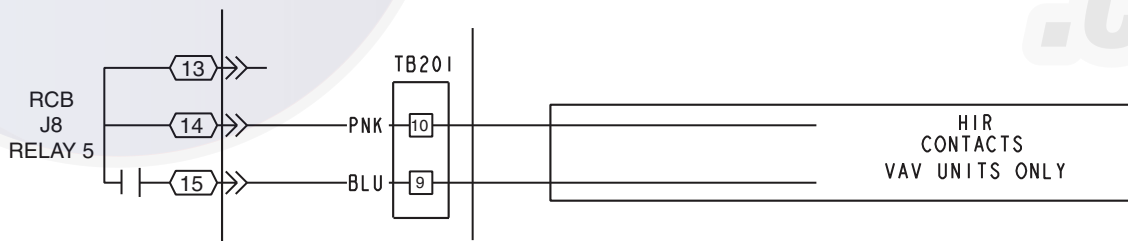


Fig. 57 — Heat Interlock Relay Wiring

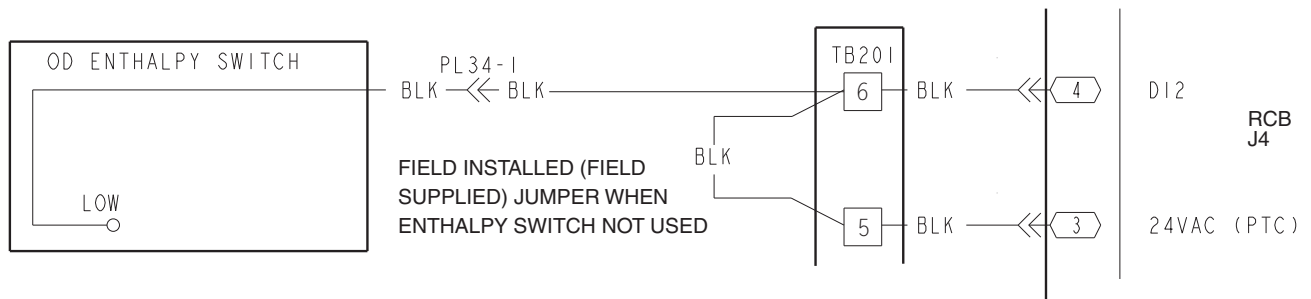


Fig. 58 — Outdoor Air Enthalpy Switch Wiring

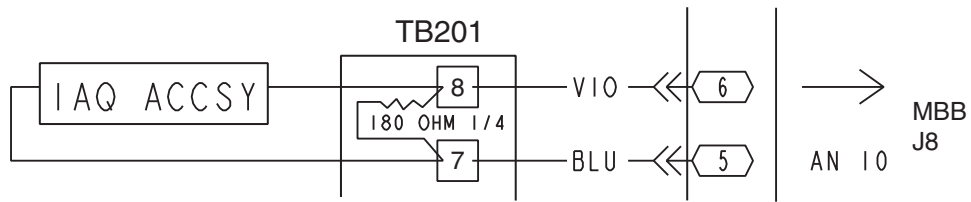


Fig. 59 — CO₂ Space Sensor Wiring

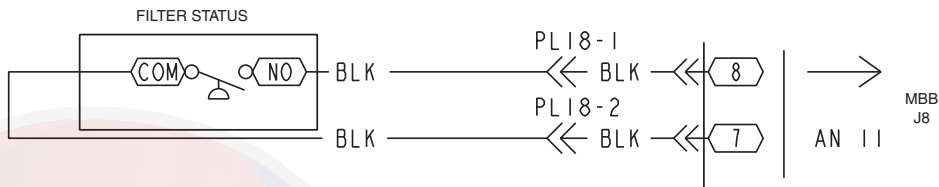


Fig. 60 — Filter Status Wiring

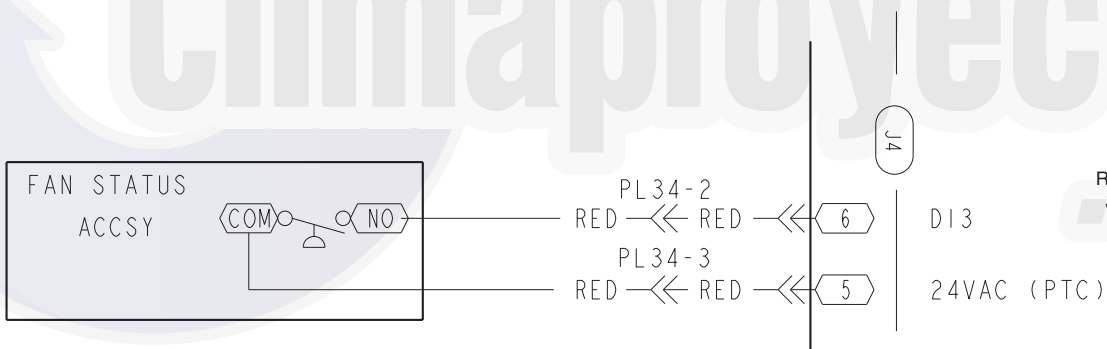


Fig. 61 — Fan Status Switch Wiring

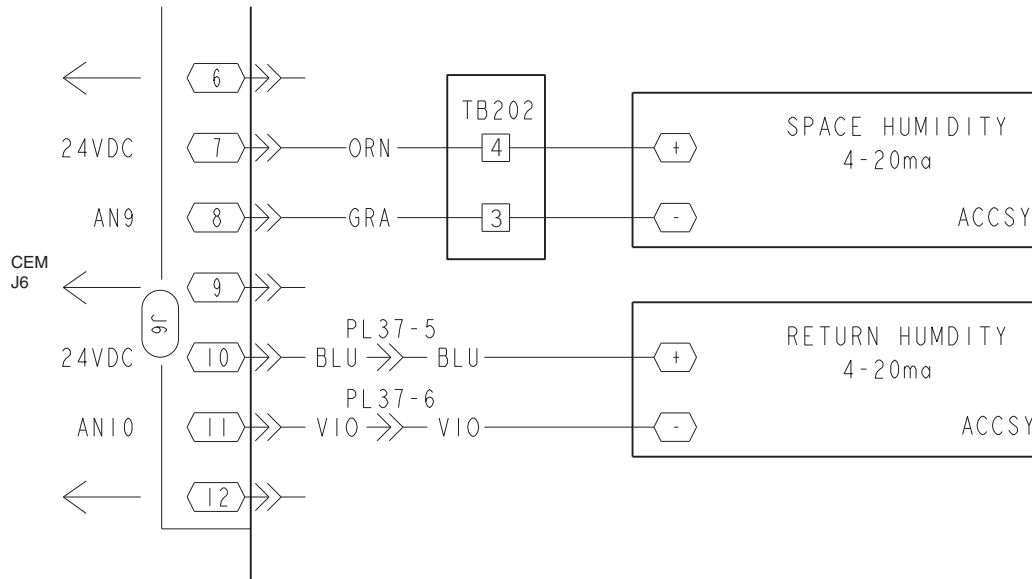


Fig. 62 — Space and Return Air Humidity Sensor Wiring

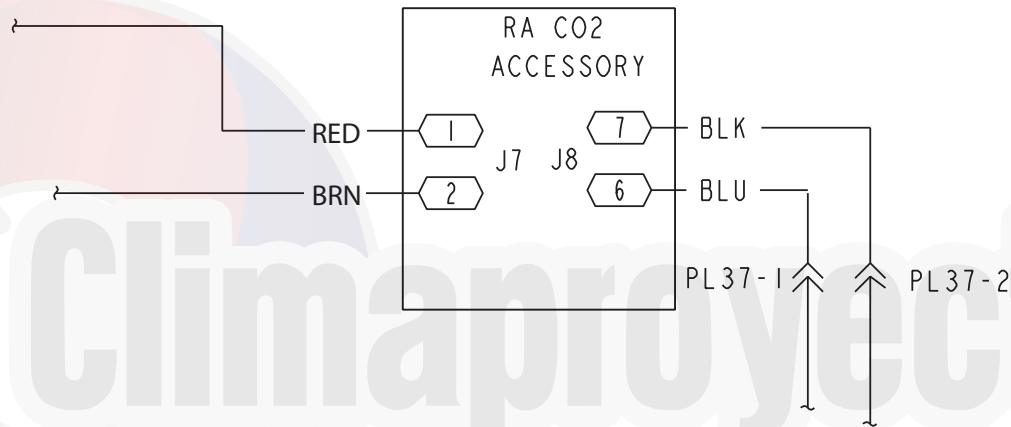


Fig. 63 — Return Air CO₂ Sensor Wiring

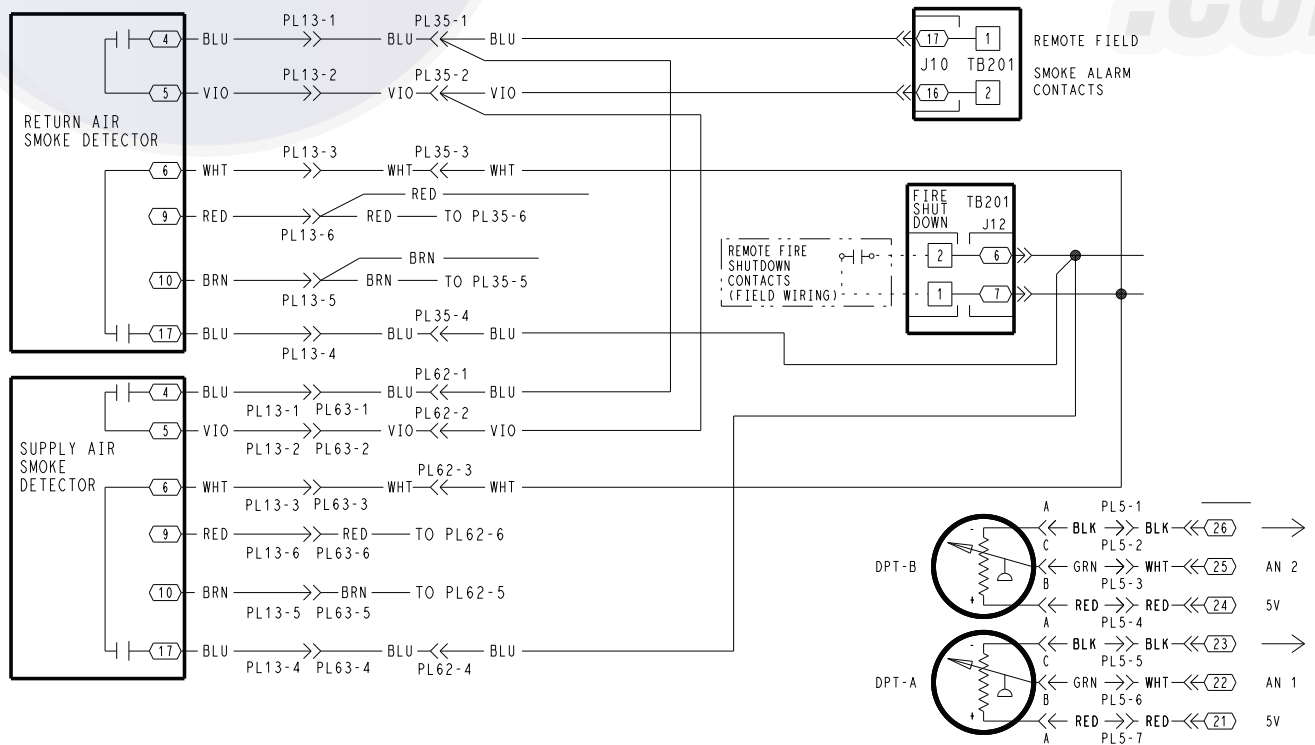


Fig. 64 — Return/Supply Air Smoke Detector Wiring

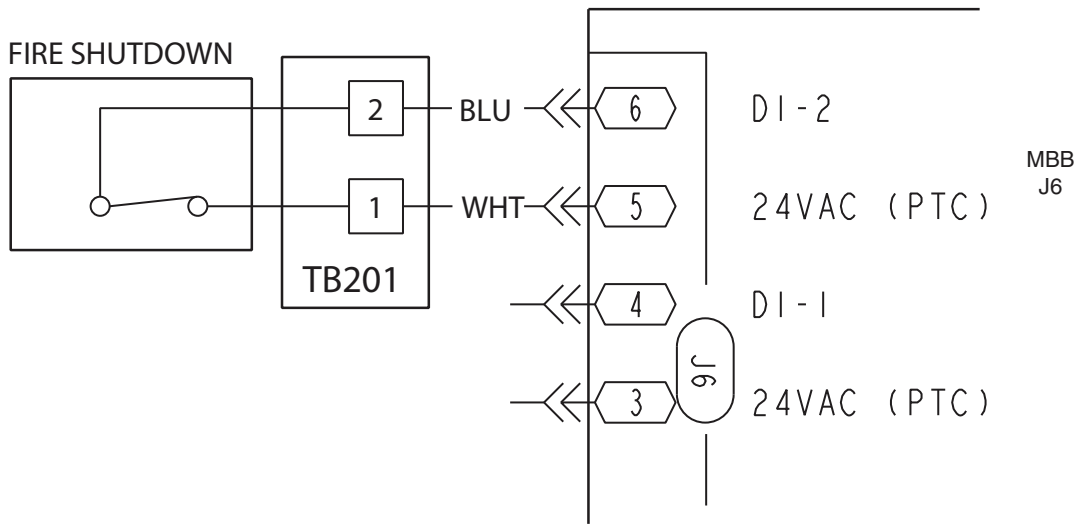


Fig. 65 — Fire Shutdown Wiring

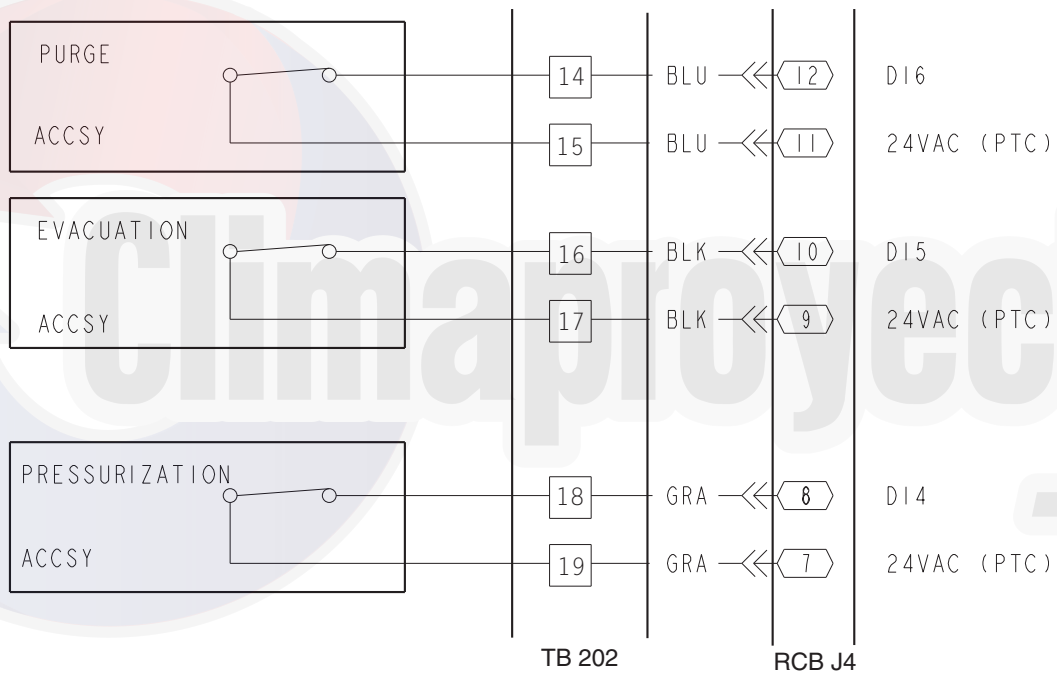


Fig. 66 — Purge, Evacuation, and Pressurization Wiring

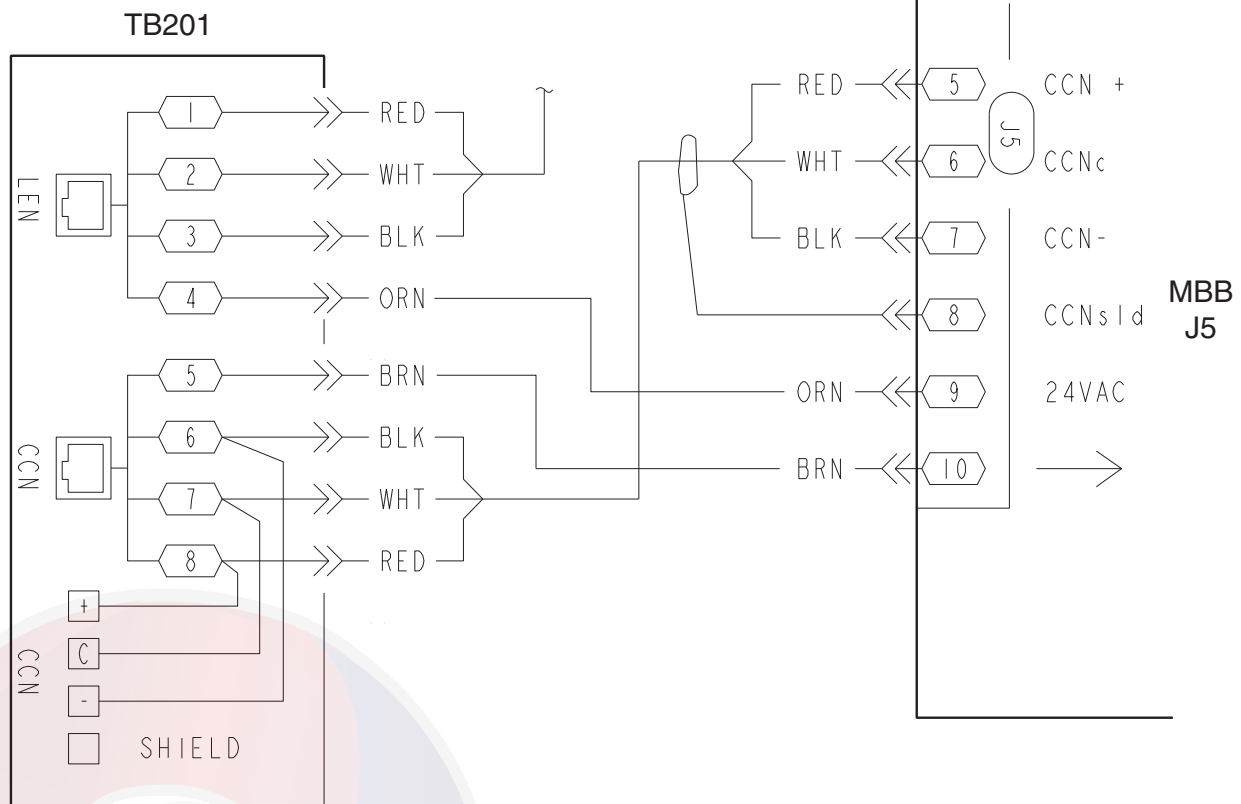


Fig. 67 — CCN Connections

Table 37 — CCN Connection Approved Shielded Cables

MANUFACTURER	CABLE PART NO.
Alpha	2413 or 5463
American	A22503
Belden	8772
Columbia	02525

IMPORTANT: When connecting the CCN communication bus to a system element, use a color coding system for the entire network to simplify installation and checkout.

The following color code is recommended:

SIGNAL TYPE	CCN BUS CONDUCTOR INSULATION COLOR	COMM1 PLUG PIN NO.
+	RED	1
COMMON	WHITE	2
-	BLACK	3

NOTE: If a cable with a different color scheme is selected, a similar color code should be adopted for the entire network.

At each system element, the shields of its communication bus cables must be tied together. If the communication bus is entirely within one building, the resulting continuous field must be connected to a ground at one point only. If the communication bus cable exits from one building and enters another, the shields must be connected to grounds at the lightning suppressor in each building where the cable enters or exits the building (one point per building only).

To connect the unit to the network (Fig. 67):

1. Turn off power to the control box.

2. Cut the CCN wire and strip the ends of the red (+), white (common) and black (-) conductors. (If a different network color scheme is used, substitute appropriate colors.)
3. Wire the CCN system to the screw terminals on the COMM board as follows (Fig. 67):
 - a. Secure the red (+) wire to CCN screw terminal + on the COMM board.
 - b. Secure the white (common) wire to CCN screw terminal C on the COMM board.
Secure the black (-) wire to CCN screw terminal - on the COMM board.
Secure shield wire to CCN screw terminal SHIELD on the COMM board.

IMPORTANT: A shorted CCN bus cable will prevent some routines from running and may prevent unit from starting. If abnormal conditions occur, unplug the connector. If conditions return to normal, check CCN connector, and run new cable if necessary. A short in one section of the bus can cause problems with all system elements on the bus.

Optional UPC Open Installation

WIRING THE UPC OPEN TO THE MS/TP NETWORK

The UPC Open controller communicates using BACnet¹ on an MS/TP network segment communications at 9600 bps, 19.2 kbps, 38.4 kbps, or 76.8 kbps.

Wire the controllers on an MS/TP network segment in a daisy-chain configuration. Wire specifications for the cable are 22 AWG (American Wire Gage) or 24 AWG, low-capacitance, twisted, stranded, shielded copper wire. The maximum length is 2000 ft.

1. BACnet is a registered trademark of ASHRAE (American Society of Heating, Refrigerating, and Air-Conditioning Engineers).

Install a BT485 terminator on the first and last controller on a network segment to add bias and prevent signal distortions due to echoing. See Fig. 68-70.

To wire the UPC Open controller to the BAS network:

1. Pull the screw terminal connector from the controller's BAS Port.
2. Check the communications wiring for shorts and grounds.
3. Connect the communications wiring to the BAS port's screw terminals labeled Net +, Net -, and Shield.

NOTE: Use the same polarity throughout the network segment.

4. Insert the power screw terminal connector into the UPC Open controller's power terminals if they are not currently connected.
5. Verify communication with the network by viewing a module status report. To perform a module status report using the BACview keypad/display unit, press and hold the "FN" key then press the "." Key.

To install a BT485 terminator, push the BT485 terminator on to the BT485 connector located near the BACnet connector.

NOTE: The BT485 terminator has no polarity associated with it.

To order a BT485 terminator, consult Commercial Products i-Vu® Open Control System Master Prices.

MS/TP WIRING RECOMMENDATIONS

Recommendations are shown in Tables 38 and 39. The wire jacket and UL temperature rating specifications list two acceptable alternatives. The Halar¹ specification has a higher temperature rating and a tougher outer jacket than the SmokeGard² specification, and it is appropriate for use in applications where the user is concerned about abrasion. The Halar jacket is also less likely to crack in extremely low temperatures.

NOTE: Use the specified type of wire and cable for maximum signal integrity.

1. Halar is a registered trademark of Solvay Plastics.
2. SmokeGard is a trademark of AlphaGary-Mexichem Corp.

Table 38 — MS/TP Wiring Recommendations

SPECIFICATION	RECOMMENDATION
Cable	Single twisted pair, low capacitance, CL2P, 22 AWG (7x30), TC foam FEP, plenum rated cable
Conductor	22 or 24 AWG stranded copper (tin plated)
Insulation	Foamed FEP 0.015 in. (0.381 mm) wall 0.060 in. (1.524 mm) O.D.
Color Code	Black/White
Twist Lay	2 in. (50.8 mm) lay on pair 6 twists/foot (20 twists/meter) nominal
Shielding	Aluminum/Mylar shield with 24 AWG TC drain wire
Jacket	SmokeGard Jacket (SmokeGard PVC) 0.021 in. (0.5334 mm) wall 0.175 in. (4.445 mm) O.D. Halar Jacket (E-CTFE) 0.010 in. (0.254 mm) wall 0.144 in. (3.6576 mm) O.D.
DC Resistance	15.2 Ohms/1000 feet (50 Ohms/km) nominal
Capacitance	12.5 pF/ft (41 pF/meter) nominal conductor to conductor
Characteristic Impedance	100 Ohms nominal
Weight	12 lb/1000 feet (17.9 kg/km)
UL Temperature Rating	SmokeGard 167°F (75°C) Halar -40 to 302°F (-40 to 150°C)
Voltage	300 Vac, power limited
Listing	UL: NEC CL2P, or better

LEGEND

- AWG — American Wire Gage
- CL2P — Class 2 Plenum Cable
- DC — Direct Current
- FEP — Fluorinated Ethylene Polymer
- NEC — National Electrical Code
- O.D. — Outside Diameter
- TC — Tinned Copper
- UL — Underwriters Laboratories

Table 39 — Open System Wiring Specifications and Recommended Vendors

WIRING SPECIFICATIONS		RECOMMENDED VENDORS AND PART NUMBERS			
Wire Type	Description	Connect Air International	Belden	RMCORP	Contractors Wire and Cable
MS/TP Network (RS-485)	22 AWG, single twisted shielded pair, low capacitance, CL2P, TC foam FEP, plenum rated. See MS/TP Installation Guide for specifications.	W221P-22227	—	25160PV	CLP0520LC
	24 AWG, single twisted shielded pair, low capacitance, CL2P, TC foam FEP, plenum rated. See MS/TP Installation Guide for specifications.	W241P-2000F	82841	25120-OR	—
Rnet	4 conductor, unshielded, CMP, 18 AWG, plenum rated.	W184C-2099BLB	6302UE	21450	CLP0442

LEGEND

- AWG — American Wire Gage
- CL2P — Class 2 Plenum Cable
- CMP — Communications Plenum Rated
- FEP — Fluorinated Ethylene Polymer
- TC — Tinned Copper

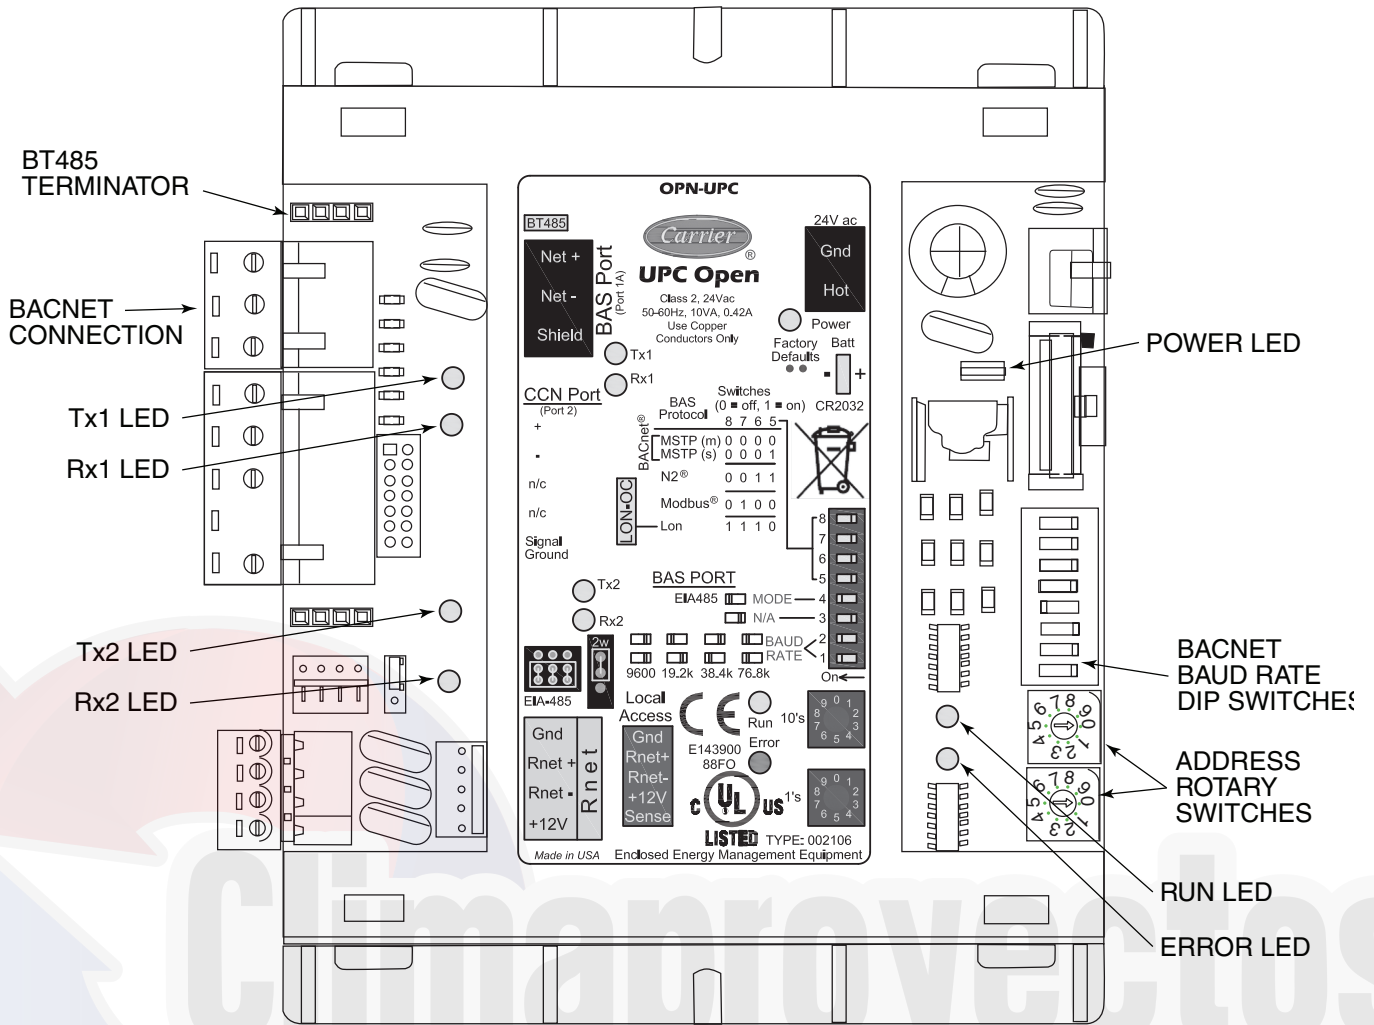


Fig. 68 — UPC Open Controller

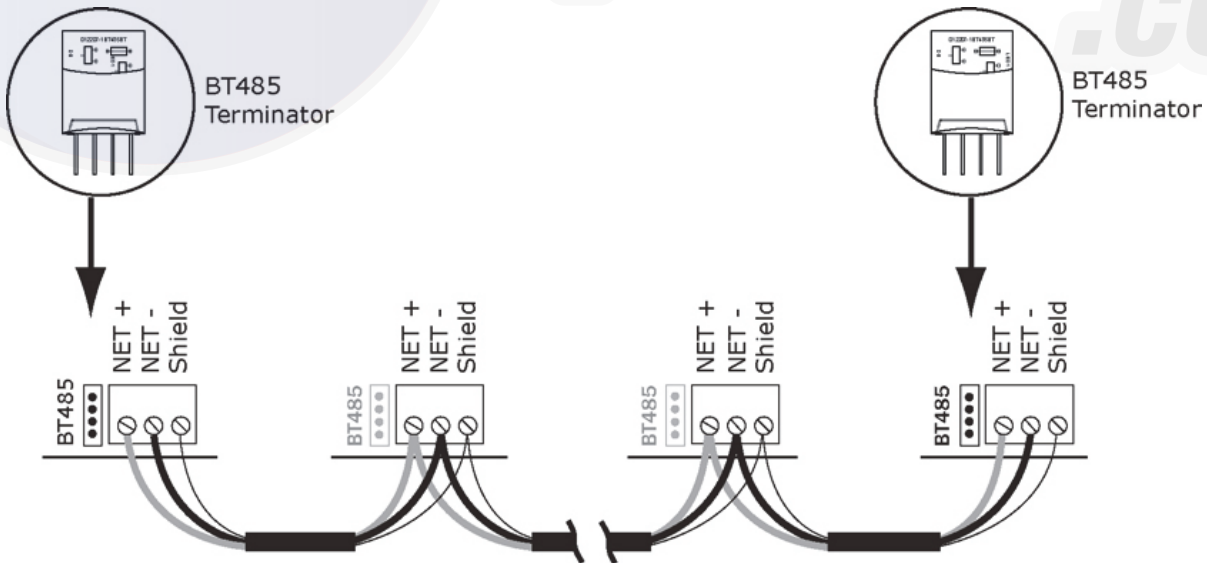


Fig. 69 — Open System Network Wiring

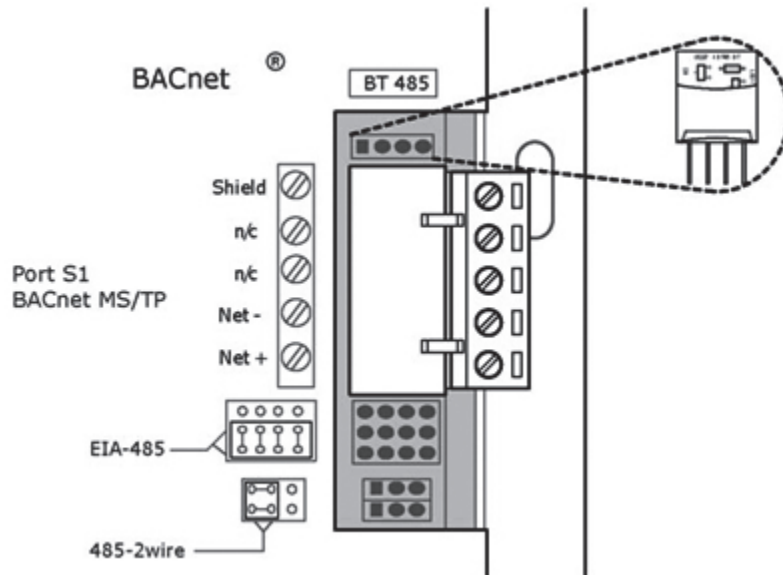


Fig. 70 — BT485 Installation

Smoke Control Modes

Rooftop units can be used for aid in building smoke control in the event of a building fire. The available functions include: Fire Shutdown, Pressurization, Evacuation, and Smoke Purge. These functions are enhanced when multiple rooftop units are used to zone a building. See Table 40 and Fig. 65 and 66.

FIRE SHUTDOWN

Fire Shutdown mode terminates all unit operation (cooling, heating, supply fan, and power exhaust). This mode prevents recirculation of contaminated air back into the space. The mode will not allow admission into the space of unsuitable outside air. See Fig. 65 for wiring.

PRESSURIZATION

Pressurization mode is intended to keep smoke out of a zone. The factory-installed optional economizer is required for this function. Pressurization is accomplished by the following:

- opening the economizer (option)
- running the supply fan (optional inlet guide vanes open or optional VFD at normal duct static pressure set point)
- closing the power exhaust dampers (if installed as option or accessory)
- shutting off the power exhaust fans (if installed as option or accessory)

This allows the space to be overpressurized relative to adjacent zones and prevents or slows entry of smoke into this space from adjacent zones. See Fig. 66 for wiring.

EVACUATION

Evacuation mode removes smoke or undesirable air from interior spaces without reintroducing unsuitable air. The factory-installed optional economizer with option or accessory power exhaust is required. Evacuation is accomplished by the following:

- turning the supply fan off
- opening the economizer (option required)
- running the exhaust fans (option or accessory required)
- opening the exhaust dampers.

See Fig. 66 for wiring.

SMOKE PURGE

Smoke Purge mode removes smoke from the interior spaces and replaces it with fresh outside air. The factory-installed optional economizer with option or accessory power exhaust are required for this function. Smoke purge is accomplished by the following:

- turning supply fan on
- opening the economizer (option required)
- running the exhaust fans (option or accessory required)
- opening the exhaust dampers

See Fig. 66 for wiring.

SMOKE CONTROL INSTALLATION

Implementation of the various Smoke Control Modes on these units requires the installer to modify the unit wiring to add contacts (via either manual switches or relays) that will selectively interrupt and override standard factory control sequences. See Table 40 and Fig. 65 and 66 for more information.

Table 40 — Smoke Control Modes

FUNCTION	MODE			
	Fire Shutdown	Pressurization	Evacuation*	Smoke Purge*
Supply Fan	Off	On	Off	On
VFD†	—	Open/On	—	Open/On
Economizer	Closed	Open	Open	Open
Return Air Damper	Open	Closed	Closed	Closed
Exhaust Fans	Off	Off	On	On
Exhaust Damper	Closed	Closed	Open	Open

LEGEND

VAV — Variable Air Volume
VFD — Variable Frequency Drive

*Power exhaust option required for this mode.

†Applicable to VAV units with appropriate options.