


**50TC**  
**Cooling Only/Electric Heat**  
**Packaged Rooftop**  
**3 to 15 Nominal Tons**



## Product Data

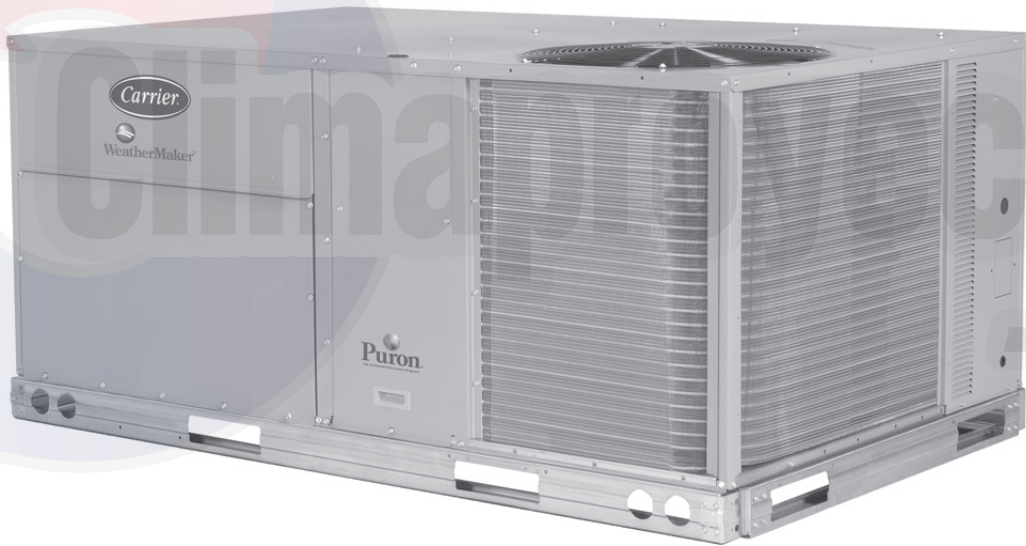

C08613



# TABLE OF CONTENTS

	PAGE		PAGE
FEATURES AND BENEFITS .....	3	APPLICATION DATA .....	27
MODEL NUMBER NOMENCLATURE .....	4	COOLING TABLES .....	30
FACTORY OPTIONS & ACCESSORIES .....	5	STATIC PRESSURE TABLES .....	51
AHRI CAPACITY RATING .....	9	FAN PERFORMANCE .....	54
SOUND PERFORMANCE .....	11	SEQUENCE OF OPERATION .....	168
PHYSICAL DATA .....	12	GUIDE SPECIFICATIONS .....	171
CURBS & WEIGHTS DIMENSIONS .....	15		



Turn to the Experts™

The Carrier rooftop unit (RTU) was designed by customers for customers. With no-strip screw collars, handled access panels, and more we've made your unit easy to install, easy to maintain and easy to use.

### **Easy to install:**

All WeatherMaker™ units are field-convertible to horizontal air flow which makes it easy to adjust to unexpected job site complications. Lighter units make easy replacement. Most Carrier 50TC rooftops fit on existing Carrier curbs dating back to 1989. Also, our large control box gives you room to work and room to mount Carrier accessory controls.

### **Easy to maintain:**

Easy access handles by Carrier provide quick and easy access to all normally serviced components. Our "no-strip" screw system has superior holding power and guides screws into position while preventing the screw from stripping the unit's metal. Take accurate pressure readings by reading condenser pressure with panels on. Simply remove the black, composite plug, route your gauge line(s) through the hole, and connect them to the refrigeration service valve(s).

### **Easy to use:**

The newly designed, central terminal board by Carrier puts all your connections and troubleshooting points in one convenient place, standard. Most low voltage connections are made to the same board and make it easy to find what you're looking for and easy to access it. Carrier rooftops have high and low pressure switches, a filter drier, and 2-in (51mm) filters standard.

## FEATURES AND BENEFITS

- Single-stage cooling capacity control on 04 to 12 models. Two-stage cooling capacity control on 08 to 16 models.
- SEER's up to 13.0.
- EER's up to 11.3.
- IEER's up to 12.2 with 1-speed indoor fan motor.
- IEER's up to 13.0 with 2-speed/VFD indoor fan motor.
- Up to 28% lighter than similar industry units. Lighter rooftops make easier replacement jobs.
- 3-12.5 ton units fit on existing Carrier rooftop curbs making the utility connections the same. This saves time and money on replacement jobs.
- Standardized components and layout. Standardized components and controls make service and stocking parts easier.
- Scroll compressors on all units. This makes service, stocking parts, replacement, and troubleshooting easier.
- Field convertible airflow (3-12.5 tons). Being able to convert a unit from vertical airflow to horizontal makes it easy to overcome job site complications. 15 ton models requires a simple supply duct cover to field convert from factory vertical to horizontal.
- Easy-adjust, belt-drive motor available. There's no need for field-supplied drives or motors.
- Provisions for bottom or side condensate drain.
- Capable of thru-the-base or thru-the-curb electrical routing.
- Single-point electrical connection.
- Sloped, composite drain pan sheds water; and won't rust.
- Standardized controls and control box layout. Standardized components and controls make stocking parts and service easier.
- Clean, large, easy to use control box.
- Color-coded wiring.
- Large, laminated wiring and power wiring drawings which are affixed to unit make troubleshooting easy.
- Single, central terminal board for test and wiring connections.
- Fast-access, handled, panels for easy access to the blower and blower motor, control box, and compressors.
- "No-strip" screw system guides screws into the panel and captures them tightly without stripping the screw, the panel, or the unit.
- Exclusive, newly-design indoor refrigerant header for easier maintenance and replacement.
- Mechanical cooling (115°F to 40°F or 46°C to 4°C) standard on all models. Winter start kit allows cooling operation down to 25°F (-4°C) and MotorMaster to -20°F (-29°C).
- 2-in (51mm) disposable filters on all units.
- Refrigerant filter-drier on each circuit.
- High and low pressure switches. Added reliability with high pressure switch and low pressure switch.
- Factory-installed Humidi-MiZer adaptive dehumidification system on all sizes with round tube/plate fin condenser coils, includes MotorMaster I controller.
- Optional Staged Air Volume (SAV) system utilizes a Variable Frequency Drive (VFD) to automatically adjust the indoor fan motor speed between cooling stages. Available on 2-stage cooling models 08-16 with electromechanical controls or RTU Open.

# MODEL NUMBER NOMENCLATURE

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
5	0	T	C	-	A	0	4	A	1	A	5	-	0	A	0	A	0

## Product Type

50 = Elect Heat Pkg. Rooftop

## Model Series

TC = Standard Efficiency

## Heat Size

- = No heat

## Refrigerant System Options

A = 1-stage cooling models  
 B = 1 stg cooling w/Humidi-MiZer (04-07)  
 D = 2 stage Cooling (08-16)  
 E = 2 stg cooling w/Al/Cu cond. coil and with Humidi-MiZer (08-16)

## Cooling Tons

04 = 3 ton                      08 = 7.5 ton  
 05 = 4 ton                      09 = 8.5 ton  
 06 = 5 ton                      12 = 10 ton  
 07 = 6 ton                      14 = 12.5 ton  
    16 = 15 ton

## Sensor Options

A = None  
 B = RA Smoke Detector  
 C = SA Smoke Detector  
 D = RA + SA Smoke Detector  
 E = CO<sub>2</sub> Sensor  
 F = RA Smoke Detector + CO<sub>2</sub>  
 G = SA Smoke Detector + CO<sub>2</sub>  
 H = RA + SA Smoke Detector + CO<sub>2</sub>

## Indoor Fan Options

1 = Standard Static Option  
 2 = Medium Static Option  
 3 = High Static Option  
 C = High Static Option w/Hi-Effy Motor (16 only)

## Coil Options for round tube plate fin (RTPF) cond. models only (Outdoor-Indoor-Hail Guard)

A = Al/Cu - Al/Cu  
 B = Pre-coat Al/Cu - Al/Cu  
 C = E-coat Al/Cu - Al/Cu  
 D = E-coat AL/Cu - E-coat AL/Cu  
 E = Cu/Cu - Al/Cu  
 F = Cu/Cu - Cu/Cu  
 M = Al/Cu - Al/Cu - Louvered Hail Guard  
 N = Pre-Coat Al/Cu - Al/Cu - Louvered Hail Guard  
 P = E-Coat Al/Cu - Al/Cu Louvered Hail Guard  
 Q = E-Coat Al/Cu - E-coat Al/Cu - Louvered Hail Guard  
 R = Cu/Cu - Al/Cu - Louvered Hail Guard  
 S = Cu/Cu - Cu/Cu - Louvered Hail Guard

## Coil Options for all aluminum - Novation cond. models only (Outdoor-Indoor-Hail Guard)

G = Al/Al - Al/Cu  
 H = Al/Al - Cu/Cu  
 J = Al/Al - E-coat Al/Cu  
 K = E-coat Al/Al - Al/Cu  
 L = E-coat Al/Al - E-coat Al/Cu  
 T = Al/Al - Al/Cu, Louvered Hail Guard  
 U = Al/Al - Cu/Cu, Louvered Hail Guard  
 V = Al/Al - E-coat Al/Cu, Louvered Hail Guard  
 W = E-coat Al/Al - Al/Cu, Louvered Hail Guard  
 X = E-coat Al/Al - E-coat Al/Cu, Louvered Hail Guard

## Packaging

0 = Standard  
 1 = LTL  
 3 = CA Seismic Compliant  
 4 = LTL & CA Seismic Compliant

## Electrical Options

A = None  
 C = Non-fused disconnect  
 D = Thru the base connections  
 F = Non-fused disconnect & thru the base  
 G = 2-speed indoor fan (VFD) controller  
 J = 2-spd contr (VFD) & non-fused disc.  
 K = 2-spd contr (VFD) & thru the base  
 M = 2-spd cont (VFD) non-fused disc. & thru the base connections

## Service Options

0 = None  
 1 = Un-powered Convenience Outlet  
 2 = Powered Convenience Outlet  
 3 = Hinged Panels  
 4 = Hinged Panels, un-powered C.O.  
 5 = Hinged Panels, powered C.O.

## Intake / Exhaust Options

A = None  
 B = Temperature Economizer w/Barometric Relief  
 F = Enthalpy Economizer w/Barometric Relief  
 K = 2 position Damper  
 U = Temp Ultra Low Leak Economizer w/Baro Relief  
 W = Enthalpy Ultra Low Leak Econo w/Baro Relief

## Base Unit Controls

0 = Base Electromechanical Controls  
 1 = PremierLink Controller  
 2 = RTU Open Multi-Protocol Controller  
 6 = Electromechanical with 2 speed fan and W7220 Econo controller

## Design Revision

= Factory Design Revision

## Voltage

1 = 575/3/60  
 3 = 208-230/1/60  
 5 = 208-230/3/60  
 6 = 460/3/60

## Note: On single phase (-3 voltage code) models, the Following are not available as a factory installed option:

- Humidi-Mizer
- Coated Coils or CU Fin Coils
- Louvered Hail Guards
- Economizer or 2 Position Damper
- Powered 115 Volt Convenience Outlet

Not all possible options can be displayed above - see price pages or contact your Carrier Expert for more details.

**Table 1 – FACTORY-INSTALLED OPTIONS AND FIELD-INSTALLED ACCESSORIES**

CATEGORY	ITEM	FACTORY INSTALLED OPTION	FIELD INSTALLED ACCESSORY
<b>Cabinet</b>	Supply Duct Cover (16 size only)		X
	Thru-the-base electrical connections	X	X
	California Seismic Compliant Labeling	X	
	Hinged Access Panels	X	
<b>Coil Options</b>	Cu/Cu indoor and/or outdoor coils <sup>1, 6</sup>	X	
	Pre-coated outdoor coils <sup>1, 6</sup>	X	
	Premium, E-coated outdoor coils <sup>1, 6</sup>	X	
<b>Humidity Control</b>	Humidi-MiZer Adaptive Dehumidification System <sup>6</sup>	X	
<b>Condenser Protection</b>	Condenser coil hail guard (louvered design) <sup>6</sup>	X	X
<b>Controls</b>	Thermostats, temperature sensors, and subbases		X
	PremierLink DDC communicating controller	X	X
	RTU Open-protocol controller	X	
	Smoke detector (supply and/or return air)	X	
	Time Guard II compressor delay control circuit		X
	Phase Monitor		X
<b>Economizers &amp; Outdoor Air Dampers</b>	EconoMi\$er IV (for electromechanical controlled RTUs) <sup>6</sup>	X	X
	EconoMi\$er2 (for DDC controlled RTUs) <sup>6</sup>	X	X
	Motorized 2 position outdoor-air damper <sup>6</sup>	X	X
	Manual outdoor-air damper (25% and 50%)		X
	Barometric relief <sup>2</sup>	X	X
	Power exhaust		X
	Ultra Low Leak EconoMi\$er X (for 2-speed SAV system only 08 to 16 sizes with 2 stages of cooling), vertical supply and return air only.	X	X
<b>Economizer Sensors &amp; IAQ Devices</b>	Single dry bulb temperature sensors <sup>3</sup>	X	X
	Differential dry bulb temperature sensors <sup>3</sup>		X
	Single enthalpy sensors <sup>3</sup>	X	X
	Differential enthalpy sensors <sup>3</sup>		X
	CO <sub>2</sub> sensor (wall, duct, or unit mounted) <sup>3</sup>	X	X
<b>Electric Heat</b>	Electric Resistance Heaters		X
	Single Point Kit		X
<b>Indoor Motor &amp; Drive</b>	Multiple motor and drive packages	X	
	Staged Air Vol (SAV) system w/VFD controller (2-stage cool only with electrical mechanical and RTU Open controls)	X	
	Display Kit for SAV system with VFD		X
<b>Low Ambient Control</b>	Winter start kit <sup>4</sup>		X
	Motormaster® head pressure controller <sup>4</sup>		X
<b>Power Options</b>	Convenience outlet (powered) <sup>6</sup>	X	
	Convenience outlet (unpowered)	X	
	Non-fused disconnect <sup>5</sup>	X	
	Disconnect Switch Bracket (16 size only)		X
<b>Roof Curbs</b>	Roof curb 14-in (356mm)		X
	Roof curb 24-in (610mm)		X

**NOTES:**

1. Novation coated coils are only available with E-coat.
2. Included with economizer.
3. Sensors for optimizing economizer.
4. See application data for assistance.
5. Available on units with MOCP's of 80 amps or less.
6. Not available as factory installed option on single phase (208/230/1/60) models. Use field-installed accessory where available.

## FACTORY OPTIONS AND/OR ACCESSORIES

### **Economizer (dry-bulb or enthalpy)**

Economizers save money. They bring in fresh, outside air for ventilation; and provide cool, outside air to cool your building. This is the preferred method of low ambient cooling. When coupled to CO<sub>2</sub> sensors, Economizers can provide even more savings by coupling the ventilation air to only that amount required.

Economizers are available, installed and tested by the factory, with either enthalpy or dry-bulb temperature inputs. There are also models for electromechanical as well as direct digital controllers. Additional sensors are available as accessories to optimize the economizers.

Economizers include gravity controlled, barometric relief which equalizes building pressure and ambient air pressures. This can be a cost effective solution to prevent building pressurization.

### **CO<sub>2</sub> Sensor**

Improves productivity and saves money by working with the economizer to intake only the correct amount of outside air for ventilation. As occupants fill your building, the CO<sub>2</sub> sensor detects their presence through increasing CO<sub>2</sub> levels, and opens the economizer appropriately.

When the occupants leave, the CO<sub>2</sub> levels decrease, and the sensor appropriately closes the economizer. This intelligent control of the ventilation air, called Demand Control Ventilation (DCV) reduces the overall load on the rooftop, saving money.

### **Smoke Detectors**

Trust the experts. Smoke detectors make your application safer and your job easier. Carrier smoke detectors immediately shut down the rooftop unit when smoke is detected. They are available, installed by the factory, for supply air, return air, or both.

### **Louvered Hail Guards**

Sleek, louvered panels protect the condenser coil from hail damage, foreign objects, and incidental contact.

### **Convenience Outlet (powered or un-powered)**

Reduce service and/or installation costs by including a convenience outlet in your specification. Carrier will install this service feature at our factory. Provides a convenient, 15 amp, 115v GFCI receptacle with "Wet in Use" cover. The "powered" option allows the installer to power the outlet from the line side of the disconnect or load side as required by code. The "unpowered" option is to be powered from a separate 115/120v power source.

### **Non-fused Disconnect**

This OSHA-compliant, factory-installed, safety switch allows a service technician to locally secure power to the rooftop.

### **Disconnect Switch Bracket**

Provides a pre-engineered and sized mounting bracket for applications requiring a unit mounted fused and non-fused disconnect of greater than 100 amps. Bracket assures that no damage will occur to coils when mounting with screws and other fasteners (16 size only).

### **Power Exhaust with Barometric Relief**

Superior internal building pressure control. This field-installed accessory may eliminate the need for costly, external pressure control fans.

### **PremierLink**

This CCN controller regulates your rooftop's performance to tighter tolerances and expanded limits, as well as facilitates zoning systems and digital accessories. It also unites your Carrier HVAC equipment together on one, coherent CCN network. The PremierLink can be factory-installed, or easily field-installed. Not available with 2-speed Staged Air Volume (SAV) System.

### **RTU Open, Multi-protocol Controller**

Connect the rooftop to an existing BAS without needing complicated translators or adapter modules using the RTU Open controller. This new controller speaks the 4 most common building automation system languages (Bacnet, Modbus, N2, and Lonworks). Use this controller when you have an existing BAS.

### **Time Guard II Control Circuit**

This accessory protects your compressor by preventing short-cycling in the event of some other failure, prevents the compressor from restarting for 30 seconds after stopping. Not required with PremierLink, RTU Open, or authorized commercial thermostats.

### **Filter or Fan Status Switches**

Use these differential pressure switches to detect a filter clog or indoor fan motor failure. When used in conjunction with a compatible unit controller/thermostat, the switches will activate an alarm to warn the appropriate personnel.

### **Motorized 2-Position Damper**

The new Carrier 2-position, motorized outdoor air damper admits up to 100% outside air. Using reliable, gear-driven technology, the 2-position damper opens to allow ventilation air and closes when the rooftop stops, stopping unwanted infiltration.

### **Manual OA Damper**

Manual outdoor air dampers are an economical way to bring in ventilation air. The dampers are available in 25% and 50% versions.



## FACTORY OPTIONS AND/OR ACCESSORIES (cont.)

### Optional Humidi-MiZer Adaptive Dehumidification System

Carrier's Humidi-MiZer adaptive dehumidification system is an all-inclusive factory-installed option that can be ordered with any WeatherMaker 50TC-04-16 rooftop unit.

This system expands the envelope of operation of Carrier's WeatherMaker rooftop products to provide unprecedented flexibility to meet year-round comfort conditions.

The Humidi-MiZer adaptive dehumidification system has the industry's only dual dehumidification mode setting. The Humidi-MiZer system includes two new modes of operation.

The WeatherMaker 50TC-04-16 rooftop coupled with the Humidi-MiZer system is capable of operating in normal design cooling mode, subcooling mode, and hot gas reheat mode. Normal design cooling mode is when the unit will operate under its normal sequence of operation by cycling compressors to maintain comfort conditions.

Subcooling mode will operate to satisfy part load type conditions when the space requires combined sensible and a higher proportion of latent load control. Hot Gas Reheat mode will operate when outdoor temperatures diminish and the need for latent capacity is required for sole humidity control. Hot Gas Reheat mode will provide neutral air for maximum dehumidification operation.

### Staged Air Volume (SAV) Indoor Fan Speed System

Carrier's Staged Air Volume (SAV) system saves energy and installation time by utilizing a Variable Frequency Drive (VFD) to automatically adjust the indoor fan motor speed in sequence with the units cooling operation. Per ASHRAE 90.1 2010 standard section 6.4.3.10.b, during the first stage of cooling operation the VFD will adjust the fan motor to provide 2/3rd of the total cfm established for the unit. When a call for the second stage of cooling is required, the VFD will allow the total cfm for the unit established (100%). During the heating mode the VFD will allow total design cfm (100%) operation and during the ventilation mode the VFD will allow operation to 2/3rd of total cfm.

Compared to 1-speed indoor fan motor systems, Carrier's SAV system can save substantial energy, 25%+\*, versus 1-speed indoor fan motor systems.

The VFD used in Carrier's SAV system has soft start capabilities to slowly ramp up the speeds, thus eliminating any high inrush air volume during initial start-up. It also has internal over-current protection for the fan motor and a field installed display kit that allows adjustment and in depth diagnostics of the VFD.

This SAV system is available on models with 2-stage cooling operation with electromechanical or RTU Open, Multi Protocol controls. Both space sensor and

conventional thermostats/controls can be used to provide accurate control in any application.

The SAV system is very flexible for initial fan performance set up and adjustment. The standard factory shipped VFD is pre-programmed to automatically stage the fan speed between the first and second stage of cooling. The unit fan performance static pressure and cfm can be easily adjusted using the traditional means of pulley adjustments. The other means to adjust the unit static and cfm performance is to utilize the field installed Display Kit and adjust the frequency and voltage in the VFD to performance requirements. In either case, once set up, the VFD will automatically adjust the speed between the cooling stage operations.

\*Data based on .10 (\$/kWh) utilizing Carrier's HAP 4.6 simulation software program

### Motormaster Head Pressure Controller

The Motormaster motor controller is a low ambient, head pressure controller kit that is designed to maintain the unit's condenser head pressure during periods of low ambient cooling operation. This device should be used as an alternative to economizer free cooling when economizer usage is either not appropriate or desired. The Motormaster will either cycle the outdoor fan motors or operate them at reduced speed to maintain the unit operation, depending on the model.

### Hinged Access Panels

Allows access to unit's major components with specifically designed hinged access panels. Panels are: filters, control box, fan motor and compressor.

### Winter Start Kit

The winter start kit by Carrier extends the low ambient limit of your rooftop to 25°F (-4°C). The kit bypasses the low pressure switch, preventing nuisance tripping of the low pressure switch. Other low ambient precautions may still be prudent.

### Alternate Motors and Drives

Some applications need larger horsepower motors, some need more airflow, and some need both. Regardless of the case, your Carrier expert has a factory installed combination to meet your application. A wide selection of motors and pulleys (drives) are available, factory installed, to handle nearly any application.

### Thru-the-Base Connections

Thru-the-base connections, available as either an accessory or as a factory option, are necessary to ensure proper connection and seal when routing wire and piping through the rooftop's basepan and curb. These couplings eliminate roof penetration and should be considered for gas lines, main power lines, as well as control power.

## FACTORY OPTIONS AND/OR ACCESSORIES (cont.)

### Electric Heaters

Carrier offers a full-line of field-installed accessory heaters. The heaters are very easy to use, install and are all pre-engineered and certified.

### Supply Duct Cover

This supply duct cover is required when field converting the factory standard vertical duct supply to horizontal duct supply configuration. One required per unit (16 size only).

### California OSHPD Seismic Certification Label

Units meet the seismic requirements of the International Code Council Evaluation Service (ICC-ES) document AC156 (Acceptance Criteria for Seismic Qualification by Shake-Table Testing of Nonstructural Components and Systems) and per International Building Code (IBC 2009) at an SDS (g) value of 2.00 z/h=1.0, Ip=1.5 and certified by independent structural engineers. A certification label is applied to the unit that meets the CA OSHPD Special Seismic Certification pre-approval labeling requirements on the external chassis of the unit.





**Table 2 – AHRI COOLING RATING TABLES**

UNIT	COOLING STAGES	NOM. CAPACITY (TONS)	NET COOLING CAPACITY (MBH)	TOTAL POWER (KW)	SEER	EER	IEER
A04	1	3	34.6	3.1	13.00	11.00	N/A
A05	1	4	45.0	4.0	13.00	11.00	N/A
A06	1	5	59.0	5.5	13.00	10.75	N/A
A07	1	6	70.0	6.4	N/A	11.20	11.4
A08	1	7.5	88.0	8.0	N/A	11.20	11.4
A09	1	8.5	97.0	8.8	N/A	11.20	11.4
A12	1	10	117.0	10.6	N/A	11.20	11.4

UNIT	COOLING STAGES	NOM. CAPACITY (TONS)	NET COOLING CAPACITY (MBH)	TOTAL POWER (KW)	EER	IEER WITH 1-SPEED INDOOR FAN MOTOR	IEER WITH 2-SPEED INDOOR FAN MOTOR
D08	2	7.5	83.0	7.4	11.20	11.7	13.0
D09	2	8.5	99.0	8.8	11.20	11.7	13.0
D12	2	10	114.0	10.1	11.30	12.2	13.0
D14	2	12.5	140.0	12.7	11.00	11.2	12.0
D16	2	15	174.0	15.8	11.00	11.5	12.6

**LEGEND**

- AHRI – Air Conditioning, Heating and Refrigeration Institute
- ASHRAE – American Society of Heating, Refrigerating and Air Conditioning, Inc.
- EER – Energy Efficiency Ratio
- IEER – Integrated Energy Efficiency Ratio
- SEER – Seasonal Energy Efficiency Ratio

**NOTES**

1. Rated and certified under AHRI Standard 210/240 or 340/360, as appropriate.
2. Ratings are based on:  
**Cooling Standard:** 80°F (27°C) db, 67°F (19°C) wb indoor air temp and 95°F db outdoor air temp.  
**IEER Standard:** A measure that expresses cooling part-load EER efficiency for commercial unitary air conditioning and heat pump equipment on the basis of weighted operation at various load capacities.
3. All 50TC units comply with ASHRAE 90.1 Energy Standard for minimum SEER and EER requirements.
4. Where appropriate, 50TC units comply with US Energy Policy Act (2005). Refer to state and local codes.



Use of the AHRI Certified TM Mark indicates a manufacturer's participation in the program. For verification of certification for individual products, go to [www.ahridirectory.org](http://www.ahridirectory.org).

**Table 3 – MINIMUM - MAXIMUM AIRFLOWS COOLING AND ELECTRIC HEAT**

UNIT	COOLING				ELECTRIC HEATERS	
	Minimum Single Speed Fan Motor	Minimum 2-speed Fan Motor (at high speed)	Minimum 2-speed Fan Motor (at low speed)	Maximum	Minimum	Maximum
50TC**04	900	–	–	1500	900	1500
50TC**05	1200	–	–	2000	1200	2000
50TC**06	1500	–	–	2500	1500	2500
50TC**07	1800	–	–	3000	1800	3000
50TC**08	2250	2250	1485	3750	2250*	3750
50TC**09	2550	2873	1896	4250	2550*	4250
50TC**12	3000	3380	2231	5000	3000*	5000
50TC**14	3600	4225	2789	6000	3000*	6000
50TC**16	4500	5625	3713	7500	4500	7500

\* Minimum electric heat CFM exceptions :

UNIT	UNIT VOLTAGE	HEATER KW	UNIT CONFIGURATION	REQUIRED MINIMUM CFM
50TC**12 50TC**14	208/230	42.4	Horizontal	3200
50TC**12 50TC**14	208/230	50.0	Horizontal	3200
50TC**12 50TC**14	460	50.0	Horizontal or Vertical	3200
50TC**08	575	17.0	Horizontal or Vertical	2800
50TC**09 50TC**12 50TC**14	575	34.0	Horizontal or Vertical	2350



**Table 4 – SOUND PERFORMANCE TABLE**


UNIT	COOLING STAGES	OUTDOOR SOUND (dB)								
		A-WEIGHTED	63	125	250	500	1000	2000	4000	8000
A04	1	80	90.6	80.9	80.2	76	74.6	71.3	68.5	63.9
A05	1	81	90.9	84.6	79.5	77.9	76.5	71.1	66.9	62.5
A06	1	78	84.0	82.2	76.3	74.8	72.5	68.8	65.6	61.8
A07	1	78	88.8	81.8	76.9	74.4	73.3	69.8	66.3	62.7
A08	1	82	90.1	82.6	81.0	79.4	77.0	73.0	70.4	66.7
D08	2	82	85.8	84.3	80.5	78.7	76.4	72.7	68.3	65.1
A09	1	83	91.2	86.4	81.9	81.0	78.3	73.9	71.4	67.3
D09	2	82	88.6	85.0	81.6	79.5	77.4	74.1	71.0	66.3
A12	1	82	88.6	85.0	81.6	79.5	77.4	74.1	71.0	66.3
D12	2	82	89.0	83.1	80.5	78.5	75.5	71.6	69.6	69.3
D14	2	87	87.0	85.2	84.6	84.9	82.2	78.4	75.3	72.9
D16	2	87	87.0	85.2	84.6	84.9	82.2	78.4	75.3	72.9

**LEGEND**

dB – Decibel

**NOTES:**

1. Outdoor sound data is measure in accordance with AHRI stand-ard 270–2008.
2. Measurements are expressed in terms of sound power. Do not compare these values to sound pressure values because sound pressure accounts for specific environmental factors which do not match individual applications. Sound power values are inde-pendent of the environment and therefore more accurate.
3. A–weighted sound ratings filter out very high and very low frequencies, to better approximate the response of an “aver-age” human ear. A–weighted measurements for Carrier units are taken in accordance with 270–2008.

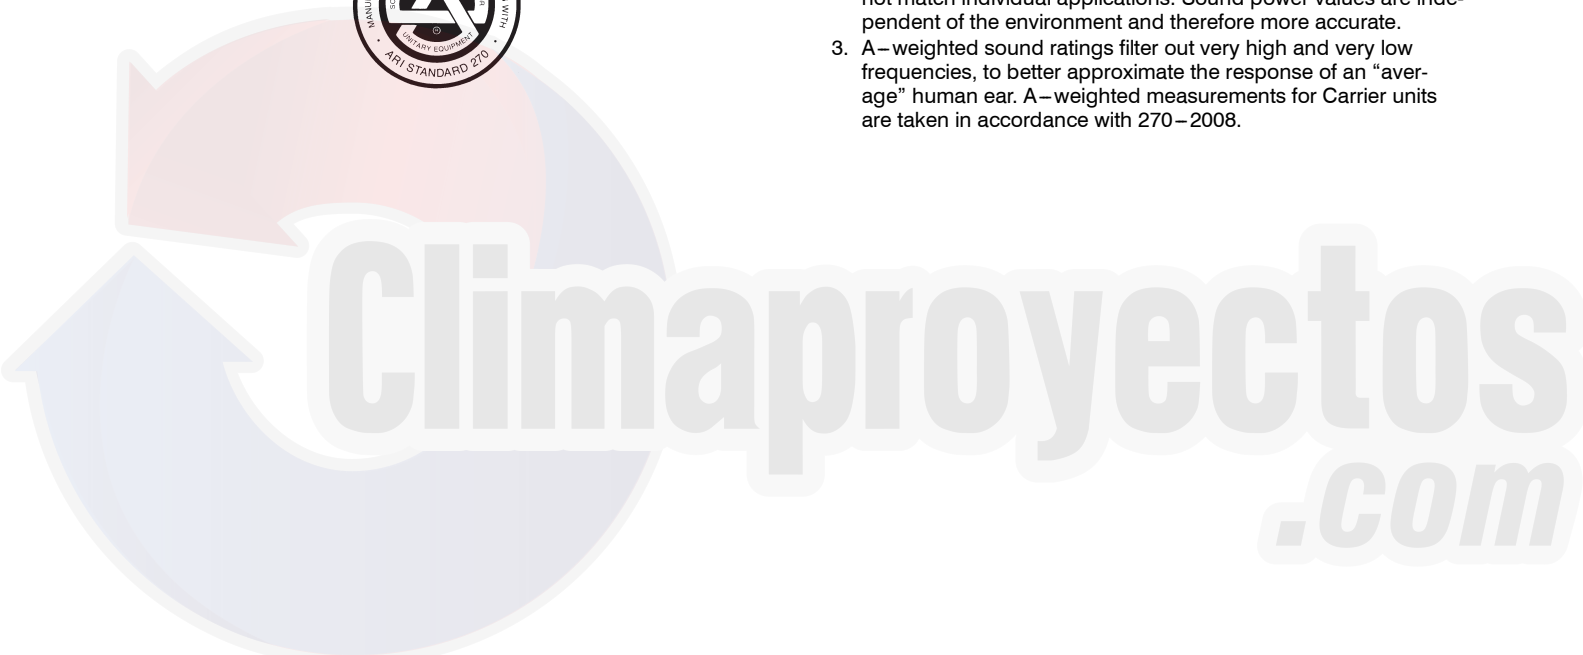

**Table 5 – PHYSICAL DATA**

**(COOLING)**

**3 - 6 TONS**

		50TC*A04	50TC*A05	50TC*A06	50TC*A07
<b>Refrigeration System</b>					
# Circuits / # Comp. / Type		1 / 1 / Scroll	1 / 1 / Scroll	1 / 1 / Scroll	1 / 1 / Scroll
Puron® refig. (R-410A) (lbs-oz)		5-10	8-8	10-11	14-2
Humidi-MiZer Puron® refig. charge A/B (lbs - oz)		8-11	14-13	16-0	22-5
Metering Device		Acutrol	Acutrol	Acutrol	Acutrol
High-press. Trip / Reset (psig)		630 / 505	630 / 505	630 / 505	630 / 505
Low-press. Trip / Reset (psig)		54 / 117	54 / 117	54 / 117	54 / 117
Compressor Capacity Staging (%)		100%	100%	100%	100%
<b>Evap. Coil</b>					
Material (Tube/Fin)		Cu / Al	Cu / Al	Cu / Al	Cu / Al
Coil type		3/8-in RTPF	3/8-in RTPF	3/8-in RTPF	3/8-in RTPF
Rows / FPI		2 / 15	2 / 15	4 / 15	4 / 15
Total Face Area (ft <sup>2</sup> )		5.5	5.5	5.5	7.3
Condensate Drain Conn. Size		3/4-in	3/4-in	3/4-in	3/4-in
<b>Evap. Fan and Motor</b>					
Standard Static 1 phase	Motor Qty / Drive Type	1 / Belt	1 / Belt	1 / Belt	-
	Max BHP	1.2	1.2	1.2	-
	RPM Range	560-854	560-854	770-1175	-
	Motor Frame Size	48	48	48	-
	Fan Qty / Type	1 / Centrifugal	1 / Centrifugal	1 / Centrifugal	-
	Fan Diameter (in)	10 x 10	10 x 10	10 x 10	-
Medium Static 1 phase	Motor Qty / Drive Type	1 / Belt	1 / Belt	1 / Belt	-
	Max BHP	1.2	1.2	1.5	-
	RPM Range	770-1175	770-1175	1035-1466	-
	Motor Frame Size	48	48	56	-
	Fan Qty / Type	1 / Centrifugal	1 / Centrifugal	1 / Centrifugal	-
	Fan Diameter (in)	10 x 10	10 x 10	10 x 10	-
Standard Static 3 phase	Motor Qty / Drive Type	1 / Belt	1 / Belt	1 / Belt	1 / Belt
	Max BHP	1.2	1.2	1.5	2.4
	RPM Range	560-854	560-854	770-1175	1073-1457
	Motor Frame Size	48	48	48	56
	Fan Qty / Type	1 / Centrifugal	1 / Centrifugal	1 / Centrifugal	1 / Centrifugal
	Fan Diameter (in)	10 x 10	10 x 10	10 x 10	10 x 10
Medium Static 3 phase	Motor Qty / Drive Type	1 / Belt	1 / Belt	1 / Belt	1 / Belt
	Max BHP	1.2	1.2	2.4	2.9*
	RPM Range	770-1175	770-1175	1035-1466	1173-1518
	Motor Frame Size	48	48	56	56
	Fan Qty / Type	1 / Centrifugal	1 / Centrifugal	1 / Centrifugal	1 / Centrifugal
	Fan Diameter (in)	10 x 10	10 x 10	10 x 10	10 x 10
High Static 3 phase	Motor Qty / Drive Type	1 / Belt	1 / Belt	1 / Belt	1 / Belt
	Max BHP	2.4	2.4	2.9	3.7
	RPM Range	1035-1466	1035-1466	1303-1687	1474-1788
	Motor Frame Size	56	56	56	56
	Fan Qty / Type	1 / Centrifugal	1 / Centrifugal	1 / Centrifugal	1 / Centrifugal
	Fan Diameter (in)	10 x 10	10 x 10	10 x 10	10 x 10
<b>Cond. Coil</b>					
Material (Tube/Fin)		Cu / Al	Cu / Al	Cu / Al	Cu / Al
Coil type		3/8-in RTPF	3/8-in RTPF	3/8-in RTPF	3/8-in RTPF
Rows / FPI		1 / 17	2 / 17	2 / 17	2 / 17
Total Face Area (ft <sup>2</sup> )		14.6	16.5	16.5	21.3
<b>Humidi-MiZer Coil</b>					
Material (Tube/Fin)		Cu / Al	Cu / Al	Cu / Al	Cu / Al
Rows..Fins/in.		1 / 17	2 / 17	2 / 17	2 / 17
Total Face Area (ft <sup>2</sup> )		3.9	3.9	3.9	5.2
<b>Cond. fan / motor</b>					
Qty / Motor Drive Type		1/ Direct	1/ Direct	1/ Direct	1/ Direct
Motor HP / RPM		1/4 / 1100	1/4 / 1100	1/4 / 1100	1/4 / 1100
Fan diameter (in)		22	22	22	22
<b>Filters</b>					
RA Filter # / Size (in)		2 / 16 x 25 x 2	2 / 16 x 25 x 2	2 / 16 x 25 x 2	4 / 16 x 16 x 2
OA inlet screen # / Size (in)		1 / 20 x 24 x 1	1 / 20 x 24 x 1	1 / 20 x 24 x 1	1 / 20 x 24 x 1

**NOTE:** Humidi-MiZer is not available with Novation condenser coil models, only Round Tube / Plate Fin (RTPF).

\* 575V motor utilizes 3.7 BHP.

**Table 5 - PHYSICAL DATA (cont.)**

**(COOLING)**

**7.5 - 8.5 TONS**

		50TC*A08	50TC*D08	50TC*A09	50TC*D09
<b>Refrigeration System</b>					
# Circuits / # Comp. / Type		1 / 1 / Scroll	2 / 2 / Scroll	1 / 1 / Scroll	2 / 2 / Scroll
RTPF models R-410a charge A/B (lbs - oz)		13 - 12	8 - 5 / 8 - 2	15 - 4	10 - 5 / 10 - 12
Alternate (MCHX) R-410a charge A/B (lbs - oz)			4 - 6 / 4 - 6		
Alternate (Humidi-MiZer) R-410a charge A/B (lbs - oz)			13 - 3 / 13 - 3		16 - 13 / 16 - 13
Metering device		Acutrol	Acutrol	Acutrol	Acutrol
High - press. Trip / Reset (psig)		630 / 505	630 / 505	630 / 505	630 / 505
Low - press. Trip / Reset (psig)		54 / 117	54 / 117	54 / 117	54 / 117
Compressor Capacity Staging (%)		100%	50% / 100%	100%	50% / 100%
<b>Evap. Coil</b>					
Material		Cu / Al	Cu / Al	Cu / Al	Cu / Al
Coil type		3/8-in RTPF	3/8-in RTPF	3/8-in RTPF	3/8-in RTPF
Rows / FPI		3 / 15	3 / 15	3 / 15	3 / 15
Total face area (ft <sup>2</sup> )		8.9	8.9	11.1	11.1
Condensate drain conn. size		3/4-in	3/4-in	3/4-in	3/4-in
<b>Humidi-MiZer Coil</b>					
Material		-	Cu / Al	-	Cu / Al
Coil type		-	3/8-in RTPF	-	3/8-in RTPF
Rows / FPI		-	2 / 17	-	2 / 17
Total face area (ft <sup>2</sup> )		-	6.3	-	8.4
<b>Evap. fan and motor</b>					
Standard Static 3 phase	Motor Qty / Drive Type	1 / Belt	1 / Belt	1 / Belt	1 / Belt
	Max BHP	1.7	1.7	1.7	1.7
	RPM range	489-747	489-747	518-733	518-733
	Motor frame size	56	56	56	56
	Fan Qty / Type	1 / Centrifugal	1 / Centrifugal	1 / Centrifugal	1 / Centrifugal
Fan Diameter (in)	15 x 15	15 x 15	15 x 15	15 x 15	
Medium Static 3 phase	Motor Qty / Drive type	1 / Belt	1 / Belt	1 / Belt	1 / Belt
	Max BHP	2.9	2.9	2.4	2.4
	RPM range	733-949	733-949	690-936	690-936
	Motor frame size	56	56	56	56
	Fan Qty / Type	1 / Centrifugal	1 / Centrifugal	1 / Centrifugal	1 / Centrifugal
Fan Diameter (in)	15 x 15	15 x 15	15 x 15	15 x 15	
High Static 3 phase	Motor Qty / Drive type	1 / Belt	1 / Belt	1 / Belt	1 / Belt
	Max BHP	4.7	4.7	3.7	3.7
	RPM range	909-1102	909-1102	838-1084	838-1084
	Motor frame size	14	14	56	56
	Fan Qty / Type	1 / Centrifugal	1 / Centrifugal	1 / Centrifugal	1 / Centrifugal
Fan Diameter (in)	15 x 15	15 x 15	15 x 15	15 x 15	
<b>Cond. Coil</b>					
Material		Cu / Al	Cu / Al	Cu / Al	Cu / Al
Coil type		3/8-in RTPF	3/8-in RTPF	3/8-in RTPF	3/8-in RTPF
Rows / FPI		2 / 17	2 / 17	2 / 17	2 / 17
Total face area (ft <sup>2</sup> )		20.5	20.5	21.4	25.1
<b>Alternate (MCHX) Cond. Coil</b>					
Material		-	Al / Al	-	-
Coil type		-	Novation™	-	-
Rows / FPI		-	1 / 20	-	-
Total face area (ft <sup>2</sup> )		-	20.5	-	-
<b>Cond. fan / motor</b>					
Qty / Motor drive type		2 / direct	2 / direct	2 / direct	2 / direct
Motor HP / RPM		1/4 / 1100	1/4 / 1100	1/4 / 1100	1/4 / 1100
Fan diameter (in)		22	22	22	22
<b>Filters</b>					
RA Filter # / Size (in)		4 / 16 x 20 x 2	4 / 16 x 20 x 2	4 / 16 x 20 x 2	4 / 16 x 20 x 2
OA inlet screen # / Size (in)		1 / 20 x 24 x 1	1 / 20 x 24 x 1	1 / 20 x 24 x 1	1 / 20 x 24 x 1

**NOTE:** Humidi-MiZer is not available with Novation condenser coil models, only Round Tube/Plate Fin (RTPF).

**Table 5 - PHYSICAL DATA (cont.)**

**(COOLING)**

**10 - 15 TONS**

		50TC*A12	50TC*D12	50TC*D14	50TC*D16
<b>Refrigeration System</b>					
# Circuits / # Comp. / Type		1 / 1 / Scroll	2 / 2 / Scroll	2 / 2 / Scroll	2 / 2 / Scroll
RTPF models R-410a charge A/B (lbs - oz)		20 - 0	10 - 5 / 10 - 3	11 - 0 / 11 - 6	15 - 14/16 - 12
Alternate (MCHX) R-410a charge A/B (lbs - oz)		-	6 - 0 / 6 - 0	7 - 6 / 8 - 0	-
Alternate (Humidi-MiZer) R-410a charge A/B (lbs - oz)		-	16 - 10 / 16 - 0	17 - 10 / 18 - 3	-
Metering device		Acutrol	Acutrol	Acutrol	Acutrol
High - press. Trip / Reset (psig)		630 / 505	630 / 505	630 / 505	630 / 505
Low - press. Trip / Reset (psig)		54 / 117	54 / 117	54 / 117	54 / 117
Compressor Capacity Staging (%)		100%	50% / 100%	50% / 100%	50% / 100%
<b>Evap. Coil</b>					
Material		Cu / Al	Cu / Al	Cu / Al	Cu / Al
Coil type		3/8-in RTPF	3/8-in RTPF	3/8-in RTPF	3/8-in RTPF
Rows / FPI		4 / 15	4 / 15	4 / 15	3 / 15
Total face area (ft <sup>2</sup> )		11.1	11.1	11.1	17.5
Condensate drain conn. size		3/4-in	3/4-in	3/4-in	3/4-in
<b>Humidi-MiZer Coil</b>					
Material		-	Cu / Al	Cu / Al	Cu / Al
Coil type		-	3/8-in RTPF	3/8-in RTPF	3/8-in RTPF
Rows / FPI		-	2 / 17	2 / 17	1 / 17
Total face area (ft <sup>2</sup> )		-	8.4	8.4	13.8
<b>Evap. fan and motor</b>					
Standard Static 3 phase	Motor Qty / Drive type	1 / Belt	1 / Belt	1 / Belt	1 / Belt
	Max BHP	2.4	2.4	2.9	2.9
	RPM range	591-838	591-838	652-843	507-676
	Motor frame size	56	56	56	56
	Fan Qty / Type	1 / Centrifugal	1 / Centrifugal	1 / Centrifugal	1 / Centrifugal
	Fan Diameter (in)	15 x 15	15 x 15	15 x 15	18 x 18
Medium Static 3 phase	Motor Qty / Drive type	1 / Belt	1 / Belt	1 / Belt	1 / Belt
	Max BHP	3.7	3.7	3.7	3.7
	RPM range	838-1084	838-1084	838-1084	627-851
	Motor frame size	56	56	56	56
	Fan Qty / Type	1 / Centrifugal	1 / Centrifugal	1 / Centrifugal	1 / Centrifugal
	Fan Diameter (in)	15 x 15	15 x 15	15 x 15	18 x 18
High Static 3 phase	Motor Qty / Drive type	1 / Belt	1 / Belt	1 / Belt	1 / Belt
	Max BHP	4.7	4.7	4.7	6.1
	RPM range	1022-1240	1022-1240	1022-1240	776-955
	Motor frame size	14	14	14	S184T
	Fan Qty / Type	1 / Centrifugal	1 / Centrifugal	1 / Centrifugal	1 / Centrifugal
	Fan Diameter (in)	15 x 15	15 x 15	15 x 15	18 x 18
<b>Cond. Coil</b>					
Material		Cu / Al	Cu / Al	Cu / Al	Cu / Al
Coil type		3/8-in RTPF	3/8-in RTPF	3/8-in RTPF	3/8-in RTPF
Rows / FPI		2 / 17	2 / 17	3 / 17	2/17
Total face area (ft <sup>2</sup> )		25.1	25.1	25.1	2 @ 23.1
<b>Alternate (MCHX) Cond. Coil</b>					
Material		-	Al / Al	Al / Al	-
Coil type		-	Novation™	Novation™	-
Rows / FPI		-	1 / 20	2 / 20	-
Total face area (ft <sup>2</sup> )		-	25.1	25.1	-
<b>Cond. fan / motor</b>					
Qty / Motor drive type		2 / direct	2 / direct	1 / direct	3 / direct
Motor HP / RPM		1/4 / 1100	1/4 / 1100	1 / 1175	1/4 / 1100
Fan diameter (in)		22	22	30	22
<b>Filters</b>					
RA Filter # / Size (in)		4 / 20 x 20 x 2	4 / 20 x 20 x 2	4 / 20 x 20 x 2	6 / 18 x 24 x 2 2 / 24 x 27 x 1 (vert.)
OA inlet screen # / Size (in)		1 / 20 x 24 x 1	1 / 20 x 24 x 1	1 / 20 x 24 x 1	1 / 30 x 39 x 1 (horiz)


**NOTE:** Humidi-MiZer is not available with Novation condenser coil models, only Round Tube/Plate Fin (RTPF) up to 16 size.



# CURBS, WEIGHTS & DIMENSIONS

**NOTES:**

1. DIMENSIONS ARE IN INCHES, DIMENSIONS IN ( ) ARE IN MILLIMETERS.
2. CENTER OF GRAVITY
3. DIRECTION OF AIR FLOW

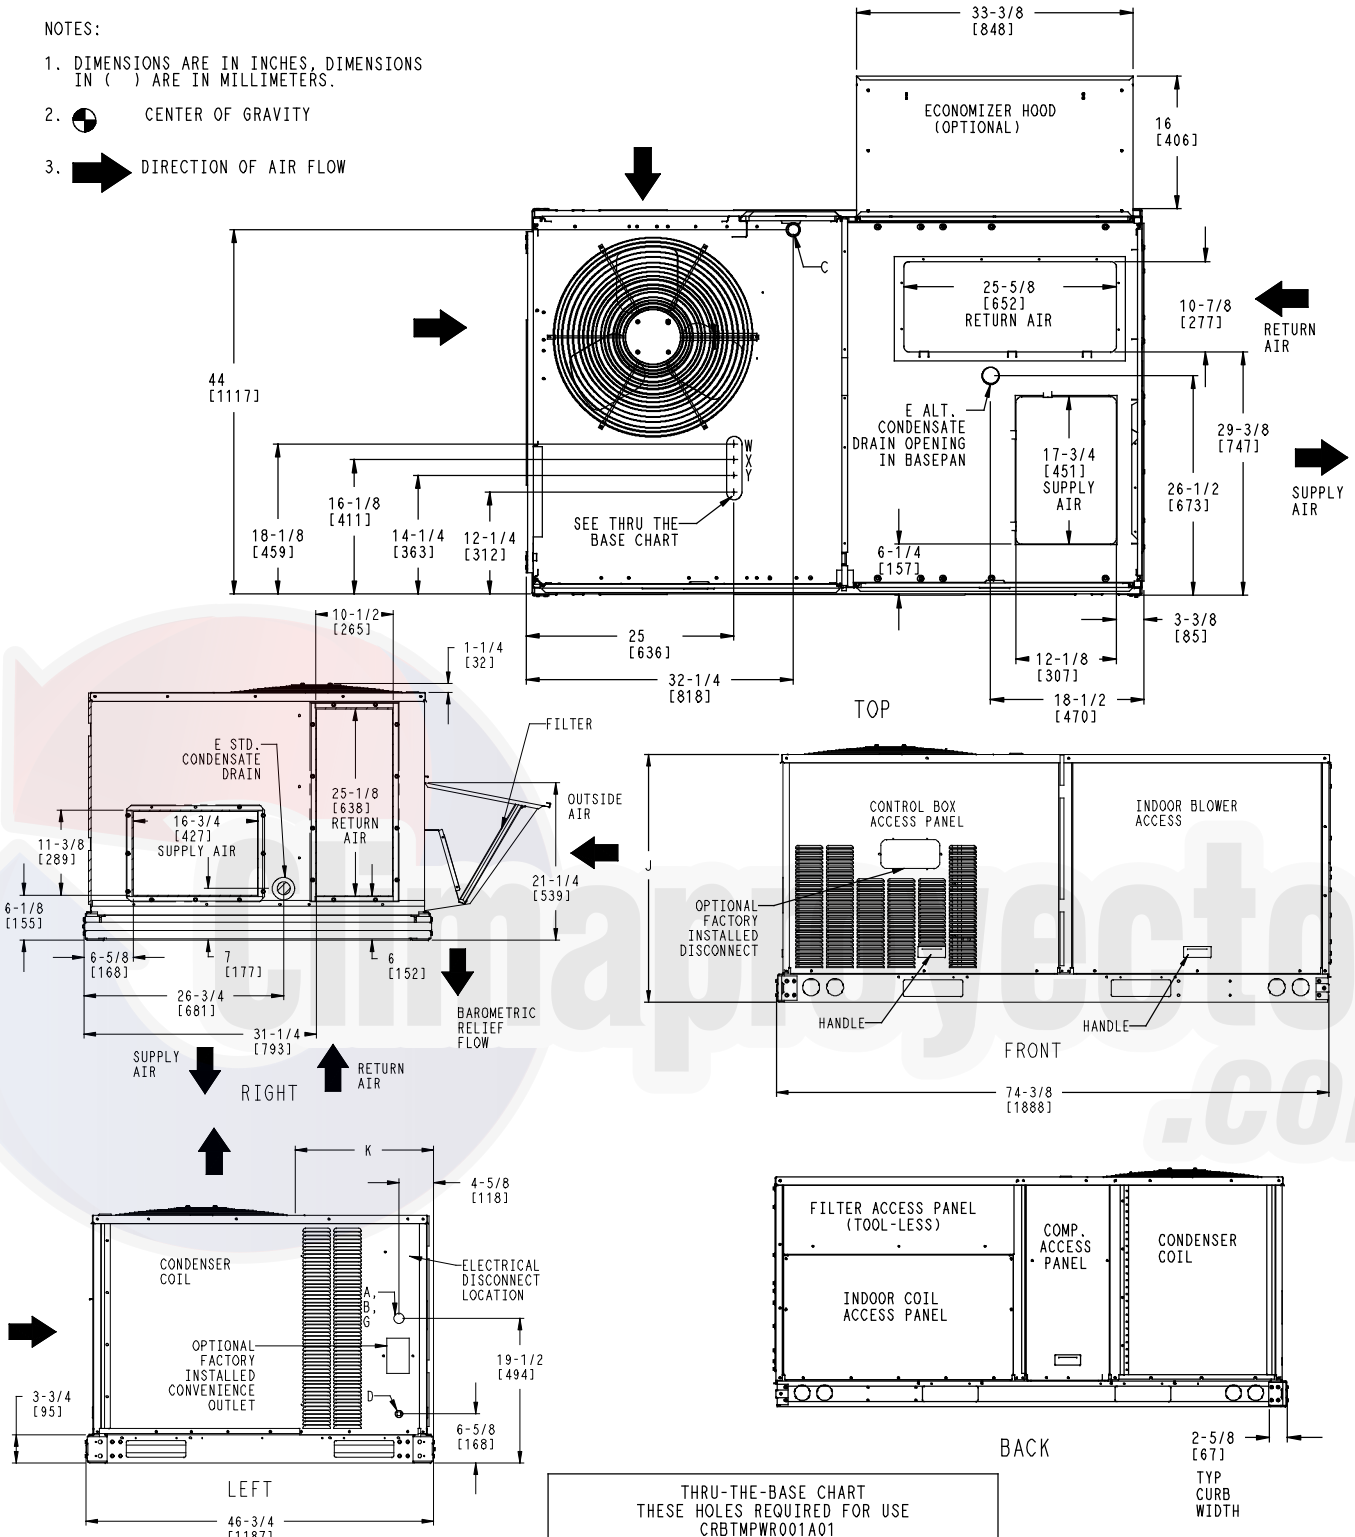

CONNECTION SIZES	
A	1 3/8" DIA [35] FIELD POWER SUPPLY HOLE
B	2" DIA [51] POWER SUPPLY KNOCKOUT
C	1 3/4" DIA [44] GAUGE ACCESS PLUG
D	7/8" DIA [22] FIELD CONTROL WIRING HOLE
E	3/4"-14 NPT CONDENSATE DRAIN
G	2 1/2" DIA [64] POWER SUPPLY KNOCK-OUT

THRU-THE-BASE CHART THESE HOLES REQUIRED FOR USE CRBTMPWR001A01			
	THREADED CONDUIT SIZE	WIRE USE	REQ'D HOLE SIZES (MAX.)
W	1/2"	ACC.	7/8" (22.2)
X	1/2"	24V	7/8" (22.2)
Y *	3/4" (001)	POWER	1 1/8" (28.4)
FOR "THRU-THE-BASEPAN" FACTORY OPTION, FITTINGS FOR ONLY X & Y ARE PROVIDED			
* SELECT EITHER 3/4" OR 1/2" FOR POWER, DEPENDING ON WIRE SIZE			


UNIT	J	K
50TC-A04	33 3/8 [847]	18 5/8 [472]
50TC-A05	33 3/8 [847]	14 7/8 [377]
50TC-A06	33 3/8 [847]	14 7/8 [377]
50TC-A07	41 3/8 [1051]	14 7/8 [377]

**Fig. 1 - Dimensions 50TC 04-07**

C08529


## CURBS, WEIGHTS & DIMENSIONS (cont.)

UNIT	STD. UNIT WEIGHT		CORNER WEIGHT (A)		CORNER WEIGHT (B)		CORNER WEIGHT (C)		CORNER WEIGHT (D)		C.G.		HEIGHT
	LBS.	KG.	LBS.	KG.	LBS.	KG.	LBS.	KG.	LBS.	KG.	X	Y	Z
50TC-A04	438	199	108	49	115	52	110	50	104	47	38 [965]	22 [559]	17 1/4 [438]
50TC-A05	494	224	122	55	130	59	125	57	117	53	38 [965]	22 [559]	17 1/2 [445]
50TC-A06	524	238	130	59	138	63	132	60	124	56	38 [965]	22 [559]	17 3/4 [451]
50TC-A07	607	275	150	68	160	73	153	69	144	65	38 [965]	22 [559]	20 3/4 [527]

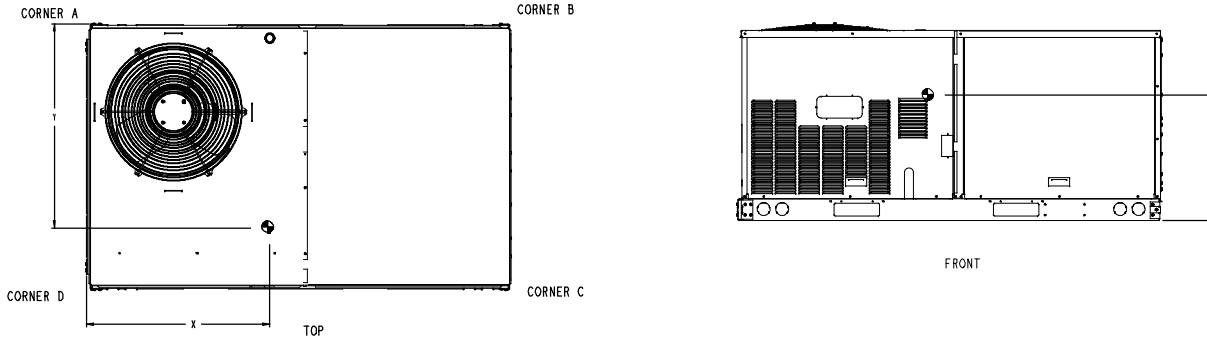

**Fig. 2 - Dimensions 50TC 04-07**

C08530

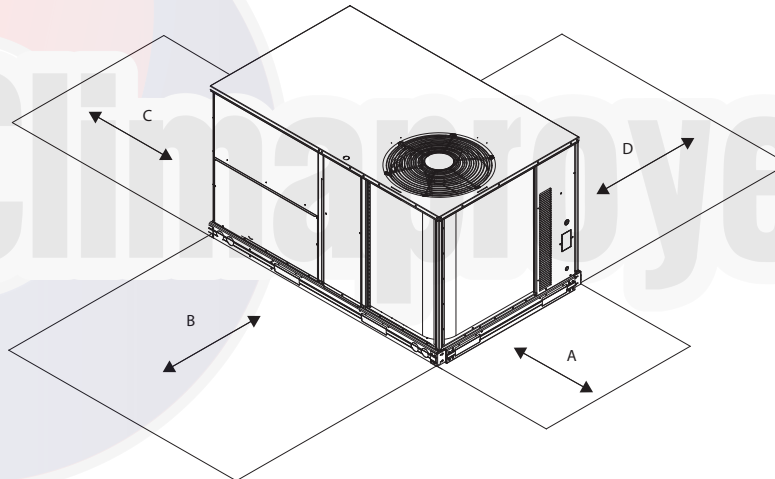


**Fig. 3 - Service Clearance**

C08337

LOC	DIMENSION	CONDITION
A	48-in (1219 mm)	Unit disconnect is mounted on panel
	18-in (457 mm)	No disconnect, convenience outlet option
	18-in (457 mm)	Recommended service clearance
	12-in (305 mm)	Minimum clearance
B	42-in (1067 mm)	Surface behind servicer is grounded (e.g., metal, masonry wall)
	36-in (914 mm)	Surface behind servicer is electrically non-conductive (e.g., wood, fiberglass)
	Special	Check for sources of flue products within 10-ft of unit fresh air intake hood
C	36-in (914 mm)	Side condensate drain is used
	18-in (457 mm)	Minimum clearance
D	42-in (1067 mm)	Surface behind servicer is grounded (e.g., metal, masonry wall, another unit)
	36-in (914 mm)	Surface behind servicer is electrically non-conductive (e.g., wood, fiberglass)


**NOTE:** Unit not designed to have overhead obstruction. Contact Application Engineering for guidance on any application planning overhead obstruction or vertical clearances.

# CURBS, WEIGHTS & DIMENSIONS (cont.)

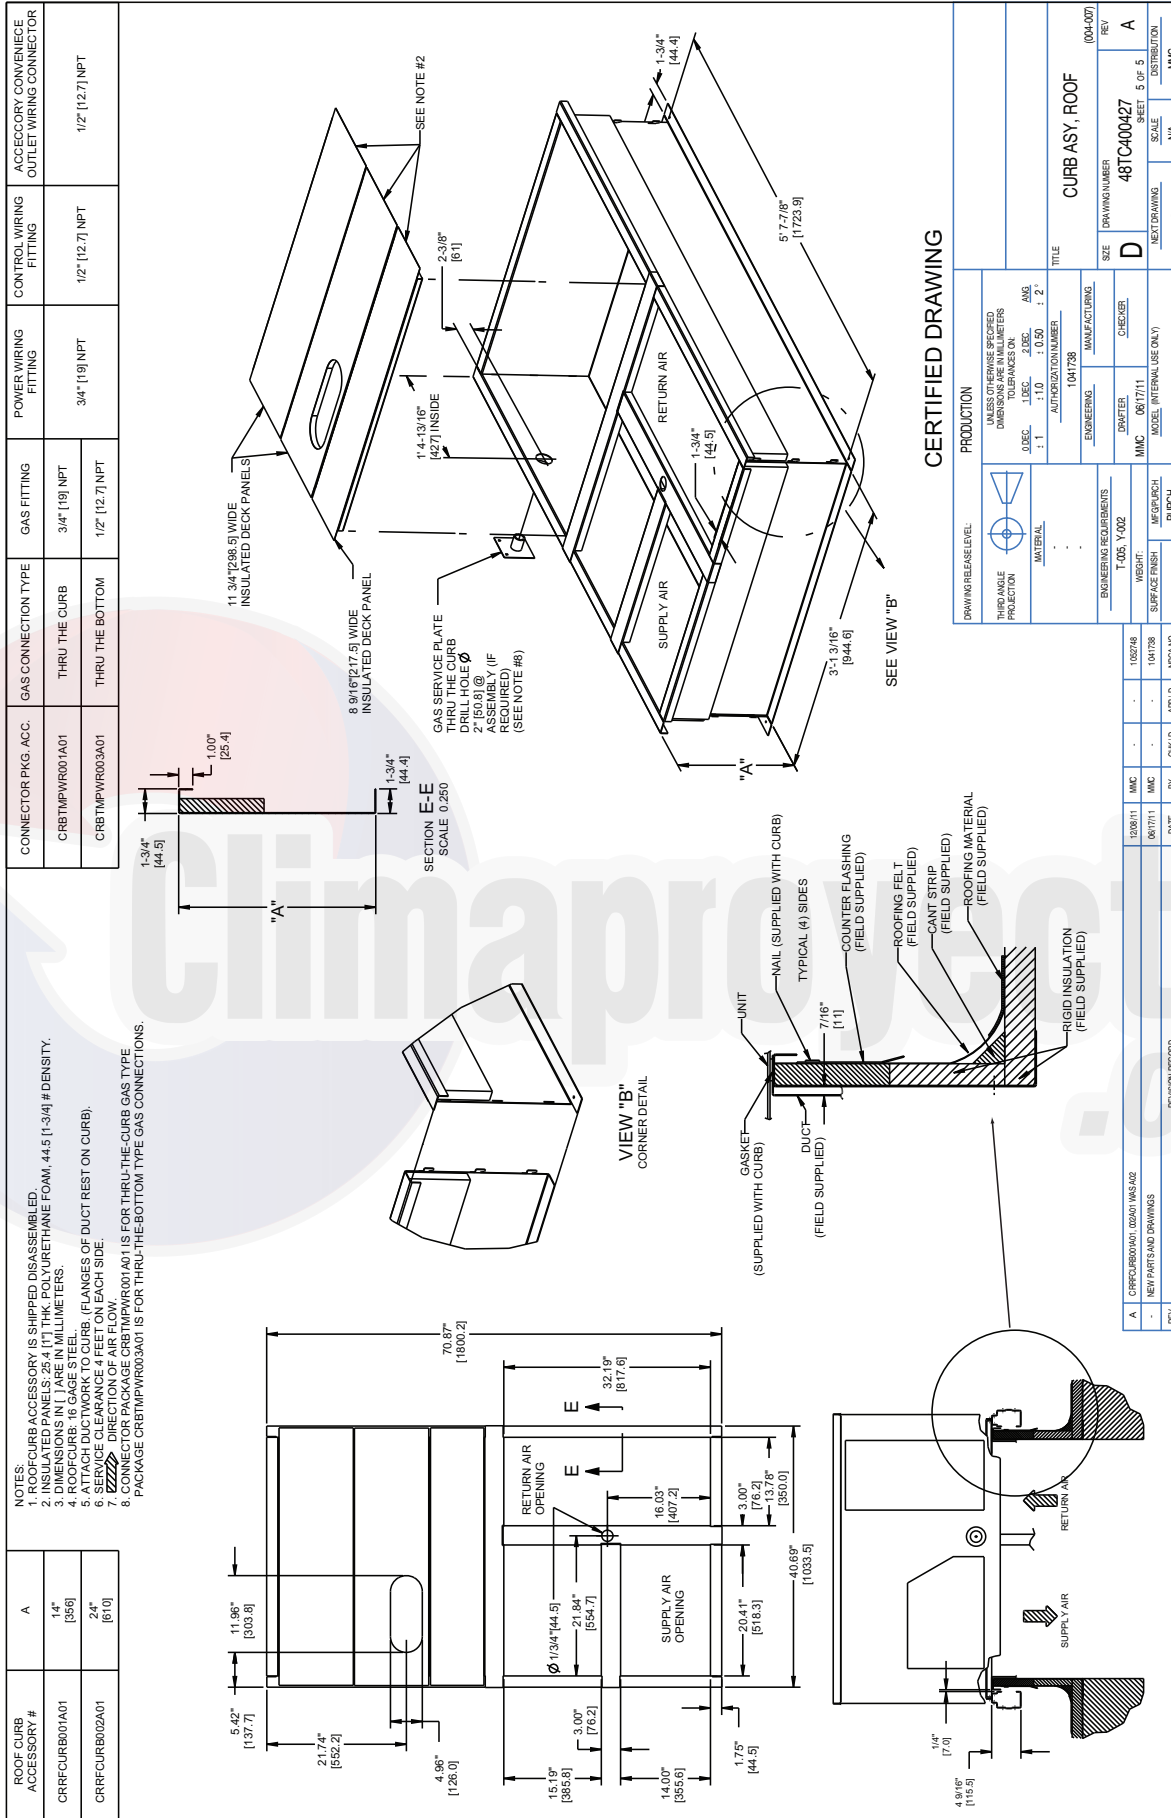

**Fig. 4 - Roof Curb Details 50TC 04-07**

# CURBS, WEIGHTS & DIMENSIONS (cont.)

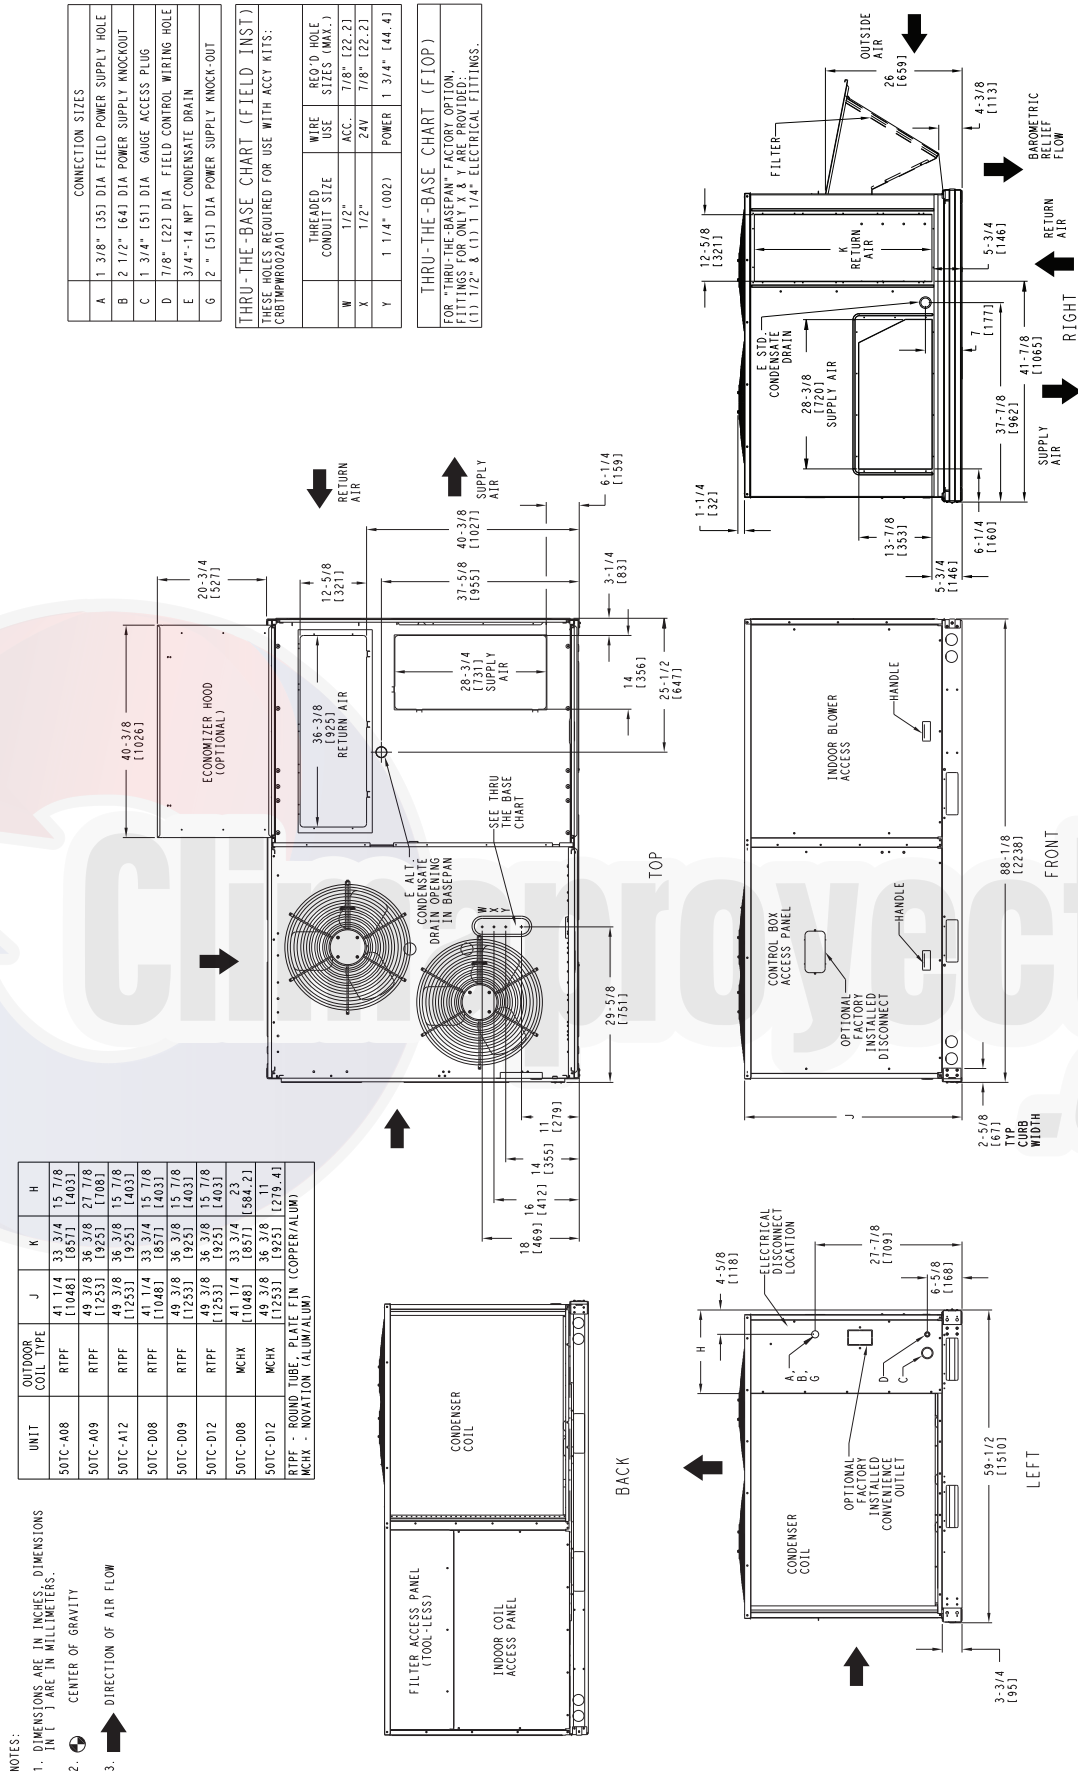


**Fig. 5 - Dimensions 50TC 08-12**

## CURBS, WEIGHTS & DIMENSIONS (cont.)


UNIT	OUTDOOR COIL TYPE	STD. UNIT WEIGHT ***		CORNER WEIGHT (A)		CORNER WEIGHT (B)		CORNER WEIGHT (C)		CORNER WEIGHT (D)		C.G.		
		LBS.	KG.	LBS.	KG.	LBS.	KG.	LBS.	KG.	LBS.	KG.	X	Y	Z
50TC-A08	RTPF	705	320	172	78	142	64.5	177	80.4	214	97.2	39 7/8 [1013]	33 [838]	21 1/4 [540]
50TC-A09	RTPF	845	383.6	206	93.5	167	76	212	96.2	261	118.5	39 1/2 [1003]	33 1/4 [845]	24 [610]
50TC-A12	RTPF	855	388	210	95.3	180	81.7	215	97.6	250	113.5	40 3/4 [1035]	32 3/8 [822]	25 1/4 [641]
50TC-D08	RTPF	760	345	158	71.7	155	70.4	222	100.8	225	102.2	43 3/4 [1111.3]	35 [889]	20 [508]
50TC-D09	RTPF	855	388.2	223	101.2	171	77.6	200	90.8	261	118.5	38 3/8 [975]	32 1/8 [816]	19 1/8 [486]
50TC-D12	RTPF	865	392.7	225	102.2	173	78.5	203	92.2	264	120	38 3/8 [975]	32 1/8 [816]	19 1/8 [486]
50TC-D08	MCHX	730	331.4	153	69.5	138	62.7	208	94.4	231	104.9	41 3/4 [1060.5]	35 3/4 [908]	21 1/8 [536.6]
50TC-D12	MCHX	820	372.3	179	81.3	161	73.1	228	103.5	253	114.9	41 3/4 [1060.5]	34 7/8 [885.8]	23 3/4 [603.3]

RTPF - ROUND TUBE, PLATE FIN (COPPER/ALUM)  
MCHX - NOVATION (ALUM/ALUM)

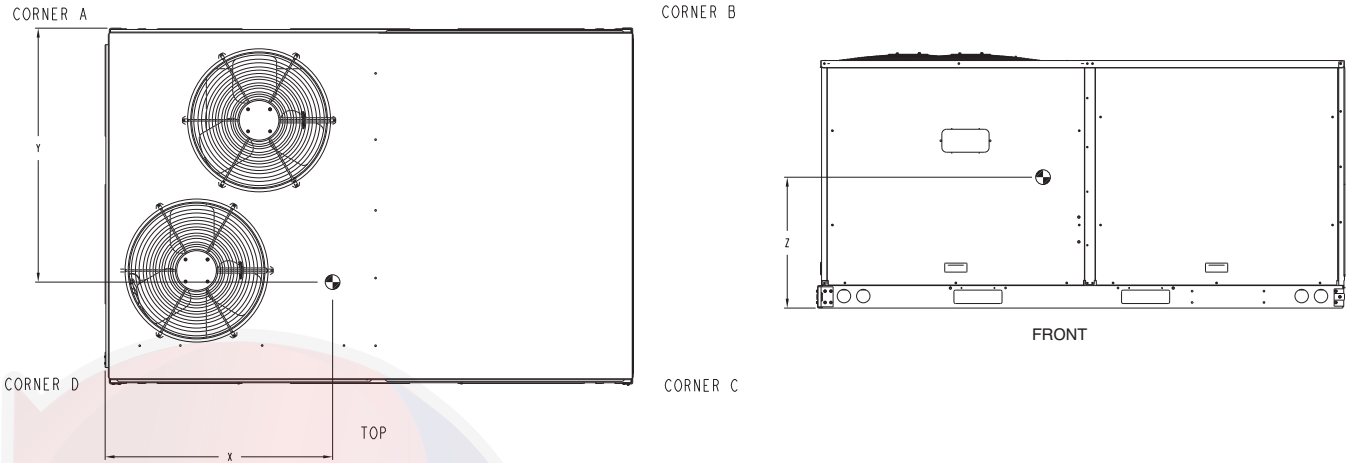

**Fig. 6 - Dimensions 50TC 08-12**

C101206

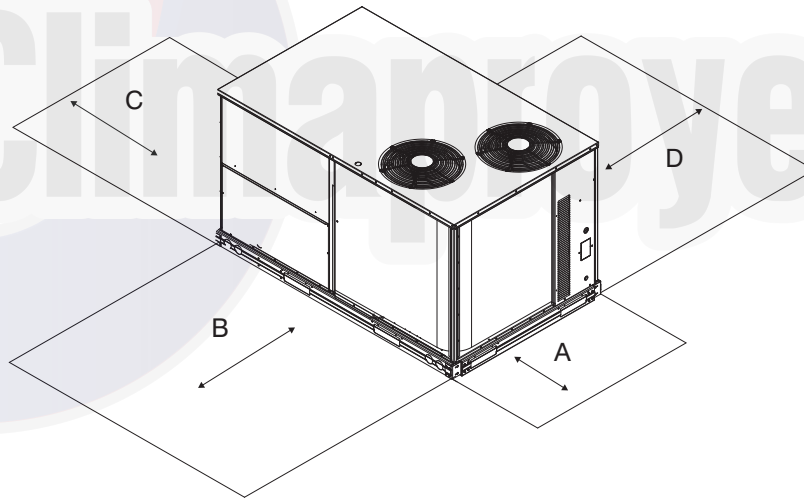


**Fig. 7 - Service Clearance**

C11247

LOC	DIMENSION	CONDITION
A	48-in (1219 mm)	Unit disconnect is mounted on panel
	36-in (914 mm)	If dimension - B is 12-in (305 mm)
	18-in (457 mm)	No disconnect, convenience outlet option
	18-in (457 mm)	Recommended service clearance (use electric screwdriver)
	12-in (305 mm)	Minimum clearance (use manual ratchet screwdriver)
B	36-in (914 mm)	Unit has economizer
	12-in (305 mm)	If dimension - A is 36-in (914 mm)
	Special	Check for sources of flue products within 10-ft of unit fresh air intake hood
C	36-in (914 mm)	Side condensate drain is used
	18-in (457 mm)	Minimum clearance
D	42-in (1067 mm)	Surface behind servicer is grounded (e.g., metal, masonry wall, another unit)
	36-in (914 mm)	Surface behind servicer is electrically non-conductive (e.g., wood, fiberglass)

**NOTE:** Unit not designed to have overhead obstruction. Contact Application Engineering for guidance on any application planning overhead obstruction or vertical clearances.

# CURBS, WEIGHTS & DIMENSIONS (cont.)

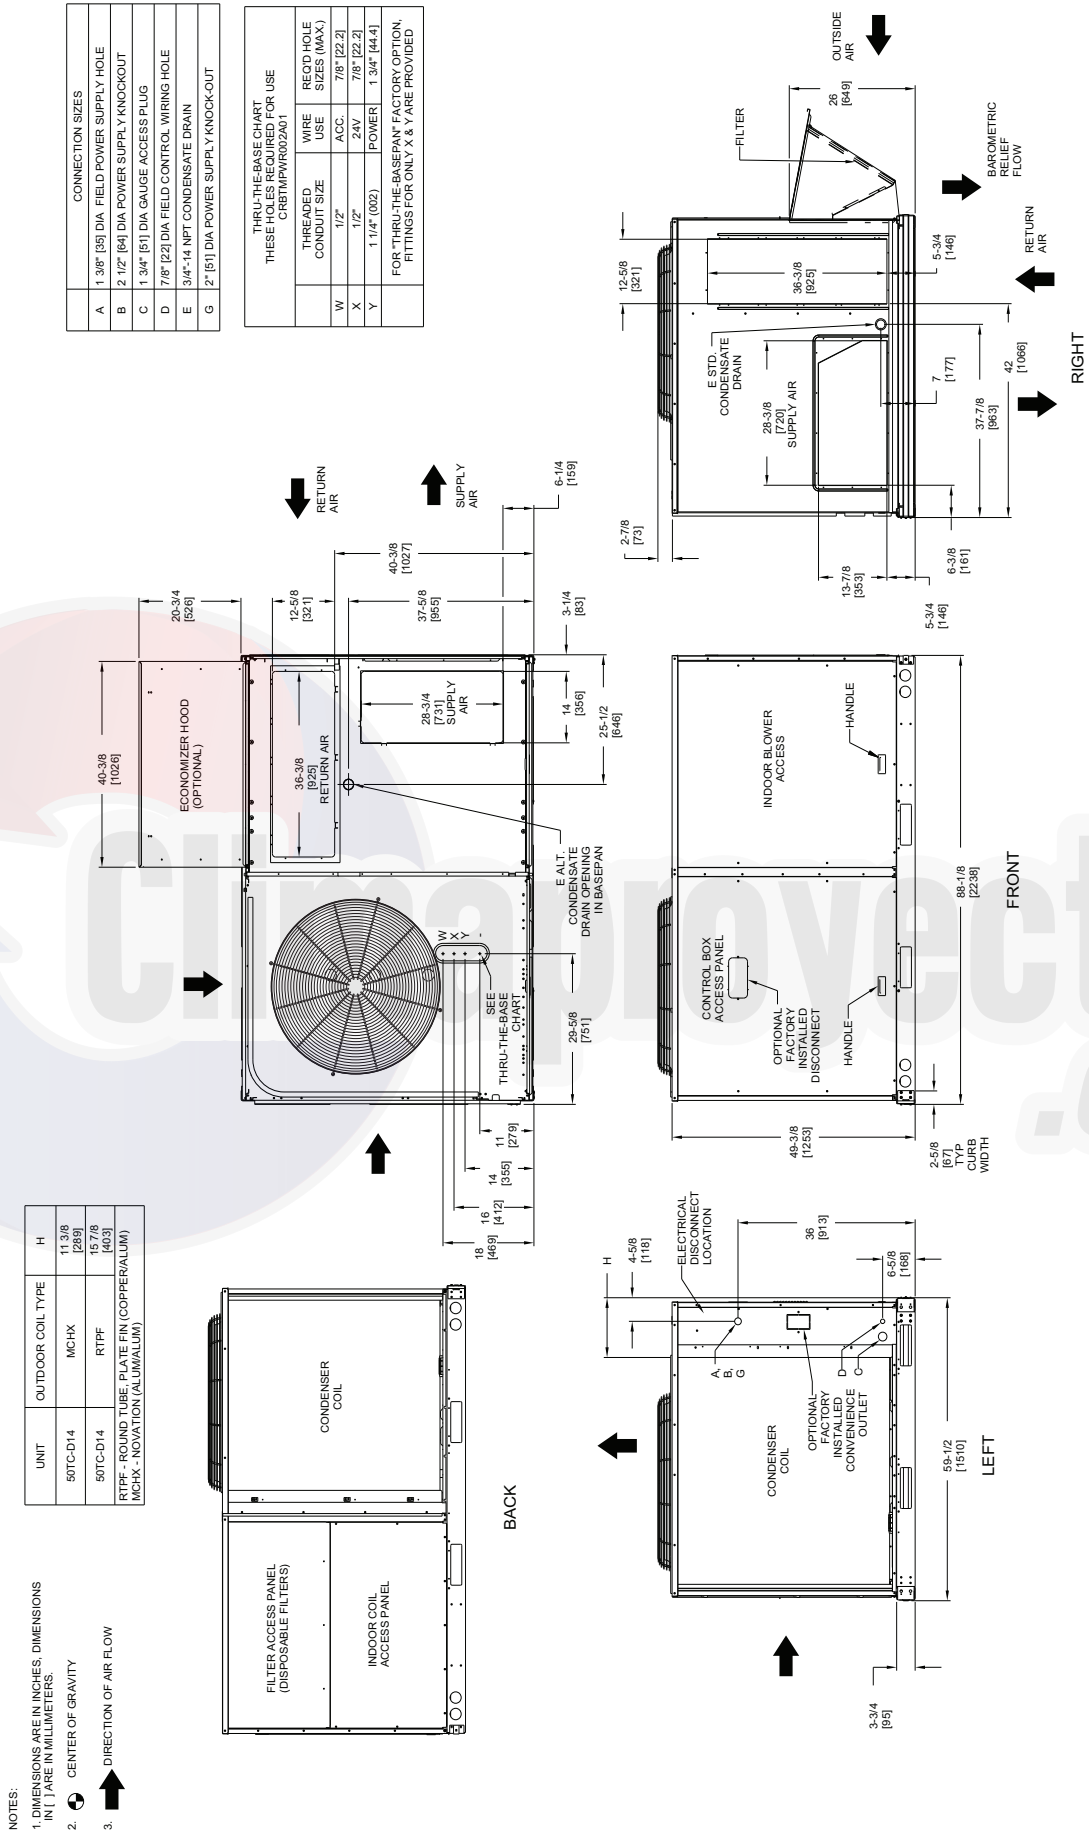

**Fig. 8 - Dimensions 50TC-14**




## CURBS, WEIGHTS & DIMENSIONS (cont.)

UNIT	OUTDOOR COIL TYPE	STD. UNIT WEIGHT***		CORNER WEIGHT (A)		CORNER WEIGHT (B)		CORNER WEIGHT (C)		CORNER WEIGHT (D)		C.G.		
		LBS.	KG.	LBS.	KG.	LBS.	KG.	LBS.	KG.	LBS.	KG.	X	Y	Z
50TC-D14	MCHX	1030	467	294	133	146	66	197	89	395	179	28 3/8 [721]	33 1/8 [841]	21 3/8 [543]
50TC-D14	RTPF	1075	489	340	155	155	70	181	82	399	181	27 1/2 [699]	32 [813]	20 1/2 [523]


RTPF - ROUND TUBE, PLATE FIN (COPPER/ALUM)  
MCHX - MICROCHANNEL (ALUM/ALUM)

\*\*\* STANDARD UNIT WEIGHT IS WITHOUT ELECTRIC HEAT AND WITHOUT PACKAGING.  
FOR OTHER OPTIONS AND ACCESSORIES, REFER TO THE PRODUCT DATA CATALOG.

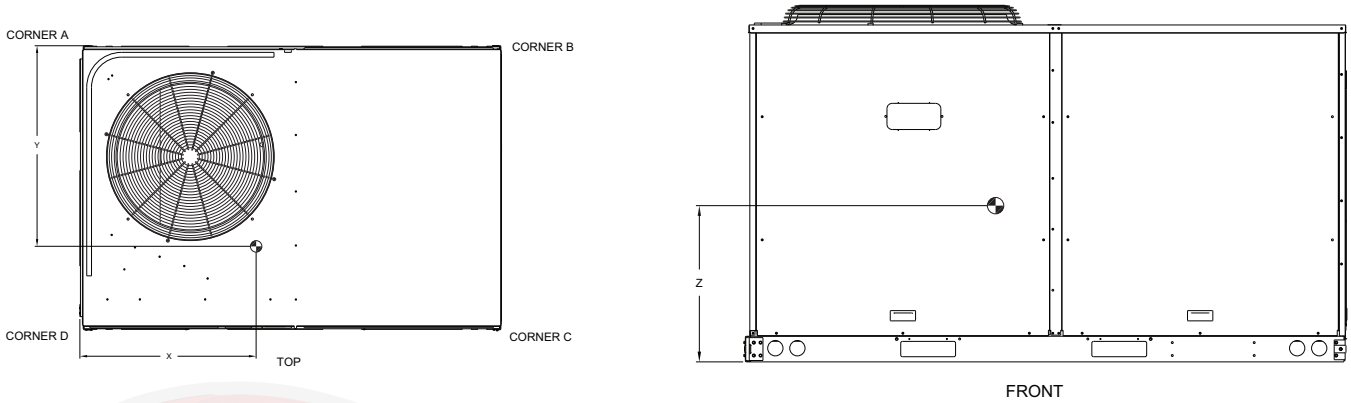

**Fig. 9 - Dimensions 50TC-14**

C101208

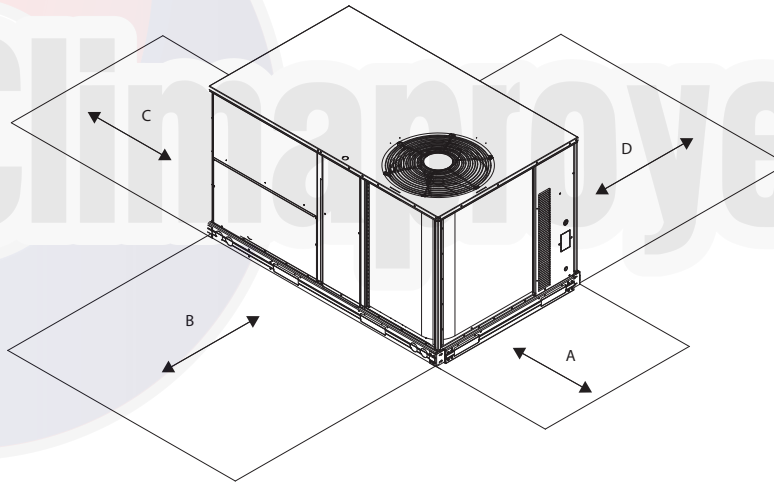


**Fig. 10 - Service Clearance**

C08337

LOC	DIMENSION	CONDITION
A	48-in (1219 mm)	Unit disconnect is mounted on panel
	18-in (457 mm)	No disconnect, convenience outlet option
	18-in (457 mm)	Recommended service clearance
	12-in (305 mm)	Minimum clearance
B	42-in (1067 mm)	Surface behind servicer is grounded (e.g., metal, masonry wall)
	36-in (914 mm)	Surface behind servicer is electrically non-conductive (e.g., wood, fiberglass)
	Special	Check for sources of flue products within 10-ft of unit fresh air intake hood
C	36-in (914 mm)	Side condensate drain is used
	18-in (457 mm)	Minimum clearance
D	42-in (1067 mm)	Surface behind servicer is grounded (e.g., metal, masonry wall, another unit)
	36-in (914 mm)	Surface behind servicer is electrically non-conductive (e.g., wood, fiberglass)

**NOTE:** Unit not designed to have overhead obstruction. Contact Application Engineering for guidance on any application planning overhead obstruction or vertical clearances.

# CURBS, WEIGHTS & DIMENSIONS (cont.)

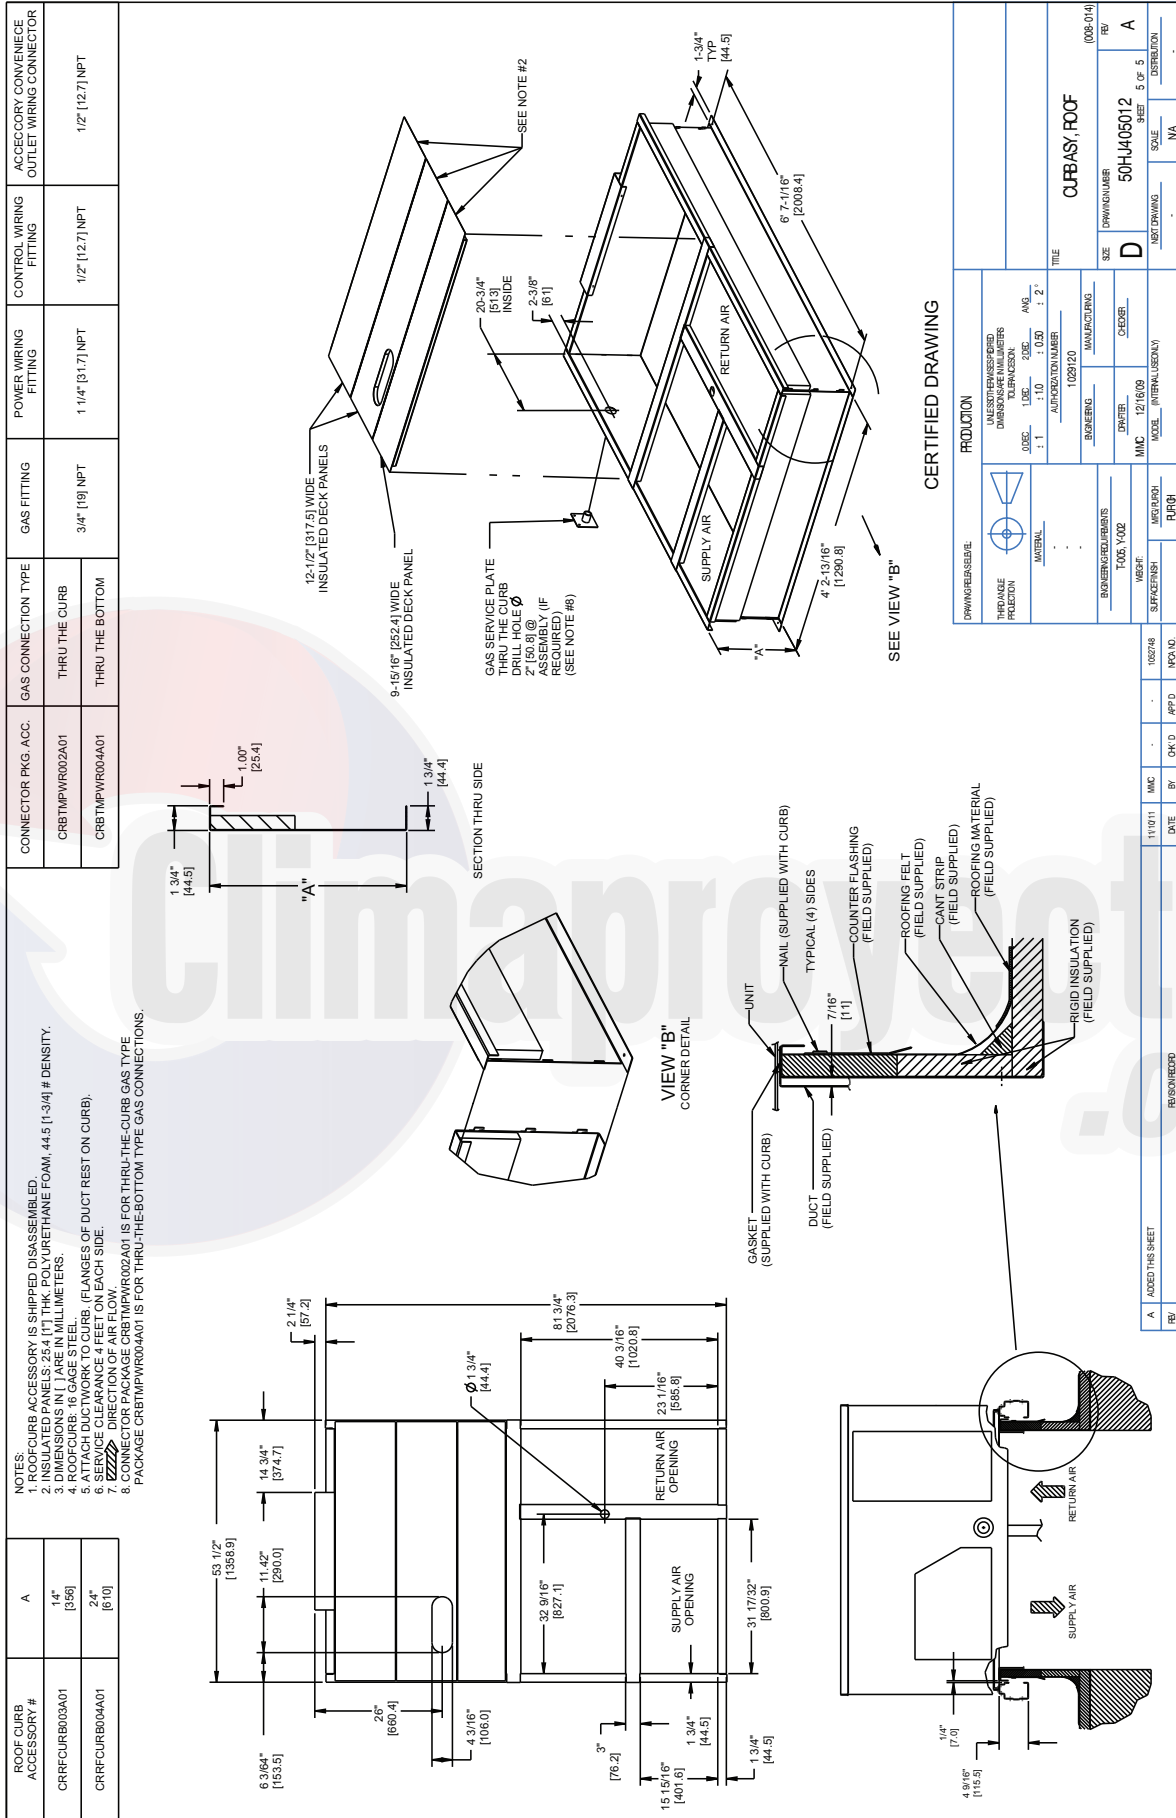

<b>PRODUCTION</b> UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE MILLIMETERS DEC. 1.00    1.25    2.00    3.00    4.00    5.00    6.00    8.00    10.00    12.00    15.00    20.00    25.00    30.00    40.00    50.00    60.00    75.00    100.00 MATERIAL: 10291/20 AUTHORIZATION NUMBER: 10291/20		<b>MANUFACTURING</b> DRAWING NUMBER: 50HJ405012 SIZE: D SHEET: 5 OF 5 CORRECTION:	
<b>DESIGN</b> DESIGNER: [blank] CHECKER: [blank] DATE: 12/18/08 MODEL: [blank]		<b>REVISIONS</b> NO.    DATE    BY    DESCRIPTION	
<b>APPROVALS</b> DESIGNER: [blank] CHECKER: [blank] DATE: 12/18/08		<b>APPROVALS</b> DATE: 11/07/11    BY: [blank]    FOR: [blank]	






<b>PRODUCTION</b> UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE MILLIMETERS DEC. 1.00    1.25    2.00    3.00    4.00    5.00    6.00    8.00    10.00    12.00    15.00    20.00    25.00    30.00    40.00    50.00    60.00    75.00    100.00 MATERIAL: 10291/20 AUTHORIZATION NUMBER: 10291/20		<b>MANUFACTURING</b> DRAWING NUMBER: 50HJ405012 SIZE: D SHEET: 5 OF 5 CORRECTION:	
<b>DESIGN</b> DESIGNER: [blank] CHECKER: [blank] DATE: 12/18/08 MODEL: [blank]		<b>REVISIONS</b> NO.    DATE    BY    DESCRIPTION	
<b>APPROVALS</b> DESIGNER: [blank] CHECKER: [blank] DATE: 12/18/08		<b>APPROVALS</b> DATE: 11/07/11    BY: [blank]    FOR: [blank]	

Fig. 11 - Roof Curb Details 50TC 08-14

# CURBS, WEIGHTS & DIMENSIONS (cont.)

**NOTES:**

1. DIMENSIONS ARE IN INCHES. DIMENSIONS IN [ ] ARE IN MILLIMETERS.
2. CENTER OF GRAVITY
3. DIRECTION OF AIR FLOW

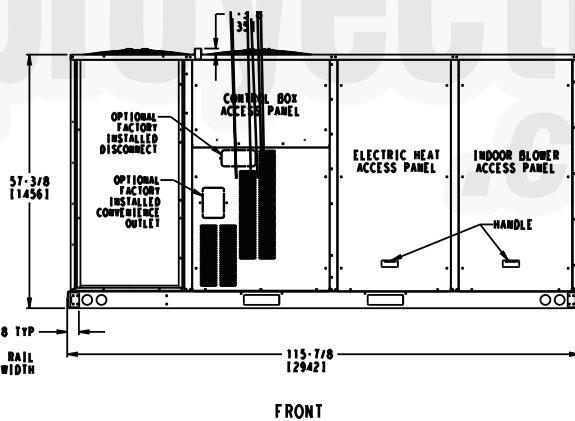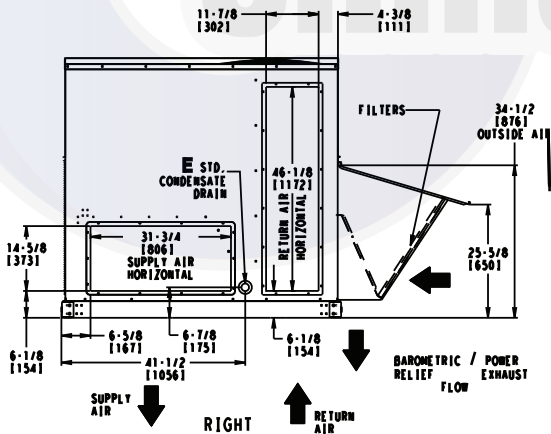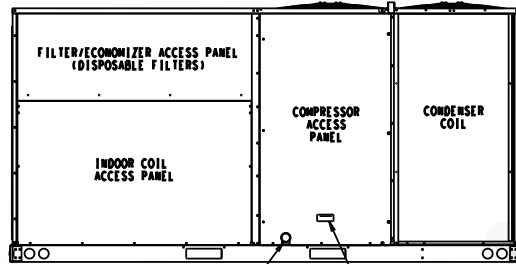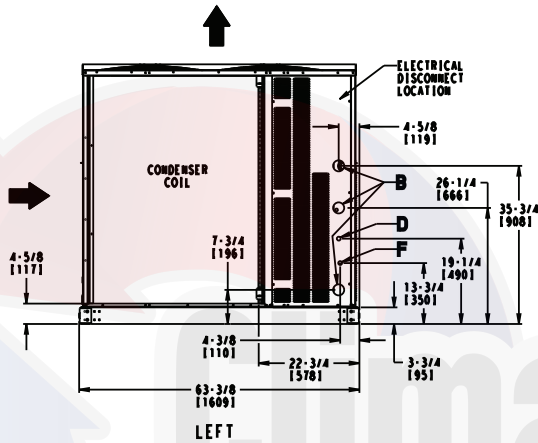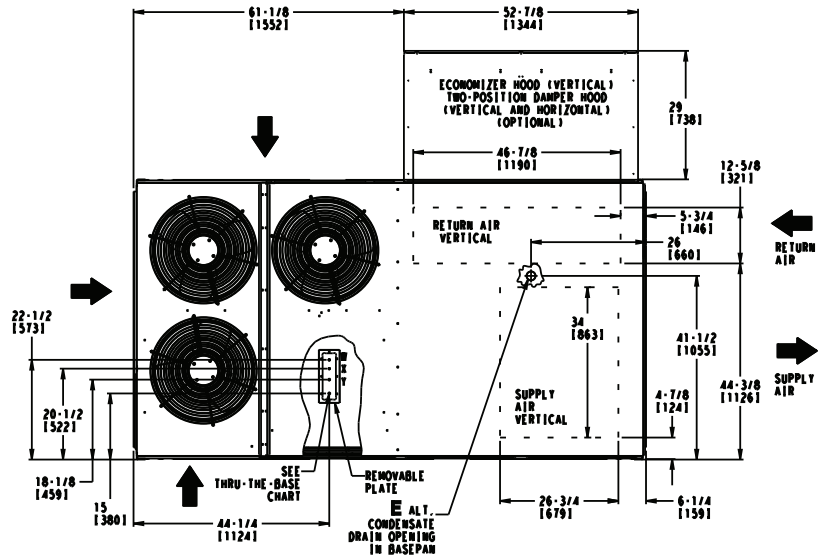

CONNECTION SIZES	
B	2 1/2" [64] DIA POWER SUPPLY HOLE
D	7/8" [22] DIA FIELD CONTROL WIRING HOLE
E	3/4"-14 NPT CONDENSATE DRAIN
F	7/8" [22] DIA FIELD CONVENIENCE OUTLET HOLE

THRU-THE-BASE CHART THESE HOLES REQUIRED FOR USE CRBTMPW005A00, 006A00, 007A00			
ACCESSORY NO.	THREADED CONDUIT SIZE	WIRE USE	REQ'D HOLE SIZES (MAX.)
005	W	1/2"	ACC. 7/8" [22.2]
	X	1/2"	24V 7/8" [22.2]
	Y	1 1/4"	POWER 1 1/2" [38.1]
006	W	1/2"	ACC. 7/8" [22.2]
	X	1/2"	24V 7/8" [22.2]
	Y	1 1/2"	POWER 2" [50.8]
007	W	1/2"	ACC. 7/8" [22.2]
	X	1/2"	24V 7/8" [22.2]
	Y	2"	POWER 2 1/2" [63.5]
FOR "THRU-THE-BASEPAN" FACTORY OPTION, FITTINGS FOR X & Y ARE PROVIDED AS SPECIFIED ON "006".			

Fig. 12 - Dimensions 50TC-16

## CURBS, WEIGHTS & DIMENSIONS (cont.)

UNIT	STD UNIT WEIGHT		CORNER WEIGHT (A)		CORNER WEIGHT (B)		CORNER WEIGHT (C)		CORNER WEIGHT (D)		C.G.		
	LBS.	KG.	LBS.	KG.	LBS.	KG.	LBS.	KG.	LBS.	KG.	X	Y	Z
50TC 16	1305	593	268	122	325	148	389	177	322	146	58 1/2 [1486]	32 [813]	21 [533]

STANDARD UNIT WEIGHT IS WITHOUT ELECTRIC HEAT & WITHOUT PACKAGING.  
FOR OPTIONS & ACCESSORIES, REFER TO THE PRODUCT DATA CATALOG.

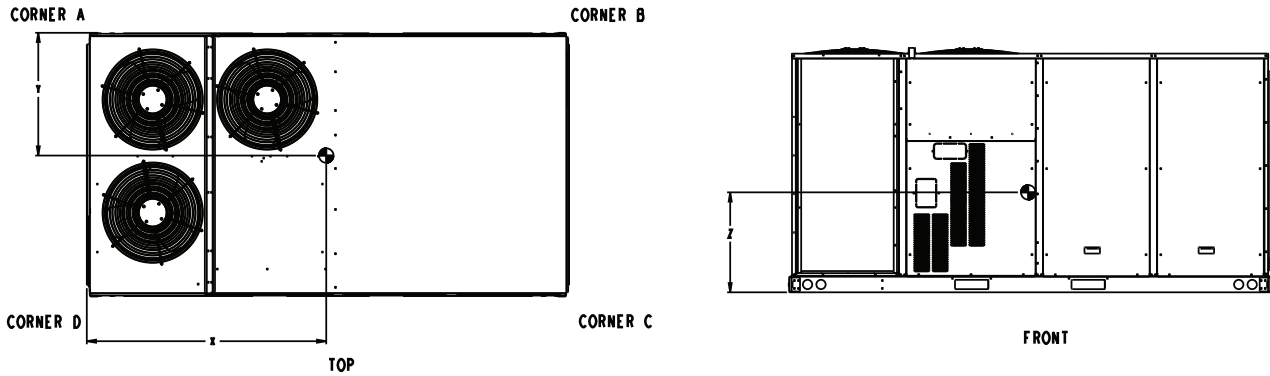


Fig. 13 - Dimensions 50TC-16

C101116A

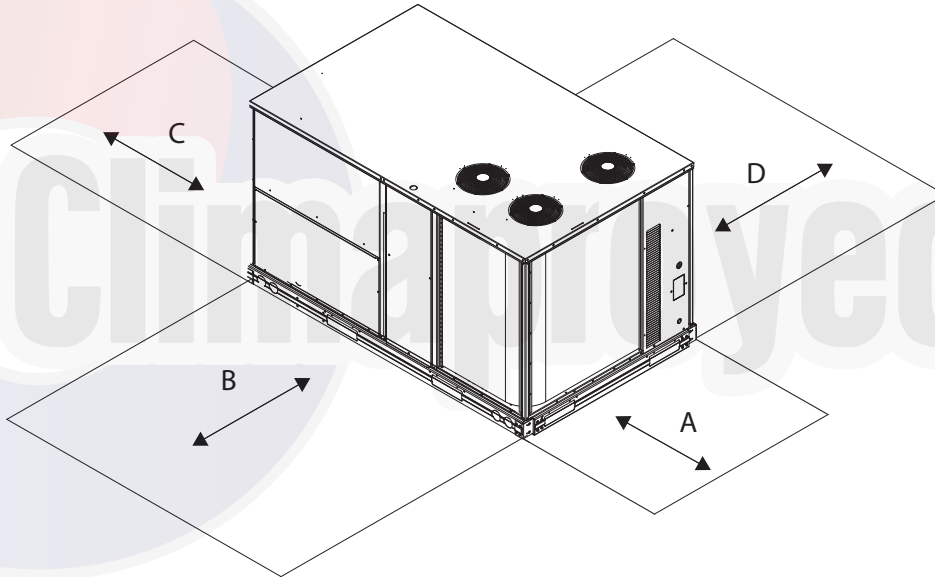



Fig. 14 - Service Clearance

C10578B

LOC	DIMENSION	CONDITION
A	48-in (1219 mm)	Unit disconnect is mounted on panel
	18-in (457 mm)	No disconnect, convenience outlet option
	18-in (457 mm)	Recommended service clearance
	12-in (305 mm)	Minimum clearance
B	42-in (1067 mm)	Surface behind servicer is grounded (e.g., metal, masonry wall)
	36-in (914 mm) Special	Surface behind servicer is electrically non-conductive (e.g., wood, fiberglass) Check for sources of flue products within 10-ft of unit fresh air intake hood
C	36-in (914 mm)	Side condensate drain is used
	18-in (457 mm)	Minimum clearance
D	48-in (1219 mm)	No flue discharge accessory installed, surface is combustible material
	42-in (1067 mm)	Surface behind servicer is grounded (e.g., metal, masonry wall, another unit)
	36-in (914 mm)	Surface behind servicer is electrically non-conductive (e.g., wood, fiberglass)
	Special	Check for adjacent units or building fresh air intakes within 10-ft of this unit's flue outlet

**NOTE:** Unit not designed to have overhead obstruction. Contact Application Engineering for guidance on any application planning overhead obstruction or vertical clearances.

# CURBS, WEIGHTS & DIMENSIONS (cont.)

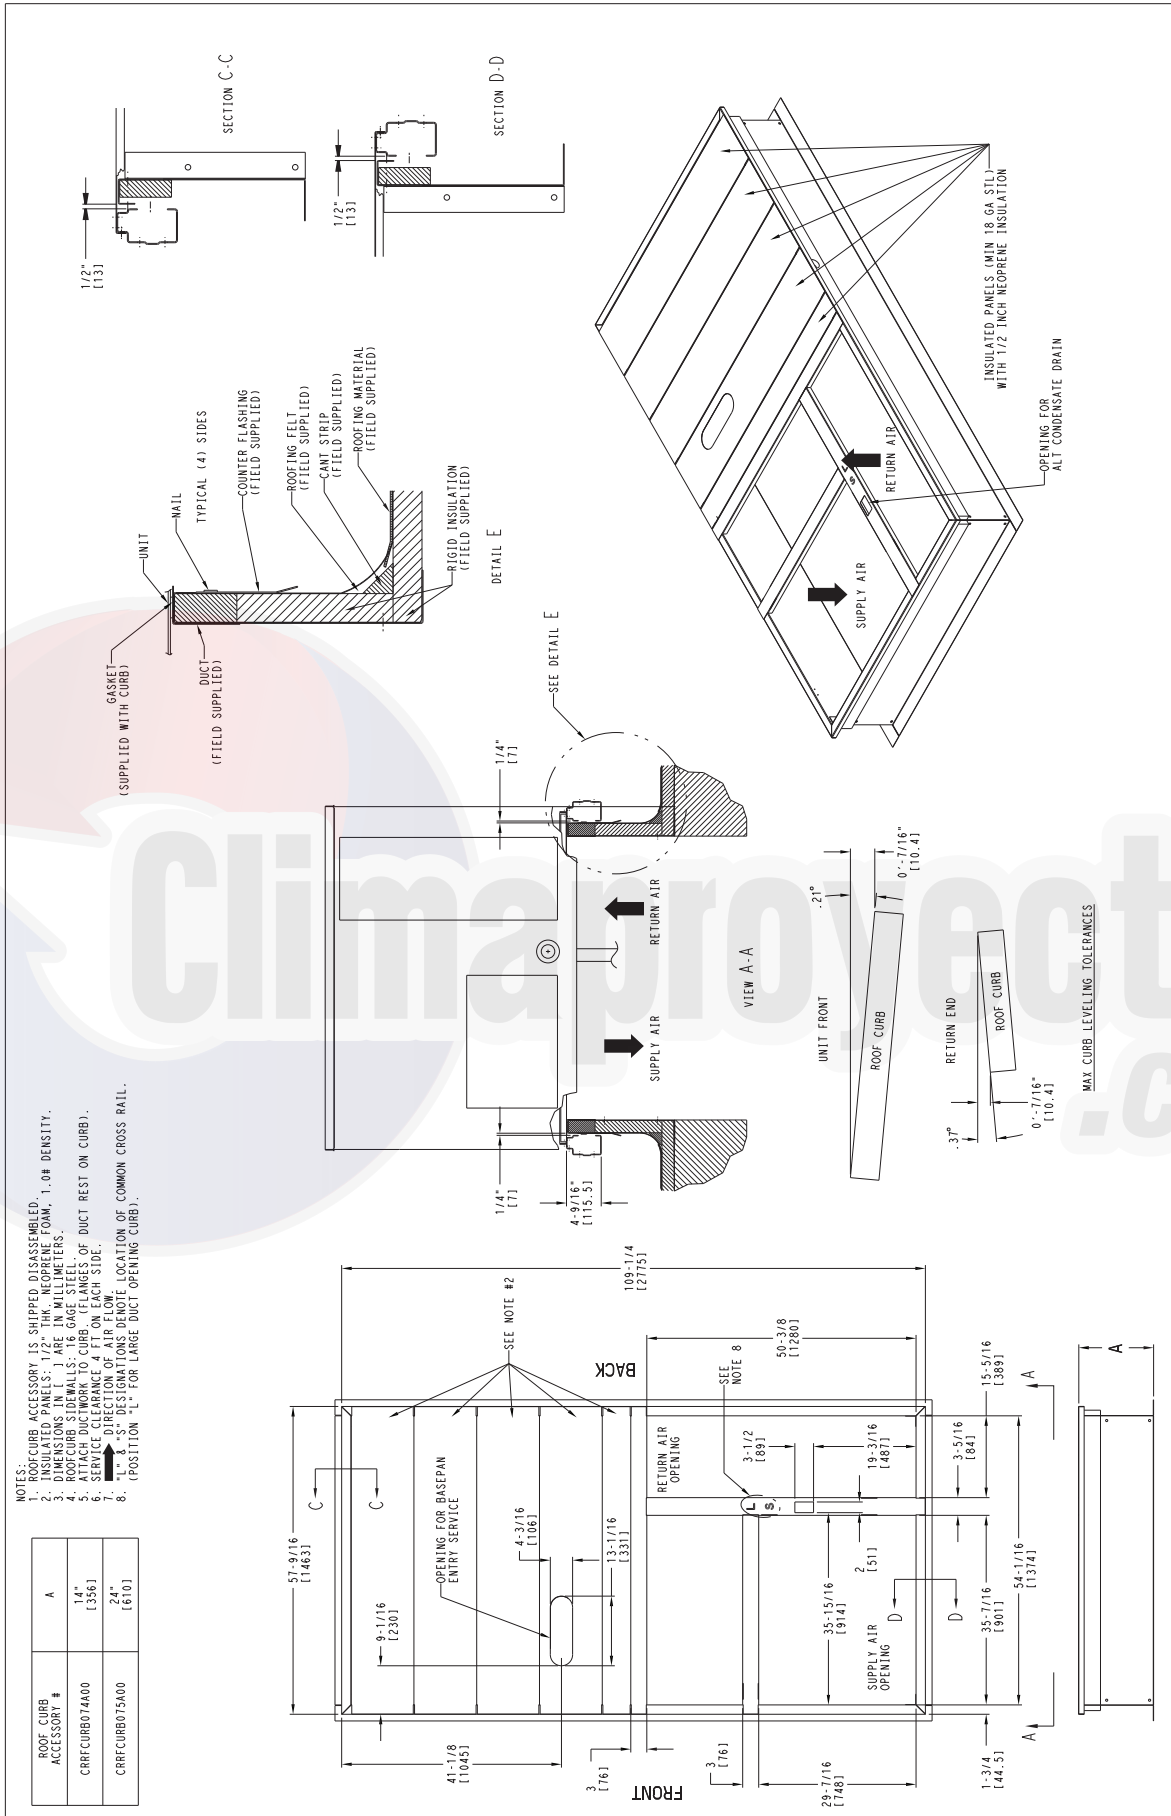

**Fig. 15 - Roof Curb Details 50TC 16**

## OPTION / ACCESSORY WEIGHTS

OPTION / ACCESSORY	OPTION / ACCESSORY WEIGHTS																	
	04		05		06		07		08		09		12		14		16	
	lb	kg	lb	kg	lb	kg	lb	kg	lb	kg	lb	kg	lb	kg	lb	kg	lb	kg
Humidi–MiZer <sup>1</sup>	15	7	23	10	25	11	29	13	38	17	47	21	57	21	47	21	57	26
Power Exhaust – vertical	50	23	50	23	50	23	50	23	75	34	75	34	75	34	75	34	85	39
Power Exhaust – horizontal	30	14	30	14	30	14	30	14	30	14	30	14	30	14	30	14	75	34
EconoMi\$er (IV, X or 2)	50	23	50	23	50	23	50	23	75	34	75	34	75	34	75	34	115	52
Two Position damper	39	18	39	18	39	18	39	18	58	26	58	26	58	26	58	26	65	29
Manual Dampers	12	5	12	5	12	5	12	5	18	8	18	8	18	8	18	8	25	11
Hail Guard (louvered)	16	7	16	7	16	7	16	7	34	15	34	15	34	15	34	15	45	20
Cu/Cu Condenser Coil <sup>2</sup>	6	3	13	6	13	6	15	7	12	5	23	10	23	10	23	10	190	86
Cu/Cu Cond. & Evaporator Coils <sup>2</sup>	12	5	19	9	21	10	26	12	25	11	49	22	49	22	49	22	280	127
Roof Curb (14–in. curb)	115	52	115	52	115	52	115	52	143	65	143	65	143	65	143	65	180	82
Roof Curb (24–in. curb)	197	89	197	89	197	89	197	89	245	111	245	111	245	111	245	111	255	116
CO <sub>2</sub> sensor	5	2	5	2	5	2	5	2	5	2	5	2	5	2	5	2	5	2
Electric Heater	30	14	30	14	30	14	30	14	45	20	45	20	45	20	45	20	25	11
Single Point Kit	10	5	10	5	10	5	10	5	12	5	12	5	12	5	15	7	25	11
Optional Indoor Motor / Drive	10	5	10	5	10	5	10	5	15	7	15	7	15	7	15	7	45	20
Motor Master Controller	35	16	35	16	35	16	35	16	35	16	35	16	35	16	40	18	35	16
Return Smoke Detector	5	2	5	2	5	2	5	2	5	2	5	2	5	2	5	2	5	2
Supply Smoke Detector	5	2	5	2	5	2	5	2	5	2	5	2	5	2	5	2	5	2
Non–Fused Disconnect	15	7	15	7	15	7	15	7	15	7	15	7	15	7	15	7	15	7
Powered Convenience outlet	35	16	35	16	35	16	35	16	35	16	35	16	35	16	35	16	35	16
Non–Powered Convenience outlet	5	2	5	2	5	2	5	2	5	2	5	2	5	2	5	2	5	2
Enthalpy Sensor	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1
Differential Enthalpy Sensor	3	1	3	1	3	1	3	1	3	1	3	1	3	1	3	1	3	1
SAV System with VFD	–	–	–	–	–	–	–	–	20	9	20	9	20	9	20	9	20	9

**NOTE:** Where multiple variations are available, the heaviest combination is listed.

– Not Available

<sup>1</sup> For Humidi–MiZer add MotorMaster Controller.

<sup>2</sup> Where available.



## APPLICATION DATA

### Min operating ambient temp (cooling):

In mechanical cooling mode, your Carrier rooftop can safely operate down to an outdoor ambient temperature of 40°F (4°C) and 25°F (-4°C), with an accessory winter start kit. It is possible to provide cooling at lower outdoor ambient temperatures by using less outside air, economizers, and/or accessory low ambient kits.

### Max operating ambient temp (cooling):

The maximum operating ambient temperature for cooling mode is 115°F (46°C). While cooling operation above 115°F (46°C) may be possible, it could cause either a reduction in performance, reliability, or a protective action by the unit's internal safety devices.

### Min and max airflow (cooling mode):

To maintain safe and reliable operation of your rooftop, operate within the cooling airflow limits. Operating above the max may cause blow-off, undesired airflow noise, or airflow related problems with the rooftop unit. Operating below the min may cause problems with coil freeze-up.

### Airflow:

All units are draw-through in cooling mode.

### Outdoor air application strategies:

Economizers reduce operating expenses and compressor run time by providing a free source of cooling and a means of ventilation to match application changing needs. In fact, they should be considered for most applications. Also, consider the various economizer control methods and their benefits, as well as sensors required to accomplish your application goals. Please contact your local Carrier representative for assistance.

### Motor limits, Brake horsepower (BHP):

Due to Carrier's internal unit design, air path, and specially designed motors, the full horsepower (maximum continuous BHP) band, as listed in the Physical Data tables, can be used with the utmost confidence. There is no need for extra safety factors, as Carrier's motors are designed and rigorously tested to use the entire, listed BHP range without either nuisance tripping or premature motor failure.

### Sizing a rooftop

Bigger isn't necessarily better. While an air conditioner needs to have enough capacity to meet the load, it doesn't need excess capacity. In fact, having excess capacity typically results in very poor part load performance and humidity control.

Using higher design temperatures than ASHRAE recommends for your location, adding "safety factors" to the calculated load, and rounding up to the next largest unit, are all signs of oversizing air conditioners. Oversizing can cause short-cycling, and short cycling leads to poor humidity control, reduced efficiency, higher utility bills, drastic indoor temperature swings, excessive noise, and increased wear and tear on the air conditioner.

Rather than oversizing an air conditioner, wise contractors and engineers "right-size" or even slightly undersize air conditioners. Correctly sizing an air conditioner controls humidity better; promotes efficiency; reduces utility bills; extends equipment life, and maintains even, comfortable temperatures.

### Low ambient applications

When equipped with a Carrier economizer, your rooftop unit can cool your space by bringing in fresh, cool outside air. In fact, when so equipped, accessory low ambient kit may not be necessary. In low ambient conditions, unless the outdoor air is excessively humid or contaminated, economizer-based "free cooling" is the preferred less costly and energy conscious method.

In low ambient applications where outside air might not be desired (such as contaminated or excessively humid outdoor environments), your Carrier rooftop can operate at ambient temperatures down to -20°F (-29°C) using the recommended accessory Motormaster low ambient controller.

### Winter start

Carrier's winter start kit extends the low ambient limit of your rooftop to 25°F (-4°C). The kit bypasses the low pressure switch, preventing nuisance tripping of the low pressure switch. Other low ambient precautions may still be prudent.

## APPLICATION DATA (cont.)

### Staged Air Volume (SAV) with Variable Frequency Drive (VFD)

Carrier's Staged Air Volume (SAV) system utilizes a Variable Frequency Drive (VFD) to automatically adjust the indoor fan motor speed in sequence with the units cooling operation. Per ASHRAE 90.1 2010 standard section 6.4.3.10.b, during the first stage of cooling operation the VFD will adjust the fan motor to provide 2/3rd of the total cfm established for the unit. When a call for the second stage of cooling is required, the VFD will allow the total cfm for the unit established (100%). During the heating mode, the VFD will allow total design cfm (100%) operation and during the ventilation mode the VFD will allow operation to 2/3rd of total cfm.

The VFD used in Carrier's SAV system has soft start capabilities to slowly ramp up the speeds, thus eliminating any high inrush air volume during initial start-up. It also has internal over current protection for the fan motor and a field installed display kit that allows adjustment and in depth diagnostics of the VFD.

This SAV system is available on models with 2-stage cooling operation with electrical mechanical or RTU Open (multi Protocol) controls. Both space sensor and conventional thermostats/controls can be used to provide accurate control in any application.

The SAV system is very flexible for initial fan performance set up and adjustment. The standard factory shipped VFD is pre programmed to automatically stage the fan speed between the first and second stage of cooling. The unit fan performance static pressure and cfm can be easily adjusted using the traditional means of pulley adjustments. The other means to adjust the unit static and cfm performance is to utilize the field installed display module and adjust the frequency and voltage in the VFD to required performance requirements. In either case, once set up the VFD will automatically adjust the speed between the cooling stage operation.



Climaproyectos  
.com

## SELECTION PROCEDURE (WITH 50TC\*A07 EXAMPLE)

### I. Determine cooling and heating loads.

Given:

Mixed Air Drybulb	80°F (27°C)
Mixed Air Wetbulb	67°F (19°C)
Ambient Drybulb	95°F (35°C)
TC <sub>Load</sub>	69.0 MBH
SHC <sub>Load</sub>	51.0 MBH
Vertical Supply Air	2100 CFM
External Static Pressure	0.66 in.wg
Electrical Characteristics	230-3-60

### II. Make an initial guess at cooling tons.

Refrig. tons = TC<sub>Load</sub> / 12 MBH per ton  
 Refrig. tons = 69.0 / 12 = 5.75 tons

In this case, start by looking at the 50TC\*A07.

### III. Look up the rooftop's TC and SHC.

Table 6 shows that, at the application's supply air CFM, mixed air and ambient temperatures, the 50TC\*A07 supplies:

TC<sub>Load</sub> = 73.7 MBH  
 SHC<sub>Load</sub> = 54.4 MBH.

### IV. Calculate the building Latent Heat Load.

LC<sub>Load</sub> = TC<sub>Load</sub> - SHC<sub>Load</sub>  
 LC<sub>Load</sub> = 69.0 MBH - 51.0 MBH = 18.0 MBH

### V. Calculate RTU Latent Heat Capacity

LC = TC - SHC  
 LC = 73.7 MBH - 54.4 MBH = 19.3 MBH

### VI. Compare RTU capacities to loads. <sup>2,3</sup>

Compare the rooftop's SHC and LC to the building's Sensible and Latent Heat Loads.

### VII. Select factory options (FIOP)

Local code requires an economizer for any unit with TC larger than 65.0 MBH.

### VIII. Calculate the total static pressure.

External static pressure	0.66 in. wg
Sum of FIOP/Accessory static	<u>+0.14 in. wg</u>
Total Static Pressure	0.80 in. wg

### IX. Look up the Indoor Fan RPM & BHP.

Table 8 shows, at 2100 CFM & ESP= 0.8, RPM = 1268 & BHP = 1.52

### X. Determine electrical requirements

The MCA and MOCP tables show a 50TC\*A07 (without convenience outlet) as:

MCA = 30.5 amps & MOCP = 45 amps  
 Min. Disconnect Size: FLA = 30 & LRA = 157.

#### Legend:

BHP	— Brake horsepower
FLA	— Full load amps
LC	— Latent capacity
LRA	— Lock rotor amp
MBH	— (1,000) BTUH
MCA	— Min. circuit ampacity
MOCP	— Max. over-current protection
RPM	— Revolutions per minute
RTU	— Rooftop unit
SHC	— Sensible heat capacity
TC	— Total capacity

#### NOTES:

1. Selection software by Carrier saves time by performing many of the steps above. Contact your Carrier sales representative for assistance.
2. Selecting a unit with a SHC slightly lower than the SHC<sub>Load</sub> is often better than oversizing. Slightly lower SHC's will help control indoor humidity, and prevent temperature swings.
3. If the rooftop's capacity meets the Sensible Heat Load, but not the Latent Heat Load.
4. Indoor Fan Motor efficiency is available in Table 10. Use the decimal form in the equation eg. 80% = .8.

Table 6 – COOLING CAPACITIES

1-STAGE COOLING

3 TONS

50TC*A04 (RTPF)				AMBIENT TEMPERATURE											
				85			95			105			115		
				EAT (db)			EAT (db)			EAT (db)			EAT (db)		
		75	80	85	75	80	85	75	80	85	75	80	85		
900 Cfm	EAT (wb)	58	TC	28.1	28.1	31.7	26.3	26.3	29.8	24.5	24.5	27.7	22.6	22.6	25.5
			SHC	24.4	28.1	31.7	22.9	26.3	29.8	21.3	24.5	27.7	19.6	22.6	25.5
		62	TC	30.3	30.3	31.0	27.8	27.8	29.8	25.1	25.1	28.4	22.6	22.6	26.5
			SHC	22.6	26.8	31.0	21.5	25.7	29.8	20.2	24.3	28.4	18.7	22.6	26.5
		67	TC	35.5	35.5	35.5	33.1	33.1	33.1	30.5	30.5	30.5	27.5	27.5	27.5
		SHC	19.5	23.7	27.9	18.5	22.7	26.9	17.4	21.6	25.8	16.2	20.4	24.6	
	72	TC	39.0	39.0	39.0	37.1	37.1	37.1	35.1	35.1	35.1	32.7	32.7	32.7	
		SHC	15.3	19.5	23.7	14.5	18.8	23.0	13.7	17.9	22.2	12.9	17.1	21.3	
	76	TC	-	41.4	41.4	-	39.6	39.6	-	37.6	37.6	-	35.4	35.4	
		SHC	-	16.0	21.0	-	15.4	20.2	-	14.6	19.3	-	13.8	18.3	
1050 Cfm	EAT (wb)	58	TC	30.2	30.2	34.2	28.4	28.4	32.2	26.5	26.5	30.0	24.5	24.5	27.7
			SHC	26.3	30.2	34.2	24.7	28.4	32.2	23.1	26.5	30.0	21.3	24.5	27.7
		62	TC	31.9	31.9	34.2	29.4	29.4	32.8	26.7	26.7	31.2	24.5	24.5	28.8
			SHC	24.6	29.4	34.2	23.4	28.1	32.8	22.0	26.6	31.2	20.3	24.5	28.8
		67	TC	36.7	36.7	36.7	34.8	34.8	34.8	32.2	32.2	32.2	29.1	29.1	29.1
		SHC	20.6	25.4	30.2	19.8	24.6	29.4	18.8	23.6	28.4	17.6	22.4	27.2	
	72	TC	40.1	40.1	40.1	38.2	38.2	38.2	36.1	36.1	36.1	33.7	33.7	33.7	
		SHC	15.7	20.5	25.3	15.0	19.8	24.6	14.2	19.0	23.8	13.4	18.2	23.0	
	76	TC	-	42.4	42.4	-	40.6	40.6	-	38.5	38.5	-	36.2	36.2	
		SHC	-	16.6	22.2	-	15.9	21.3	-	15.2	20.4	-	14.4	19.5	
1200 Cfm	EAT (wb)	58	TC	32.2	32.2	36.4	30.4	30.4	34.3	28.4	28.4	32.1	26.3	26.3	29.7
			SHC	28.0	32.2	36.4	26.4	30.4	34.3	24.7	28.4	32.1	22.8	26.3	29.7
		62	TC	33.3	33.3	37.0	30.8	30.8	35.5	28.4	28.4	33.4	26.3	26.3	30.9
			SHC	26.4	31.7	37.0	25.1	30.3	35.5	23.4	28.4	33.4	21.7	26.3	30.9
		67	TC	37.7	37.7	37.7	35.6	35.6	35.6	33.4	33.4	33.4	30.4	30.4	30.4
		SHC	21.7	27.0	32.4	20.9	26.3	31.6	20.0	25.4	30.8	18.8	24.2	29.6	
	72	TC	40.9	40.9	40.9	39.0	39.0	39.0	36.9	36.9	36.9	34.4	34.4	34.4	
		SHC	16.1	21.5	26.8	15.4	20.8	26.1	14.7	20.0	25.4	13.8	19.2	24.5	
	76	TC	-	43.1	43.1	-	41.3	41.3	-	39.1	39.1	-	36.8	36.8	
		SHC	-	17.1	23.1	-	16.4	22.3	-	15.7	21.4	-	14.9	20.5	
1350 Cfm	EAT (wb)	58	TC	-	-	-	32.1	32.1	36.3	30.0	30.0	34.0	27.9	27.9	31.5
			SHC	-	-	-	27.9	32.1	36.3	26.1	30.0	34.0	24.2	27.9	31.5
		62	TC	28.4	28.4	30.5	32.2	32.2	37.8	30.1	30.1	35.3	27.9	27.9	32.8
			SHC	17.6	24.1	30.5	26.6	32.2	37.8	24.8	30.1	35.3	23.0	27.9	32.8
		67	TC	33.2	33.2	33.2	36.4	36.4	36.4	34.1	34.1	34.1	31.5	31.5	32.0
		SHC	15.0	21.4	27.9	21.9	27.8	33.7	21.0	26.9	32.9	20.0	26.0	32.0	
	72	TC	37.5	37.5	37.5	39.7	39.7	39.7	37.5	37.5	37.5	35.0	35.0	35.0	
		SHC	11.8	18.3	24.8	15.8	21.7	27.5	15.0	20.9	26.8	14.2	20.1	26.0	
	76	TC	-	40.1	40.1	-	41.8	41.8	-	39.6	39.6	-	37.3	37.3	
		SHC	-	15.3	22.7	-	16.8	23.2	-	16.1	22.3	-	15.3	21.5	
1500 Cfm	EAT (wb)	58	TC	28.1	28.1	34.2	33.7	33.7	38.1	31.6	31.6	35.7	29.3	29.3	33.2
			SHC	21.9	28.1	34.2	29.3	33.7	38.1	27.4	31.6	35.7	25.5	29.3	33.2
		62	TC	30.3	30.3	33.8	33.7	33.7	39.6	31.6	31.6	37.1	29.4	29.4	34.5
			SHC	19.8	26.8	33.8	27.8	33.7	39.6	26.1	31.6	37.1	24.2	29.4	34.5
		67	TC	35.5	35.5	35.5	36.9	36.9	36.9	34.6	34.6	34.9	32.0	32.0	34.0
		SHC	16.7	23.7	30.7	22.8	29.2	35.7	21.9	28.4	34.9	21.0	27.5	34.0	
	72	TC	39.0	39.0	39.0	40.2	40.2	40.2	38.0	38.0	38.0	35.5	35.5	35.5	
		SHC	12.4	19.5	26.6	16.1	22.5	28.8	15.4	21.7	28.1	14.6	21.0	27.4	
	76	TC	-	41.4	41.4	-	42.2	42.2	-	40.0	40.0	-	-	-	
		SHC	-	16.0	24.3	-	17.2	24.0	-	16.5	23.2	-	-	-	

LEGEND:

- Do not operate
- Cfm - Cubic feet per minute (supply air)
- EAT(db) - Entering air temperature (dry bulb)
- EAT(wb) - Entering air temperature (wet bulb)
- SHC - Sensible heat capacity
- TC - Total capacity

50TC04 (3 TONS) – UNIT WITH HUMIDI-MIZER SYSTEM IN SUBCOOLING MODE										
Air Entering Evaporator – CFM										
Temp (F) Air Ent Condenser (Edb)		80 dry bulb			80 dry bulb			80 dry bulb		
		72 wet bulb			67 wet bulb			62 wet bulb		
		900	1200	1500	900	1200	1500	900	1200	1500
75	TC	40.6	43.2	45.3	37.0	39.4	41.3	33.4	35.6	37.4
	SHC	21.6	23.9	25.6	25.6	27.7	29.3	29.6	31.6	33.1
	kW	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0
85	TC	37.0	39.6	41.7	33.6	36.0	37.9	30.2	32.3	34.1
	SHC	17.7	20.2	22.2	22.7	25.0	26.9	27.7	29.9	31.6
	kW	2.3	2.3	2.3	2.3	2.3	2.3	2.3	2.3	2.3
95	TC	33.5	36.0	38.1	30.2	32.5	34.4	26.9	29.1	30.8
	SHC	13.7	16.6	18.8	19.7	22.4	24.4	25.7	28.2	30.1
	kW	2.6	2.6	2.6	2.5	2.5	2.5	2.5	2.5	2.5
105	TC	29.9	32.4	34.5	26.8	29.1	31.0	23.6	25.8	27.5
	SHC	9.8	12.9	15.3	16.8	19.7	22.0	23.8	26.5	28.6
	kW	2.9	2.9	2.9	2.8	2.8	2.8	2.8	2.8	2.8
115	TC	26.3	28.8	30.9	23.3	25.7	27.5	20.4	22.5	24.2
	SHC	5.8	9.2	11.9	13.8	17.0	19.5	21.9	24.8	27.1
	kW	3.2	3.2	3.2	3.1	3.1	3.1	3.1	3.1	3.1

50TC04 (3 TONS) – UNIT WITH HUMIDI-MIZER SYSTEM IN HOT GAS REHEAT MODE										
Air Entering Evaporator – CFM										
Temp (F) Air Ent Condenser (Edb)		75 dry bulb			75 dry bulb			75 dry bulb		
		62.5 wet bulb (50% relative)			64 wet bulb (55% relative)			65.3 wet bulb (60% relative)		
		1050	1200	1350	1050	1200	1350	1050	1200	1350
80	TC	14.7	15.5	16.2	15.9	16.7	17.4	16.9	17.7	18.4
	SHC	6.7	7.6	8.5	4.8	5.7	6.6	3.2	4.1	5.0
	kW	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0
75	TC	15.1	15.8	16.4	16.2	17.0	17.6	17.2	18.0	18.6
	SHC	7.5	8.4	9.2	5.8	6.7	7.5	4.4	5.2	6.0
	kW	1.9	1.9	1.9	2.0	2.0	2.0	2.0	2.0	2.0
70	TC	15.5	16.1	16.7	16.6	17.3	17.9	17.5	18.2	18.8
	SHC	8.4	9.3	10.0	6.9	7.7	8.5	5.5	6.4	7.1
	kW	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9
60	TC	16.2	16.8	17.3	17.2	17.8	18.3	18.1	18.7	19.2
	SHC	10.2	10.9	11.6	8.9	9.7	10.4	7.8	8.6	9.3
	kW	1.8	1.8	1.8	1.8	1.8	1.8	1.9	1.9	1.9
50	TC	17.0	17.5	17.9	17.9	18.4	18.8	18.7	19.2	19.6
	SHC	11.9	12.6	13.2	11.0	11.6	12.2	10.1	10.8	11.4
	kW	1.7	1.7	1.7	1.8	1.8	1.8	1.8	1.8	1.8
40	TC	17.7	18.1	18.5	18.6	19.0	19.3	19.3	19.7	20.1
	SHC	13.7	14.3	14.8	13.0	13.6	14.1	12.4	13.0	13.5
	kW	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7

**LEGEND**

- Edb** – Entering Dry–Bulb
- Ewb** – Entering Wet–Bulb
- kW** – Compressor Motor Power Input
- ldb** – Leaving Dry–Bulb
- lwb** – Leaving Wet–Bulb
- SHC** – Sensible Heat Capacity (1000 Btuh) Gross
- TC** – Total Capacity (1000 Btuh) Gross

**NOTES:**

1. Direct interpolation is permissible. Do not extrapolate.
2. The following formulas may be used:

$$t_{ldb} = t_{edb} - \frac{\text{sensible capacity (Btuh)}}{1.10 \times \text{cfm}}$$

$t_{lwb}$  = Wet–bulb temperature corresponding to enthalpy of air leaving evaporator coil ( $h_{lwb}$ )

$$h_{lwb} = h_{ewb} - \frac{\text{total capacity (Btuh)}}{4.5 \times \text{cfm}}$$

Where:  $h_{ewb}$  = Enthalpy of air entering evaporator coil

Table 6 - COOLING CAPACITIES (cont.)

1-STAGE COOLING

4 TONS

50TC*A05 (RTPF)			AMBIENT TEMPERATURE												
			85			95			105			115			
			EAT (db)			EAT (db)			EAT (db)			EAT (db)			
			75	80	85	75	80	85	75	80	85	75	80	85	
1200 Cfm	EAT (wb)	58	TC	-	-	-	-	-	-	36.1	36.1	40.7	34.3	34.3	38.6
			SHC	-	-	-	-	-	-	31.5	36.1	40.7	29.9	34.3	38.6
		62	TC	43.1	43.1	43.1	40.8	40.8	40.8	38.4	38.4	39.4	35.9	35.9	38.2
			SHC	31.2	36.4	41.7	30.1	35.3	40.6	28.9	34.1	39.4	27.8	33.0	38.2
		67	TC	47.4	47.4	47.4	45.2	45.2	45.2	42.9	42.9	42.9	40.3	40.3	40.3
			SHC	25.9	31.2	36.4	25.0	30.2	35.5	23.9	29.2	34.4	22.9	28.2	33.4
		72	TC	51.1	51.1	51.1	49.1	49.1	49.1	46.8	46.8	46.8	43.9	43.9	43.9
			SHC	20.1	25.5	30.9	19.4	24.7	30.1	18.4	23.7	29.0	17.4	22.7	28.0
		76	TC	-	53.3	53.3	-	51.5	51.5	-	49.2	49.2	-	45.9	45.9
			SHC	-	20.8	27.4	-	20.2	26.8	-	19.3	25.7	-	18.3	24.6
1400 cfm	EAT (wb)	58	TC	41.9	41.9	47.3	40.1	40.1	45.3	38.2	38.2	43.2	36.3	36.3	41.0
			SHC	36.6	41.9	47.3	35.0	40.1	45.3	33.3	38.2	43.2	31.7	36.3	41.0
		62	TC	44.6	44.6	45.4	42.3	42.3	44.2	39.8	39.8	42.9	37.3	37.3	41.6
			SHC	33.4	39.4	45.4	32.3	38.3	44.2	31.0	37.0	42.9	29.8	35.7	41.6
		67	TC	48.7	48.7	48.7	46.6	46.6	46.6	44.2	44.2	44.2	41.4	41.4	41.4
			SHC	27.3	33.2	39.2	26.4	32.3	38.3	25.3	31.3	37.3	24.2	30.2	36.2
		72	TC	52.2	52.2	52.2	50.3	50.3	50.3	47.8	47.8	47.8	44.8	44.8	44.8
			SHC	20.6	26.7	32.7	19.9	25.9	32.0	18.9	24.9	30.9	17.9	23.8	29.7
		76	TC	-	54.1	54.1	-	52.3	52.3	-	49.9	49.9	-	46.4	46.4
			SHC	-	21.5	29.0	-	20.8	28.0	-	19.9	26.9	-	18.8	25.7
1600 Cfm	EAT (wb)	58	TC	44.0	44.0	49.6	42.1	42.1	47.4	40.1	40.1	45.2	38.1	38.1	43.0
			SHC	38.3	44.0	49.6	36.7	42.1	47.4	34.9	40.1	45.2	33.2	38.1	43.0
		62	TC	45.7	45.7	48.6	43.5	43.5	47.5	41.0	41.0	46.0	38.5	38.5	44.4
			SHC	35.3	42.0	48.6	34.2	40.8	47.5	32.9	39.4	46.0	31.6	38.0	44.4
		67	TC	49.8	49.8	49.8	47.6	47.6	47.6	45.1	45.1	45.1	42.3	42.3	42.3
			SHC	28.4	35.0	41.6	27.6	34.2	40.9	26.5	33.2	39.9	25.4	32.1	38.7
		72	TC	53.0	53.0	53.0	51.1	51.1	51.1	48.6	48.6	48.6	45.4	45.4	45.4
			SHC	21.0	27.6	34.3	20.3	27.0	33.6	19.4	26.0	32.6	18.3	24.8	31.3
		76	TC	-	54.6	54.6	-	52.8	52.8	-	50.4	50.4	-	46.8	46.8
			SHC	-	22.0	29.9	-	21.3	29.0	-	20.3	27.9	-	19.2	26.6
1800 Cfm	EAT (wb)	58	TC	44.0	44.0	50.3	42.1	42.1	48.1	40.1	40.1	45.9	38.0	38.0	43.5
			SHC	37.6	44.0	50.3	36.0	42.1	48.1	34.3	40.1	45.9	32.6	38.0	43.5
		62	TC	45.7	45.7	49.5	43.5	43.5	48.3	41.0	41.0	46.8	38.4	38.4	45.2
			SHC	34.5	42.0	49.5	33.4	40.8	48.3	32.1	39.4	46.8	30.8	38.0	45.2
		67	TC	49.8	49.8	49.8	47.6	47.6	47.6	45.1	45.1	45.1	42.3	42.3	42.3
			SHC	27.6	35.0	42.5	26.8	34.2	41.7	25.7	33.2	40.7	24.6	32.1	39.5
		72	TC	53.0	53.0	53.0	51.1	51.1	51.1	48.6	48.6	48.6	45.4	45.4	45.4
			SHC	20.2	27.6	35.1	19.5	27.0	34.4	18.5	26.0	33.4	17.5	24.8	32.1
		76	TC	-	54.6	54.6	-	52.8	52.8	-	50.4	50.4	-	46.8	46.8
			SHC	-	22.0	30.9	-	21.3	30.0	-	20.3	28.9	-	19.2	27.5
2000 Cfm	EAT (wb)	58	TC	46.9	46.9	52.9	45.0	45.0	50.8	42.9	42.9	48.4	40.7	40.7	45.9
			SHC	40.9	46.9	52.9	39.3	45.0	50.8	37.4	42.9	48.4	35.5	40.7	45.9
		62	TC	47.5	47.5	54.0	45.3	45.3	52.5	43.0	43.0	50.3	40.7	40.7	47.7
			SHC	38.5	46.3	54.0	37.3	44.9	52.5	35.6	43.0	50.3	33.8	40.7	47.7
		67	TC	51.2	51.2	51.2	49.1	49.1	49.1	46.5	46.5	46.5	43.5	43.5	43.5
			SHC	30.5	38.3	46.0	29.8	37.6	45.5	28.7	36.6	44.5	27.5	35.4	43.2
		72	TC	54.0	54.0	54.0	52.1	52.1	52.1	49.7	49.7	49.7	46.2	46.2	46.2
			SHC	21.7	29.2	36.8	21.1	28.7	36.4	20.1	27.8	35.4	18.9	26.4	33.9
		76	TC	-	55.2	55.2	-	53.5	53.5	-	51.0	51.0	-	47.3	47.3
			SHC	-	22.7	31.4	-	22.0	30.6	-	21.1	29.6	-	19.9	28.1

LEGEND:

- Do not operate
- Cfm - Cubic feet per minute (supply air)
- EAT(db) - Entering air temperature (dry bulb)
- EAT(wb) - Entering air temperature (wet bulb)
- SHC - Sensible heat capacity
- TC - Total capacity



50TC05 (4 TONS) – UNIT WITH HUMIDI-MIZER SYSTEM IN SUBCOOLING MODE										
Air Entering Evaporator – CFM										
Temp (F) Air Ent Condenser (Edb)		80 dry bulb			80 dry bulb			80 dry bulb		
		72 wet bulb			67 wet bulb			62 wet bulb		
		1200	1600	2000	1200	1600	2000	1200	1600	2000
75	TC	52.5	55.9	58.6	47.1	50.2	52.7	41.7	44.5	46.8
	SHC	22.6	25.5	27.8	27.1	29.9	32.0	31.6	34.2	36.2
	kW	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5
85	TC	48.7	52.2	54.9	43.4	46.5	49.0	38.0	40.8	43.1
	SHC	18.0	21.3	23.9	23.6	26.8	29.2	29.3	32.2	34.4
	kW	2.9	2.9	2.9	2.9	2.9	2.9	2.9	2.9	2.9
95	TC	44.9	48.4	51.2	39.6	42.8	45.3	34.3	37.1	39.4
	SHC	13.4	17.2	20.0	20.2	23.7	26.4	27.0	30.2	32.7
	kW	3.4	3.4	3.4	3.3	3.3	3.3	3.3	3.3	3.3
105	TC	41.1	44.7	47.5	35.9	39.1	41.7	30.6	33.5	35.8
	SHC	8.8	13.0	16.1	16.7	20.6	23.6	24.6	28.2	31.0
	kW	3.8	3.8	3.8	3.7	3.7	3.7	3.7	3.7	3.7
115	TC	37.4	41.0	43.9	32.1	35.4	38.0	26.8	29.8	32.1
	SHC	4.3	8.8	12.2	13.3	17.5	20.7	22.3	26.2	29.2
	kW	4.2	4.2	4.2	4.2	4.2	4.2	4.1	4.1	4.1

50TC05 (4 TONS) – UNIT WITH HUMIDI-MIZER SYSTEM IN HOT GAS REHEAT MODE										
Air Entering Evaporator – CFM										
Temp (F) Air Ent Condenser (Edb)		75 dry bulb			75 dry bulb			75 dry bulb		
		62.5 wet bulb (50% relative)			64 wet bulb (55% relative)			65.3 wet bulb (60% relative)		
		1200	1600	2000	1200	1600	2000	1200	1600	2000
80	TC	11.6	13.8	15.5	13.5	15.8	17.6	15.2	17.5	19.3
	SHC	-1.0	1.2	3.0	-3.1	-0.8	0.9	-4.8	-2.6	-0.9
	kW	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5
75	TC	12.5	14.6	16.2	14.3	16.4	18.1	15.9	18.1	19.8
	SHC	-0.7	1.4	3.0	-2.7	-0.6	1.1	-4.3	-2.2	-0.6
	kW	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5
70	TC	13.4	15.3	16.8	15.1	17.1	18.7	16.6	18.7	20.3
	SHC	-0.5	1.5	3.0	-2.3	-0.3	1.2	-3.8	-1.9	-0.3
	kW	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5
60	TC	15.1	16.8	18.1	16.7	18.4	19.8	18.1	19.9	21.2
	SHC	0.0	1.7	3.1	-1.5	0.2	1.5	-2.8	-1.1	0.2
	kW	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6
50	TC	16.9	18.3	19.4	18.3	19.8	20.9	19.6	21.0	22.2
	SHC	0.6	2.0	3.1	-0.7	0.7	1.8	-1.8	-0.4	0.7
	kW	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6
40	TC	18.7	19.8	20.7	19.9	21.1	22.0	21.0	22.2	23.2
	SHC	1.1	2.2	3.1	0.1	1.2	2.1	-0.8	0.4	1.3
	kW	2.6	2.6	2.6	2.7	2.7	2.7	2.7	2.7	2.7

**LEGEND**

- Edb** – Entering Dry–Bulb
- Ewb** – Entering Wet–Bulb
- kW** – Compressor Motor Power Input
- ldb** – Leaving Dry–Bulb
- lwb** – Leaving Wet–Bulb
- SHC** – Sensible Heat Capacity (1000 Btuh) Gross
- TC** – Total Capacity (1000 Btuh) Gross

**NOTES:**

1. Direct interpolation is permissible. Do not extrapolate.
2. The following formulas may be used:

$$t_{ldb} = t_{edb} - \frac{\text{sensible capacity (Btuh)}}{1.10 \times \text{cfm}}$$

$t_{lwb}$  = Wet–bulb temperature corresponding to enthalpy of air leaving evaporator coil ( $h_{lwb}$ )

$$h_{lwb} = h_{ewb} - \frac{\text{total capacity (Btuh)}}{4.5 \times \text{cfm}}$$

Where:  $h_{ewb}$  = Enthalpy of air entering evaporator coil

Table 6 - COOLING CAPACITIES (cont.)

1-STAGE COOLING

5 TONS

50TC*A06 (RTPF)			AMBIENT TEMPERATURE												
			85			95			105			115			
			EAT (db)			EAT (db)			EAT (db)			EAT (db)			
			75	80	85	75	80	85	75	80	85	75	80	85	
1500 Cfm	EAT (wb)	58	TC	52.9	52.9	60.0	49.9	49.9	56.6	46.6	46.6	52.9	43.1	43.1	48.9
			SHC	45.8	52.9	60.0	43.2	49.9	56.6	40.4	46.6	52.9	37.3	43.1	48.9
		62	TC	56.2	56.2	57.6	52.2	52.2	55.7	47.8	47.8	53.5	43.2	43.2	51.0
			SHC	41.8	49.7	57.6	39.9	47.8	55.7	37.8	45.6	53.5	35.5	43.2	51.0
		67	TC	62.4	62.4	62.4	58.8	58.8	58.8	54.4	54.4	54.4	49.5	49.5	49.5
		SHC	34.8	42.8	50.7	33.2	41.2	49.1	31.4	39.3	47.3	29.4	37.3	45.3	
		72	TC	68.2	68.2	68.2	64.8	64.8	64.8	60.8	60.8	60.8	56.2	56.2	56.2
		SHC	27.2	35.2	43.2	25.9	33.9	41.9	24.4	32.4	40.4	22.6	30.6	38.6	
		76	TC	-	71.1	71.1	-	69.0	69.0	-	65.4	65.4	-	60.9	60.9
		SHC	-	28.4	36.6	-	27.6	35.9	-	26.3	34.6	-	24.8	33.0	
1750 Cfm	EAT (wb)	58	TC	56.5	56.5	64.0	53.3	53.3	60.4	49.8	49.8	56.5	46.1	46.1	52.3
			SHC	48.9	56.5	64.0	46.1	53.3	60.4	43.1	49.8	56.5	39.9	46.1	52.3
		62	TC	58.5	58.5	63.4	54.4	54.4	61.3	49.9	49.9	58.9	46.1	46.1	54.4
			SHC	45.2	54.3	63.4	43.2	52.2	61.3	41.0	49.9	58.9	37.9	46.1	54.4
		67	TC	64.3	64.3	64.3	60.5	60.5	60.5	56.2	56.2	56.2	51.3	51.3	51.3
		SHC	36.9	46.1	55.2	35.3	44.5	53.7	33.6	42.8	51.9	31.6	40.8	49.9	
		72	TC	69.5	69.5	69.5	66.5	66.5	66.5	62.4	62.4	62.4	57.7	57.7	57.7
		SHC	27.8	36.9	45.9	26.7	35.9	45.1	25.2	34.5	43.7	23.5	32.8	42.0	
		76	TC	-	72.2	72.2	-	70.1	70.1	-	66.6	66.6	-	-	-
		SHC	-	29.3	38.9	-	28.6	38.2	-	27.4	36.8	-	-	-	
2000 Cfm	EAT (wb)	58	TC	59.3	59.3	67.3	56.1	56.1	63.6	52.5	52.5	59.5	48.6	48.6	55.1
			SHC	51.4	59.3	67.3	48.6	56.1	63.6	45.4	52.5	59.5	42.1	48.6	55.1
		62	TC	60.1	60.1	68.5	56.2	56.2	66.3	52.5	52.5	62.0	48.7	48.7	57.4
			SHC	48.1	58.3	68.5	46.2	56.2	66.3	43.1	52.5	62.0	39.9	48.7	57.4
		67	TC	65.7	65.7	65.7	61.9	61.9	61.9	57.5	57.5	57.5	52.6	52.6	54.4
		SHC	38.8	49.1	59.5	37.3	47.7	58.1	35.6	46.0	56.4	33.6	44.0	54.4	
		72	TC	70.1	70.1	70.1	67.6	67.6	67.6	63.6	63.6	63.6	58.9	58.9	58.9
		SHC	28.3	38.1	48.0	27.4	37.7	48.0	26.0	36.4	46.7	24.3	34.7	45.2	
		76	TC	-	72.9	72.9	-	70.8	70.8	-	67.4	67.4	-	-	-
		SHC	-	30.1	40.7	-	29.3	39.9	-	28.2	38.7	-	-	-	
2250 Cfm	EAT (wb)	58	TC	61.5	61.5	69.8	58.4	58.4	66.2	54.8	54.8	62.1	50.8	50.8	57.6
			SHC	53.2	61.5	69.8	50.5	58.4	66.2	47.4	54.8	62.1	43.9	50.8	57.6
		62	TC	61.6	61.6	72.6	58.4	58.4	68.9	54.8	54.8	64.6	50.8	50.8	59.9
			SHC	50.6	61.6	72.6	47.9	58.4	68.9	45.0	54.8	64.6	41.7	50.8	59.9
		67	TC	66.8	66.8	66.8	63.0	63.0	63.0	58.5	58.5	60.6	53.6	53.6	58.6
		SHC	40.5	52.0	63.4	39.1	50.7	62.3	37.4	49.0	60.6	35.5	47.0	58.6	
		72	TC	70.8	70.8	70.8	68.5	68.5	68.5	64.5	64.5	64.5	59.8	59.8	59.8
		SHC	28.7	39.5	50.2	28.0	39.3	50.5	26.7	38.1	49.6	25.0	36.6	48.1	
		76	TC	-	73.4	73.4	-	71.2	71.2	-	67.9	67.9	-	-	-
		SHC	-	30.7	42.1	-	30.0	41.4	-	28.9	40.4	-	-	-	
2500 Cfm	EAT (wb)	58	TC	63.3	63.3	71.8	60.1	60.1	68.2	56.5	56.5	64.1	52.6	52.6	59.6
			SHC	54.8	63.3	71.8	52.1	60.1	68.2	49.0	56.5	64.1	45.5	52.6	59.6
		62	TC	63.4	63.4	74.7	60.2	60.2	71.0	56.6	56.6	66.7	52.6	52.6	62.1
			SHC	52.0	63.4	74.7	49.4	60.2	71.0	46.5	56.6	66.7	43.2	52.6	62.1
		67	TC	67.6	67.6	67.6	63.8	63.8	66.2	59.3	59.3	64.6	54.4	54.4	62.5
		SHC	42.1	54.6	67.1	40.9	53.5	66.2	39.2	51.9	64.6	37.2	49.8	62.5	
		72	TC	71.3	71.3	71.3	69.0	69.0	69.0	65.1	65.1	65.1	60.4	60.4	60.4
		SHC	29.1	40.7	52.2	28.5	40.7	52.9	27.3	39.7	52.2	25.7	38.3	50.9	
		76	TC	-	73.8	73.8	-	71.4	71.4	-	68.3	68.3	-	-	-
		SHC	-	31.2	43.3	-	30.5	42.6	-	29.6	41.9	-	-	-	

LEGEND:

- Do not operate
- Cfm - Cubic feet per minute (supply air)
- EAT(db) - Entering air temperature (dry bulb)
- EAT(wb) - Entering air temperature (wet bulb)
- SHC - Sensible heat capacity
- TC - Total capacity

50TC06 (5 TONS) – UNIT WITH HUMIDI-MIZER SYSTEM IN SUBCOOLING MODE										
Air Entering Evaporator – CFM										
Temp (F) Air Ent Condenser (Edb)		80 dry bulb			80 dry bulb			80 dry bulb		
		72 wet bulb			67 wet bulb			62 wet bulb		
		1750	2000	2250	1750	2000	2250	1750	2000	2250
75	TC	73.1	78.7	84.5	63.2	66.9	70.8	53.2	55.1	57.1
	SHC	35.3	37.2	38.8	42.0	43.7	45.3	48.7	50.3	51.8
	kW	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3
85	TC	67.6	71.2	75.0	59.1	61.2	63.3	50.6	51.1	51.5
	SHC	27.9	30.0	31.9	36.3	38.3	40.1	44.8	46.6	48.2
	kW	3.8	3.8	3.8	3.8	3.8	3.8	3.8	3.8	3.8
95	TC	62.1	63.8	65.5	55.1	55.4	55.8	48.0	47.0	46.0
	SHC	20.5	22.9	24.9	30.7	32.9	34.8	40.9	42.9	44.7
	kW	4.3	4.3	4.3	4.3	4.3	4.3	4.3	4.3	4.3
105	TC	56.6	56.3	56.0	51.0	49.6	48.3	45.4	43.0	40.5
	SHC	13.1	15.7	18.0	25.0	27.5	29.6	36.9	39.2	41.2
	kW	4.8	4.8	4.8	4.8	4.8	4.8	4.7	4.7	4.7
115	TC	51.1	48.8	46.5	46.9	43.9	40.7	42.8	39.0	35.0
	SHC	5.8	8.6	11.0	19.4	22.0	24.4	33.0	35.5	37.7
	kW	5.3	5.3	5.3	5.3	5.3	5.3	5.2	5.2	5.2

50TC06 (5 TONS) – UNIT WITH HUMIDI-MIZER SYSTEM IN HOT GAS REHEAT MODE										
Air Entering Evaporator – CFM										
Temp (F) Air Ent Condenser (Edb)		75 dry bulb			75 dry bulb			75 dry bulb		
		62.5 wet bulb (50% relative)			64 wet bulb (55% relative)			65.3 wet bulb (60% relative)		
		1750	2000	2250	1750	2000	2250	1750	2000	2250
80	TC	23.0	24.4	25.6	24.7	26.2	27.4	26.3	27.7	29.0
	SHC	5.3	6.1	6.8	3.2	4.0	4.7	1.4	2.2	2.9
	kW	2.9	2.9	2.9	2.9	2.9	2.9	2.9	2.9	2.9
75	TC	23.3	24.6	25.7	25.0	26.3	27.5	26.4	27.8	29.0
	SHC	5.1	5.8	6.5	3.1	3.9	4.5	1.4	2.2	2.8
	kW	2.9	2.9	2.9	2.9	2.9	2.9	2.9	2.9	2.9
70	TC	23.5	24.8	25.9	25.2	26.4	27.5	26.6	27.9	29.0
	SHC	4.8	5.5	6.2	3.0	3.7	4.3	1.4	2.1	2.8
	kW	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0
60	TC	24.1	25.2	26.1	25.6	26.7	27.7	26.9	28.0	29.0
	SHC	4.3	5.0	5.5	2.8	3.4	3.9	1.4	2.0	2.6
	kW	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0
50	TC	24.7	25.6	26.4	26.1	27.0	27.8	27.2	28.2	29.0
	SHC	3.8	4.4	4.8	2.5	3.1	3.5	1.4	2.0	2.4
	kW	3.1	3.1	3.1	3.1	3.1	3.1	3.1	3.1	3.1
40	TC	25.3	26.0	26.7	26.5	27.3	27.9	27.6	28.3	29.0
	SHC	3.3	3.8	4.2	2.3	2.8	3.1	1.4	1.9	2.3
	kW	3.1	3.1	3.1	3.2	3.2	3.2	3.2	3.2	3.2

**LEGEND**

- Edb** – Entering Dry–Bulb
- Ewb** – Entering Wet–Bulb
- kW** – Compressor Motor Power Input
- ldb** – Leaving Dry–Bulb
- lwb** – Leaving Wet–Bulb
- SHC** – Sensible Heat Capacity (1000 Btuh) Gross
- TC** – Total Capacity (1000 Btuh) Gross

**NOTES:**

1. Direct interpolation is permissible. Do not extrapolate.
2. The following formulas may be used:

$$t_{ldb} = t_{edb} - \frac{\text{sensible capacity (Btuh)}}{1.10 \times \text{cfm}}$$

$t_{lwb}$  = Wet–bulb temperature corresponding to enthalpy of air leaving evaporator coil ( $h_{lwb}$ )

$$h_{lwb} = h_{ewb} - \frac{\text{total capacity (Btuh)}}{4.5 \times \text{cfm}}$$

Where:  $h_{ewb}$  = Enthalpy of air entering evaporator coil

Table 6 - COOLING CAPACITIES (cont.)

## 1-STAGE COOLING

6 TONS

50TC*A07 (RTPF)			AMBIENT TEMPERATURE											
			85			95			105			115		
			EAT (db)			EAT (db)			EAT (db)			EAT (db)		
			75	80	85	75	80	85	75	80	85	75	80	85
1800 Cfm	58	TC	64.9	64.9	73.3	62.1	62.1	70.0	58.9	58.9	66.4	55.6	55.6	62.7
		SHC	56.6	64.9	73.3	54.1	62.1	70.0	51.4	58.9	66.4	48.5	55.6	62.7
	62	TC	68.7	68.7	70.3	64.9	64.9	68.5	60.8	60.8	66.4	56.4	56.4	64.0
		SHC	51.7	61.0	70.3	49.9	59.2	68.5	47.9	57.2	66.4	45.7	54.9	64.0
	67	TC	75.6	75.6	75.6	71.7	71.7	71.7	67.4	67.4	67.4	62.5	62.5	62.5
		SHC	42.8	52.2	61.5	41.2	50.5	59.8	39.3	48.6	58.0	37.2	46.5	55.8
	72	TC	82.6	82.6	82.6	78.5	78.5	78.5	73.7	73.7	73.7	67.8	67.8	67.8
		SHC	33.5	42.8	52.2	31.9	41.3	50.6	30.0	39.3	48.6	27.8	36.9	45.9
	76	TC	-	87.5	87.5	-	83.3	83.3	-	77.7	77.7	-	70.9	70.9
		SHC	-	35.0	44.9	-	33.5	43.4	-	31.6	41.5	-	29.3	39.1
2100 Cfm	58	TC	68.9	68.9	77.7	65.9	65.9	74.3	62.5	62.5	70.5	58.7	58.7	66.2
		SHC	60.1	68.9	77.7	57.4	65.9	74.3	54.5	62.5	70.5	51.2	58.7	66.2
	62	TC	70.9	70.9	76.9	67.1	67.1	75.0	63.0	63.0	72.5	58.7	58.7	68.7
		SHC	55.6	66.3	76.9	53.8	64.4	75.0	51.6	62.1	72.5	48.7	58.7	68.7
	67	TC	77.8	77.8	77.8	73.7	73.7	73.7	69.2	69.2	69.2	64.0	64.0	64.0
		SHC	45.4	56.1	66.8	43.7	54.4	65.2	41.8	52.5	63.2	39.6	50.2	60.7
	72	TC	84.5	84.5	84.5	80.3	80.3	80.3	75.1	75.1	75.1	68.8	68.8	68.8
		SHC	34.5	45.2	55.9	32.9	43.5	54.2	30.9	41.4	52.0	28.5	38.7	48.9
	76	TC	-	89.2	89.2	-	84.7	84.7	-	78.8	78.8	-	71.6	71.6
		SHC	-	36.3	47.8	-	34.7	46.0	-	32.6	43.7	-	30.1	40.9
2400 Cfm	58	TC	72.0	72.0	81.2	68.7	68.7	77.5	65.2	65.2	73.5	61.1	61.1	68.9
		SHC	62.8	72.0	81.2	60.0	68.7	77.5	56.9	65.2	73.5	53.3	61.1	68.9
	62	TC	72.8	72.8	82.8	68.9	68.9	80.7	65.2	65.2	76.4	61.2	61.2	71.6
		SHC	59.1	71.0	82.8	57.2	68.9	80.7	54.1	65.2	76.4	50.7	61.2	71.6
	67	TC	79.4	79.4	79.4	75.2	75.2	75.2	70.5	70.5	70.5	65.1	65.1	65.3
		SHC	47.7	59.8	71.8	46.0	58.1	70.2	44.0	56.0	68.1	41.6	53.5	65.3
	72	TC	86.0	86.0	86.0	81.6	81.6	81.6	76.1	76.1	76.1	69.6	69.6	69.6
		SHC	35.3	47.2	59.2	33.7	45.6	57.5	31.7	43.3	55.0	29.1	40.3	51.4
	76	TC	-	90.3	90.3	-	85.7	85.7	-	79.6	79.6	-	72.1	72.1
		SHC	-	37.3	49.8	-	35.6	48.0	-	33.5	45.6	-	30.8	42.5
2700 Cfm	58	TC	60.3	60.3	74.1	71.1	71.1	80.2	67.4	67.4	76.0	63.0	63.0	71.1
		SHC	46.4	60.3	74.1	62.0	71.1	80.2	58.8	67.4	76.0	55.0	63.0	71.1
	62	TC	65.4	65.4	69.3	71.2	71.2	83.3	67.5	67.5	79.0	63.1	63.1	73.8
		SHC	41.0	55.1	69.3	59.0	71.2	83.3	55.9	67.5	79.0	52.3	63.1	73.8
	67	TC	72.7	72.7	72.7	76.3	76.3	76.3	71.5	71.5	72.6	65.8	65.8	69.4
		SHC	33.8	48.0	62.2	48.2	61.6	74.9	46.1	59.3	72.6	43.5	56.5	69.4
	72	TC	79.7	79.7	79.7	82.5	82.5	82.5	76.9	76.9	76.9	70.1	70.1	70.1
		SHC	25.8	40.2	54.6	34.5	47.5	60.5	32.3	45.0	57.7	29.7	41.7	53.8
	76	TC	-	85.1	85.1	-	86.4	86.4	-	80.2	80.2	-	72.5	72.5
		SHC	-	33.5	48.4	-	36.5	49.9	-	34.3	47.3	-	31.5	44.0
3000 Cfm	58	TC	64.9	64.9	78.8	73.1	73.1	82.5	69.2	69.2	78.0	64.5	64.5	72.7
		SHC	51.1	64.9	78.8	63.8	73.1	82.5	60.3	69.2	78.0	56.2	64.5	72.7
	62	TC	68.7	68.7	76.5	73.2	73.2	85.7	69.2	69.2	81.0	64.5	64.5	75.5
		SHC	45.5	61.0	76.5	60.7	73.2	85.7	57.4	69.2	81.0	53.5	64.5	75.5
	67	TC	75.6	75.6	75.6	77.2	77.2	79.4	72.2	72.2	76.8	66.3	66.3	73.0
		SHC	36.6	52.2	67.7	50.2	64.8	79.4	48.0	62.4	76.8	45.1	59.1	73.0
	72	TC	82.6	82.6	82.6	83.3	83.3	83.3	77.5	77.5	77.5	70.5	70.5	70.5
		SHC	27.2	42.8	58.5	35.1	49.2	63.3	32.9	46.6	60.3	30.2	43.0	55.9
	76	TC	-	87.5	87.5	-	86.9	86.9	-	80.6	80.6	-	72.8	72.8
		SHC	-	35.0	51.5	-	37.3	51.6	-	35.0	48.9	-	32.1	45.3

## LEGEND:

- Do not operate in this region
- Cfm - Cubic feet per minute (supply air)
- EAT(db) - Entering air temperature (dry bulb)
- EAT(wb) - Entering air temperature (wet bulb)
- SHC - Sensible heat capacity
- TC - Total capacity

50TC07 (6 TONS) – UNIT WITH HUMIDI-MIZER SYSTEM IN SUBCOOLING MODE										
Air Entering Evaporator – CFM										
Temp (F) Air Ent Condenser (Edb)		80 dry bulb			80 dry bulb			80 dry bulb		
		72 wet bulb			67 wet bulb			62 wet bulb		
		2100	2400	2700	2100	2400	2700	2100	2400	2700
75	TC	86.7	89.9	92.8	79.3	82.3	84.9	71.9	74.6	77.0
	SHC	40.1	41.8	43.3	46.9	48.5	49.9	53.7	55.2	56.5
	kW	4.3	4.3	4.3	4.2	4.2	4.2	4.2	4.2	4.2
85	TC	79.5	82.6	85.4	72.5	75.3	77.9	65.4	68.0	70.3
	SHC	32.1	34.0	35.7	40.7	42.5	44.1	49.4	51.0	52.5
	kW	5.0	5.0	5.0	5.0	5.0	5.0	4.9	4.9	4.9
95	TC	72.4	75.3	78.1	65.6	68.3	70.8	58.8	61.3	63.6
	SHC	24.1	26.3	28.1	34.6	36.6	38.3	45.1	46.9	48.5
	kW	5.8	5.8	5.8	5.7	5.7	5.7	5.6	5.6	5.6
105	TC	65.2	68.1	70.7	58.7	61.4	63.8	52.3	54.7	56.8
	SHC	16.2	18.5	20.5	28.5	30.6	32.6	40.7	42.8	44.6
	kW	6.5	6.5	6.5	6.4	6.4	6.4	6.3	6.3	6.3
115	TC	58.0	60.8	63.3	51.9	54.4	56.7	45.7	48.0	50.1
	SHC	8.2	10.7	13.0	22.3	24.7	26.8	36.4	38.6	40.6
	kW	7.2	7.2	7.2	7.1	7.1	7.1	7.0	7.0	7.0

50TC07 (6 TONS) – UNIT WITH HUMIDI-MIZER SYSTEM IN HOT GAS REHEAT MODE										
Air Entering Evaporator – CFM										
Temp (F) Air Ent Condenser (Edb)		75 dry bulb			75 dry bulb			75 dry bulb		
		62.5 wet bulb (50% relative)			64 wet bulb (55% relative)			65.3 wet bulb (60% relative)		
		2100	2400	2700	2100	2400	2700	1750	2000	2700
80	TC	16.7	19.8	22.5	18.8	21.9	24.7	16.2	19.4	26.7
	SHC	0.6	0.6	0.6	-0.4	-0.4	-0.4	-1.3	-1.3	-1.3
	kW	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0
75	TC	17.7	20.6	23.1	19.6	22.6	25.3	17.3	20.3	27.1
	SHC	0.6	0.6	0.6	-0.3	-0.3	-0.3	-1.2	-1.2	-1.2
	kW	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0
70	TC	18.6	21.3	23.7	20.5	23.3	25.8	18.3	21.1	27.6
	SHC	0.7	0.7	0.7	-0.2	-0.2	-0.2	-1.0	-1.0	-1.0
	kW	4.0	4.0	4.0	4.1	4.1	4.1	4.1	4.1	4.1
60	TC	20.5	22.9	25.0	22.2	24.7	26.8	20.4	22.8	28.5
	SHC	0.7	0.7	0.7	-0.0	-0.0	-0.0	-0.7	-0.7	-0.7
	kW	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1
50	TC	22.4	24.4	26.2	24.0	26.0	27.9	22.4	24.5	29.3
	SHC	0.8	0.8	0.8	0.1	0.1	0.1	-0.4	-0.4	-0.4
	kW	4.1	4.1	4.1	4.1	4.1	4.1	4.2	4.2	4.2
40	TC	24.3	25.9	27.4	25.7	27.4	28.9	24.5	26.3	30.2
	SHC	0.8	0.8	0.8	0.3	0.3	0.3	-0.1	-0.1	-0.1
	kW	4.1	4.1	4.1	4.2	4.2	4.2	4.2	4.2	4.2

**LEGEND**

- Edb** – Entering Dry–Bulb
- Ewb** – Entering Wet–Bulb
- kW** – Compressor Motor Power Input
- ldb** – Leaving Dry–Bulb
- lwb** – Leaving Wet–Bulb
- SHC** – Sensible Heat Capacity (1000 Btuh) Gross
- TC** – Total Capacity (1000 Btuh) Gross

**NOTES:**

1. Direct interpolation is permissible. Do not extrapolate.
2. The following formulas may be used:

$$t_{ldb} = t_{edb} - \frac{\text{sensible capacity (Btuh)}}{1.10 \times \text{cfm}}$$

$t_{lwb}$  = Wet–bulb temperature corresponding to enthalpy of air leaving evaporator coil ( $h_{lwb}$ )

$$h_{lwb} = h_{ewb} - \frac{\text{total capacity (Btuh)}}{4.5 \times \text{cfm}}$$

Where:  $h_{ewb}$  = Enthalpy of air entering evaporator coil

Table 6 - COOLING CAPACITIES (cont.)

1-STAGE COOLING

7.5 TONS

50TC*A08 (RTPF)			AMBIENT TEMPERATURE												
			85			95			105			115			
			EAT (db)			EAT (db)			EAT (db)			EA (db)			
			75	80	85	75	80	85	75	80	85	75	80	85	
2250 Cfm	EAT (wb)	58	TC	81.2	81.2	91.8	77.5	77.5	87.7	73.6	73.6	83.3	69.5	69.5	78.7
			SHC	70.5	81.2	91.8	67.3	77.5	87.7	63.9	73.6	83.3	60.4	69.5	78.7
		62	TC	86.9	86.9	86.9	82.3	82.3	84.0	77.2	77.2	81.5	71.9	71.9	78.8
			SHC	63.6	74.9	86.2	61.4	72.7	84.0	58.9	70.2	81.5	56.3	67.6	78.8
		67	TC	95.2	95.2	95.2	90.7	90.7	90.7	85.7	85.7	85.7	79.9	79.9	79.9
		SHC	52.8	64.2	75.6	50.9	62.2	73.6	48.8	60.1	71.5	46.3	57.6	68.9	
	72	TC	103.5	103.5	103.5	98.9	98.9	98.9	93.8	93.8	93.8	87.3	87.3	87.3	
		SHC	41.5	53.1	64.6	39.7	51.2	62.7	37.7	49.2	60.6	35.3	46.6	57.8	
	76	TC	-	109.6	109.6	-	104.8	104.8	-	99.1	99.1	-	91.6	91.6	
		SHC	-	43.7	56.0	-	42.0	54.3	-	40.0	52.4	-	37.4	49.8	
2625 Cfm	EAT (wb)	58	TC	85.9	85.9	97.2	82.2	82.2	93.1	78.1	78.1	88.4	73.9	73.9	83.6
			SHC	74.6	85.9	97.2	71.4	82.2	93.1	67.9	78.1	88.4	64.1	73.9	83.6
		62	TC	89.6	89.6	94.1	85.1	85.1	91.7	80.1	80.1	89.1	74.6	74.6	86.0
			SHC	68.1	81.1	94.1	65.9	78.8	91.7	63.4	76.3	89.1	60.6	73.3	86.0
		67	TC	97.9	97.9	97.9	93.2	93.2	93.2	88.1	88.1	88.1	82.0	82.0	82.0
		SHC	55.7	68.7	81.7	53.7	66.7	79.8	51.6	64.6	77.6	49.0	62.0	74.9	
	72	TC	106.0	106.0	106.0	101.3	101.3	101.3	95.9	95.9	95.9	89.0	89.0	89.0	
		SHC	42.7	55.8	68.9	40.9	53.9	67.0	38.8	51.8	64.7	36.2	48.9	61.7	
	76	TC	-	111.8	111.8	-	106.9	106.9	-	100.7	100.7	-	92.7	92.7	
		SHC	-	45.3	59.8	-	43.6	58.0	-	41.4	55.6	-	38.7	52.6	
3000 Cfm	EAT (wb)	58	TC	89.6	89.6	101.4	85.9	85.9	97.2	81.7	81.7	92.5	77.0	77.0	87.1
			SHC	77.9	89.6	101.4	74.6	85.9	97.2	71.0	81.7	92.5	66.9	77.0	87.1
		62	TC	91.8	91.8	101.1	87.2	87.2	98.6	82.3	82.3	95.5	77.1	77.1	90.6
			SHC	72.2	86.7	101.1	69.9	84.3	98.6	67.2	81.3	95.5	63.5	77.1	90.6
		67	TC	99.9	99.9	99.9	95.2	95.2	95.2	89.9	89.9	89.9	83.6	83.6	83.6
		SHC	58.3	72.9	87.5	56.4	71.0	85.5	54.2	68.8	83.4	51.6	66.1	80.5	
	72	TC	107.9	107.9	107.9	103.0	103.0	103.0	97.3	97.3	97.3	90.1	90.1	90.1	
		SHC	43.7	58.3	72.8	41.9	56.4	70.9	39.7	54.1	68.4	37.0	51.0	65.0	
	76	TC	-	113.8	113.8	-	108.4	108.4	-	102.0	102.0	-	93.4	93.4	
		SHC	-	46.7	62.5	-	44.8	60.4	-	42.6	57.9	-	39.6	54.7	
3375 Cfm	EAT (wb)	58	TC	92.7	92.7	104.9	88.8	88.8	100.5	84.6	84.6	95.7	79.6	79.6	90.0
			SHC	80.5	92.7	104.9	77.1	88.8	100.5	73.4	84.6	95.7	69.1	79.6	90.0
		62	TC	93.7	93.7	107.3	89.1	89.1	104.7	84.6	84.6	99.5	79.6	79.6	93.6
			SHC	75.8	91.6	107.3	73.5	89.1	104.7	69.8	84.6	99.5	65.6	79.6	93.6
		67	TC	101.5	101.5	101.5	96.7	96.7	96.7	91.3	91.3	91.3	84.8	84.8	85.7
		SHC	60.8	76.9	93.0	58.8	74.9	91.0	56.7	72.8	88.9	53.9	69.8	85.7	
	72	TC	109.4	109.4	109.4	104.3	104.3	104.3	98.4	98.4	98.4	90.9	90.9	90.9	
		SHC	44.6	60.5	76.4	42.8	58.6	74.4	40.5	56.2	71.8	37.7	52.8	68.0	
	76	TC	-	115.1	115.1	-	109.5	109.5	-	102.8	102.8	-	94.0	94.0	
		SHC	-	47.8	64.9	-	45.9	62.7	-	43.5	60.1	-	40.4	56.5	
3750 Cfm	EAT (wb)	58	TC	95.3	95.3	107.8	91.3	91.3	103.3	86.9	86.9	98.3	81.7	81.7	92.4
			SHC	82.7	95.3	107.8	79.3	91.3	103.3	75.5	86.9	98.3	70.9	81.7	92.4
		62	TC	95.5	95.5	112.2	91.3	91.3	107.4	87.0	87.0	102.2	81.7	81.7	96.0
			SHC	78.7	95.5	112.2	75.3	91.3	107.4	71.7	87.0	102.2	67.4	81.7	96.0
		67	TC	102.8	102.8	102.8	97.9	97.9	97.9	92.3	92.3	94.0	85.7	85.7	90.5
		SHC	63.1	80.6	98.2	61.2	78.7	96.3	59.0	76.5	94.0	56.0	73.2	90.5	
	72	TC	110.6	110.6	110.6	105.4	105.4	105.4	99.2	99.2	99.2	91.5	91.5	91.5	
		SHC	45.5	62.7	79.9	43.5	60.7	77.8	41.3	58.1	75.0	38.3	54.5	70.7	
	76	TC	-	116.1	116.1	-	110.3	110.3	-	103.5	103.5	-	94.5	94.5	
		SHC	-	48.9	67.0	-	46.8	64.8	-	44.4	62.0	-	41.1	58.1	

LEGEND:

- Do not operate in this region
- Cfm - Cubic feet per minute (supply air)
- EAT(db) - Entering air temperature (dry bulb)
- EAT(wb) - Entering air temperature (wet bulb)
- SHC - Sensible heat capacity
- TC - Total capacity



Table 6 - COOLING CAPACITIES (cont.)

2-STAGE COOLING

7.5 TONS

50TC*D08 (RTPF & Novation)				AMBIENT TEMPERATURE											
				85			95			105			115		
				EAT (db)			EAT (db)			EAT (db)			EA (db)		
				75	80	85	75	80	85	75	80	85	75	80	85
2250 Cfm	EAT (wb)	58	TC	77.4	77.4	87.8	73.8	73.8	83.8	70.1	70.1	79.5	66.0	66.0	74.9
			SHC	66.9	77.4	87.8	63.9	73.8	83.8	60.6	70.1	79.5	57.1	66.0	74.9
		62	TC	82.2	82.2	83.9	77.5	77.5	81.7	72.6	72.6	79.2	67.3	67.3	76.4
			SHC	60.8	72.4	83.9	58.6	70.1	81.7	56.3	67.7	79.2	53.6	65.0	76.4
		67	TC	90.1	90.1	90.1	86.0	86.0	86.0	81.4	81.4	81.4	75.9	75.9	75.9
			SHC	50.2	61.8	73.3	48.5	60.1	71.6	46.5	58.1	69.7	44.2	55.8	67.4
		72	TC	98.0	98.0	98.0	94.0	94.0	94.0	89.5	89.5	89.5	84.3	84.3	84.3
			SHC	39.1	50.7	62.4	37.5	49.2	60.9	35.8	47.5	59.2	33.8	45.5	57.2
		76	TC	-	104.3	104.3	-	100.4	100.4	-	95.9	95.9	-	90.7	90.7
			SHC	-	41.7	54.0	-	40.3	52.7	-	38.7	51.0	-	36.8	49.0
2625 Cfm	EAT (wb)	58	TC	82.1	82.1	93.2	78.4	78.4	89.0	74.4	74.4	84.4	70.0	70.0	79.5
			SHC	71.0	82.1	93.2	67.8	78.4	89.0	64.3	74.4	84.4	60.6	70.0	79.5
		62	TC	84.9	84.9	91.8	80.4	80.4	89.5	75.4	75.4	86.7	70.2	70.2	82.9
			SHC	65.4	78.6	91.8	63.2	76.3	89.5	60.6	73.7	86.7	57.6	70.2	82.9
		67	TC	92.5	92.5	92.5	88.3	88.3	88.3	83.6	83.6	83.6	78.3	78.3	78.3
			SHC	53.0	66.3	79.5	51.3	64.6	78.0	49.4	62.8	76.1	47.2	60.6	73.9
		72	TC	100.4	100.4	100.4	96.4	96.4	96.4	91.7	91.7	91.7	86.4	86.4	86.4
			SHC	40.2	53.5	66.7	38.7	52.0	65.3	36.9	50.3	63.7	35.0	48.4	61.8
		76	TC	-	106.5	106.5	-	102.6	102.6	-	98.0	98.0	-	92.7	92.7
			SHC	-	43.3	57.6	-	41.8	55.9	-	40.2	54.1	-	38.4	52.2
3000 Cfm	EAT (wb)	58	TC	85.7	85.7	97.3	82.2	82.2	93.3	78.0	78.0	88.6	73.5	73.5	83.4
			SHC	74.1	85.7	97.3	71.1	82.2	93.3	67.5	78.0	88.6	63.6	73.5	83.4
		62	TC	86.9	86.9	98.7	82.8	82.8	96.4	78.2	78.2	92.3	73.6	73.6	86.9
			SHC	69.3	84.0	98.7	67.2	81.8	96.4	64.1	78.2	92.3	60.3	73.6	86.9
		67	TC	94.3	94.3	94.3	90.1	90.1	90.1	85.2	85.2	85.2	79.8	79.8	80.1
			SHC	55.6	70.5	85.4	54.0	68.9	83.9	52.1	67.1	82.2	49.9	65.0	80.1
		72	TC	102.2	102.2	102.2	98.1	98.1	98.1	93.3	93.3	93.3	87.9	87.9	87.9
			SHC	41.2	56.0	70.7	39.7	54.6	69.5	38.0	53.0	68.0	36.0	51.1	66.2
		76	TC	-	108.1	108.1	-	104.2	104.2	-	99.5	99.5	-	94.2	94.2
			SHC	-	44.5	60.2	-	43.2	58.7	-	41.6	57.0	-	39.8	55.2
3375 Cfm	EAT (wb)	58	TC	88.5	88.5	100.4	85.0	85.0	96.4	81.0	81.0	92	76.5	76.5	86.8
			SHC	76.5	88.5	100.4	73.5	85.0	96.4	70.1	81.0	92	66.1	76.5	86.8
		62	TC	88.9	88.9	103.9	85.1	85.1	100.4	81.1	81.1	95.7	76.5	76.5	90.3
			SHC	72.3	88.1	103.9	69.7	85.1	100.4	66.5	81.1	95.7	62.7	76.5	90.3
		67	TC	95.8	95.8	95.8	91.5	91.5	91.5	86.6	86.6	87.9	81.1	81.1	85.8
			SHC	58.0	74.4	90.9	56.4	73.0	89.6	54.6	71.3	87.9	52.4	69.1	85.8
		72	TC	103.6	103.6	103.6	99.4	99.4	99.4	94.6	94.6	94.6	89.1	89.1	89.1
			SHC	42.0	58.3	74.5	40.6	57.0	73.4	38.9	55.5	72.0	37.0	53.7	70.3
		76	TC	-	109.2	109.2	-	105.4	105.4	-	100.7	100.7	-	95.3	95.3
			SHC	-	45.6	62.6	-	44.4	61.3	-	42.8	59.7	-	41.0	58.0
3750 Cfm	EAT (wb)	58	TC	90.8	90.8	103.0	87.3	87.3	99.1	83.3	83.3	94.5	78.8	78.8	89.4
			SHC	78.5	90.8	103.0	75.5	87.3	99.1	72.0	83.3	94.5	68.2	78.8	89.4
		62	TC	90.9	90.9	107.2	87.4	87.4	103.1	83.3	83.3	98.4	78.9	78.9	93.1
			SHC	74.5	90.9	107.2	71.6	87.4	103.1	68.3	83.3	98.4	64.7	78.9	93.1
		67	TC	97.0	97.0	97.0	92.6	92.6	95.1	87.6	87.6	93.4	82.1	82.1	91.2
			SHC	60.3	78.2	96.2	58.8	76.9	95.1	56.9	75.2	93.4	54.8	73.0	91.2
		72	TC	104.7	104.7	104.7	100.5	100.5	100.5	95.6	95.6	95.6	90.1	90.1	90.1
			SHC	42.9	60.5	78.1	41.4	59.3	77.1	39.8	57.8	75.9	37.9	56.1	74.3
		76	TC	-	110.2	110.2	-	106.2	106.2	-	101.6	101.6	-	96.1	96.1
			SHC	-	46.7	64.8	-	45.4	63.6	-	44.0	62.3	-	42.2	60.6

\* See Minimum - Maximum Airflow Ratings in Table 3. Do not operate outside these limits.

LEGEND:

- Do not operate in this region
- Cfm - Cubic feet per minute (supply air)
- EAT(db) - Entering air temperature (dry bulb)
- EAT(wb) - Entering air temperature (wet bulb)
- SHC - Sensible heat capacity
- TC - Total capacity



50TC08 COOLING CAPACITIES, UNIT WITH HUMIDI-MIZER SYSTEM IN SUBCOOLING MODE										
TEMP (F) AIR ENT CONDENSER (Edb)		AIR ENTERING EVAPORATOR – CFM								
		2250/0.05			3000/0.07			3750/0.09		
		Air Entering Evaporator – Ewb (F)								
		72	67	62	72	67	62	72	67	62
75	TC	103.05	93.02	83.60	109.77	99.52	90.08	114.01	103.69	95.19
	SHC	43.66	55.34	67.09	50.99	66.29	81.31	57.49	76.27	92.20
	kW	4.90	4.83	4.77	4.82	4.88	4.96	4.99	4.91	4.85
85	TC	95.39	85.83	76.88	101.59	91.89	82.95	105.53	95.76	87.77
	SHC	36.42	48.47	60.60	43.24	58.99	74.40	49.44	68.68	84.90
	kW	5.49	5.42	5.36	5.40	5.47	5.54	5.58	5.50	5.44
95	TC	87.48	78.44	69.97	93.21	84.05	75.61	96.84	87.63	80.14
	SHC	28.98	41.46	53.97	35.32	51.53	67.34	41.21	60.92	77.41
	kW	6.16	6.09	6.03	6.08	6.14	6.21	6.24	6.17	6.11
105	TC	79.35	70.83	62.84	84.57	75.96	68.04	87.88	79.23	72.26
	SHC	21.34	34.26	47.18	27.17	43.86	60.08	32.73	52.95	69.70
	kW	6.93	6.86	6.81	6.85	6.91	6.97	7.00	6.93	6.88
115	TC	70.87	62.89	55.42	75.58	67.54	60.15	78.56	70.51	64.06
	SHC	13.40	26.79	40.14	18.70	35.89	52.54	23.94	44.68	61.67
	kW	7.79	7.74	7.69	7.73	7.78	7.83	7.86	7.80	7.76

50TC08 COOLING CAPACITIES, UNIT WITH HUMIDI-MIZER SYSTEM IN HOT GAS REHEAT MODE										
TEMP (F) AIR ENT CONDENSER (Edb)		AIR ENTERING EVAPORATOR – Ewb (F)								
		75 Dry Bulb 62.5 Wet Bulb (50% Relative)			75 Dry Bulb 64 Wet Bulb (56% Relative)			75 Dry Bulb 65.3 Wet Bulb (60% Relative)		
		Air Entering Evaporator – Cfm								
		2250	3000	3750	2250	3000	3750	2250	3000	3750
80	TC	27.60	32.75	30.19	40.09	39.43	37.73	45.06	45.25	44.25
	SHC	-3.12	5.20	6.71	3.75	5.24	6.75	3.77	5.26	6.78
	kW	4.56	4.51	4.46	4.63	4.60	4.56	4.70	4.67	4.64
75	TC	35.40	33.78	31.20	41.14	40.51	38.80	46.15	46.37	45.38
	SHC	4.67	6.17	7.69	4.71	6.21	7.73	4.74	6.24	7.76
	kW	4.41	4.36	4.39	4.41	4.36	4.36	4.41	4.39	4.36
70	TC	36.36	34.71	32.18	42.10	41.47	39.77	47.08	47.31	46.32
	SHC	5.63	7.14	8.66	5.67	7.18	8.71	5.70	7.21	8.74
	kW	4.43	4.49	4.41	4.44	4.40	4.39	4.49	4.47	4.44
60	TC	38.25	36.64	34.15	43.97	43.37	41.72	48.98	49.22	48.26
	SHC	7.56	9.09	10.62	7.60	9.13	10.66	7.62	9.15	10.69
	kW	4.56	4.55	4.43	4.57	4.53	4.46	4.56	4.55	4.50
50	TC	40.15	38.60	36.14	45.95	45.37	43.73	50.57	50.97	49.56
	SHC	9.48	11.03	12.58	9.52	11.07	12.62	9.54	11.10	12.64
	kW	4.63	4.52	4.38	4.45	4.41	4.33	4.52	4.41	4.30
40	TC	42.18	40.62	38.11	47.80	47.25	45.43	52.65	52.75	51.83
	SHC	11.41	12.98	14.54	11.45	13.02	14.58	11.47	13.04	14.60
	kW	4.32	4.37	4.37	4.65	4.60	4.89	4.96	5.20	5.12

**LEGEND**

- Edb** - Entering Dry-Bulb
- Ewb** - Entering Wet-Bulb
- kW** - Compressor Motor Power Input
- ldb** - Leaving Dry-Bulb
- lwb** - Leaving Wet-Bulb
- SHC** - Sensible Heat Capacity (1000 Btuh) Gross
- TC** - Total Capacity (1000 Btuh) Gross

**NOTES:**

1. Direct interpolation is permissible. Do not extrapolate.
2. The following formulas may be used:

$$t_{ldb} = t_{edb} - \frac{\text{sensible capacity (Btuh)}}{1.10 \times \text{cfm}}$$

$t_{lwb}$  = Wet-bulb temperature corresponding to enthalpy of air leaving evaporator coil ( $h_{lwb}$ )

$$h_{lwb} = h_{ewb} - \frac{\text{total capacity (Btuh)}}{4.5 \times \text{cfm}}$$

Where:  $h_{ewb}$  = Enthalpy of air entering evaporator coil

Table 6 - COOLING CAPACITIES (cont.)

1-STAGE COOLING

8.5 TONS

50TC*A09 (RTPF)			AMBIENT TEMPERATURE												
			85			95			105			115			
			EAT (db)			EAT (db)			EAT (db)			EAT (db)			
			75	80	85	75	80	85	75	80	85	75	80	85	
2550 Cfm	EAT (wb)	58	TC	88.1	88.1	99.9	84.1	84.1	95.3	79.6	79.6	90.3	74.9	74.9	84.9
			SHC	76.4	88.1	99.9	72.8	84.1	95.3	69.0	79.6	90.3	64.9	74.9	84.9
		62	TC	93.9	93.9	95.2	88.6	88.6	92.6	82.8	82.8	89.7	76.6	76.6	86.5
			SHC	69.4	82.3	95.2	66.8	79.7	92.6	64.1	76.9	89.7	61.0	73.8	86.5
		67	TC	103.8	103.8	103.8	98.7	98.7	98.7	93.0	93.0	93.0	86.7	86.7	86.7
		SHC	57.8	70.7	83.6	55.6	68.5	81.4	53.1	66.1	79.0	50.5	63.4	76.4	
		72	TC	113.1	113.1	113.1	108.0	108.0	108.0	102.4	102.4	102.4	96.1	96.1	96.1
		SHC	45.2	58.3	71.3	43.2	56.3	69.3	41.1	54.1	67.1	38.7	51.7	64.7	
		76	TC	-	119.9	119.9	-	114.7	114.7	-	109.0	109.0	-	102.7	102.7
		SHC	-	47.9	61.9	-	46.0	60.1	-	44.1	58.1	-	41.9	55.8	
2975 Cfm	EAT (wb)	58	TC	93.6	93.6	106.1	89.3	89.3	101.2	84.6	84.6	96.0	79.6	79.6	90.3
			SHC	81.1	93.6	106.1	77.4	89.3	101.2	73.3	84.6	96.0	69.0	79.6	90.3
		62	TC	97.5	97.5	104.3	92.0	92.0	101.4	86.1	86.1	98.3	79.8	79.8	94.1
			SHC	74.7	89.5	104.3	72.0	86.7	101.4	69.1	83.7	98.3	65.6	79.8	94.1
		67	TC	106.7	106.7	106.7	101.5	101.5	101.5	95.7	95.7	95.7	89.2	89.2	89.2
		SHC	61.0	75.8	90.6	58.8	73.6	88.5	56.4	71.3	86.1	53.8	68.7	83.6	
		72	TC	115.8	115.8	115.8	110.6	110.6	110.6	104.9	104.9	104.9	98.4	98.4	98.4
		SHC	46.5	61.3	76.2	44.5	59.4	74.2	42.3	57.2	72.1	40.0	54.8	69.7	
		76	TC	-	122.4	122.4	-	117.0	117.0	-	111.1	111.1	-	104.5	104.5
		SHC	-	49.8	66.1	-	47.8	63.9	-	45.7	61.6	-	43.4	59.0	
3400 Cfm	EAT (wb)	58	TC	98.1	98.1	111.3	93.7	93.7	106.2	88.9	88.9	100.8	83.7	83.7	94.9
			SHC	85.0	98.1	111.3	81.2	93.7	106.2	77.0	88.9	100.8	72.5	83.7	94.9
		62	TC	100.0	100.0	112.3	94.9	94.9	108.6	89.1	89.1	104.9	83.8	83.8	98.7
			SHC	79.3	95.8	112.3	76.3	92.5	108.6	73.2	89.1	104.9	68.8	83.8	98.7
		67	TC	109.0	109.0	109.0	103.6	103.6	103.6	97.6	97.6	97.6	91.0	91.0	91.0
		SHC	63.9	80.5	97.2	61.8	78.5	95.2	59.4	76.1	92.9	56.8	73.5	90.3	
		72	TC	117.9	117.9	117.9	112.5	112.5	112.5	106.6	106.6	106.6	100.0	100.0	100.0
		SHC	47.6	64.1	80.6	45.6	62.1	78.7	43.4	60.0	76.6	41.1	57.6	74.2	
		76	TC	-	124.2	124.2	-	118.6	118.6	-	112.5	112.5	-	105.7	105.7
		SHC	-	51.2	69.0	-	49.2	66.7	-	47.0	64.4	-	44.7	61.9	
3825 Cfm	EAT (wb)	58	TC	101.6	101.6	115.1	97.2	97.2	110.1	92.3	92.3	104.6	87.0	87.0	98.6
			SHC	88.0	101.6	115.1	84.2	97.2	110.1	80.0	92.3	104.6	75.4	87.0	98.6
		62	TC	101.9	101.9	120.0	97.3	97.3	114.6	92.4	92.4	108.9	87.1	87.1	102.6
			SHC	83.7	101.8	120.0	79.9	97.3	114.6	75.9	92.4	108.9	71.6	87.1	102.6
		67	TC	110.7	110.7	110.7	105.3	105.3	105.3	99.2	99.2	99.3	92.5	92.5	96.7
		SHC	66.7	85.0	103.4	64.6	83.0	101.5	62.2	80.8	99.3	59.6	78.2	96.7	
		72	TC	119.4	119.4	119.4	114.0	114.0	114.0	108.0	108.0	108.0	101.3	101.3	101.3
		SHC	48.5	66.6	84.6	46.6	64.7	82.7	44.4	62.6	80.7	42.1	60.2	78.4	
		76	TC	-	125.5	125.5	-	119.8	119.8	-	113.6	113.6	-	106.7	106.7
		SHC	-	52.4	71.5	-	50.4	69.3	-	48.2	67.0	-	45.9	64.4	
4250 Cfm	EAT (wb)	58	TC	104.4	104.4	118.3	99.9	99.9	113.2	95.0	95.0	107.6	89.5	89.5	101.5
			SHC	90.4	104.4	118.3	86.6	99.9	113.2	82.3	95.0	107.6	77.6	89.5	101.5
		62	TC	104.4	104.4	123.0	99.9	99.9	117.8	95.0	95.0	112.0	89.6	89.6	105.6
			SHC	85.8	104.4	123.0	82.1	99.9	117.8	78.1	95.0	112.0	73.6	89.6	105.6
		67	TC	112.1	112.1	112.1	106.6	106.6	107.5	100.4	100.4	105.3	93.6	93.6	102.7
		SHC	69.2	89.2	109.2	67.2	87.3	107.5	64.9	85.1	105.3	62.3	82.5	102.7	
		72	TC	120.7	120.7	120.7	115.1	115.1	115.1	109.0	109.0	109.0	102.2	102.2	102.2
		SHC	49.4	68.9	88.4	47.4	67.0	86.5	45.3	64.9	84.6	42.9	62.6	82.3	
		76	TC	-	126.6	126.6	-	120.8	120.8	-	114.5	114.5	-	107.4	107.4
		SHC	-	53.5	73.9	-	51.5	71.7	-	49.3	69.4	-	46.9	66.8	

LEGEND:

- Do not operate in this region
- Cfm - Cubic feet per minute (supply air)
- EAT(db) - Entering air temperature (dry bulb)
- EAT(wb) - Entering air temperature (wet bulb)
- SHC - Sensible heat capacity
- TC - Total capacity

Table 6 - COOLING CAPACITIES (cont.)

2-STAGE COOLING

8.5 TONS

50TC*D09 (RTPF)			AMBIENT TEMPERATURE													
			85			95			105			115				
			EA (dB)			EA (dB)			EA (dB)			EA (dB)				
			75	80	85	75	80	85	75	80	85	75	80	85		
2550 Cfm	EAT (wb)	58	TC	89.7	89.7	101.6	85.2	85.2	96.5	79.6	79.6	90.1	73.8	73.8	83.6	
			SHC	77.8	89.7	101.6	73.9	85.2	96.5	69.0	79.6	90.1	64.0	73.8	83.6	
		62	TC	94.3	94.3	97.9	88.7	88.7	95.2	81.3	81.3	91.5	74.3	74.3	86.5	
			SHC	71.0	84.4	97.9	68.2	81.7	95.2	64.7	78.1	91.5	60.6	73.6	86.5	
		72	TC	105.0	105.0	105.0	99.3	99.3	99.3	92.2	92.2	92.2	84.1	84.1	84.1	
	SHC		59.0	72.6	86.1	56.6	70.1	83.7	53.6	67.1	80.7	50.3	63.8	77.3		
	76	TC	115.9	115.9	115.9	110.4	110.4	110.4	104.2	104.2	104.2	96.0	96.0	96.0		
		SHC	46.4	60.0	73.6	44.3	57.9	71.5	41.9	55.5	69.1	38.8	52.4	65.9		
	2975 Cfm	EAT (wb)	58	TC	95.3	95.3	107.9	90.7	90.7	102.7	84.8	84.8	96.1	78.7	78.7	89.1
				SHC	82.6	95.3	107.9	78.6	90.7	102.7	73.5	84.8	96.1	68.2	78.7	89.1
62			TC	97.9	97.9	107.8	92.1	92.1	104.7	85.4	85.4	99.4	78.8	78.8	92.8	
			SHC	76.7	92.2	107.8	73.9	89.3	104.7	69.6	84.5	99.4	64.8	78.8	92.8	
67			TC	108.5	108.5	108.5	102.6	102.6	102.6	95.4	95.4	95.4	86.9	86.9	86.9	
		SHC	62.8	78.4	94.1	60.4	76.0	91.7	57.4	73.1	88.8	54.0	69.7	85.3		
72		TC	119.1	119.1	119.1	113.5	113.5	113.5	107.2	107.2	107.2	99.2	99.2	99.2		
		SHC	47.9	63.5	79.2	45.8	61.5	77.1	43.5	59.2	74.9	40.6	56.3	72.0		
76		TC	126.4	126.4	126.4	120.8	120.8	120.8	114.8	114.8	114.8	108.2	108.2	108.2		
		SHC	51.1	67.4	83.7	49.2	65.3	81.6	47.0	63.0	79.3	44.8	60.7	77.0		
3400 Cfm	EAT (wb)	58	TC	100.0	100.0	113.3	95.2	95.2	107.9	89.3	89.3	101.1	82.9	82.9	93.9	
			SHC	86.7	100.0	113.3	82.6	95.2	107.9	77.4	89.3	101.1	71.8	82.9	93.9	
		62	TC	101.1	101.1	115.8	95.7	95.7	111.7	89.4	89.4	105.3	83.0	83.0	97.7	
			SHC	81.5	98.7	115.8	78.2	94.9	111.7	73.5	89.4	105.3	68.2	83.0	97.7	
		67	TC	111.1	111.1	111.1	105.1	105.1	105.1	97.8	97.8	97.8	89.1	89.1	93.0	
	SHC		66.2	83.9	101.6	63.9	81.6	99.3	61.0	78.7	96.5	57.5	75.3	93.0		
	72	TC	121.3	121.3	121.3	115.6	115.6	115.6	109.4	109.4	109.4	101.5	101.5	101.5		
		SHC	49.2	66.7	84.3	47.1	64.7	82.3	44.9	62.5	80.2	42.1	59.9	77.7		
	76	TC	128.3	128.3	128.3	122.6	122.6	122.6	116.3	116.3	116.3	109.7	109.7	109.7		
		SHC	52.7	70.7	88.7	50.7	68.6	86.6	48.6	66.4	84.4	46.4	64.2	82.2		
3825 Cfm	EAT (wb)	58	TC	104.0	104.0	117.8	99.1	99.1	112.3	93.2	93.2	105.5	86.5	86.5	97.9	
			SHC	90.2	104.0	117.8	86.0	99.1	112.3	80.8	93.2	105.5	75.0	86.5	97.9	
		62	TC	104.2	104.2	122.7	99.3	99.3	116.9	93.3	93.3	109.8	86.6	86.6	101.9	
			SHC	85.7	104.2	122.7	81.7	99.3	116.9	76.7	93.3	109.8	71.2	86.6	101.9	
		67	TC	113.1	113.1	113.1	107.1	107.1	107.1	99.9	99.9	103.8	91.0	91.0	100.3	
	SHC		69.4	89.1	108.8	67.1	86.8	106.5	64.3	84.1	103.8	60.9	80.6	100.3		
	72	TC	123.0	123.0	123.0	117.2	117.2	117.2	110.9	110.9	110.9	103.3	103.3	103.3		
		SHC	50.3	69.7	89.0	48.3	67.7	87.1	46.1	65.6	85.2	43.5	63.3	83.0		
	76	TC	129.7	129.7	129.7	124.0	124.0	124.0	117.5	117.5	117.5	110.8	110.8	110.8		
		SHC	54.0	73.7	93.4	52.1	71.7	91.4	50.0	69.5	89.2	47.8	67.4	87.1		
4250 Cfm	EAT (wb)	58	TC	107.4	107.4	121.7	102.5	102.5	116.1	96.5	96.5	109.3	89.5	89.5	101.4	
			SHC	93.1	107.4	121.7	88.9	102.5	116.1	83.7	96.5	109.3	77.6	89.5	101.4	
		62	TC	107.5	107.5	126.6	102.6	102.6	120.8	96.6	96.6	113.7	89.6	89.6	105.5	
			SHC	88.4	107.5	126.6	84.4	102.6	120.8	79.5	96.6	113.7	73.7	89.6	105.5	
		67	TC	114.7	114.7	115.6	108.7	108.7	113.5	101.7	101.7	110.8	92.6	92.6	107.2	
	SHC		72.5	94.0	115.6	70.2	91.8	113.5	67.5	89.2	110.8	64.0	85.6	107.2		
	72	TC	124.3	124.3	124.3	118.5	118.5	118.5	112.1	112.1	112.1	104.7	104.7	104.7		
		SHC	51.3	72.4	93.4	49.3	70.5	91.7	47.2	68.5	89.9	44.7	66.4	88.1		
	76	TC	130.7	130.7	130.7	125.0	125.0	125.0	118.5	118.5	118.5	111.6	111.6	111.6		
		SHC	55.3	76.5	97.5	53.5	74.6	95.6	51.3	72.4	93.4	49.2	70.3	91.2		

\* See Minimum–Maximum Airflow Ratings in Table 3. Do not operate outside these limits.

LEGEND:

- Do not operate in this region
- Cfm - Cubic feet per minute (supply air)
- EAT(db) - Entering air temperature (dry bulb)
- EAT(wb) - Entering air temperature (wet bulb)
- SHC - Sensible heat capacity
- TC - Total capacity

50TC09 COOLING CAPACITIES, UNIT WITH HUMIDI-MIZER SYSTEM IN SUBCOOLING MODE										
TEMP (F) AIR ENT CONDENSER (Edb)		AIR ENTERING EVAPORATOR – CFM								
		2550/0.04			3400/0.05			4250/0.07		
		Air Entering Evaporator – Ewb (F)								
		72	67	62	72	67	62	72	67	62
75	TC	119.20	107.44	96.41	126.95	114.98	103.92	131.87	119.81	109.54
	SHC	50.63	63.94	77.40	59.17	76.72	94.21	66.80	88.44	108.22
	kW	5.67	5.57	5.47	5.54	5.63	5.74	5.79	5.68	5.59
85	TC	110.40	99.22	88.76	117.63	106.26	95.77	122.21	110.77	101.07
	SHC	42.39	56.16	70.07	50.42	68.45	86.38	57.71	79.86	99.95
	kW	6.33	6.23	6.14	6.20	6.30	6.40	6.45	6.34	6.25
95	TC	101.37	90.79	80.86	108.07	97.31	87.39	112.29	101.47	92.38
	SHC	33.97	48.22	62.56	41.46	60.01	78.39	48.40	71.09	91.47
	kW	7.08	6.99	6.90	6.96	7.05	7.16	7.20	7.09	7.01
105	TC	92.04	82.06	72.71	98.19	88.05	78.72	102.07	91.86	83.40
	SHC	25.31	40.06	54.88	32.24	51.33	70.17	38.85	62.06	82.67
	kW	7.94	7.85	7.77	7.83	7.91	8.01	8.06	7.95	7.87
115	TC	82.37	73.01	64.24	87.95	78.45	69.73	91.46	81.90	74.09
	SHC	16.38	31.65	46.95	22.71	42.37	61.69	28.94	52.74	73.52
	kW	8.92	8.84	8.77	8.82	8.89	8.98	9.02	8.93	8.86

50TC09 COOLING CAPACITIES, UNIT WITH HUMIDI-MIZER SYSTEM IN HOT GAS REHEAT MODE										
TEMP (F) AIR ENT CONDENSER (Edb)		AIR ENTERING EVAPORATOR – Ewb (F)								
		75 Dry Bulb 62.5 Wet Bulb (50% Relative)			75 Dry Bulb 64 Wet Bulb (56% Relative)			75 Dry Bulb 65.3 Wet Bulb (60% Relative)		
		Air Entering Evaporator – Cfm								
		2550	3400	4250	2550	3400	4250	2550	3400	4250
80	TC	37.61	33.13	26.77	44.74	41.60	36.46	50.96	48.99	44.93
	SHC	-0.52	-0.63	-0.73	-0.46	-0.57	-0.67	-0.42	-0.53	-0.62
	kW	5.88	5.68	5.44	6.13	5.97	5.76	6.35	6.24	6.06
75	TC	38.71	34.24	27.86	45.84	42.73	37.59	52.05	50.11	46.06
	SHC	0.45	0.34	0.25	0.50	0.40	0.31	0.54	0.44	0.36
	kW	5.68	5.47	5.22	5.94	5.78	5.56	6.18	6.07	5.88
70	TC	39.70	35.25	28.83	46.80	43.70	38.59	52.97	51.04	47.02
	SHC	1.41	1.32	1.23	1.47	1.37	1.29	1.50	1.41	1.34
	kW	5.65	5.42	5.24	5.97	5.79	5.53	6.26	6.13	5.91
60	TC	41.77	37.33	30.76	48.86	45.80	40.71	55.00	53.10	49.12
	SHC	3.34	3.26	3.18	3.40	3.32	3.25	3.43	3.36	3.29
	kW	5.42	5.15	5.17	5.80	5.59	5.30	6.16	6.01	5.75
50	TC	43.83	39.27	32.61	50.92	47.89	42.70	57.04	55.16	51.22
	SHC	5.27	5.21	5.14	5.32	5.27	5.21	5.36	5.31	5.25
	kW	5.18	5.15	5.17	5.62	5.39	5.05	6.04	5.87	5.59
40	TC	45.75	41.13	34.50	53.08	50.00	44.64	59.24	57.40	53.44
	SHC	7.20	7.15	6.95	7.26	7.21	7.16	7.29	7.25	7.21
	kW	4.79	4.98	4.80	5.25	5.01	5.23	5.68	5.51	5.21

**LEGEND**

- Edb** – Entering Dry–Bulb
- Ewb** – Entering Wet–Bulb
- kW** – Compressor Motor Power Input
- ldb** – Leaving Dry–Bulb
- lwb** – Leaving Wet–Bulb
- SHC** – Sensible Heat Capacity (1000 Btuh) Gross
- TC** – Total Capacity (1000 Btuh) Gross

**NOTES:**

1. Direct interpolation is permissible. Do not extrapolate.
2. The following formulas may be used:

$$t_{ldb} = t_{edb} - \frac{\text{sensible capacity (Btuh)}}{1.10 \times \text{cfm}}$$

$t_{lwb}$  = Wet–bulb temperature corresponding to enthalpy of air leaving evaporator coil ( $h_{lwb}$ )

$$h_{lwb} = h_{ewb} - \frac{\text{total capacity (Btuh)}}{4.5 \times \text{cfm}}$$

Where:  $h_{ewb}$  = Enthalpy of air entering evaporator coil

Table 6 - COOLING CAPACITIES (cont.)

1-STAGE COOLING

10 TONS

50TC*A12 (RTPF)			AMBIENT TEMPERATURE												
			85			95			105			115			
			EAT (db)			EAT (db)			EAT (db)			EAT (db)			
			75	80	85	75	80	85	75	80	85	75	80	85	
3000 Cfm	EAT (wb)	58	TC	106.3	106.3	120.5	101.7	101.7	115.2	96.6	96.6	109.4	91.0	91.0	103.1
			SHC	92.2	106.3	120.5	88.2	101.7	115.2	83.8	96.6	109.4	78.9	91.0	103.1
		62	TC	112.5	112.5	115.2	106.5	106.5	112.3	99.9	99.9	109.0	92.7	92.7	105.2
			SHC	83.8	99.5	115.2	81.0	96.6	112.3	77.8	93.4	109.0	74.2	89.7	105.2
		67	TC	123.5	123.5	123.5	117.8	117.8	117.8	111.3	111.3	111.3	104.0	104.0	104.0
		SHC	69.2	85.0	100.7	66.8	82.5	98.3	64.1	79.8	95.5	61.0	76.8	92.5	
		72	TC	134.3	134.3	134.3	128.5	128.5	128.5	122.0	122.0	122.0	114.7	114.7	114.7
		SHC	53.8	69.6	85.5	51.6	67.4	83.2	49.1	64.9	80.7	46.3	62.1	77.9	
		76	TC	-	142.4	142.4	-	136.3	136.3	-	129.5	129.5	-	121.8	121.8
		SHC	-	56.8	73.3	-	54.7	71.2	-	52.3	68.8	-	49.7	66.2	
3500 Cfm	EAT (wb)	58	TC	112.9	112.9	127.8	108.0	108.0	122.3	102.7	102.7	116.3	96.8	96.8	109.7
			SHC	97.9	112.9	127.8	93.6	108.0	122.3	89.0	102.7	116.3	83.9	96.8	109.7
		62	TC	116.3	116.3	126.2	110.5	110.5	123.3	103.8	103.8	119.5	97.1	97.1	114.3
			SHC	90.2	108.2	126.2	87.4	105.3	123.3	84.0	101.8	119.5	79.8	97.1	114.3
		67	TC	126.9	126.9	126.9	120.9	120.9	120.9	114.3	114.3	114.3	106.8	106.8	106.8
		SHC	73.2	91.3	109.4	70.8	88.9	107.1	68.1	86.2	104.4	65.0	83.2	101.3	
		72	TC	137.5	137.5	137.5	131.4	131.4	131.4	124.7	124.7	124.7	117.2	117.2	117.2
		SHC	55.3	73.4	91.5	53.1	71.1	89.2	50.6	68.7	86.7	47.8	65.9	83.9	
		76	TC	-	145.1	145.1	-	138.8	138.8	-	131.7	131.7	-	123.6	123.6
		SHC	-	59.0	78.2	-	56.7	75.8	-	54.3	73.1	-	51.5	70.0	
4000 Cfm	EAT (wb)	58	TC	117.8	117.8	133.5	113.0	113.0	128.0	107.5	107.5	121.8	101.5	101.5	115.0
			SHC	102.2	117.8	133.5	98.0	113.0	128.0	93.3	107.5	121.8	88.0	101.5	115.0
		62	TC	119.1	119.1	136.0	113.5	113.5	132.5	107.7	107.7	126.7	101.6	101.6	119.6
			SHC	95.8	115.9	136.0	92.8	112.6	132.5	88.6	107.7	126.7	83.6	101.6	119.6
		67	TC	129.4	129.4	129.4	123.3	123.3	123.3	116.5	116.5	116.5	108.9	108.9	109.8
		SHC	76.9	97.3	117.7	74.5	95.0	115.4	71.8	92.3	112.8	68.8	89.3	109.8	
		72	TC	139.7	139.7	139.7	133.5	133.5	133.5	126.6	126.6	126.6	118.8	118.8	118.8
		SHC	56.7	76.8	97.0	54.4	74.6	94.7	51.9	72.1	92.3	49.1	69.3	89.5	
		76	TC	-	147.0	147.0	-	140.5	140.5	-	133.2	133.2	-	124.9	124.9
		SHC	-	60.6	81.7	-	58.4	79.3	-	55.8	76.5	-	53.0	73.5	
4500 Cfm	EAT (wb)	58	TC	121.7	121.7	137.9	116.8	116.8	132.3	111.2	111.2	126.0	105.0	105.0	118.9
			SHC	105.6	121.7	137.9	101.3	116.8	132.3	96.4	111.2	126.0	91.0	105.0	118.9
		62	TC	121.8	121.8	143.4	116.9	116.9	137.6	111.3	111.3	131.0	105.1	105.1	123.7
			SHC	100.2	121.8	143.4	96.1	116.9	137.6	91.6	111.3	131.0	86.5	105.1	123.7
		67	TC	131.3	131.3	131.3	125.1	125.1	125.1	118.2	118.2	120.8	110.5	110.5	117.7
		SHC	80.3	102.9	125.5	78.0	100.7	123.3	75.3	98.0	120.8	72.3	95.0	117.7	
		72	TC	141.5	141.5	141.5	135.1	135.1	135.1	128.0	128.0	128.0	120.1	120.1	120.1
		SHC	57.9	80.0	102.1	55.6	77.7	99.9	53.1	75.2	97.4	50.3	72.4	94.6	
		76	TC	-	148.3	148.3	-	141.8	141.8	-	134.3	134.3	-	125.8	125.8
		SHC	-	62.1	84.9	-	59.8	82.5	-	57.3	79.7	-	54.4	76.6	
5000 Cfm	EAT (wb)	58	TC	125.0	125.0	141.6	120.0	120.0	135.9	114.3	114.3	129.5	107.9	107.9	122.3
			SHC	108.4	125.0	141.6	104.0	120.0	135.9	99.1	114.3	129.5	93.6	107.9	122.3
		62	TC	125.1	125.1	147.2	120.1	120.1	141.4	114.4	114.4	134.7	108.0	108.0	127.2
			SHC	102.9	125.1	147.2	98.8	120.1	141.4	94.1	114.4	134.7	88.9	108.0	127.2
		67	TC	132.8	132.8	133.0	126.5	126.5	130.8	119.6	119.6	128.2	111.8	111.8	125.1
		SHC	83.6	108.3	133.0	81.2	106.0	130.8	78.6	103.4	128.2	75.6	100.3	125.1	
		72	TC	142.8	142.8	142.8	136.3	136.3	136.3	129.1	129.1	129.1	121.1	121.1	121.1
		SHC	59.0	82.9	106.9	56.7	80.7	104.7	54.1	78.2	102.2	51.3	75.4	99.4	
		76	TC	-	149.4	149.4	-	142.8	142.8	-	135.1	135.1	-	126.5	126.5
		SHC	-	63.4	87.9	-	61.2	85.5	-	58.6	82.7	-	55.6	79.4	

LEGEND:

- Do not operate in this region
- Cfm - Cubic feet per minute (supply air)
- EAT(db) - Entering air temperature (dry bulb)
- EAT(wb) - Entering air temperature (wet bulb)
- SHC - Sensible heat capacity
- TC - Total capacity

Table 6 - COOLING CAPACITIES (cont.)

2-STAGE COOLING

10 TONS

50TC*D12 (RTPF & Novation)			AMBIENT TEMPERATURE												
			85			95			105			115			
			EAT (db)			EAT (db)			EAT (db)			EAT (db)			
			75	80	85	75	80	85	75	80	85	75	80	85	
3000 Cfm	EAT (wb)	58	TC	107.6	107.6	121.9	102.5	102.5	116.2	96.8	96.8	109.7	90.5	90.5	102.6
			SHC	93.2	107.6	121.9	88.8	102.5	116.2	83.9	96.8	109.7	78.4	90.5	102.6
		62	TC	113.6	113.6	116.5	107.1	107.1	113.4	99.7	99.7	109.8	91.8	91.8	104.9
			SHC	84.6	100.6	116.5	81.5	97.4	113.4	78.0	93.9	109.8	73.7	89.3	104.9
		67	TC	124.4	124.4	124.4	118.4	118.4	118.4	111.5	111.5	111.5	103.3	103.3	103.3
	SHC		69.7	85.7	101.7	67.1	83.2	99.2	64.3	80.3	96.3	60.8	76.8	92.8	
	72	TC	135.8	135.8	135.8	129.7	129.7	129.7	122.8	122.8	122.8	115	115	115	
		SHC	54.3	70.4	86.6	52.0	68.1	84.2	49.3	65.4	81.6	46.4	62.5	78.6	
	76	TC	-	145.3	145.3	-	139	139	-	131.9	131.9	-	124.1	124.1	
		SHC	-	57.8	74.3	-	55.6	72.1	-	53.1	69.6	-	50.4	66.9	
3500 Cfm	EAT (wb)	58	TC	114.2	114.2	129.4	108.9	108.9	123.4	102.9	102.9	116.6	96.3	96.3	109.1
			SHC	98.9	114.2	129.4	94.3	108.9	123.4	89.1	102.9	116.6	83.4	96.3	109.1
		62	TC	117.2	117.2	127.9	111.0	111.0	124.7	104.0	104.0	119.5	96.5	96.5	113.7
			SHC	91.1	109.5	127.9	88.1	106.4	124.7	83.9	101.7	119.5	79.3	96.5	113.7
		67	TC	127.8	127.8	127.8	121.7	121.7	121.7	114.5	114.5	114.5	106.6	106.6	106.6
	SHC		73.8	92.3	110.8	71.3	89.8	108.3	68.4	87.0	105.5	65.2	83.8	102.3	
	72	TC	139.4	139.4	139.4	133.0	133.0	133	125.8	125.8	125.8	117.9	117.9	117.9	
		SHC	56.0	74.6	93.1	53.7	72.2	90.8	51.0	69.6	88.2	48.1	66.7	85.4	
	76	TC	-	148.8	148.8	-	142.2	142.2	-	134.9	134.9	-	126.8	126.8	
		SHC	-	60.2	79.5	-	58.0	77.1	-	55.4	74.5	-	52.7	71.6	
4000 Cfm	EAT (wb)	58	TC	119.0	119.0	134.9	114.0	114.0	129.2	108.0	108.0	122.4	101.1	101.1	114.6
			SHC	103.1	119.0	134.9	98.7	114.0	129.2	93.6	108.0	122.4	87.6	101.1	114.6
		62	TC	120.3	120.3	137.1	114.7	114.7	132.8	108.2	108.2	127.5	101.3	101.3	119.3
			SHC	96.5	116.8	137.1	93.0	112.9	132.8	88.9	108.2	127.5	83.2	101.3	119.3
		67	TC	130.5	130.5	130.5	124.1	124.1	124.1	116.8	116.8	116.8	108.7	108.7	111.1
	SHC		77.7	98.6	119.5	75.2	96.2	117.2	72.3	93.3	114.4	69.1	90.1	111.1	
	72	TC	142.1	142.1	142.1	135.5	135.5	135.5	128.2	128.2	128.2	120.0	120.0	120.0	
		SHC	57.6	78.4	99.3	55.2	76.1	97.1	52.5	73.6	94.6	49.7	70.7	91.8	
	76	TC	-	151.4	151.4	-	144.7	144.7	-	137.1	137.1	-	-	-	
		SHC	-	62.3	83.8	-	60.0	81.4	-	57.5	78.8	-	-	-	
4500 Cfm	EAT (wb)	58	TC	123.0	123.0	139.5	117.8	117.8	133.6	111.9	111.9	126.9	105.3	105.3	119.3
			SHC	106.6	123.0	139.5	102.1	117.8	133.6	97.0	111.9	126.9	91.2	105.3	119.3
		62	TC	123.4	123.4	144.4	117.9	117.9	139.0	112.0	112.0	132.0	105.4	105.4	124.2
			SHC	100.9	122.7	144.4	96.9	117.9	139	92.1	112.0	132	86.6	105.4	124.2
		67	TC	132.6	132.6	132.6	126.0	126	126.0	118.7	118.7	122.9	110.4	110.4	119.6
	SHC		81.4	104.6	127.9	78.9	102.3	125.7	76.1	99.5	122.9	72.9	96.2	119.6	
	72	TC	144.2	144.2	144.2	137.4	137.4	137.4	129.9	129.9	129.9	121.6	121.6	121.6	
		SHC	59.0	82.1	105.2	56.6	79.8	103.1	54.0	77.3	100.7	51.1	74.5	98	
	76	TC	-	153.4	153.4	-	146.6	146.6	-	138.9	138.9	-	-	-	
		SHC	-	64.1	87.8	-	61.9	85.6	-	59.4	83	-	-	-	
5000 Cfm	EAT (wb)	58	TC	126.5	126.5	143.3	121.2	121.2	137.4	115.1	115.1	130.5	108.4	108.4	122.8
			SHC	109.6	126.5	143.3	105.0	121.2	137.4	99.8	115.1	130.5	93.9	108.4	122.8
		62	TC	126.5	126.5	149.1	121.3	121.3	142.9	115.2	115.2	135.8	108.5	108.5	127.8
			SHC	104.0	126.5	149.1	99.7	121.3	142.9	94.7	115.2	135.8	89.1	108.5	127.8
		67	TC	134.2	134.2	135.9	127.5	127.5	133.8	120.1	120.1	131.0	111.9	111.9	127.6
	SHC		84.9	110.4	135.9	82.4	108.1	133.8	79.6	105.3	131	76.4	102.0	127.6	
	72	TC	145.8	145.8	145.8	139.0	139.0	139.0	131.3	131.3	131.3	122.9	122.9	122.9	
		SHC	60.3	85.6	110.8	57.9	83.4	108.9	55.3	81.0	106.6	52.5	78.2	104	
	76	TC	-	155.1	155.1	-	148.2	148.2	-	-	-	-	-	-	
		SHC	-	65.9	91.5	-	63.7	89.5	-	-	-	-	-	-	

\* See Minimum–Maximum Airflow Ratings in Table 3. Do not operate outside these limits.

LEGEND:

- Do not operate in this region
- Cfm - Cubic feet per minute (supply air)
- EAT(db) - Entering air temperature (dry bulb)
- EAT(wb) - Entering air temperature (wet bulb)
- SHC - Sensible heat capacity
- TC - Total capacity



50TC12 COOLING CAPACITIES, UNIT WITH HUMIDI-MIZER SYSTEM IN SUBCOOLING MODE										
TEMP (F) AIR ENT CONDENSER (Edb)		AIR ENTERING EVAPORATOR – CFM								
		3000/0.04			4000/0.06			5000/0.07		
		Air Entering Evaporator – Ewb (F)								
		72	67	62	72	67	62	72	67	62
75	TC	142.85	129.44	116.93	152.09	138.44	125.76	157.99	144.23	132.06
	SHC	58.38	74.88	91.58	67.96	89.45	111.02	76.63	102.94	127.93
	kW	7.19	6.97	6.79	6.92	7.12	7.35	7.45	7.22	7.02
85	TC	132.33	119.68	107.86	140.92	128.03	116.10	146.41	133.41	121.98
	SHC	48.44	65.56	82.83	57.37	79.50	101.68	65.65	92.58	118.12
	kW	7.98	7.77	7.58	7.72	7.92	8.14	8.25	8.01	7.82
95	TC	121.41	109.52	98.43	129.35	117.22	106.04	134.43	122.20	111.50
	SHC	38.19	55.92	73.78	46.47	69.22	92.01	54.34	81.92	107.96
	kW	8.87	8.66	8.48	8.61	8.80	9.03	9.14	8.90	8.71
105	TC	110.04	98.92	88.56	117.27	105.94	95.53	121.88	110.46	100.54
	SHC	27.59	45.94	64.39	35.16	58.57	81.98	42.56	70.82	97.40
	kW	9.86	9.66	9.48	9.61	9.79	10.02	10.12	9.89	9.70
115	TC	98.09	87.74	78.13	104.62	94.08	84.45	108.76	98.13	89.01
	SHC	16.52	35.47	54.53	23.37	47.44	71.46	30.32	59.25	86.31
	kW	10.95	10.76	10.60	10.72	10.89	11.10	11.19	10.98	10.81

50TC12 COOLING CAPACITIES, UNIT WITH HUMIDI-MIZER SYSTEM IN HOT GAS REHEAT MODE										
TEMP (F) AIR ENT CONDENSER (Edb)		AIR ENTERING EVAPORATOR – Ewb (F)								
		75 Dry Bulb 62.5 Wet Bulb (50% Relative)			75 Dry Bulb 64 Wet Bulb (56% Relative)			75 Dry Bulb 65.3 Wet Bulb (60% Relative)		
		Air Entering Evaporator – Cfm								
		3000	4000	5000	3000	4000	5000	3000	4000	5000
80	TC	44.78	39.41	31.89	53.22	49.44	43.38	60.56	58.12	53.32
	SHC	-0.44	-0.57	-0.69	-0.37	-0.51	-0.61	-0.33	-0.46	-0.56
	kW	6.96	6.77	6.52	7.26	7.13	6.91	7.54	7.45	7.27
75	TC	45.84	40.46	32.86	54.28	50.51	44.45	61.61	59.19	54.40
	SHC	0.53	0.40	0.29	0.60	0.47	0.37	0.64	0.52	0.42
	kW	6.77	6.56	6.29	7.11	6.95	6.72	7.41	7.31	7.12
70	TC	46.91	41.48	33.50	55.36	51.59	45.50	62.69	60.28	55.49
	SHC	1.51	1.38	1.27	1.57	1.45	1.35	1.61	1.50	1.40
	kW	6.54	6.32	6.02	6.90	6.74	6.49	7.23	7.13	6.92
60	TC	48.88	43.42	35.76	57.29	53.56	47.48	64.56	62.16	57.42
	SHC	3.44	3.34	3.24	3.51	3.40	3.31	3.55	3.45	3.37
	kW	6.45	6.16	6.70	6.93	6.72	6.39	7.38	7.24	6.96
50	TC	50.83	45.28	37.67	59.22	55.52	49.43	66.05	64.03	59.34
	SHC	5.38	5.29	5.20	5.45	5.36	5.28	5.48	5.40	5.33
	kW	6.46	6.01	6.34	6.98	6.71	6.29	8.15	7.38	7.02
40	TC	52.82	47.29	39.50	61.14	57.48	51.39	68.23	65.88	61.25
	SHC	7.32	7.24	7.20	7.38	7.31	7.24	7.43	7.36	7.29
	kW	6.29	6.09	6.12	7.05	6.72	6.29	7.78	7.55	7.10

**LEGEND**

- Edb** - Entering Dry-Bulb
- Ewb** - Entering Wet-Bulb
- kW** - Compressor Motor Power Input
- ldb** - Leaving Dry-Bulb
- lwb** - Leaving Wet-Bulb
- SHC** - Sensible Heat Capacity (1000 Btuh) Gross
- TC** - Total Capacity (1000 Btuh) Gross

**NOTES:**

1. Direct interpolation is permissible. Do not extrapolate.
2. The following formulas may be used:

$$t_{ldb} = t_{edb} - \frac{\text{sensible capacity (Btuh)}}{1.10 \times \text{cfm}}$$

$$t_{lwb} = \text{Wet-bulb temperature corresponding to enthalpy of air leaving evaporator coil } (h_{lwb})$$

$$h_{lwb} = h_{ewb} - \frac{\text{total capacity (Btuh)}}{4.5 \times \text{cfm}}$$

Where:  $h_{ewb}$  = Enthalpy of air entering evaporator coil



Table 6 - COOLING CAPACITIES (cont.)

2-STAGE COOLING

12.5 TONS

50TC*D14 (RTPF & Novation)			AMBIENT TEMPERATURE												
			85			95			105			115			
			EAT (db)			EAT (db)			EAT (db)			EAT (db)			
			75	80	85	75	80	85	75	80	85	75	80	85	
3600 Cfm	EAT (wb)	58	TC	127.6	127.6	142.9	121.7	121.7	137.6	115.0	115.0	130	108.3	108.3	122.6
			SHC	110.3	126.6	142.9	105.8	121.7	137.6	99.9	115.0	130	94.1	108.3	122.6
		62	TC	136.1	136.1	136.1	131.1	131.1	131.1	123.8	123.8	124.5	114.9	114.9	120.3
			SHC	96.6	112.8	129.0	94.7	111.2	127.7	91.4	108.0	124.5	87.3	103.8	120.3
		67	TC	146.2	146.2	146.2	142.0	142.0	142.0	136.2	136.2	136.2	128.8	128.8	128.8
		SHC	78.5	94.4	110.3	76.9	93.1	109.2	74.7	91.0	107.3	71.7	88.1	104.6	
	72	TC	155.9	155.9	155.9	152.4	152.4	152.4	147.2	147.2	147.2	140.1	140.1	140.1	
		SHC	60.1	76.6	93.2	58.7	75.2	91.7	56.8	73.3	89.7	54.2	70.6	87.0	
	76	TC	-	163.0	163	-	160.0	160	-	155.1	155.1	-	148.2	148.2	
		SHC	-	62.0	81.8	-	61.1	80.9	-	59.5	79.3	-	57.0	76.3	
4200 Cfm	EAT (wb)	58	TC	132.2	132.2	149.5	128.2	128.2	144.9	121.9	121.9	137.8	115.0	115.0	130.1
			SHC	115.0	132.2	149.5	111.5	128.2	144.9	106.0	121.9	137.8	99.9	115.0	130.1
		62	TC	139.6	139.6	139.6	134.7	134.7	138	128.0	128.0	135.6	119.1	119.1	131.2
			SHC	102.5	120.8	139	100.8	119.4	138	98.1	116.8	135.6	93.9	112.6	131.2
		67	TC	149.5	149.5	149.5	145.4	145.4	145.4	139.6	139.6	139.6	132.1	132.1	132.1
		SHC	81.8	99.6	117.4	80.6	98.7	116.8	78.5	96.9	115.2	75.7	94.3	112.8	
	72	TC	159.0	159.0	159.0	155.5	155.5	155.5	150.3	150.3	150.3	143.1	143.1	143.1	
		SHC	61.4	79.6	97.8	60.2	78.5	96.8	58.3	76.7	95	55.8	74.2	92.5	
	76	TC	-	165.7	165.7	-	162.8	162.8	-	157.8	157.8	-	150.8	150.8	
		SHC	-	64.6	87.7	-	63.5	86.3	-	61.5	83.3	-	58.9	79.9	
4800 Cfm	EAT (wb)	58	TC	136.7	136.7	154.5	133.0	133.0	150.3	127.7	127.7	144.3	120.6	120.6	136.4
			SHC	118.9	136.7	154.5	115.7	133.0	150.3	111.0	127.7	144.3	104.9	120.6	136.4
		62	TC	142.2	142.2	147.8	137.4	137.4	147.1	131.0	131.0	144.7	122.8	122.8	140.3
			SHC	107.7	127.8	147.8	106.2	126.7	147.1	103.6	124.2	144.7	99.3	119.8	140.3
		67	TC	152.1	152.1	152.1	148.0	148	148	142.2	142.2	142.2	134.6	134.6	134.6
		SHC	84.8	104.3	123.7	83.8	103.8	123.7	82.0	102.3	122.6	79.4	99.9	120.4	
	72	TC	161.3	161.3	161.3	157.8	157.8	157.8	152.5	152.5	152.5	145.4	145.4	145.4	
		SHC	62.6	82.2	101.9	61.4	81.4	101.3	59.7	79.7	99.8	57.2	77.3	97.5	
	76	TC	-	167.7	167.7	-	164.9	164.9	-	159.9	159.9	-	152.8	152.8	
		SHC	-	66.4	91.4	-	65	89.2	-	63.1	86.4	-	60.5	83.1	
5400 Cfm	EAT (wb)	58	TC	140.5	140.5	158.8	136.9	136.9	154.7	131.8	131.8	149	125.2	125.2	141.6
			SHC	122.2	140.5	158.8	119	136.9	154.7	114.7	131.8	149	108.9	125.2	141.6
		62	TC	144.3	144.3	155.7	139.6	139.6	155	133.5	133.5	152.4	125.8	125.8	147.8
			SHC	112.2	133.9	155.7	110.9	132.9	155	108.1	130.2	152.4	103.9	125.8	147.8
		67	TC	154.2	154.2	154.2	150.0	150.0	150.0	144.2	144.2	144.2	136.7	136.7	136.7
		SHC	87.6	108.6	129.6	86.8	108.5	130.1	85.2	107.3	129.4	82.8	105.1	127.4	
	72	TC	163.1	163.1	163.1	159.7	159.7	159.7	154.3	154.3	154.3	147.1	147.1	147.1	
		SHC	63.6	84.6	105.6	62.5	83.9	105.4	60.8	82.5	104.2	58.4	80.2	102	
	76	TC	-	169.3	169.3	-	166.5	166.5	-	161.5	161.5	-	154.2	154.2	
		SHC	-	67.6	93.7	-	66.4	91.7	-	64.5	89.2	-	61.9	86.1	
6000 Cfm	EAT (wb)	58	TC	143.6	143.6	162.3	140.1	140.1	158.3	135.1	135.1	152.7	128.7	128.7	145.5
			SHC	124.9	143.6	162.3	121.8	140.1	158.3	117.5	135.1	152.7	111.9	128.7	145.5
		62	TC	146.1	146.1	162.4	141.7	141.7	161.5	135.6	135.6	159.2	128.8	128.8	151.2
			SHC	116.1	139.3	162.4	114.7	138.1	161.5	112.1	135.6	159.2	106.4	128.8	151.2
		67	TC	155.8	155.8	155.8	151.6	151.6	151.6	145.9	145.9	145.9	138.3	138.3	138.3
		SHC	90.1	112.6	135	89.6	112.8	136	88.3	112.0	135.8	85.9	110.0	134.1	
	72	TC	164.5	164.5	164.5	161.2	161.2	161.2	155.8	155.8	155.8	148.5	148.5	148.5	
		SHC	64.5	86.7	108.9	63.5	86.3	109.1	61.9	85.1	108.2	59.6	82.9	106.3	
	76	TC	-	170.6	170.6	-	167.8	167.8	-	162.8	162.8	-	155.5	155.5	
		SHC	-	68.7	95.8	-	67.5	94.1	-	65.7	91.8	-	63.3	88.8	

\* See Minimum–Maximum Airflow Ratings in Table 3. Do not operate outside these limits.

LEGEND:

- Do not operate in this region
- Cfm - Cubic feet per minute (supply air)
- EAT(db) - Entering air temperature (dry bulb)
- EAT(wb) - Entering air temperature (wet bulb)
- SHC - Sensible heat capacity
- TC - Total capacity

**Table 6 - COOLING CAPACITIES (cont.) 2-STAGE COOLING**

**12.5 TONS**

<b>50TC14 COOLING CAPACITIES, UNIT WITH HUMIDI-MIZER SYSTEM IN SUBCOOLING MODE</b>										
<b>TEMP (F) AIR ENT CONDENSER (Edb)</b>		<b>AIR ENTERING EVAPORATOR – CFM</b>								
		<b>3750/0.02</b>			<b>5000/0.06</b>			<b>6250/0.05</b>		
		<b>Air Entering Evaporator – Ewb (F)</b>								
		<b>72</b>	<b>67</b>	<b>62</b>	<b>72</b>	<b>67</b>	<b>62</b>	<b>72</b>	<b>67</b>	<b>62</b>
75	TC	183.66	166.86	151.43	194.90	177.83	162.05	201.97	184.84	170.53
	SHC	79.39	100.52	121.91	91.70	119.42	147.05	102.94	137.00	166.71
	kW	9.82	9.63	9.46	9.58	9.76	9.96	10.04	9.84	9.67
85	TC	172.71	156.78	142.09	183.32	167.13	152.17	189.98	173.73	160.25
	SHC	69.03	90.92	112.95	80.69	109.17	137.51	91.49	126.33	156.65
	kW	10.82	10.63	10.45	10.57	10.76	10.96	11.04	10.84	10.67
95	TC	161.37	146.24	132.38	171.36	156.04	141.86	177.62	162.22	149.50
	SHC	58.44	81.04	103.77	69.42	98.67	127.71	79.83	115.45	146.15
	kW	11.92	11.73	11.56	11.68	11.86	12.05	12.14	11.93	11.77
105	TC	149.57	135.32	122.21	158.89	144.45	131.10	164.74	150.27	138.35
	SHC	47.57	70.92	94.32	57.85	87.91	117.61	67.79	104.26	135.30
	kW	13.12	12.94	12.77	12.89	13.06	13.24	13.32	13.13	12.97
115	TC	137.22	123.88	111.55	145.85	132.33	119.84	151.27	137.71	126.67
	SHC	36.31	60.47	84.57	45.87	76.77	107.19	55.34	92.66	123.98
	kW	14.41	14.25	14.10	14.20	14.35	14.53	14.59	14.42	14.28

<b>50 TC14 COOLING CAPACITIES, UNIT WITH HUMIDI-MIZER SYSTEM IN HOT GAS REHEAT MODE</b>										
<b>TEMP (F) AIR ENT CONDENSER (Edb)</b>		<b>AIR ENTERING EVAPORATOR – Ewb (F)</b>								
		<b>75 Dry Bulb 62.5 Wet Bulb (50% Relative)</b>			<b>75 Dry Bulb 64 Wet Bulb (56% Relative)</b>			<b>75 Dry Bulb 65.3 Wet Bulb (60% Relative)</b>		
		<b>Air Entering Evaporator – Cfm</b>								
		<b>3750</b>	<b>5000</b>	<b>6250</b>	<b>3750</b>	<b>5000</b>	<b>6250</b>	<b>3750</b>	<b>5000</b>	<b>6250</b>
80	TC	52.42	45.88	36.99	62.64	58.07	51.07	71.56	68.64	63.23
	SHC	-0.39	-0.54	-0.67	-0.31	-0.46	-0.58	-0.26	-0.40	-0.52
	kW	9.65	9.39	9.07	9.97	9.77	9.50	10.25	10.11	9.89
75	TC	53.45	46.63	36.10	63.77	59.11	51.87	72.76	69.80	64.31
	SHC	0.59	0.44	0.30	0.67	0.52	0.40	0.72	0.58	0.47
	kW	9.09	8.83	8.49	9.39	9.20	8.94	9.67	9.53	9.32
70	TC	54.33	46.91	37.58	64.77	60.01	52.30	73.80	70.80	65.24
	SHC	1.56	1.41	1.29	1.64	1.50	1.38	1.70	1.56	1.45
	kW	8.81	8.53	8.62	9.15	8.94	8.65	9.46	9.31	9.08
60	TC	55.47	49.48	40.48	66.62	62.07	54.88	75.68	72.76	67.28
	SHC	3.50	3.38	3.27	3.59	3.47	3.36	3.65	3.52	3.42
	kW	8.36	8.84	8.98	9.88	9.56	9.10	9.83	9.64	9.31
50	TC	58.33	51.72	42.81	68.72	63.93	55.84	77.74	74.77	69.24
	SHC	5.47	5.35	5.24	5.54	5.43	5.32	5.60	5.49	5.39
	kW	8.98	9.25	9.43	9.33	8.97	8.73	9.55	9.33	9.70
40	TC	60.33	53.69	46.89	70.67	65.93	49.83	79.46	76.62	71.24
	SHC	7.42	7.31	7.22	7.49	7.39	7.23	7.55	7.45	7.37
	kW	9.16	9.88	9.06	9.50	9.05	9.47	10.31	10.00	9.48

**LEGEND**

- Edb** – Entering Dry–Bulb
- Ewb** – Entering Wet–Bulb
- kW** – Compressor Motor Power Input
- ldb** – Leaving Dry–Bulb
- lwb** – Leaving Wet–Bulb
- SHC** – Sensible Heat Capacity (1000 Btuh) Gross
- TC** – Total Capacity (1000 Btuh) Gross

Table 6 - COOLING CAPACITIES (cont.)

2-STAGE COOLING

15 TONS

50TC*D16 (RTPF)			Ambient Temperature												
			85			95			105			115			
			EA (dB)			EA (dB)			EA (dB)			EA (dB)			
			75	80	85	75	80	85	75	80	85	75	80	85	
4500 Cfm	EAT (wb)	58	THC	156.6	156.6	175.2	149.4	149.4	169.1	141.6	141.6	160.2	133.3	133.3	150.9
			SHC	134.7	154.9	175.2	129.8	149.4	169.1	123.0	141.6	160.2	115.7	133.3	150.9
		62	THC	166.7	166.7	166.9	158.0	158.0	162.6	147.6	147.6	157.2	136.8	136.8	150.3
			SHC	122.8	144.9	166.9	118.6	140.6	162.6	113.5	135.3	157.2	107.4	128.8	150.3
		67	THC	184.1	184.1	184.1	175.6	175.6	175.6	165.6	165.6	165.6	154.5	154.5	154.5
	SHC		101.6	123.7	145.7	98.1	120.2	142.3	94.0	116.1	138.2	89.4	111.5	133.6	
	72	THC	200.3	200.3	200.3	192.0	192.0	192.0	182.9	182.9	182.9	172.2	172.2	172.2	
		SHC	78.7	101.1	123.5	75.5	97.9	120.2	72.1	94.4	116.7	68.2	90.5	112.7	
	76	THC	-	211.4	211.4	-	203.1	203.1	-	193.8	193.8	-	183.9	183.9	
		SHC	-	82.2	107.0	-	79.3	103.8	-	76.0	100.2	-	72.6	96.5	
5250 Cfm	EAT (wb)	58	THC	165.2	165.2	186.9	158.2	158.2	179.0	150.0	150.0	169.7	141.3	141.3	160.0
			SHC	143.5	165.2	186.9	137.4	158.2	179.0	130.2	150.0	169.7	122.7	141.3	160.0
		62	THC	172.3	172.3	181.7	163.4	163.4	176.9	153.1	153.1	169.3	143.4	143.4	161.4
			SHC	131.6	156.6	181.7	127.1	152.0	176.9	120.5	144.9	169.3	114.1	137.8	161.4
		67	THC	189.5	189.5	189.5	180.9	180.9	180.9	170.7	170.7	170.7	159.1	159.1	159.1
	SHC		107.2	132.4	157.5	103.8	129.0	154.1	99.9	125.1	150.4	95.3	120.6	145.8	
	72	THC	205.0	205.0	205.0	196.5	196.5	196.5	187.1	187.1	187.1	176.4	176.4	176.4	
		SHC	80.9	106.1	131.3	77.7	102.9	128.1	74.4	99.5	124.7	70.6	95.8	121.0	
	76	THC	-	215.4	215.4	-	206.8	206.8	-	197.1	197.1	-	186.9	186.9	
		SHC	-	85.0	113.0	-	82.0	109.8	-	78.8	106.4	-	75.4	102.8	
6000 Cfm	EAT (wb)	58	THC	172.7	172.7	195.4	165.5	165.5	187.3	157.1	157.1	177.8	148.1	148.1	167.7
			SHC	150.0	172.7	195.4	143.8	165.5	187.3	136.4	157.1	177.8	128.6	148.1	167.7
		62	THC	176.6	176.6	195.7	168.1	168.1	187.6	158.9	158.9	180.2	148.9	148.9	172.1
			SHC	139.6	167.7	195.7	133.2	160.4	187.6	127.1	153.7	180.2	120.7	146.4	172.1
		67	THC	193.6	193.6	193.6	184.8	184.8	184.8	174.7	174.7	174.7	162.7	162.7	162.7
	SHC		112.3	140.3	168.3	108.9	137.0	165.2	105.2	133.5	161.7	100.7	129.0	157.3	
	72	THC	208.4	208.4	208.4	199.6	199.6	199.6	190.2	190.2	190.2	179.5	179.5	179.5	
		SHC	82.7	110.5	138.3	79.6	107.3	135.1	76.2	104.0	131.8	72.6	100.6	128.5	
	76	THC	-	218.2	218.2	-	209.5	209.5	-	199.5	199.5	-	189.0	189.0	
		SHC	-	87.5	118.6	-	84.5	115.2	-	81.1	111.3	-	77.5	107.3	
6750 Cfm	EAT (wb)	58	THC	178.8	178.8	202.4	171.6	171.6	194.2	163.1	163.1	184.6	153.8	153.8	174.1
			SHC	155.3	178.8	202.4	149.0	171.6	194.2	141.6	163.1	184.6	133.5	153.8	174.1
		62	THC	181.0	181.0	203.6	173.0	173.0	197.5	163.8	163.8	190.1	153.9	153.9	181.1
			SHC	144.1	173.9	203.6	139.1	168.3	197.5	133.3	161.7	190.1	126.7	153.9	181.1
		67	THC	196.8	196.8	196.8	187.9	187.9	187.9	177.7	177.7	177.7	165.5	165.5	167.9
	SHC		117.0	147.7	178.4	113.7	144.5	175.4	110.1	141.1	172.2	105.6	136.8	167.9	
	72	THC	211.0	211.0	211.0	202.2	202.2	202.2	192.5	192.5	192.5	181.8	181.8	181.8	
		SHC	84.3	114.5	144.7	81.2	111.5	141.7	77.9	108.1	138.4	74.4	104.9	135.4	
	76	THC	-	220.2	220.2	-	211.5	211.5	-	201.3	201.3	-	190.6	190.6	
		SHC	-	89.5	122.8	-	86.4	119.4	-	83.0	115.4	-	79.4	111.5	
7500 Cfm	EAT (wb)	58	THC	183.9	183.9	208.2	176.6	176.6	199.8	168.2	168.2	190.3	158.6	158.6	179.5
			SHC	159.7	183.9	208.2	153.3	176.6	199.8	146.0	168.2	190.3	137.7	158.6	179.5
		62	THC	185.1	185.1	212.5	177.1	177.1	206.2	168.3	168.3	197.9	158.7	158.7	186.7
			SHC	149.5	181.0	212.5	144.5	175.4	206.2	138.7	168.3	197.9	130.8	158.7	186.7
		67	THC	199.3	199.3	199.3	190.3	190.3	190.3	180.0	180.0	181.7	167.8	167.8	177.8
	SHC		121.3	154.6	187.9	118.1	151.6	185.1	114.4	148.1	181.7	110.1	144.0	177.8	
	72	THC	213.0	213.0	213.0	204.1	204.1	204.1	194.2	194.2	194.2	183.5	183.5	183.5	
		SHC	85.8	118.2	150.5	82.7	115.2	147.7	79.4	111.9	144.4	76.0	108.8	141.6	
	76	THC	-	221.9	221.9	-	213.0	213.0	-	202.7	202.7	-	191.8	191.8	
		SHC	-	91.2	126.5	-	88.2	123.1	-	84.7	119.2	-	81.2	115.3	

\* See Minimum–Maximum Airflow Ratings in Table 3. Do not operate outside these limits.

LEGEND:

- Do not operate in this region
- Cfm - Cubic feet per minute (supply air)
- EAT(db) - Entering air temperature (dry bulb)
- EAT(wb) - Entering air temperature (wet bulb)
- SHC - Sensible heat capacity
- TC - Total capacity

**Table 6 - COOLING CAPACITIES (cont.) 2-STAGE COOLING**

**15 TONS**

<b>50TC*E16 Cooling Capacities, Subcooling Mode</b>										
<b>TEMP (F) AIR ENT CONDENSER (Edb)</b>		<b>AIR ENTERING EVAPORATOR – CFM</b>								
		<b>4500/0.02</b>			<b>6000/0.06</b>			<b>7500/0.05</b>		
		<b>Air Entering Evaporator – Ewb (F)</b>								
		<b>72</b>	<b>67</b>	<b>62</b>	<b>72</b>	<b>67</b>	<b>62</b>	<b>72</b>	<b>67</b>	<b>62</b>
75	TC	204.4	186.3	168.2	218.4	199.6	180.9	229.6	210.4	191.2
	SHC	98.9	118.1	137.2	114.8	133.7	152.6	127.6	146.2	164.9
	kW	11.57	11.22	10.77	11.78	11.45	11.00	12.06	11.64	11.35
85	TC	189.2	171.7	154.1	203.0	184.8	166.7	214.1	195.5	176.9
	SHC	79.5	103.4	127.3	96.5	120.2	144.0	110.2	133.7	157.3
	kW	12.59	12.24	11.81	12.81	12.50	12.03	13.05	12.66	12.47
95	TC	174.0	157.0	140.0	187.6	170.1	152.5	198.6	180.6	162.7
	SHC	60.0	88.7	117.5	78.2	106.8	135.3	92.9	121.3	149.7
	kW	13.68	13.35	12.86	13.91	13.57	13.05	14.15	13.75	13.47
105	TC	158.8	142.3	125.8	172.2	155.3	138.3	183.1	165.7	148.4
	SHC	40.5	74.1	107.7	59.9	93.3	126.7	75.5	108.8	142.0
	kW	14.67	14.41	13.88	14.90	14.55	14.10	15.15	14.73	14.53
115	TC	143.6	127.6	111.7	156.8	140.5	124.1	167.6	150.9	134.2
	SHC	21.0	59.4	97.8	41.6	79.9	118.1	58.1	96.3	134.2
	kW	15.77	15.38	14.88	15.88	15.65	15.10	16.12	15.84	15.54

<b>50TC*E16 Cooling Capacities, Hot Gas Reheat Mode</b>										
<b>TEMP (F) AIR ENT CONDENSER (Edb)</b>		<b>AIR ENTERING EVAPORATOR – Ewb (F)</b>								
		<b>75 Dry Bulb 62.5 Wet Bulb (50% Relative)</b>			<b>75 Dry Bulb 64 Wet Bulb (56% Relative)</b>			<b>75 Dry Bulb 65.3 Wet Bulb (60% Relative)</b>		
		<b>Air Entering Evaporator – Cfm</b>								
		<b>4500</b>	<b>6000</b>	<b>7500</b>	<b>4500</b>	<b>6000</b>	<b>7500</b>	<b>4500</b>	<b>6000</b>	<b>7500</b>
80	TC	83.75	84.85	88.95	86.65	91.90	92.90	87.90	91.75	96.30
	SHC	37.50	42.80	55.10	30.90	40.40	44.50	24.80	29.30	34.10
	kW	10.50	11.49	11.60	10.56	10.65	11.70	11.60	11.72	11.77
75	TC	85.00	86.00	90.50	88.05	93.60	94.65	89.20	93.45	97.85
	SHC	40.00	45.00	57.30	33.20	42.30	46.90	26.90	31.50	36.30
	kW	10.16	11.15	11.25	10.21	10.31	11.33	11.26	11.35	11.42
70	TC	86.15	87.35	91.50	89.20	94.30	96.10	90.40	94.10	98.95
	SHC	42.10	47.50	59.80	35.50	45.30	49.50	29.50	33.90	38.70
	kW	9.84	10.83	10.94	10.02	10.13	11.03	10.95	11.05	11.12
60	TC	88.90	90.10	94.25	92.00	97.10	98.20	93.20	96.90	101.75
	SHC	46.80	52.30	64.60	40.20	50.10	54.10	34.10	38.60	43.40
	kW	9.37	10.36	10.44	9.42	9.52	10.55	10.45	10.57	10.64
50	TC	91.70	92.80	97.00	94.80	99.90	101.00	96.10	99.70	104.20
	SHC	51.50	57.10	69.40	44.80	54.80	58.90	38.70	43.20	49.00
	kW	9.12	10.09	10.16	9.17	9.28	10.26	10.17	10.26	10.32
40	TC	94.45	95.60	99.80	97.45	102.55	103.70	98.65	102.35	107.00
	SHC	56.30	61.40	73.70	49.70	59.20	63.30	43.60	48.10	52.90
	kW	9.05	10.02	10.10	9.10	9.21	10.18	10.11	10.20	10.26

**LEGEND**

- Edb** – Entering Dry–Bulb
- Ewb** – Entering Wet–Bulb
- kW** – Compressor Motor Power Input
- ldb** – Leaving Dry–Bulb
- lwb** – Leaving Wet–Bulb
- SHC** – Sensible Heat Capacity (1000 Btuh) Gross
- TC** – Total Capacity (1000 Btuh) Gross

**Table 7 – STATIC PRESSURE ADDERS (IN. WG) (FACTORY OPTIONS AND/OR ACCESSORIES)**

**Electric Heaters**

3–6 TONS										
CFM	600	900	1200	1400	1600	1800	2000	2200	2400	2600
1 Electric Heater Module	0.03	0.05	0.07	0.09	0.09	0.10	0.11	0.11	0.12	0.13
2 Electric Heater Modules	0.13	0.15	0.16	0.16	0.16	0.17	0.17	0.17	0.18	0.18

7.5 – 12.5 TONS																
CFM	2250	2500	2750	3000	3250	3500	3750	4000	4250	4500	4750	5000	5250	5500	5750	6000
1 Electric Heater Module	0.03	0.04	0.04	0.05	0.06	0.07	0.08	0.09	0.10	0.11	0.12	0.13	0.14	0.15	0.16	0.18
2 Electric Heater Modules	0.04	0.05	0.05	0.06	0.07	0.08	0.09	0.10	0.11	0.12	0.13	0.15	0.16	0.17	0.19	0.20

15 TON												
CFM	2813	3125	3438	3750	4063	4375	4688	5000	5313	5625	5938	6250
Vertical - 1 Electric Heater Module	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.03	0.03	0.03	0.03	0.04
Vertical - 2 Electric Heater Modules	0.02	0.03	0.03	0.03	0.04	0.04	0.05	0.05	0.06	0.06	0.07	0.08
Horizontal - 1 Electric Heater Module	0.03	0.03	0.04	0.04	0.05	0.05	0.06	0.06	0.07	0.07	0.08	0.09
Horizontal - 2 Electric Heater Modules	0.02	0.03	0.03	0.04	0.04	0.04	0.05	0.05	0.06	0.06	0.07	0.08

**Humidi-MiZer**

3–6 TONS									
CFM	1000	1250	1500	1750	2000	2250	2500	2750	3000
3 Tons	0.04	0.052	0.07	–	–	–	–	–	–
4 Tons	–	0.106	0.138	0.172	0.21	–	–	–	–
5 Tons	–	–	0.138	0.172	0.21	0.252	0.30	–	–
6 Tons	–	–	–	0.112	0.125	0.161	0.19	0.22	0.25

7.5–12.5 TONS																
CFM	2250	2500	2750	3000	3250	3500	3750	4000	4250	4500	4750	5000	5250	5500	5750	6000
7.5 Tons	0.12	0.14	0.16	0.19	0.21	0.23	0.26	–	–	–	–	–	–	–	–	–
8.5 Tons	–	0.11	0.12	0.13	0.15	0.17	0.18	0.20	0.22	–	–	–	–	–	–	–
10 Tons	–	–	–	0.13	0.15	0.17	0.18	0.20	0.22	0.24	0.26	0.28	–	–	–	–
12.5 Tons	–	–	–	–	–	0.17	0.18	0.20	0.22	0.24	0.26	0.28	0.31	0.33	0.36	0.39

15 TONS														
CFM	4000	4250	4500	4750	5000	5250	5500	5750	6000	6250	6500	6750	7000	7250
15 Tons	0.06	0.07	0.07	0.08	0.08	0.09	0.10	0.10	0.11	0.12	0.12	0.13	0.14	0.15

# ECONOMIZER, BAROMETRIC RELIEF AND PE PERFORMANCE

## Vertical Application

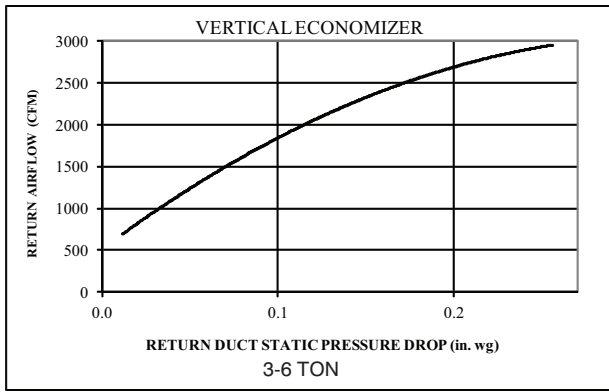


Fig. 16 - Return Air Pressure Drop

C11238

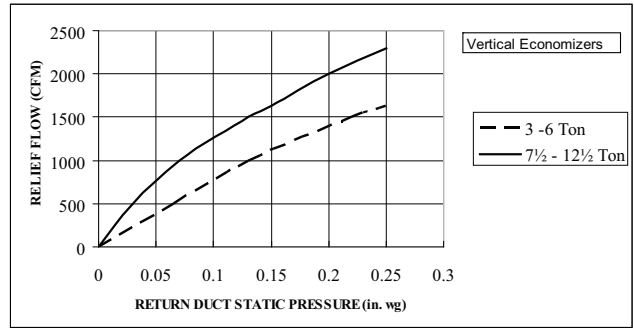


Fig. 19 - Barometric Relief Flow Capacity

C08073

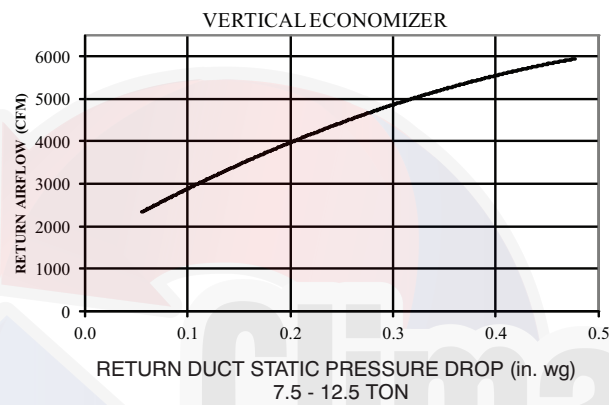


Fig. 17 - Return Air Pressure Drop

C11240

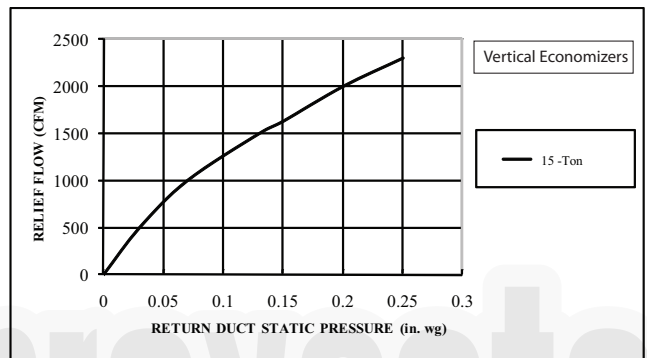


Fig. 20 - Barometric Relief Flow-Vertical 15 Ton

C101122

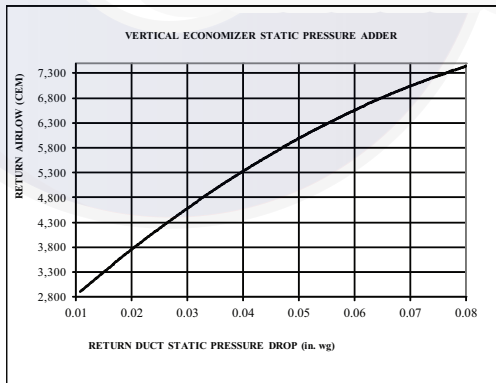


Fig. 18 - Return Air Pressure Drop-Vertical 15 Tons

C11257

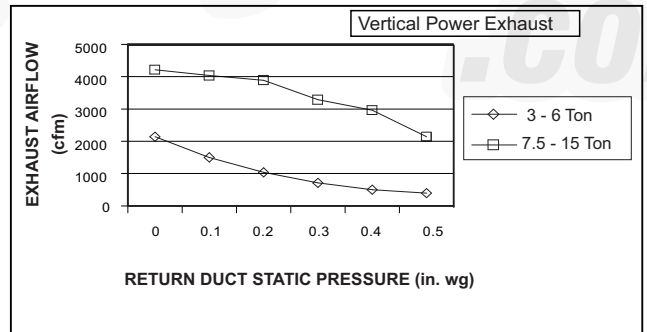


Fig. 21 - Vertical Power Exhaust Performance

C11248

# ECONOMIZER, BAROMETRIC RELIEF AND PE PERFORMANCE (cont.)

## Horizontal Application

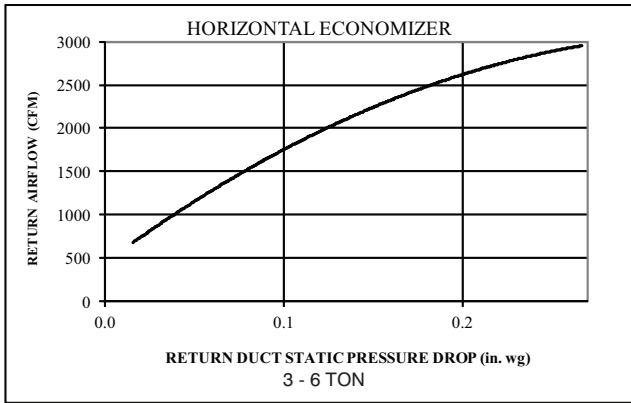


Fig. 22 - Return Air Pressure Drop

C11239

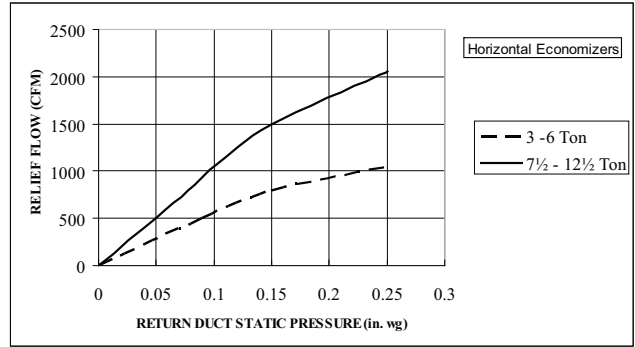


Fig. 25 - Barometric Relief Flow Capacity

C08070

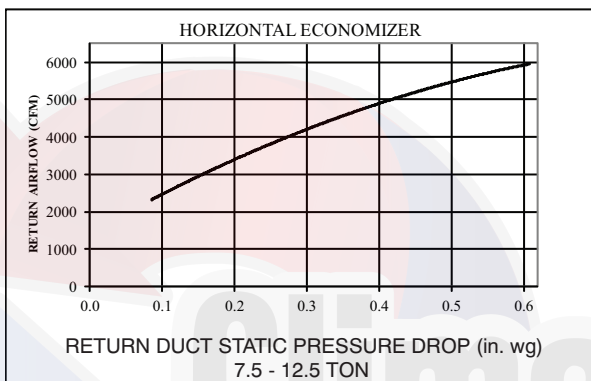


Fig. 23 - Return Air Pressure Drop

C11241

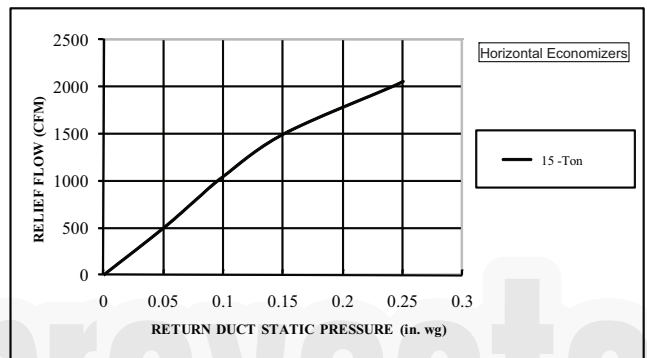


Fig. 26 - Barometric Relief Flow-Horizontal 15 Ton

C101120

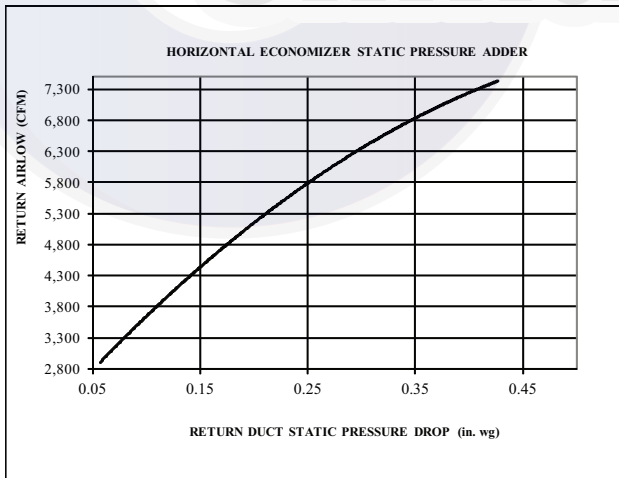


Fig. 24 - Return Air Pressure Drop-Horizontal 15 Ton

C11258

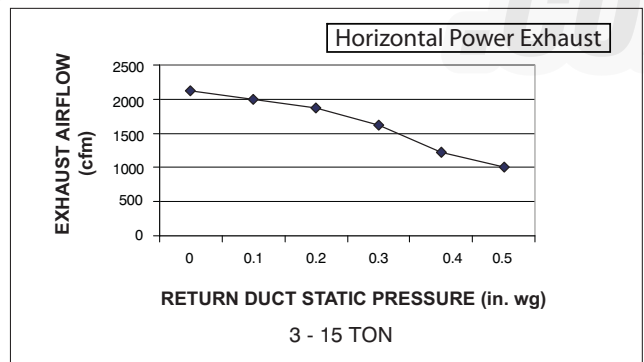


Fig. 27 - Horizontal Power Exhaust Performance

C08012



## GENERAL FAN PERFORMANCE NOTES

1. Interpolation is permissible. Do not extrapolate.
2. External static pressure is the static pressure difference between the return duct and the supply duct plus the static pressure caused by any FIOPs or accessories.
3. Tabular data accounts for pressure loss due to clean filters, unit casing, and wet coils. Factory options and accessories may add static pressure losses. Selection software is available, through your salesperson, to help you select the best motor/drive combination for your application.
4. The Fan Performance tables offer motor/drive recommendations. In cases when two motor/drive combinations would work, Carrier recommended the lower horsepower option.
5. For information on the electrical properties of Carrier motors, please see the Electrical information section of this book.
6. For more information on the performance limits of Carrier motors, see the application data section of this book.
7. The EPACT (Energy Policy Act of 1992) regulates energy requirements for specific types of indoor fan motors. Motors regulated by EPACT include any general purpose, T-frame (three-digit, 143 and larger), single-speed, foot mounted, polyphase, squirrel cage induction motors of NEMA (National Electrical Manufacturers Association) design A and B, manufactured for use in the United States. Ranging from 1 to 200 Hp, these continuous-duty motors operate on 230 and 460 volt, 60 Hz power. If a motor does not fit into these specifications, the motor does not have to be replaced by an EPACT compliant energy-efficient motor. Variable-speed motors are exempt from EPACT compliance requirements. Therefore, the indoor fan motors for Carrier 50TC04-16 units are exempt from these requirements.



# FAN PERFORMANCE

**Table 8 – 50TC\*\*04**

**1 PHASE**

**3 TON HORIZONTAL SUPPLY**

CFM	AVAILABLE EXTERNAL STATIC PRESSURE (IN. WG)									
	0.2		0.4		0.6		0.8		1.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
	Field Supplied Drive <sup>1</sup>		Standard Static Option				Medium Static Option			
900	<b>554</b>	<b>0.14</b>	681	0.22	783	0.32	870	0.42	947	0.53
975	575	0.16	701	0.25	801	0.35	888	0.45	965	0.57
1050	597	0.18	721	0.28	821	0.38	906	0.49	983	0.61
1125	620	0.21	741	0.31	840	0.42	925	0.54	1001	0.66
1200	643	0.23	762	0.35	<b>860</b>	<b>0.46</b>	944	0.58	1020	0.71
1275	666	0.27	784	0.38	880	0.50	964	0.63	1039	0.76
1350	690	0.30	805	0.42	900	0.55	983	0.68	1058	0.82
1425	714	0.34	827	0.47	921	0.60	1003	0.74	1077	0.88
1500	738	0.38	849	0.52	942	0.66	1024	0.80	1097	0.95

CFM	AVAILABLE EXTERNAL STATIC PRESSURE (IN. WG)									
	1.2		1.4		1.6		1.8		2.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
	Medium Static Option					Field Supplied Drive <sup>2</sup>				
900	1017	0.64	1082	0.76	1143	0.88	<b>1200</b>	<b>1.01</b>	<b>1254</b>	<b>1.14</b>
975	1035	0.68	1100	0.81	1160	0.93	<b>1217</b>	<b>1.07</b>	<b>1271</b>	<b>1.20</b>
1050	1053	0.73	1117	0.86	<b>1177</b>	<b>0.99</b>	<b>1234</b>	<b>1.13</b>	-	-
1125	1071	0.78	1135	0.92	<b>1195</b>	<b>1.05</b>	<b>1251</b>	<b>1.19</b>	-	-
1200	1089	0.84	1153	0.98	<b>1212</b>	<b>1.12</b>	-	-	-	-
1275	1107	0.90	1171	1.04	<b>1230</b>	<b>1.19</b>	-	-	-	-
1350	1126	0.96	<b>1189</b>	<b>1.11</b>	-	-	-	-	-	-
1425	1145	1.03	<b>1208</b>	<b>1.18</b>	-	-	-	-	-	-
1500	1164	1.10	-	-	-	-	-	-	-	-

**NOTE:** For more information, see General Fan Performance Notes.

**Boldface** indicates field-supplied drive is required.

1. Recommend using field-supplied fan pulley (part no. KR11AG006) and belt (part no. KR30AE039).
2. Recommend using field-supplied motor pulley (part no. KR11HY161) and belt (part no. KR30AE035).

**Table 8 (cont.) 50TC\*\*04**

**1 PHASE**

**3 TON VERTICAL SUPPLY**

CFM	AVAILABLE EXTERNAL STATIC PRESSURE (IN. WG)									
	0.2		0.4		0.6		0.8		1.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
	Field Supplied Drive <sup>1</sup>		Standard Static Option				Medium Static Option			
900	<b>566</b>	<b>0.14</b>	690	0.23	791	0.32	879	0.42	957	0.52
975	590	0.17	711	0.26	811	0.36	897	0.46	975	0.57
1050	615	0.19	733	0.29	831	0.39	916	0.50	993	0.62
1125	640	0.22	755	0.33	851	0.43	936	0.55	1012	0.67
1200	666	0.25	778	0.36	<b>873</b>	<b>0.48</b>	956	0.60	1031	0.72
1275	692	0.29	802	0.41	894	0.53	976	0.65	1051	0.78
1350	719	0.33	825	0.45	916	0.58	997	0.71	1071	0.84
1425	746	0.37	850	0.50	939	0.63	1019	0.77	1091	0.91
1500	774	0.42	<b>875</b>	<b>0.55</b>	962	0.69	1041	0.83	1112	0.98

CFM	AVAILABLE EXTERNAL STATIC PRESSURE (IN. WG)									
	1.2		1.4		1.6		1.8		2.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
	Medium Static Option					Field Supplied Drive <sup>2</sup>				
900	1029	0.63	1095	0.75	1157	0.86	<b>1216</b>	<b>0.99</b>	<b>1272</b>	<b>1.11</b>
975	1046	0.68	1112	0.80	1174	0.92	<b>1232</b>	<b>1.05</b>	<b>1287</b>	<b>1.18</b>
1050	1064	0.73	1129	0.86	<b>1190</b>	<b>0.98</b>	<b>1248</b>	<b>1.11</b>	-	-
1125	1082	0.79	1147	0.92	<b>1208</b>	<b>1.05</b>	<b>1265</b>	<b>1.18</b>	-	-
1200	1100	0.85	1165	0.98	<b>1225</b>	<b>1.12</b>	-	-	-	-
1275	1119	0.91	<b>1183</b>	<b>1.05</b>	<b>1243</b>	<b>1.19</b>	-	-	-	-
1350	1139	0.98	<b>1202</b>	<b>1.12</b>	-	-	-	-	-	-
1425	1159	1.05	<b>1221</b>	<b>1.20</b>	-	-	-	-	-	-
1500	<b>1179</b>	<b>1.13</b>	-	-	-	-	-	-	-	-

**NOTE:** For more information, see General Fan Performance Notes.

**Boldface** indicates field-supplied drive is required.

1. Recommend using field-supplied fan pulley (part no. KR11AG006) and belt (part no. KR30AE039).
2. Recommend using field-supplied motor pulley (part no. KR11HY161) and belt (part no. KR30AE035).

## FAN PERFORMANCE (cont.)

Table 8 (cont.) 50TC\*\*04

3 PHASE

3 TON HORIZONTAL SUPPLY

CFM	AVAILABLE EXTERNAL STATIC PRESSURE (IN. WG)									
	0.2		0.4		0.6		0.8		1.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
	Field Supplied Drive <sup>1</sup>		Standard Static Option				Medium Static Option			
900	<b>554</b>	<b>0.14</b>	681	0.22	783	0.32	870	0.42	947	0.53
975	575	0.16	701	0.25	801	0.35	888	0.45	965	0.57
1050	597	0.18	721	0.28	821	0.38	906	0.49	983	0.61
1125	620	0.21	741	0.31	840	0.42	925	0.54	1001	0.66
1200	643	0.23	762	0.35	860	0.46	944	0.58	1020	0.71
1275	666	0.27	784	0.38	880	0.50	964	0.63	1039	0.76
1350	690	0.30	805	0.42	900	0.55	983	0.68	1058	0.82
1425	714	0.34	827	0.47	921	0.60	1003	0.74	1077	0.88
1500	738	0.38	849	0.52	942	0.66	1024	0.80	1097	0.95

CFM	AVAILABLE EXTERNAL STATIC PRESSURE (IN. WG)									
	1.2		1.4		1.6		1.8		2.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
	Medium Static Option					High Static Option				
900	1017	0.64	1082	0.76	1143	0.88	1200	1.01	1254	1.14
975	1035	0.68	1100	0.81	1160	0.93	1217	1.07	1271	1.20
1050	1053	0.73	1117	0.86	1177	0.99	1234	1.13	1288	1.27
1125	1071	0.78	1135	0.92	1195	1.05	1251	1.19	1305	1.34
1200	1089	0.84	1153	0.98	1212	1.12	1269	1.26	1322	1.41
1275	1107	0.90	1171	1.04	1230	1.19	1286	1.33	1340	1.49
1350	1126	0.96	1189	1.11	1249	1.26	1304	1.41	1357	1.57
1425	1145	1.03	1208	1.18	1267	1.33	1323	1.49	1375	1.66
1500	1164	1.10	1227	1.25	1285	1.41	1341	1.58	1394	1.75

**NOTE:** For more information, see General Fan Performance Notes.

**Boldface** indicates field-supplied drive is required.

1. Recommend using field-supplied fan pulley (part no. KR11AG006) and belt (part no. KR30AE039).

Table 8 (cont.) 50TC\*\*04

3 PHASE

3 TON VERTICAL SUPPLY

CFM	AVAILABLE EXTERNAL STATIC PRESSURE (IN. WG)									
	0.2		0.4		0.6		0.8		1.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
	Field Supplied Drive <sup>1</sup>		Standard Static Option				Medium Static Option			
900	<b>566</b>	<b>0.14</b>	690	0.23	791	0.32	879	0.42	957	0.52
975	590	0.17	711	0.26	811	0.36	897	0.46	975	0.57
1050	615	0.19	733	0.29	831	0.39	916	0.50	993	0.62
1125	640	0.22	755	0.33	851	0.43	936	0.55	1012	0.67
1200	666	0.25	778	0.36	873	0.48	956	0.60	1031	0.72
1275	692	0.29	802	0.41	894	0.53	976	0.65	1051	0.78
1350	719	0.33	825	0.45	916	0.58	997	0.71	1071	0.84
1425	746	0.37	850	0.50	939	0.63	1019	0.77	1091	0.91
1500	774	0.42	875	0.55	962	0.69	1041	0.83	1112	0.98

CFM	AVAILABLE EXTERNAL STATIC PRESSURE (IN. WG)									
	1.2		1.4		1.6		1.8		2.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
	Medium Static Option					High Static Option				
900	1029	0.63	1095	0.75	1157	0.86	1216	0.99	1272	1.11
975	1046	0.68	1112	0.80	1174	0.92	1232	1.05	1287	1.18
1050	1064	0.73	1129	0.86	1190	0.98	1248	1.11	1304	1.25
1125	1082	0.79	1147	0.92	1208	1.05	1265	1.18	1320	1.32
1200	1100	0.85	1165	0.98	1225	1.12	1282	1.26	1337	1.40
1275	1119	0.91	1183	1.05	1243	1.19	1300	1.34	1354	1.49
1350	1139	0.98	1202	1.12	1262	1.27	1318	1.42	1372	1.57
1425	1159	1.05	1221	1.20	1280	1.35	1336	1.51	1390	1.66
1500	1179	1.13	1241	1.28	1300	1.44	1355	1.60	1408	1.76

**NOTE:** For more information, see General Fan Performance Notes.

**Boldface** indicates field-supplied drive is required.

1. Recommend using field-supplied fan pulley (part no. KR11AG006) and belt (part no. KR30AE039).

## FAN PERFORMANCE (cont.)

Table 8 (cont.) 50TC\*\*05

1 PHASE

4 TON HORIZONTAL SUPPLY

CFM	AVAILABLE EXTERNAL STATIC PRESSURE (IN. WG)									
	0.2		0.4		0.6		0.8		1.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
	Standard Static Option					Medium Static Option				
1200	643	0.23	762	0.35	860	0.46	944	0.58	1020	0.71
1300	674	0.28	791	0.40	887	0.52	970	0.65	1045	0.78
1400	706	0.33	820	0.45	914	0.59	997	0.72	1071	0.86
1500	738	0.38	849	0.52	942	0.66	1024	0.80	1097	0.95
1600	771	0.44	879	0.59	971	0.74	1051	0.89	1124	1.04
1700	804	0.51	910	0.66	1000	0.82	1079	0.98	1151	1.14
1800	837	0.59	941	0.75	1029	0.91	1107	1.08	-	-
1900	871	0.67	972	0.84	1059	1.02	1136	1.19	-	-
2000	906	0.76	1004	0.94	1089	1.12	-	-	-	-

CFM	AVAILABLE EXTERNAL STATIC PRESSURE (IN. WG)									
	1.2		1.4		1.6		1.8		2.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
	Medium Static Option					Field Supplied Drive <sup>1</sup>				
1200	1089	0.84	1153	0.98	1212	1.12	-	-	-	-
1300	1114	0.92	1177	1.06	-	-	-	-	-	-
1400	1139	1.01	1202	1.15	-	-	-	-	-	-
1500	1164	1.10	-	-	-	-	-	-	-	-
1600	1190	1.20	-	-	-	-	-	-	-	-
1700	-	-	-	-	-	-	-	-	-	-
1800	-	-	-	-	-	-	-	-	-	-
1900	-	-	-	-	-	-	-	-	-	-
2000	-	-	-	-	-	-	-	-	-	-

NOTE: For more information, see General Fan Performance Notes.

**Boldface** indicates field-supplied drive is required.

1. Recommend using field-supplied motor pulley (part no. KR11HY161) and belt (part no. KR30AE035).

Table 8 (cont.) 50TC\*\*05

1 PHASE

4 TON VERTICAL SUPPLY

CFM	AVAILABLE EXTERNAL STATIC PRESSURE (IN. WG)									
	0.2		0.4		0.6		0.8		1.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
	Standard Static Option					Medium Static Option				
1200	666	0.25	778	0.36	873	0.48	956	0.60	1031	0.72
1300	701	0.30	809	0.42	902	0.54	983	0.67	1057	0.80
1400	737	0.36	842	0.48	932	0.61	1012	0.75	1085	0.89
1500	774	0.42	875	0.55	962	0.69	1041	0.83	1112	0.98
1600	811	0.49	909	0.63	994	0.78	1071	0.93	1141	1.08
1700	849	0.57	943	0.72	1026	0.87	1101	1.03	1170	1.19
1800	887	0.65	978	0.81	1059	0.98	1133	1.14	-	-
1900	926	0.75	1014	0.92	1092	1.09	-	-	-	-
2000	965	0.86	1050	1.03	-	-	-	-	-	-

CFM	AVAILABLE EXTERNAL STATIC PRESSURE (IN. WG)									
	1.2		1.4		1.6		1.8		2.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
	Medium Static Option					Field Supplied Drive <sup>1</sup>				
1200	1100	0.85	1165	0.98	1225	1.12	-	-	-	-
1300	1126	0.94	1189	1.07	-	-	-	-	-	-
1400	1152	1.03	1215	1.17	-	-	-	-	-	-
1500	1179	1.13	-	-	-	-	-	-	-	-
1600	1206	1.24	-	-	-	-	-	-	-	-
1700	1235	1.36	-	-	-	-	-	-	-	-
1800	1264	1.48	-	-	-	-	-	-	-	-
1900	1293	1.62	-	-	-	-	-	-	-	-
2000	1324	1.77	-	-	-	-	-	-	-	-

NOTE: For more information, see General Fan Performance Notes.

**Boldface** indicates field-supplied drive is required.

1. Recommend using field-supplied motor pulley (part no. KR11HY161) and belt (part no. KR30AE035).

## FAN PERFORMANCE (cont.)

Table 8 (cont.) 50TC\*\*05

3 PHASE

4 TON HORIZONTAL SUPPLY

CFM	AVAILABLE EXTERNAL STATIC PRESSURE (IN. WG)									
	0.2		0.4		0.6		0.8		1.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
	Standard Static Option					Medium Static Option				
1200	643	0.23	762	0.35	860	0.46	944	0.58	1020	0.71
1300	674	0.28	791	0.40	887	0.52	970	0.65	1045	0.78
1400	706	0.33	820	0.45	914	0.59	997	0.72	1071	0.86
1500	738	0.38	849	0.52	942	0.66	1024	0.80	1097	0.95
1600	771	0.44	879	0.59	971	0.74	1051	0.89	1124	1.04
1700	804	0.51	910	0.66	1000	0.82	1079	0.98	1151	1.14
1800	837	0.59	941	0.75	1029	0.91	1107	1.08	1178	1.25
1900	871	0.67	972	0.84	1059	1.02	1136	1.19	1206	1.37
2000	906	0.76	1004	0.94	1089	1.12	1165	1.31	1234	1.49

CFM	AVAILABLE EXTERNAL STATIC PRESSURE (IN. WG)									
	1.2		1.4		1.6		1.8		2.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
	Medium Static Option					High Static Option				
1200	1089	0.84	1153	0.98	1212	1.12	1269	1.26	1322	1.41
1300	1114	0.92	1177	1.06	1236	1.21	1292	1.36	1346	1.52
1400	1139	1.01	1202	1.15	1261	1.31	1316	1.47	1369	1.63
1500	1164	1.10	1227	1.25	1285	1.41	1341	1.58	1394	1.75
1600	1190	1.20	1252	1.36	1311	1.53	1366	1.70	1418	1.87
1700	1217	1.31	1278	1.48	1336	1.65	1391	1.83	1443	2.01
1800	1244	1.42	1305	1.60	1362	1.78	1416	1.97	1468	2.15
1900	1271	1.55	1331	1.73	1388	1.92	1442	2.11	1494	2.31
2000	1298	1.68	1358	1.87	1415	2.07	1468	2.27	-	-

NOTE: For more information, see General Fan Performance Notes.

**Boldface** indicates field-supplied drive is required.

1. Recommend using field-supplied fan pulley (part no. KR11AZ506), motor pulley (part no. KR11HY181) and belt (part no. KR30AE041).

Table 8 (cont.) 50TC\*\*05

3 PHASE

4 TON VERTICAL SUPPLY

CFM	AVAILABLE EXTERNAL STATIC PRESSURE (IN. WG)									
	0.2		0.4		0.6		0.8		1.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
	Standard Static Option					Medium Static Option				
1200	666	0.25	778	0.36	873	0.48	956	0.60	1031	0.72
1300	701	0.30	809	0.42	902	0.54	983	0.67	1057	0.80
1400	737	0.36	842	0.48	932	0.61	1012	0.75	1085	0.89
1500	774	0.42	875	0.55	962	0.69	1041	0.83	1112	0.98
1600	811	0.49	909	0.63	994	0.78	1071	0.93	1141	1.08
1700	849	0.57	943	0.72	1026	0.87	1101	1.03	1170	1.19
1800	887	0.65	978	0.81	1059	0.98	1133	1.14	1200	1.31
1900	926	0.75	1014	0.92	1092	1.09	1164	1.26	1231	1.44
2000	965	0.86	1050	1.03	1127	1.21	1197	1.39	1262	1.58

CFM	AVAILABLE EXTERNAL STATIC PRESSURE (IN. WG)									
	1.2		1.4		1.6		1.8		2.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
	Medium Static Option					High Static Option				
1200	1100	0.85	1165	0.98	1225	1.12	1282	1.26	1337	1.40
1300	1126	0.94	1189	1.07	1249	1.22	1306	1.36	1360	1.51
1400	1152	1.03	1215	1.17	1274	1.32	1330	1.48	1384	1.63
1500	1179	1.13	1241	1.28	1300	1.44	1355	1.60	1408	1.76
1600	1206	1.24	1268	1.40	1326	1.56	1381	1.73	1433	1.90
1700	1235	1.36	1295	1.52	1352	1.69	1407	1.87	1459	2.04
1800	1264	1.48	1323	1.66	1380	1.84	1434	2.02	1485	2.20
1900	1293	1.62	1352	1.80	1408	1.99	1461	2.17	1512	2.37
2000	1324	1.77	1381	1.96	1436	2.15	1489	2.34	-	-

NOTE: For more information, see General Fan Performance Notes.

**Boldface** indicates field-supplied drive is required.

1. Recommend using field-supplied fan pulley (part no. KR11AZ506), motor pulley (part no. KR11HY181) and belt (part no. KR30AE041).

## FAN PERFORMANCE (cont.)

Table 8 (cont.) 50TC\*\*06

1 PHASE

5 TON HORIZONTAL SUPPLY

CFM	AVAILABLE EXTERNAL STATIC PRESSURE (IN. WG)									
	0.2		0.4		0.6		0.8		1.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
	<b>Field Supplied Drive<sup>1</sup></b>		<b>Standard Static Option</b>							
1500	<b>724</b>	<b>0.33</b>	837	0.45	937	0.59	1028	0.74	1111	0.91
1625	<b>765</b>	<b>0.40</b>	873	0.53	969	0.67	1056	0.83	1137	1.00
1750	806	0.48	909	0.61	1002	0.76	1087	0.92	1165	1.10
1875	849	0.57	947	0.71	1036	0.86	1118	1.03	1195	1.21
2000	892	0.67	986	0.82	1072	0.98	1151	1.15	1226	1.33
2125	935	0.79	1025	0.94	1108	1.11	1185	1.29	1258	1.47
2250	980	0.92	1066	1.08	1146	1.25	1220	1.43	-	-
2375	1024	1.06	1107	1.23	1184	1.41	-	-	-	-
2500	1069	1.22	1149	1.39	-	-	-	-	-	-

CFM	AVAILABLE EXTERNAL STATIC PRESSURE (IN. WG)									
	1.2		1.4		1.6		1.8		2.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
	<b>Medium Static Option</b>									
1500	1188	1.09	1261	1.29	1330	1.49	-	-	-	-
1625	1213	1.18	1284	1.38	-	-	-	-	-	-
1750	1239	1.28	1309	1.49	-	-	-	-	-	-
1875	1267	1.40	-	-	-	-	-	-	-	-
2000	-	-	-	-	-	-	-	-	-	-
2125	-	-	-	-	-	-	-	-	-	-
2250	-	-	-	-	-	-	-	-	-	-
2375	-	-	-	-	-	-	-	-	-	-
2500	-	-	-	-	-	-	-	-	-	-

**NOTE:** For more information, see General Fan Performance Notes.

**Boldface** indicates field-supplied drive is required.

1. Recommend using field-supplied fan pulley (part no. KR11AZ606) and belt (part no. KR30AE037).

Table 8 (cont.) 50TC\*\*06

1 PHASE

5 TON VERTICAL SUPPLY

CFM	AVAILABLE EXTERNAL STATIC PRESSURE (IN. WG)									
	0.2		0.4		0.6		0.8		1.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
	<b>Standard Static Option</b>									
1500	790	0.40	897	0.53	991	0.68	1075	0.83	1152	1.00
1625	837	0.48	940	0.62	1030	0.77	1112	0.94	1187	1.11
1750	885	0.58	983	0.73	1070	0.89	1150	1.06	1223	1.24
1875	934	0.69	1027	0.85	1112	1.01	1189	1.19	1260	1.38
2000	983	0.81	1073	0.98	1154	1.16	1229	1.34	-	-
2125	1033	0.95	1119	1.13	1198	1.31	1270	1.50	-	-
2250	1084	1.11	1166	1.29	1242	1.49	-	-	-	-
2375	1134	1.28	1214	1.48	-	-	-	-	-	-
2500	1185	1.48	-	-	-	-	-	-	-	-

CFM	AVAILABLE EXTERNAL STATIC PRESSURE (IN. WG)									
	1.2		1.4		1.6		1.8		2.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
	<b>Medium Static Option</b>									
1500	1224	1.18	1291	1.36	-	-	-	-	-	-
1625	1257	1.30	1323	1.49	-	-	-	-	-	-
1750	1292	1.43	-	-	-	-	-	-	-	-
1875	-	-	-	-	-	-	-	-	-	-
2000	-	-	-	-	-	-	-	-	-	-
2125	-	-	-	-	-	-	-	-	-	-
2250	-	-	-	-	-	-	-	-	-	-
2375	-	-	-	-	-	-	-	-	-	-
2500	-	-	-	-	-	-	-	-	-	-

**NOTE:** For more information, see General Fan Performance Notes.

**Boldface** indicates field-supplied drive is required.

## FAN PERFORMANCE (cont.)

Table 8 (cont.) 50TC\*\*06

3 PHASE

5 TON HORIZONTAL SUPPLY

CFM	AVAILABLE EXTERNAL STATIC PRESSURE (IN. WG)									
	0.2		0.4		0.6		0.8		1.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
	<b>Field Supplied Drive<sup>1</sup></b>		<b>Standard Static Option</b>							
1500	<b>724</b>	<b>0.33</b>	837	0.45	937	0.59	1028	0.74	1111	0.91
1625	<b>765</b>	<b>0.40</b>	873	0.53	969	0.67	1056	0.83	1137	1.00
1750	806	0.48	909	0.61	1002	0.76	1087	0.92	1165	1.10
1875	849	0.57	947	0.71	1036	0.86	1118	1.03	<b>1195</b>	<b>1.21</b>
2000	892	0.67	986	0.82	1072	0.98	1151	1.15	1226	1.33
2125	935	0.79	1025	0.94	1108	1.11	1185	1.29	1258	1.47
2250	980	0.92	1066	1.08	1146	1.25	1220	1.43	1291	1.63
2375	1024	1.06	1107	1.23	1184	1.41	1256	1.60	1325	1.79
2500	1069	1.22	1149	1.39	1223	1.58	1293	1.77	1360	1.98

CFM	AVAILABLE EXTERNAL STATIC PRESSURE (IN. WG)									
	1.2		1.4		1.6		1.8		2.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
	<b>Medium Static Option</b>									
1500	1188	1.09	1261	1.29	1330	1.49	1395	1.71	1457	1.95
1625	1213	1.18	1284	1.38	1352	1.59	1416	1.81	<b>1478</b>	<b>2.04</b>
1750	1239	1.28	1309	1.49	1375	1.70	1439	1.92	1499	2.16
1875	1267	1.40	1335	1.60	1400	1.82	1462	2.04	1522	2.28
2000	1296	1.53	1363	1.74	1427	1.95	1488	2.18	1546	2.42
2125	1326	1.67	1392	1.88	1454	2.11	1514	2.34	1571	2.58
2250	1358	1.83	1421	2.05	1483	2.27	1541	2.51	1598	2.75
2375	1390	2.00	1452	2.22	1512	2.45	1570	2.69	<b>1625</b>	<b>2.94</b>
2500	1424	2.19	1484	2.42	1543	2.65	1599	2.89	1654	3.15

**NOTE:** For more information, see General Fan Performance Notes.

**Boldface** indicates field-supplied drive is required.

1. Recommend using field-supplied fan pulley (part no. KR11AZ606) and belt (part no. KR30AE037).

Table 8 (cont.) 50TC\*\*06

3 PHASE

5 TON VERTICAL SUPPLY

CFM	AVAILABLE EXTERNAL STATIC PRESSURE (IN. WG)									
	0.2		0.4		0.6		0.8		1.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
	<b>Standard Static Option</b>									
1500	790	0.40	897	0.53	991	0.68	1075	0.83	1152	1.00
1625	837	0.48	940	0.62	1030	0.77	1112	0.94	<b>1187</b>	<b>1.11</b>
1750	885	0.58	983	0.73	1070	0.89	1150	1.06	1223	1.24
1875	934	0.69	1027	0.85	1112	1.01	1189	1.19	1260	1.38
2000	983	0.81	1073	0.98	1154	1.16	1229	1.34	1299	1.53
2125	1033	0.95	1119	1.13	1198	1.31	1270	1.50	1338	1.71
2250	1084	1.11	1166	1.29	1242	1.49	1312	1.69	1386	1.89
2375	1134	1.28	1214	1.48	1287	1.68	1355	1.89	1420	2.10
2500	1185	1.48	1262	1.68	1333	1.89	1399	2.10	1462	2.33

CFM	AVAILABLE EXTERNAL STATIC PRESSURE (IN. WG)									
	1.2		1.4		1.6		1.8		2.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
	<b>Medium Static Option</b>								<b>High Static Option</b>	
1500	1224	1.18	1291	1.36	1354	1.56	1414	1.77	1472	1.98
1625	1257	1.30	1323	1.49	1385	1.69	1445	1.90	1501	2.12
1750	1292	1.43	1356	1.63	1418	1.83	1476	2.05	1532	2.27
1875	1327	1.57	1391	1.78	1451	1.99	1509	2.21	1564	2.44
2000	1364	1.74	1427	1.95	1486	2.17	1542	2.39	1596	2.63
2125	1402	1.92	1463	2.13	1521	2.36	1577	2.59	1630	2.83
2250	1441	2.11	1501	2.34	1558	2.57	1612	2.81	-	-
2375	1481	2.33	1539	2.56	1595	2.80	-	-	-	-
2500	1522	2.56	1579	2.80	-	-	-	-	-	-

**NOTE:** For more information, see General Fan Performance Notes.

**Boldface** indicates field-supplied drive is required.



## FAN PERFORMANCE (cont.)

Table 8 (cont.) 50TC\*\*07

3 PHASE

6 TON HORIZONTAL SUPPLY

CFM	AVAILABLE EXTERNAL STATIC PRESSURE (IN. WG)									
	0.2		0.4		0.6		0.8		1.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
	Field Supplied Drive <sup>1</sup>					Standard Static Option				
1800	<b>822</b>	<b>0.51</b>	<b>927</b>	<b>0.66</b>	<b>1018</b>	<b>0.82</b>	1100	0.98	1174	1.15
1950	<b>872</b>	<b>0.62</b>	<b>973</b>	<b>0.79</b>	<b>1061</b>	<b>0.95</b>	1140	1.13	1213	1.31
2100	<b>923</b>	<b>0.75</b>	<b>1019</b>	<b>0.92</b>	1104	1.10	1182	1.29	1253	1.48
2250	<b>974</b>	<b>0.90</b>	<b>1067</b>	<b>1.08</b>	1149	1.27	1224	1.46	1294	1.66
2400	<b>1026</b>	<b>1.06</b>	1115	1.26	1195	1.46	1268	1.66	1336	1.87
2550	1079	1.25	1164	1.46	1241	1.67	1312	1.88	1379	2.10
2700	1132	1.46	1214	1.67	1289	1.90	1358	2.12	1422	2.35
2850	1186	1.69	1264	1.92	1336	2.15	1404	2.39	<b>1467</b>	<b>2.63</b>
3000	1240	1.94	1315	2.18	<b>1385</b>	<b>2.43</b>	<b>1451</b>	<b>2.68</b>	1512	2.93

CFM	AVAILABLE EXTERNAL STATIC PRESSURE (IN. WG)									
	1.2		1.4		1.6		1.8		2.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
	Standard Static Option								Medium Static Option	
1800	1244	1.33	1308	1.51	1369	1.70	1427	1.90	1483	2.10
1950	1281	1.49	1345	1.68	1405	1.88	1462	2.09	1517	2.30
2100	1320	1.67	1382	1.87	1441	2.08	1498	2.29	1552	2.51
2250	1359	1.87	1420	2.08	1479	2.29	1534	2.51	1587	2.74
2400	1400	2.09	1460	2.31	1517	2.53	1572	2.76	1624	2.99
2550	1441	2.33	1500	2.55	1557	2.79	1610	3.03	1662	3.27
2700	1483	2.59	1541	2.83	1597	3.07	1650	3.32	1701	3.57
2850	1527	2.87	1583	3.12	1638	3.37	1690	3.63	-	-
3000	1571	3.18	1626	3.44	1680	3.70	-	-	-	-

**NOTE:** For more information, see General Fan Performance Notes.

**Boldface** indicates field-supplied drive is required.

1. Recommend using field-supplied fan pulley (part no. KR11AZ406), motor pulley (part no. KR11HY151) and belt (part no. KR30AE035).

Table 8 (cont.) 50TC\*\*07

3 PHASE

6 TON VERTICAL SUPPLY

CFM	AVAILABLE EXTERNAL STATIC PRESSURE (IN. WG)									
	0.2		0.4		0.6		0.8		1.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
	Field Supplied Drive <sup>1</sup>					Standard Static Option				
1800	<b>907</b>	<b>0.63</b>	<b>1006</b>	<b>0.80</b>	1092	0.97	1169	1.14	1239	1.32
1950	<b>965</b>	<b>0.77</b>	<b>1060</b>	<b>0.95</b>	1143	1.13	1218	1.32	1287	1.51
2100	<b>1024</b>	<b>0.93</b>	1115	1.12	1195	1.32	1268	1.52	1335	1.72
2250	1083	1.11	1170	1.32	1248	1.53	1319	1.74	1385	1.96
2400	1143	1.32	1227	1.54	1302	1.76	1371	1.99	1435	2.22
2550	1203	1.55	1284	1.78	1357	2.02	1424	2.26	<b>1487</b>	<b>2.50</b>
2700	1264	1.81	1342	2.06	1412	2.31	1478	2.56	1539	2.82
2850	1326	2.09	1400	2.36	1469	2.62	1532	2.89	1592	3.16
3000	1387	2.41	1459	2.69	1525	2.97	1587	3.25	1646	3.53

CFM	AVAILABLE EXTERNAL STATIC PRESSURE (IN. WG)									
	1.2		1.4		1.6		1.8		2.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
	Standard Static Option						Medium Static Option		High Static Option	
1800	1304	1.51	1365	1.69	1422	1.88	1477	2.08	1528	2.28
1950	1350	1.71	1410	1.91	1467	2.11	1520	2.31	1572	2.52
2100	1398	1.93	1457	2.14	1512	2.35	1565	2.57	1616	2.79
2250	1446	2.18	1504	2.40	1559	2.62	1611	2.85	1661	3.09
2400	1496	2.45	1552	2.68	1606	2.92	1658	3.16	1707	3.40
2550	1546	2.75	1601	2.99	1654	3.24	1705	3.50	-	-
2700	1597	3.07	1651	3.33	1703	3.59	-	-	-	-
2850	1648	3.43	1702	3.70	-	-	-	-	-	-
3000	-	-	-	-	-	-	-	-	-	-

**NOTE:** For more information, see General Fan Performance Notes.

**Boldface** indicates field-supplied drive is required.

1. Recommend using field-supplied fan pulley (part no. KR11AZ406), motor pulley (part no. KR11HY151) and belt (part no. KR30AE035).

## FAN PERFORMANCE (cont.)

Table 8 (cont.) 50TC\*\*08

3 PHASE

7.5 TON HORIZONTAL SUPPLY

CFM	AVAILABLE EXTERNAL STATIC PRESSURE (IN. WG)									
	0.2		0.4		0.6		0.8		1.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
	<b>Field Supplied Drive<sup>1</sup></b>		<b>Standard Static Option</b>						<b>Medium Static Option</b>	
2250	<b>465</b>	<b>0.43</b>	555	0.64	629	0.86	694	1.10	753	1.34
2438	<b>488</b>	<b>0.51</b>	575	0.73	648	0.97	712	1.21	769	1.47
2625	510	0.60	595	0.84	666	1.09	729	1.34	786	1.62
2813	533	0.70	616	0.95	686	1.22	748	1.49	804	1.77
3000	557	0.82	637	1.08	705	1.36	766	1.64	822	1.94
3188	581	0.94	659	1.23	726	1.51	785	1.81	840	2.12
3375	606	1.08	681	1.38	746	1.68	805	2.00	859	2.32
3563	630	1.24	703	1.55	767	1.87	825	2.20	878	2.53
3750	655	1.41	726	1.74	789	2.07	845	2.41	897	2.76

CFM	AVAILABLE EXTERNAL STATIC PRESSURE (IN. WG)									
	1.2		1.4		1.6		1.8		2.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
	<b>Medium Static Option</b>						<b>High Static Option</b>			
2250	806	1.60	856	1.87	903	2.15	947	2.45	988	2.75
2438	822	1.74	872	2.03	918	2.32	961	2.62	1003	2.93
2625	839	1.90	887	2.19	933	2.49	977	2.81	1018	3.13
2813	856	2.06	904	2.37	949	2.68	992	3.01	1033	3.34
3000	873	2.24	921	2.56	966	2.89	1008	3.22	1049	3.56
3188	891	2.44	938	2.77	982	3.10	1025	3.45	1065	3.81
3375	909	2.65	955	2.99	1000	3.34	1041	3.70	1081	4.06
3563	927	2.88	973	3.23	1017	3.59	1059	3.96	1098	4.34
3750	946	3.12	992	3.48	1035	3.86	1076	4.24	<b>1115</b>	<b>4.63<sup>2</sup></b>

NOTE: For more information, see General Fan Performance Notes.

**Boldface** indicates field-supplied drive is required.

1. Recommend using field-supplied fan pulley (part no. KR11AK012), motor pulley (part no. KR11HY161) and belt (part no. KR30AE035).
2. Recommend using field-supplied fan pulley (part no. KR11AZ002) and belt (part no. KR29AF054).

Table 8 (cont.) 50TC\*\*08

3 PHASE

7.5 TON VERTICAL SUPPLY

CFM	AVAILABLE EXTERNAL STATIC PRESSURE (IN. WG)									
	0.2		0.4		0.6		0.8		1.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
	<b>Standard Static Option</b>						<b>Medium Static Option</b>			
2250	511	0.53	591	0.73	660	0.95	722	1.19	779	1.44
2438	540	0.64	616	0.85	683	1.08	743	1.33	799	1.59
2625	569	0.76	642	0.99	706	1.23	765	1.49	819	1.76
2813	599	0.90	669	1.14	731	1.39	788	1.66	841	1.94
3000	630	1.06	696	1.31	756	1.58	811	1.86	863	2.15
3188	661	1.23	724	1.50	782	1.78	836	2.07	886	2.38
3375	692	1.43	753	1.71	809	2.00	861	2.31	910	2.62
3563	723	1.65	782	1.94	836	2.25	887	2.56	934	2.89
3750	755	1.89	811	2.20	864	2.52	913	2.84	959	3.18

CFM	AVAILABLE EXTERNAL STATIC PRESSURE (IN. WG)									
	1.2		1.4		1.6		1.8		2.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
	<b>Medium Static Option</b>						<b>High Static Option</b>			
2250	832	1.71	882	1.99	928	2.29	973	2.59	1015	2.92
2438	851	1.87	899	2.16	945	2.46	989	2.78	1031	3.11
2625	870	2.04	918	2.34	963	2.66	1006	2.98	1048	3.32
2813	890	2.24	937	2.55	982	2.87	1024	3.21	1065	3.55
3000	912	2.46	958	2.78	1001	3.11	1043	3.45	1083	3.80
3188	934	2.69	979	3.02	1022	3.36	1063	3.72	1102	4.08
3375	956	2.95	1000	3.29	1042	3.64	1083	4.00	<b>1122</b>	<b>4.38</b>
3563	980	3.23	1023	3.58	1064	3.94	<b>1104</b>	<b>4.32</b>	<b>1142</b>	<b>4.70</b>
3750	1004	3.54	1046	3.90	1086	4.27	<b>1125</b>	<b>4.65</b>	-	-

NOTE: For more information, see General Fan Performance Notes.

**Boldface** indicates field-supplied drive is required.

1. Recommend using field-supplied fan pulley (part no. KR11AZ002) and belt (part no. KR29AF054).

## FAN PERFORMANCE (cont.)

Table 8 (cont.) 50TC\*\*09

3 PHASE

8.5 TON HORIZONTAL SUPPLY

CFM	AVAILABLE EXTERNAL STATIC PRESSURE (IN. WG)									
	0.2		0.4		0.6		0.8		1.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
	<b>Field Supplied Drive<sup>1</sup></b>		<b>Standard Static Option</b>							
2550	<b>438</b>	<b>0.39</b>	523	0.50	595	0.64	658	0.78	716	0.94
2763	<b>459</b>	<b>0.47</b>	541	0.60	611	0.73	673	0.88	730	1.05
2975	<b>481</b>	<b>0.56</b>	560	0.70	628	0.84	689	1.00	<b>745</b>	<b>1.16</b>
3188	<b>504</b>	<b>0.67</b>	580	0.82	646	0.97	705	1.13	760	1.30
3400	526	0.80	600	0.95	664	1.11	722	1.27	776	1.45
3613	550	0.94	620	1.10	683	1.26	740	1.43	793	1.62
3825	573	1.09	641	1.26	702	1.43	758	1.61	810	1.80
4038	597	1.26	663	1.44	722	1.62	777	1.81	827	2.00
4250	621	1.45	685	1.64	743	1.83	796	2.02	845	2.22

CFM	AVAILABLE EXTERNAL STATIC PRESSURE (IN. WG)									
	1.2		1.4		1.6		1.8		2.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
	<b>Medium Static Option</b>					<b>High Static Option</b>				
2550	769	1.11	819	1.30	865	1.49	909	1.70	951	1.92
2763	782	1.22	831	1.41	877	1.60	921	1.81	963	2.04
2975	796	1.34	845	1.53	890	1.73	933	1.94	974	2.16
3188	811	1.48	858	1.67	903	1.88	946	2.09	987	2.31
3400	826	1.63	873	1.83	917	2.04	959	2.25	1000	2.48
3613	842	1.81	888	2.01	932	2.22	973	2.44	1013	2.67
3825	858	2.00	903	2.20	946	2.42	988	2.64	1027	2.87
4038	875	2.20	919	2.41	962	2.63	1002	2.86	1041	3.10
4250	892	2.43	936	2.65	978	2.87	1018	3.10	1056	3.34

NOTE: For more information, see General Fan Performance Notes.

**Boldface** indicates field-supplied drive is required.

1. Recommend using field-supplied fan pulley (part no. KR11AK012) and belt (part no. KR30AE055).

Table 8 (cont.) 50TC\*\*09

3 PHASE

8.5 VERTICAL SUPPLY

CFM	AVAILABLE EXTERNAL STATIC PRESSURE (IN. WG)									
	0.2		0.4		0.6		0.8		1.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
	<b>Field Supplied Drive<sup>1</sup></b>		<b>Standard Static Option</b>						<b>Medium Static Option</b>	
2550	<b>477</b>	<b>0.43</b>	556	0.57	624	0.71	685	0.85	742	0.99
2763	<b>503</b>	<b>0.52</b>	578	0.67	644	0.82	704	0.97	759	1.13
2975	529	0.62	601	0.79	665	0.95	724	1.11	777	1.28
3188	556	0.74	625	0.92	687	1.09	744	1.26	796	1.44
3400	583	0.88	650	1.06	710	1.24	765	1.43	816	1.62
3613	611	1.03	675	1.22	733	1.42	787	1.61	836	1.81
3825	639	1.19	701	1.40	757	1.61	809	1.81	857	2.02
4038	668	1.38	727	1.60	781	1.81	832	2.03	879	2.25
4250	696	1.58	753	1.81	806	2.04	855	2.27	901	2.50

CFM	AVAILABLE EXTERNAL STATIC PRESSURE (IN. WG)									
	1.2		1.4		1.6		1.8		2.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
	<b>Medium Static Option</b>					<b>High Static Option</b>				
2550	794	1.14	842	1.29	888	1.44	932	1.59	973	1.75
2763	810	1.28	858	1.44	903	1.60	946	1.77	987	1.93
2975	827	1.44	874	1.61	919	1.78	961	1.95	1001	2.13
3188	845	1.62	891	1.79	935	1.98	977	2.16	1017	2.34
3400	864	1.80	909	1.99	952	2.18	993	2.38	1033	2.57
3613	883	2.01	928	2.21	970	2.41	1010	2.61	1049	2.82
3825	903	2.23	947	2.44	988	2.65	1028	2.87	1066	3.08
4038	924	2.47	967	2.70	1008	2.92	1047	3.14	1084	3.37
4250	945	2.73	987	2.97	1027	3.20	1066	3.43	<b>1103</b>	<b>3.67<sup>2</sup></b>

NOTE: For more information, see General Fan Performance Notes.

**Boldface** indicates field-supplied drive is required.

1. Recommend using field-supplied fan pulley (part no. KR11AK012) and belt (part no. KR29AE055).
2. Recommend using field-supplied fan pulley (part no. KR11AZ002), motor pulley (part no. KR11HY310) and belt (part no. KR29AF054).

## FAN PERFORMANCE (cont.)

Table 8 (cont.) 50TC\*\*12

3 PHASE

10 TON HORIZONTAL SUPPLY

CFM	AVAILABLE EXTERNAL STATIC PRESSURE (IN. WG)									
	0.2		0.4		0.6		0.8		1.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
	<b>Field Supplied Drive<sup>1</sup></b>		<b>Standard Static Option</b>							
3000	<b>523</b>	<b>0.58</b>	592	0.73	657	0.88	718	1.05	775	1.22
3250	<b>555</b>	<b>0.71</b>	620	0.87	681	1.04	739	1.21	794	1.39
3500	<b>588</b>	<b>0.86</b>	649	1.03	707	1.21	762	1.39	815	1.58
3750	621	1.03	679	1.21	734	1.40	786	1.59	837	1.79
4000	655	1.23	709	1.42	761	1.61	812	1.82	860	2.03
4250	689	1.45	741	1.65	790	1.86	838	2.07	885	2.29
4500	723	1.69	773	1.90	820	2.12	866	2.35	910	2.57
4750	758	1.96	805	2.19	850	2.42	894	2.65	937	2.89
5000	793	2.26	838	2.50	881	2.74	923	2.98	965	3.23

CFM	AVAILABLE EXTERNAL STATIC PRESSURE (IN. WG)									
	1.2		1.4		1.6		1.8		2.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
	<b>Standard Static Opt.</b>		<b>Medium Static Option</b>							
3000	830	1.39	883	1.57	934	1.76	982	1.95	1029	2.14
3250	847	1.57	897	1.76	946	1.96	993	2.16	1039	2.36
3500	865	1.77	914	1.97	961	2.18	1007	2.38	1051	2.60
3750	885	1.99	932	2.20	978	2.42	1022	2.64	1065	2.86
4000	907	2.24	952	2.46	996	2.68	1038	2.91	1080	3.14
4250	930	2.51	973	2.74	1015	2.97	1057	3.21	1097	3.45
4500	954	2.81	996	3.05	1037	3.29	1076	3.54	1115	3.79
4750	979	3.13	1019	3.38	1059	3.63	1097	3.89	1135	4.15
5000	1005	3.49	1044	3.74	1082	4.01	1119	4.27	1156	4.55

**NOTE:** For more information, see General Fan Performance Notes.

**Boldface** indicates field-supplied drive is required.

1. Recommend using field-supplied fan pulley (part no. KR11AD912) and belt (part no. KR29AF051).

Table 8 (cont.) 50TC\*\*12

3 PHASE

10 VERTICAL SUPPLY

CFM	AVAILABLE EXTERNAL STATIC PRESSURE (IN. WG)									
	0.2		0.4		0.6		0.8		1.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
	<b>Field Supplied Drive<sup>1</sup></b>		<b>Standard Static Option</b>							
3000	<b>556</b>	<b>0.65</b>	623	0.80	684	0.95	738	1.11	789	1.26
3250	<b>590</b>	<b>0.79</b>	655	0.96	713	1.13	766	1.29	815	1.46
3500	625	0.96	687	1.14	742	1.32	794	1.50	841	1.68
3750	661	1.16	719	1.35	773	1.54	822	1.73	869	1.93
4000	697	1.37	753	1.58	804	1.79	852	1.99	897	2.20
4250	733	1.62	787	1.84	836	2.06	883	2.28	926	2.49
4500	770	1.89	821	2.13	869	2.36	914	2.59	956	2.82
4750	807	2.20	856	2.45	902	2.69	945	2.94	986	3.18
5000	844	2.54	891	2.80	936	3.06	978	3.31	1018	3.57

CFM	AVAILABLE EXTERNAL STATIC PRESSURE (IN. WG)									
	1.2		1.4		1.6		1.8		2.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
	<b>Medium Static Option</b>									
3000	836	1.42	881	1.57	923	1.73	963	1.89	1001	2.05
3250	861	1.63	904	1.79	945	1.96	985	2.13	1023	2.30
3500	886	1.86	929	2.04	969	2.22	1008	2.40	1045	2.58
3750	912	2.12	954	2.31	994	2.50	1031	2.70	1068	2.89
4000	940	2.40	980	2.61	1019	2.81	1056	3.02	1092	3.22
4250	968	2.71	1007	2.93	1045	3.15	1081	3.36	1117	3.58
4500	996	3.05	1035	3.28	1072	3.51	1108	3.74	1142	3.97
4750	1026	3.42	1063	3.66	1100	3.91	1135	4.15	1168	4.39
5000	1056	3.82	1093	4.08	1128	4.34	1162	4.59	-	-

**NOTE:** For more information, see General Fan Performance Notes.

**Boldface** indicates field-supplied drive is required.

1. Recommend using field-supplied fan pulley (part no. KR11AD912) and belt (part no. KR29AF051).

## FAN PERFORMANCE (cont.)

**Table 8 (cont.) 50TC\*\*14**

**3 PHASE**

**12.5 TON HORIZONTAL SUPPLY**

CFM	AVAILABLE EXTERNAL STATIC PRESSURE (IN. WG)									
	0.2		0.4		0.6		0.8		1.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
	<b>Field Supplied Drive<sup>1</sup></b>		<b>Standard Static Option</b>							
3438	<b>580</b>	<b>0.82</b>	642	0.99	700	1.16	756	1.34	809	1.53
3750	<b>621</b>	<b>1.03</b>	679	1.21	734	1.40	786	1.59	837	1.79
4063	663	1.28	717	1.47	769	1.67	818	1.88	866	2.09
4375	706	1.56	757	1.77	805	1.98	852	2.20	897	2.43
4688	749	1.89	797	2.11	843	2.34	887	2.57	930	2.81
5000	793	2.26	838	2.50	881	2.74	923	2.98	965	3.23
5313	837	2.69	880	2.93	921	3.19	961	3.44	<b>1000</b>	<b>3.71</b>
5625	882	3.16	922	3.42	961	3.68	<b>999</b>	<b>3.95</b>	<b>1037</b>	<b>4.23</b>
5938	926	3.68	<b>964</b>	<b>3.96</b>	<b>1001</b>	<b>4.23</b>	<b>1038</b>	<b>4.52</b>	-	-
6250	<b>971</b>	<b>4.26</b>	<b>1007</b>	<b>4.55</b>	-	-	-	-	-	-

CFM	AVAILABLE EXTERNAL STATIC PRESSURE (IN. WG)									
	1.2		1.4		1.6		1.8		2.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
	<b>Medium Static Option</b>									
3438	860	1.72	910	1.92	957	2.12	1003	2.32	1048	2.54
3750	885	1.99	932	2.20	978	2.42	1022	2.64	1065	2.86
4063	912	2.31	957	2.53	1001	2.75	1043	2.98	1084	3.22
4375	941	2.66	984	2.89	1026	3.13	1066	3.37	1106	3.62
4688	972	3.05	1013	3.29	1053	3.54	1092	3.80	1130	4.06
5000	1005	3.49	1044	3.74	1082	4.01	1119	4.27	1156	4.55
5313	1038	3.97	1076	4.24	1113	4.52	-	-	-	-
5625	1073	4.51	-	-	-	-	-	-	-	-
5938	-	-	-	-	-	-	-	-	-	-
6250	-	-	-	-	-	-	-	-	-	-

**NOTE:** For more information, see General Fan Performance Notes.

**Boldface** indicates field-supplied drive is required.

1. Recommend using field-supplied fan pulley (part no. KR11AK012) and belt (part no. KR29AE055).
2. Recommend using field-supplied fan pulley (part no. KR11AZ002), motor pulley (part no. KR11HY310) and belt (part no. KR29AF054).

**Table 8 (cont.) 50TC\*\*14**

**3 PHASE**

**12.5 TON VERTICAL SUPPLY**

CFM	AVAILABLE EXTERNAL STATIC PRESSURE (IN. WG)									
	0.2		0.4		0.6		0.8		1.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
	<b>Field Supplied Drive<sup>1</sup></b>		<b>Standard Static Option</b>							
3438	<b>616</b>	<b>0.92</b>	679	1.10	735	1.27	786	1.45	835	1.62
3750	661	1.16	719	1.35	773	1.54	822	1.73	869	1.93
4063	706	1.43	761	1.64	812	1.85	860	2.06	904	2.27
4375	752	1.75	804	1.98	852	2.20	898	2.43	941	2.65
4688	798	2.12	847	2.36	894	2.60	937	2.85	979	3.09
5000	844	2.54	891	2.80	936	3.06	978	3.31	1018	3.57
5313	891	3.01	936	3.28	978	3.56	<b>1019</b>	<b>3.83</b>	<b>1057</b>	<b>4.11</b>
5625	938	3.53	<b>981</b>	<b>3.83</b>	<b>1022</b>	<b>4.12</b>	<b>1060</b>	<b>4.41</b>	<b>1097</b>	<b>4.70</b>
5938	<b>986</b>	<b>4.12</b>	<b>1026</b>	<b>4.43</b>	-	-	-	-	-	-
6250	-	-	-	-	-	-	-	-	-	-

CFM	AVAILABLE EXTERNAL STATIC PRESSURE (IN. WG)									
	1.2		1.4		1.6		1.8		2.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
	<b>Medium Static Option</b>									
3438	880	1.80	922	1.98	963	2.15	1002	2.33	1039	2.51
3750	912	2.12	954	2.31	994	2.50	1031	2.70	1068	2.89
4063	947	2.48	987	2.68	1025	2.89	1062	3.10	1098	3.31
4375	982	2.88	1021	3.10	1058	3.32	1094	3.55	1129	3.77
4688	1018	3.33	1056	3.57	1093	3.81	1128	4.04	1162	4.29
5000	1056	3.82	1093	4.08	1128	4.34	1162	4.59	-	-
5313	1094	4.38	1130	4.65	-	-	-	-	-	-
5625	-	-	-	-	-	-	-	-	-	-
5938	-	-	-	-	-	-	-	-	-	-
6250	-	-	-	-	-	-	-	-	-	-

**NOTE:** For more information, see General Fan Performance Notes.

**Boldface** indicates field-supplied drive is required.

1. Recommend using field-supplied fan pulley (part no. KR11AK012) and belt (part no. KR29AE055).
2. Recommend using field-supplied fan pulley (part no. KR11AZ002), motor pulley (part no. KR11HY310) and belt (part no. KR29AF054).

## FAN PERFORMANCE (cont.)

Table 8 (cont.) 50TC\*\*16

3 PHASE

15 TON VERTICAL SUPPLY

CFM	Available External Static Pressure (in. wg)									
	0.2		0.4		0.6		0.8		1.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
4500	425	0.76	490	1.02	550	1.30	607	1.61	664	1.96
4875	448	0.92	510	1.20	566	1.49	621	1.81	674	2.15
5250	472	1.10	531	1.40	584	1.70	636	2.03	686	2.38
5625	496	1.30	552	1.62	603	1.94	652	2.28	699	2.64
6000	520	1.52	574	1.86	623	2.20	670	2.55	715	2.92
6375	544	1.77	596	2.13	644	2.49	688	2.86	731	3.24
6750	568	2.05	618	2.43	664	2.81	707	3.19	749	3.59
7125	593	2.35	641	2.75	685	3.16	727	3.56	767	3.97
7500	617	2.69	664	3.11	707	3.53	747	3.95	786	4.38

CFM	Available External Static Pressure (in. wg)									
	1.2		1.4		1.6		1.8		2.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
4500	719	2.34	772	2.76	823	3.20	872	3.67	918	4.16
4875	725	2.54	776	2.95	825	3.40	873	3.87	919	4.37
5250	734	2.76	783	3.18	830	3.63	876	4.10	920	4.60
5625	746	3.03	791	3.44	836	3.89	880	4.36	923	4.86
6000	759	3.32	802	3.74	845	4.18	887	4.66	928	5.16
6375	773	3.64	814	4.07	855	4.52	895	4.99	935	5.49
6750	789	4.00	828	4.43	867	4.89	905	5.36	943	5.87
7125	806	4.39	844	4.84	881	5.29	917	5.78	-	-
7500	823	4.82	860	5.27	895	5.74	-	-	-	-

NOTE: For more information, see General Fan Performance Notes.

Table 8 (cont.) 50TC\*\*16

3 PHASE

15 TON HORIZONTAL SUPPLY

CFM	Available External Static Pressure (in. wg)									
	0.2		0.4		0.6		0.8		1.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
4500	423	0.77	487	0.99	545	1.22	601	1.47	655	1.73
4875	447	0.94	507	1.18	563	1.42	615	1.67	666	1.95
5250	471	1.13	528	1.38	581	1.64	631	1.91	679	2.19
5625	496	1.35	550	1.62	600	1.89	648	2.17	694	2.46
6000	520	1.59	572	1.88	620	2.17	666	2.46	710	2.76
6375	545	1.86	594	2.17	640	2.47	684	2.78	726	3.10
6750	571	2.17	617	2.48	661	2.81	704	3.13	744	3.46
7125	596	2.50	640	2.83	683	3.17	724	3.52	763	3.86
7500	622	2.87	663	3.22	705	3.58	744	3.93	782	4.30

CFM	Available External Static Pressure (in. wg)									
	1.2		1.4		1.6		1.8		2.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
4500	707	2.02	758	2.33	806	2.66	853	3.01	898	3.37
4875	716	2.24	764	2.55	811	2.89	856	3.24	900	3.61
5250	726	2.49	772	2.81	817	3.14	860	3.50	903	3.87
5625	738	2.77	782	3.09	825	3.43	867	3.79	908	4.17
6000	752	3.08	794	3.41	835	3.76	875	4.12	914	4.50
6375	767	3.42	807	3.76	846	4.12	885	4.49	923	4.87
6750	784	3.80	822	4.15	859	4.51	896	4.89	933	5.28
7125	801	4.22	838	4.58	874	4.95	909	5.33	944	5.73
7500	818	4.66	854	5.04	889	5.42	923	5.81	-	-

NOTE: For more information, see General Fan Performance Notes.



## FAN PERFORMANCE (cont.)

**Table 9 – PULLEY ADJUSTMENT**

UNIT	MOTOR/DRIVE COMBO	MOTOR PULLEY TURNS OPEN											
		0.0	0.5	1.0	1.5	2.0	2.5	3.0	3.5	4.0	4.5	5.0	
04	1 phase	Standard Static	854	825	795	766	736	707	678	648	619	589	560
		Medium Static	1175	1135	1094	1054	1013	973	932	892	851	811	770
		High Static	-	-	-	-	-	-	-	-	-	-	-
	3 phase	Standard Static	854	825	795	766	736	707	678	648	619	589	560
		Medium Static	1175	1135	1094	1054	1013	973	932	892	851	811	770
		High Static	1466	1423	1380	1337	1294	1251	1207	1164	1121	1078	1035
05	1 phase	Standard Static	854	825	795	766	736	707	678	648	619	589	560
		Medium Static	1175	1135	1094	1054	1013	973	932	892	851	811	770
		High Static	-	-	-	-	-	-	-	-	-	-	-
	3 phase	Standard Static	854	825	795	766	736	707	678	648	619	589	560
		Medium Static	1175	1135	1094	1054	1013	973	932	892	851	811	770
		High Static	1466	1423	1380	1337	1294	1251	1207	1164	1121	1078	1035
06	1 phase	Standard Static	1175	1135	1094	1054	1013	973	932	892	851	811	770
		Medium Static	1466	1423	1380	1337	1294	1251	1207	1164	1121	1078	1035
		High Static	-	-	-	-	-	-	-	-	-	-	-
	3 phase	Standard Static	1175	1135	1094	1054	1013	973	932	892	851	811	770
		Medium Static	1466	1423	1380	1337	1294	1251	1207	1164	1121	1078	1035
		High Static	1687	1649	1610	1572	1533	1495	1457	1418	1380	1341	1303
07	3 phase	Standard Static	1457	1419	1380	1342	1303	1265	1227	1188	1150	1111	1073
		Medium Static	1518	1484	1449	1415	1380	1346	1311	1277	1242	1208	1173
		High Static	1788	1757	1725	1694	1662	1631	1600	1568	1537	1505	1474
08	3 phase	Standard Static	747	721	695	670	644	618	592	566	541	515	489
		Medium Static	949	927	906	884	863	841	819	798	776	755	733
		High Static	1102	1083	1063	1044	1025	1006	986	967	948	928	909
09	3 phase	Standard Static	733	712	690	669	647	626	604	583	561	540	518
		Medium Static	936	911	887	862	838	813	788	764	739	715	690
		High Static	1084	1059	1035	1010	986	961	936	912	887	863	838
12	3 phase	Standard Static	838	813	789	764	739	715	690	665	640	616	591
		Medium Static	1084	1059	1035	1010	986	961	936	912	887	863	838
		High Static	1240	1218	1196	1175	1153	1131	1109	1087	1066	1044	1022
14	3 phase	Standard Static	843	824	805	786	767	748	728	709	690	671	652
		Medium Static	1084	1059	1035	1010	986	961	936	912	887	863	838
		High Static	1240	1218	1196	1175	1153	1131	1109	1087	1066	1044	1022
16	3 phase	Standard Static	676	659	642	625	608	592	575	558	541	524	507
		Medium Static	851	829	806	784	761	739	717	694	672	649	627
		High Static	955	937	919	901	883	866	848	830	812	794	776

**NOTE:** Do not adjust pulley further than 5 turns open.

■ – Factory settings



## ELECTRICAL DATA FOR UNITS PRODUCED ON OR AFTER JULY 30, 2012

**NOTE:** Check the serial number of unit to verify production date.

To confirm the date of manufacture, locate the unit nameplate and check the first four digits of the Serial Number. If the number listed in the first 4 digits of the Serial Number is 3112 or higher, the unit was produced on or after July 30, 2012.

Position:	1	2	3	4	5	6	7	8	9	10
Example:	3	1	1	2	U	1	2	3	4	5

Week of manufacture (fiscal calendar)			Sequence number
Year of manufacture ("12" = 2012)	Manufacturing location		

C12562A



**ELECTRICAL INFORMATION**  
**(UNITS PRODUCED ON OR AFTER JULY 30, 2012)**

**Table 10 – 50TC\*\*04 1-STAGE COOLING WITH 1-SPEED INDOOR FAN MOTOR 3 TONS**

V-Ph-Hz	VOLTAGE RANGE		COMP (ea)		OFM (ea)		IFM		
	MIN	MAX	RLA	LRA	WATTS	FLA	TYPE	EFF at Full Load	FLA
208-1-60	187	253	16.6	79	325	1.5	STD	67%	4.9
					325	1.5	MED	67%	4.9
230-1-60	187	253	16.6	79	325	1.5	STD	67%	4.9
					325	1.5	MED	67%	4.9
208-3-60	187	253	10.4	73	325	1.5	STD	75%	5.2
					325	1.5	MED	75%	5.2
					325	1.5	HIGH	87%	6.9
230-3-60	187	253	10.4	73	325	1.5	STD	75%	5.2
					325	1.5	MED	75%	5.2
					325	1.5	HIGH	87%	6.7
460-3-60	414	506	5.8	38	325	0.8	STD	75%	2.6
					325	0.8	MED	75%	2.6
					325	0.8	HIGH	87%	3.4
575-3-60	518	633	3.8	37	325	0.6	STD	73%	2.4
					325	0.6	MED	73%	2.4
					325	0.6	HIGH	78%	2.0

**Table 10 (cont.) - 50TC\*\*05 1-STAGE COOLING WITH 1-SPEED INDOOR FAN MOTOR 4 TONS**

V-Ph-Hz	VOLTAGE RANGE		COMP (ea)		OFM (ea)		IFM		
	MIN	MAX	RLA	LRA	WATTS	FLA	TYPE	EFF at Full Load	FLA
208-1-60	187	253	21.8	117	325	1.5	STD	67%	4.9
					325	1.5	MED	67%	4.9
230-1-60	187	253	21.8	117	325	1.5	STD	67%	4.9
					325	1.5	MED	67%	4.9
208-3-60	187	253	13.7	83	325	1.5	STD	75%	5.2
					325	1.5	MED	75%	5.2
					325	1.5	HIGH	87%	6.9
230-3-60	187	253	13.7	83	325	1.5	STD	75%	5.2
					325	1.5	MED	75%	5.2
					325	1.5	HIGH	87%	6.7
460-3-60	414	506	6.2	41	325	0.8	STD	75%	2.6
					325	0.8	MED	75%	2.6
					325	0.8	HIGH	87%	3.4
575-3-60	518	633	4.8	33	325	0.6	STD	73%	2.4
					325	0.6	MED	73%	2.4
					325	0.6	HIGH	78%	2.0

**Table 10 (cont.) - 50TC\*\*06 1-STAGE COOLING WITH 1-SPEED INDOOR FAN MOTOR 5 TONS**

V-Ph-Hz	VOLTAGE RANGE		COMP (ea)		OFM (ea)		IFM		
	MIN	MAX	RLA	LRA	WATTS	FLA	TYPE	EFF at Full Load	FLA
208-1-60	187	253	26.2	134	325	1.5	STD	67%	4.9
					325	1.5	MED	76%	7.0
230-1-60	187	253	26.2	134	325	1.5	STD	67%	4.9
					325	1.5	MED	76%	7.0
208-3-60	187	253	15.6	110	325	1.5	STD	75%	5.2
					325	1.5	MED	87%	6.9
					325	1.5	HIGH	89%	8.4
230-3-60	187	253	15.6	110	325	1.5	STD	75%	5.2
					325	1.5	MED	87%	6.7
					325	1.5	HIGH	89%	8.3
460-3-60	414	506	7.7	52	325	0.8	STD	75%	2.6
					325	0.8	MED	87%	3.4
					325	0.8	HIGH	89%	4.2
575-3-60	518	633	5.8	39	325	0.6	STD	73%	2.4
					325	0.6	MED	78%	2.0
					325	0.6	HIGH	77%	2.8

**ELECTRICAL INFORMATION**  
**(UNITS PRODUCED ON OR AFTER JULY 30, 2012) cont.**

**Table 10 (cont.) - 50TC\*\*07 1-STAGE COOLING WITH 1-SPEED INDOOR FAN MOTOR**

**6 TONS**

V-Ph-Hz	VOLTAGE RANGE		COMP (ea)		OFM (ea)		IFM		
	MIN	MAX	RLA	LRA	WATTS	FLA	TYPE	EFF at Full Load	FLA
208-3-60	187	253	19.0	123	325	1.5	STD	87%	6.9
					325	1.5	MED	89%	8.4
					325	1.5	HIGH	87%	10.6
230-3-60	187	253	19.0	123	325	1.5	STD	87%	6.7
					325	1.5	MED	89%	8.3
					325	1.5	HIGH	87%	10.6
460-3-60	414	506	9.7	62	325	0.8	STD	87%	3.4
					325	0.8	MED	89%	4.2
					325	0.8	HIGH	87%	5.3
575-3-60	518	633	7.4	50	325	0.6	STD	78%	2.0
					325	0.6	MED	77%	2.8
					325	0.6	HIGH	77%	2.8

**Table 10 (cont.) - 50TC\*\*08 1-STAGE COOLING WITH 1-SPEED INDOOR FAN MOTOR**

**7.5 TONS**

V-Ph-Hz	VOLTAGE RANGE		COMP (ea)		OFM (ea)		IFM		
	MIN	MAX	RLA	LRA	WATTS	FLA	TYPE	EFF at Full Load	FLA
208-3-60	187	253	25.0	164	325	1.5	STD	87%	5.2
					325	1.5	MED	89%	8.4
					325	1.5	HIGH	83%	13.6
230-3-60	187	253	25.0	164	325	1.5	STD	87%	4.9
					325	1.5	MED	89%	8.3
					325	1.5	HIGH	83%	12.7
460-3-60	414	506	12.2	100	325	0.8	STD	87%	2.5
					325	0.8	MED	89%	4.2
					325	0.8	HIGH	83%	6.4
575-3-60	518	633	9.0	78	325	0.6	STD	72%	1.6
					325	0.6	MED	77%	2.8
					325	0.6	HIGH	81%	5.6

**Table 10 (cont.) - 50TC\*\*D08 2-STAGE COOLING WITH 1-SPEED INDOOR FAN MOTOR**

**7.5 TONS**

V-Ph-Hz	VOLTAGE RANGE		COMP (Cir 1)		COMP (Cir 2)		OFM (ea)		IFM		
	MIN	MAX	RLA	LRA	RLA	LRA	WATTS	FLA	TYPE	EFF at Full Load	FLA
208-3-60	187	253	13.6	83	13.6	83	325	1.5	STD	87%	5.2
							325	1.5	MED	89%	8.4
							325	1.5	HIGH	83%	13.6
230-3-60	187	253	13.6	83	13.6	83	325	1.5	STD	87%	4.9
							325	1.5	MED	89%	8.3
							325	1.5	HIGH	83%	12.7
460-3-60	414	506	6.1	41	6.1	41	325	0.8	STD	87%	2.5
							325	0.8	MED	89%	4.2
							325	0.8	HIGH	83%	6.4
575-3-60	518	633	4.2	33	4.2	33	325	0.6	STD	72%	1.6
							325	0.6	MED	77%	2.8
							325	0.6	HIGH	81%	5.6

**ELECTRICAL INFORMATION**  
**(UNITS PRODUCED ON OR AFTER JULY 30, 2012) cont.**

**Table 10 (cont.) - 50TC\*D08 2-STAGE COOLING WITH 2 SPEED INDOOR FAN MOTOR**

**7.5 TONS**

V-Ph-Hz	VOLTAGE RANGE		COMP 1		COMP 2		OFM (ea)		IFM		
	MIN	MAX	RLA	LRA	RLA	LRA	WATTS	FLA	TYPE	EFF at Full Load	FLA
208-3-60	187	253	13.6	83	13.6	83	325	1.5	STD	0.84	5.8
							325	1.5	MED	0.85	8.6
							325	1.5	HIGH	0.84	13.6
230-3-60	187	253	13.6	83	13.6	83	325	1.5	STD	0.84	5.6
							325	1.5	MED	0.85	7.8
							325	1.5	HIGH	0.84	12.7
460-3-60	414	506	6.1	41	6.1	41	325	0.8	STD	0.79	2.9
							325	0.8	MED	0.85	3.8
							325	0.8	HIGH	0.84	6.4
575-3-60	518	633	4.2	33	4.2	33	325	0.6	STD	0.81	2.8
							325	0.6	MED	0.84	4.5
							325	0.6	HIGH	0.83	6.2

**Table 10 (cont.) - 50TC\*\*09 1-STAGE COOLING WITH 1-SPEED INDOOR FAN MOTOR**

**8.5 TONS**

V-Ph-Hz	VOLTAGE RANGE		COMP (ea)		OFM (ea)		IFM		
	MIN	MAX	RLA	LRA	WATTS	FLA	TYPE	EFF at Full Load	FLA
208-3-60	187	253	29.5	195	325	1.5	STD	87%	5.2
					325	1.5	MED	87%	6.9
					325	1.5	HIGH	87%	10.6
230-3-60	187	253	29.5	195	325	1.5	STD	87%	4.9
					325	1.5	MED	87%	6.7
					325	1.5	HIGH	87%	10.6
460-3-60	414	506	14.7	95	325	0.8	STD	87%	2.5
					325	0.8	MED	87%	3.4
					325	0.8	HIGH	87%	5.3
575-3-60	518	633	12.2	80	325	0.6	STD	72%	1.6
					325	0.6	MED	78%	2.0
					325	0.6	HIGH	77%	2.8

**Table 10 (cont.) - 50TC\*\*09 2-STAGE COOLING WITH 1-SPEED INDOOR FAN MOTOR**

**8.5 TONS**

V-Ph-Hz	VOLTAGE RANGE		COMP (Cir 1)		COMP (Cir 2)		OFM (ea)		IFM		
	MIN	MAX	RLA	LRA	RLA	LRA	WATTS	FLA	TYPE	EFF at Full Load	FLA
208-3-60	187	253	14.5	98	13.7	83	325	1.5	STD	87%	5.2
							325	1.5	MED	87%	6.9
							325	1.5	HIGH	87%	10.6
230-3-60	187	253	14.5	98	13.7	83	325	1.5	STD	87%	4.9
							325	1.5	MED	87%	6.7
							325	1.5	HIGH	87%	10.6
460-3-60	414	506	6.3	55	6.2	41	325	0.8	STD	87%	2.5
							325	0.8	MED	87%	3.4
							325	0.8	HIGH	87%	5.3
575-3-60	518	633	6.0	41	4.8	33	325	0.6	STD	72%	1.6
							325	0.6	MED	78%	2.0
							325	0.6	HIGH	77%	2.8

**ELECTRICAL INFORMATION**  
**(UNITS PRODUCED ON OR AFTER JULY 30, 2012) cont.**

**Table 10 (cont.) - 50TC\*D09 2-STAGE COOLING WITH 2 SPEED INDOOR FAN MOTOR**

**8.5 TONS**

V-Ph-Hz	VOLTAGE RANGE		COMP 1		COMP 2		OFM (ea)		IFM		
	MIN	MAX	RLA	LRA	RLA	LRA	WATTS	FLA	TYPE	EFF at Full Load	FLA
208-3-60	187	253	14.5	98	13.7	83	325	1.5	STD	0.84	5.8
							325	1.5	MED	0.77	7.1
							325	1.5	HIGH	0.82	10.8
230-3-60	187	253	14.5	98	13.7	83	325	1.5	STD	0.84	5.6
							325	1.5	MED	0.77	6.8
							325	1.5	HIGH	0.82	9.8
460-3-60	414	506	6.3	55	6.2	41	325	0.8	STD	0.79	2.9
							325	0.8	MED	0.77	3.8
							325	0.8	HIGH	0.82	4.9
575-3-60	518	633	6.0	41	4.8	33	325	0.6	STD	0.81	2.8
							325	0.6	MED	0.80	3.5
							325	0.6	HIGH	0.84	4.5

**Table 10 (cont.) - 50TC\*\*12 1-STAGE COOLING WITH 1-SPEED INDOOR FAN MOTOR**

**10 TONS**

V-Ph-Hz	VOLTAGE RANGE		COMP (ea)		OFM (ea)		IFM		
	MIN	MAX	RLA	LRA	WATTS	FLA	TYPE	EFF at Full Load	FLA
208-3-60	187	253	30.1	225	325	1.5	STD	87%	6.9
					325	1.5	MED	87%	10.6
					325	1.5	HIGH	83%	13.6
230-3-60	187	253	30.1	225	325	1.5	STD	87%	6.7
					325	1.5	MED	87%	10.6
					325	1.5	HIGH	83%	12.7
460-3-60	414	506	16.7	114	325	0.8	STD	87%	3.4
					325	0.8	MED	87%	5.3
					325	0.8	HIGH	83%	6.4
575-3-60	518	633	12.2	80	325	0.6	STD	78%	2.0
					325	0.6	MED	77%	2.8
					325	0.6	HIGH	81%	5.6

**Table 10 (cont.) - 50TC\*\*12 2-STAGE COOLING WITH 1-SPEED INDOOR FAN MOTOR**

**10 TONS**

V-Ph-Hz	VOLTAGE RANGE		COMP (Cir 1)		COMP (Cir 2)		OFM (ea)		IFM		
	MIN	MAX	RLA	LRA	RLA	LRA	WATTS	FLA	TYPE	EFF at Full Load	FLA
208-3-60	187	253	15.6	110	15.9	110	325	1.5	STD	87%	6.9
							325	1.5	MED	87%	10.6
							325	1.5	HIGH	83%	13.6
230-3-60	187	253	15.6	110	15.9	110	325	1.5	STD	87%	6.7
							325	1.5	MED	87%	10.6
							325	1.5	HIGH	83%	12.7
460-3-60	414	506	7.7	52	7.7	52	325	0.8	STD	87%	3.4
							325	0.8	MED	87%	5.3
							325	0.8	HIGH	83%	6.4
575-3-60	518	633	5.8	39	5.7	39	325	0.6	STD	78%	2.0
							325	0.6	MED	77%	2.8
							325	0.6	HIGH	81%	5.6

**ELECTRICAL INFORMATION**  
**(UNITS PRODUCED ON OR AFTER JULY 30, 2012) cont.**

**Table 10 (cont.) - 50TC\*D12 2-STAGE COOLING WITH 2 SPEED INDOOR FAN MOTOR**

**10 TONS**

V-Ph-Hz	VOLTAGE RANGE		COMP 1		COMP 2		OFM (ea)		IFM		
	MIN	MAX	RLA	LRA	RLA	LRA	WATTS	FLA	TYPE	EFF at Full Load	FLA
208-3-60	187	253	15.6	110	15.9	110	325	1.5	STD	0.77	7.1
							325	1.5	MED	0.82	10.8
							325	1.5	HIGH	0.84	13.6
230-3-60	187	253	15.6	110	15.9	110	325	1.5	STD	0.77	6.8
							325	1.5	MED	0.82	9.8
							325	1.5	HIGH	0.84	12.7
460-3-60	414	506	7.7	52	7.7	52	325	0.8	STD	0.77	3.8
							325	0.8	MED	0.82	4.9
							325	0.8	HIGH	0.84	6.4
575-3-60	518	633	5.8	39	5.7	39	325	0.6	STD	0.80	3.5
							325	0.6	MED	0.84	4.5
							325	0.6	HIGH	0.83	6.2

**Table 10 (cont.) - 50TC\*\*14 2-STAGE COOLING WITH 1-SPEED INDOOR FAN MOTOR**

**12.5 TONS**

V-Ph-Hz	VOLTAGE RANGE		COMP (Cir 1)		COMP (Cir 2)		OFM (ea)		IFM		
	MIN	MAX	RLA	LRA	RLA	LRA	WATTS	FLA	TYPE	EFF at Full Load	FLA
208-3-60	187	253	19.0	123	22.4	149	1070	6.2	STD	89%	8.4
							1070	6.2	MED	87%	10.6
							1070	6.2	HIGH	83%	13.6
230-3-60	187	253	19.0	123	22.4	149	1070	6.2	STD	89%	8.3
							1070	6.2	MED	87%	10.6
							1070	6.2	HIGH	83%	12.7
460-3-60	414	506	9.7	62	10.6	75	1070	3.1	STD	89%	4.2
							1070	3.1	MED	87%	5.3
							1070	3.1	HIGH	83%	6.4
575-3-60	518	633	7.4	50	7.7	54	1070	2.5	STD	77%	2.8
							1070	2.5	MED	77%	2.8
							1070	2.5	HIGH	81%	5.6

**Table 10 (cont.) - 50TC\*D14 2-STAGE COOLING WITH 2 SPEED INDOOR FAN MOTOR**

**12.5 TONS**

V-Ph-Hz	VOLTAGE RANGE		COMP 1		COMP 2		OFM (ea)		IFM		
	MIN	MAX	RLA	LRA	RLA	LRA	WATTS	FLA	TYPE	EFF at Full Load	FLA
208-3-60	187	253	19.0	123	22.4	149	1070	6.2	STD	0.85	8.6
							1070	6.2	MED	0.82	10.8
							1070	6.2	HIGH	0.84	13.6
230-3-60	187	253	19.0	123	22.4	149	1070	6.2	STD	0.85	7.8
							1070	6.2	MED	0.82	9.8
							1070	6.2	HIGH	0.84	12.7
460-3-60	414	506	9.7	62	10.6	75	1070	3.1	STD	0.85	3.8
							1070	3.1	MED	0.82	4.9
							1070	3.1	HIGH	0.84	6.4
575-3-60	518	633	7.4	50	7.7	54	1070	2.5	STD	0.84	4.5
							1070	2.5	MED	0.84	4.5
							1070	2.5	HIGH	0.83	6.2

**ELECTRICAL INFORMATION**  
**(UNITS PRODUCED ON OR AFTER JULY 30, 2012) cont.**

**Table 10 (cont.) - 50TC\*D16 2-STAGE COOLING WITH 1-SPEED INDOOR FAN MOTOR**

**15 TONS**

V-Ph-Hz	VOLTAGE RANGE		COMP (Cir 1)		COMP (Cir 2)		OFM (ea)		IFM		
	MIN	MAX	RLA	LRA	RLA	LRA	WATTS	FLA	TYPE	EFF at Full Load	FLA
208-3-60	187	253	25.0	164	25.0	164	280	1.5	STD	89%	8.4
							280	1.5	MED	87%	10.6
							280	1.5	HIGH	90%	20.4
230-3-60	187	253	25.0	164	25.0	164	280	1.5	STD	89%	8.3
							280	1.5	MED	87%	10.6
							280	1.5	HIGH	90%	20.4
460-3-60	414	506	12.2	100	12.8	100	280	0.8	STD	89%	4.2
							280	0.8	MED	87%	5.3
							280	0.8	HIGH	90%	10.2
575-3-60	518	633	9.8	78	9.6	78	280	0.6	STD	77%	2.8
							280	0.6	MED	77%	2.8
							280	0.6	HIGH	94%	9.0

**Table 10 (cont.) - 50TC\*D16 2-STAGE COOLING WITH 2 SPEED INDOOR FAN MOTOR**

**15 TONS**

V-Ph-Hz	VOLTAGE RANGE		COMP 1		COMP 2		OFM (ea)		IFM		
	MIN	MAX	RLA	LRA	RLA	LRA	WATTS	FLA	TYPE	EFF at Full Load	FLA
208-3-60	187	253	25.0	164	25.0	164	280	1.5	STD	0.85	8.6
							280	1.5	MED	0.82	10.8
							280	1.5	HIGH	0.90	20.4
230-3-60	187	253	25.0	164	25.0	164	280	1.5	STD	0.85	7.8
							280	1.5	MED	0.82	9.8
							280	1.5	HIGH	0.90	20.4
460-3-60	414	506	12.2	100	12.8	100	280	0.8	STD	0.85	3.8
							280	0.8	MED	0.82	4.9
							280	0.8	HIGH	0.90	10.2
575-3-60	518	633	9.8	78	9.6	78	280	0.6	STD	0.84	4.5
							280	0.6	MED	0.84	4.5
							280	0.6	HIGH	0.94	9



# ELECTRIC HEAT - ELECTRICAL INFORMATION (UNITS PRODUCED ON OR AFTER JULY 30, 2012)

**Table 11 – 50TC\*\*04**

## 1-STAGE COOLING 1-SPEED INDOOR FAN MOTOR WITHOUT FACTORY INSTALLED NON-FUSED DISCONNECT

NOM. V-PH-Hz.	IFM TYPE	ELECTRIC HEATER PART NUMBER CRHEATERXXXXXX	NOM PWR (kW)	APP PWR (kW)	SINGLE POINT KIT PART NUMBER CRSINGLEXXXXXX			
					NO C.O. or UNPWRD C.O.		w/PWRD C.O.	
					NO P.E.	w/P.E. (pwrd fr/unit)	NO P.E.	w/P.E. (pwrd fr/unit)
208/ 230-1-60	STD	101A00	4.4	3.3/4.0	-	-	-	-
		102A00	6.5	4.9/6.0	-	-	-	-
		103B00	8.7	6.5/8.0	037	037	037	037
		104B00	10.5	7.9/9.6	040	040	040	040
		102A00,102A00	13.0	9.8/11.9	040	040	040	040
	MED	101A00	4.4	3.3/4.0	-	-	-	-
		102A00	6.5	4.9/6.0	-	-	-	-
		103B00	8.7	6.5/8.0	037	037	037	037
		104B00	10.5	7.9/9.6	040	040	040	040
		102A00,102A00	13.0	9.8/11.9	040	040	040	040
208/ 230-3-60	STD	101A00	4.4	3.3/4.0	-	-	-	-
		102A00	6.5	4.9/6.0	-	-	-	-
		103B00	8.7	6.5/8.0	-	-	-	-
		104B00	10.5	7.9/9.6	-	-	-	-
		105A00	16.0	12.0/14.7	037	037	038	038
	MED	101A00	4.4	3.3/4.0	-	-	-	-
		102A00	6.5	4.9/6.0	-	-	-	-
		103B00	8.7	6.5/8.0	-	-	-	-
		104B00	10.5	7.9/9.6	-	-	-	-
		105A00	16.0	12.0/14.7	037	037	038	038
HIGH	101A00	4.4	3.3/4.0	-	-	-	-	
	102A00	6.5	4.9/6.0	-	-	-	-	
	103B00	8.7	6.5/8.0	-	-	-	-	
	104B00	10.5	7.9/9.6	-	-	-	-	
	105A00	16.0	12.0/14.7	037	037	038	038	
460-3-60	STD	106A00	6.0	5.5	-	-	-	-
		107A00	8.8	8.1	-	-	-	-
		108A00	11.5	10.6	-	-	-	-
		109A00	14.0	12.9	-	-	-	-
	MED	106A00	6.0	5.5	-	-	-	-
		107A00	8.8	8.1	-	-	-	-
		108A00	11.5	10.6	-	-	-	-
		109A00	14.0	12.9	-	-	-	-
	HIGH	106A00	6.0	5.5	-	-	-	-
		107A00	8.8	8.1	-	-	-	-
		108A00	11.5	10.6	-	-	-	-
		109A00	14.0	12.9	-	-	-	-

**LEGEND:**

- APP PWR - 208 / 230V / 460V / 575V
- C.O. - Convenience outlet
- FLA - Full load amps
- IFM - Indoor fan motor
- NOM PWR - 240V / 480V / 600V
- P.E. - Power exhaust
- PWRD - Powered convenience outlet
- UNPWRD - Unpowered convenience outlet

# ELECTRIC HEAT - ELECTRICAL INFORMATION (UNITS PRODUCED ON OR AFTER JULY 30, 2012)

Table 11 (cont.) - 50TC\*\*04

## 1-STAGE COOLING 1-SPEED INDOOR FAN MOTOR WITH FACTORY INSTALLED NON-FUSED DISCONNECT

NOM. V-PH-Hz.	IFM TYPE	ELECTRIC HEATER PART NUMBER CRHEATERXXXXXX	NOM PWR (kW)	APP PWR (kW)	SINGLE POINT KIT PART NUMBER CRSINGLEXXXXXX			
					NO C.O. or UNPWRD C.O.		w/PWRD C.O.	
					NO P.E.	w/P.E. (pwrd fr/unit)	NO P.E.	w/P.E. (pwrd fr/unit)
208/ 230-1-60	STD	101A00	4.4	3.3/4.0	037	037	037	037
		102A00	6.5	4.9/6.0	037	037	037	037
		103B00	8.7	6.5/8.0	037	037	037	037
		104B00	10.5	7.9/9.6	040	040	040	040
		102A00,102A00	13.0	9.8/11.9	040	040	040	040
	MED	101A00	4.4	3.3/4.0	037	037	037	037
		102A00	6.5	4.9/6.0	037	037	037	037
		103B00	8.7	6.5/8.0	037	037	037	037
		104B00	10.5	7.9/9.6	040	040	040	040
		102A00,102A00	13.0	9.8/11.9	040	040	040	040
208/ 230-3-60	STD	101A00	4.4	3.3/4.0	037	037	037	037
		102A00	6.5	4.9/6.0	037	037	037	037
		103B00	8.7	6.5/8.0	037	037	037	037
		104B00	10.5	7.9/9.6	037	037	037	037
		105A00	16.0	12.0/14.7	037	037	038	038
	MED	101A00	4.4	3.3/4.0	037	037	037	037
		102A00	6.5	4.9/6.0	037	037	037	037
		103B00	8.7	6.5/8.0	037	037	037	037
		104B00	10.5	7.9/9.6	037	037	037	037
		105A00	16.0	12.0/14.7	037	037	038	038
	HIGH	101A00	4.4	3.3/4.0	037	037	037	037
		102A00	6.5	4.9/6.0	037	037	037	037
		103B00	8.7	6.5/8.0	037	037	037	037
		104B00	10.5	7.9/9.6	037	037	037	037
		105A00	16.0	12.0/14.7	037	037	038	038
460-3-60	STD	106A00	6.0	5.5	-	-	-	-
		107A00	8.8	8.1	-	-	-	-
		108A00	11.5	10.6	-	-	-	-
		109A00	14.0	12.9	-	-	-	-
	MED	106A00	6.0	5.5	-	-	-	-
		107A00	8.8	8.1	-	-	-	-
		108A00	11.5	10.6	-	-	-	-
		109A00	14.0	12.9	-	-	-	-
	HIGH	106A00	6.0	5.5	-	-	-	-
		107A00	8.8	8.1	-	-	-	-
		108A00	11.5	10.6	-	-	-	-
		109A00	14.0	12.9	-	-	-	-

**LEGEND:**

- APP PWR - 208 / 230V / 460V / 575V
- C.O. - Convenience outlet
- FLA - Full load amps
- IFM - Indoor fan motor
- NOM PWR - 240V / 480V / 600V
- P.E. - Power exhaust
- PWRD - Powered convenience outlet
- UNPWRD - Unpowered convenience outlet

# ELECTRIC HEAT - ELECTRICAL INFORMATION (UNITS PRODUCED ON OR AFTER JULY 30, 2012)

Table 11 (cont.) - 50TC\*\*05

## 1-STAGE COOLING 1-SPEED INDOOR FAN MOTOR WITHOUT FACTORY INSTALLED NON-FUSED DISCONNECT

NOM. V-PH-Hz.	IFM TYPE	ELECTRIC HEATER PART NUMBER CRHEATERXXXXXX	NOM PWR (kW)	APP PWR (kW)	SINGLE POINT KIT PART NUMBER CRSINGLEXXXXXX			
					NO C.O. or UNPWRD C.O.		w/PWRD C.O.	
					NO P.E.	w/P.E. (pwrd fr/unit)	NO P.E.	w/P.E. (pwrd fr/unit)
208/ 230-1-60	STD	101A00	4.4	3.3/4.0	-	-	-	-
		103B00	8.7	6.5/8.0	037	037	037	037
		102A00,102A00	13.0	9.8/11.9	040	040	040	040
		103B00,103B00	17.4	13.1/16.0	040	040	040	040
	MED	104B00,104B00	21.0	15.8/19.3	040	040	040	040
		101A00	4.4	3.3/4.0	-	-	-	-
		103B00	8.7	6.5/8.0	037	037	037	037
		102A00,102A00	13.0	9.8/11.9	040	040	040	040
208/ 230-3-60	STD	103B00,103B00	17.4	13.1/16.0	040	040	040	040
		104B00,104B00	21.0	15.8/19.3	040	040	040	040
		102A00	6.5	4.9/6.0	-	-	-	-
		103B00	8.7	6.5/8.0	-	-	-	-
	MED	105A00	16.0	12.0/14.7	037	037	038	038
		104B00,104B00	21.0	15.8/19.3	038	038	038	038
		102A00	6.5	4.9/6.0	-	-	-	-
		103B00	8.7	6.5/8.0	-	-	-	-
	HIGH	105A00	16.0	12.0/14.7	037	037	038	038
		104B00,104B00	21.0	15.8/19.3	038	038	038	038
		102A00	6.5	4.9/6.0	-	-	-	-
		103B00	8.7	6.5/8.0	-	-	-	-
460-3-60	STD	105A00	16.0	12.0/14.7	037	037	038	038
		104B00,104B00	21.0	15.8/19.3	038	038	038	038
		106A00	6.0	5.5	-	-	-	-
		108A00	11.5	10.6	-	-	-	-
	MED	109A00	14.0	12.9	-	-	-	-
		108A00,108A00	23.0	21.1	037	037	037	037
		106A00	6.0	5.5	-	-	-	-
		108A00	11.5	10.6	-	-	-	-
	HIGH	109A00	14.0	12.9	-	-	-	-
		108A00,108A00	23.0	21.1	037	037	037	037
		106A00	6.0	5.5	-	-	-	-
		108A00	11.5	10.6	-	-	-	-

**LEGEND:**

- APP PWR - 208 / 230V / 460V / 575V
- C.O. - Convenience outlet
- FLA - Full load amps
- IFM - Indoor fan motor
- NOM PWR - 240V / 480V / 600V
- P.E. - Power exhaust
- PWRD - Powered convenience outlet
- UNPWRD - Unpowered convenience outlet

# ELECTRIC HEAT - ELECTRICAL INFORMATION (UNITS PRODUCED ON OR AFTER JULY 30, 2012)

Table 11 (cont.) - 50TC\*\*05

## 1-STAGE COOLING 1-SPEED INDOOR FAN MOTOR WITH FACTORY INSTALLED NON-FUSED DISCONNECT

NOM. V-PH-Hz.	IFM TYPE	ELECTRIC HEATER PART NUMBER CRHEATERXXXXXX	NOM PWR (kW)	APP PWR (kW)	SINGLE POINT KIT PART NUMBER CRSINGLEXXXXXX				
					NO C.O. or UNPWRD C.O.		w/PWRD C.O.		
					NO P.E.	w/P.E. (pwr fr/unit)	NO P.E.	w/P.E. (pwr fr/unit)	
208/ 230-1-60	STD	101A00	4.4	3.3/4.0	037	037	037	037	
		103B00	8.7	6.5/8.0	037	037	037	037	
		102A00,102A00	13.0	9.8/11.9	040	040	040	040	
		103B00,103B00	17.4	13.1/16.0	040	040	040	040	
			104B00,104B00	21.0	15.8/19.3	040	040	040	040
	MED	101A00	4.4	3.3/4.0	037	037	037	037	
		103B00	8.7	6.5/8.0	037	037	037	037	
		102A00,102A00	13.0	9.8/11.9	040	040	040	040	
103B00,103B00		17.4	13.1/16.0	040	040	040	040		
		104B00,104B00	21.0	15.8/19.3	040	040	040	040	
208/ 230-3-60	STD	102A00	6.5	4.9/6.0	037	037	037	037	
		103B00	8.7	6.5/8.0	037	037	037	037	
		105A00	16.0	12.0/14.7	037	037	038	038	
		104B00,104B00	21.0	15.8/19.3	038	038	038	038	
	MED	102A00	6.5	4.9/6.0	037	037	037	037	
		103B00	8.7	6.5/8.0	037	037	037	037	
		105A00	16.0	12.0/14.7	037	037	038	038	
		104B00,104B00	21.0	15.8/19.3	038	038	038	038	
	HIGH	102A00	6.5	4.9/6.0	037	037	037	037	
		103B00	8.7	6.5/8.0	037	037	037	037	
		105A00	16.0	12.0/14.7	037	037	038	038	
		104B00,104B00	21.0	15.8/19.3	038	038	038	038	
460-3-60	STD	106A00	6.0	5.5	-	-	-	-	
		108A00	11.5	10.6	-	-	-	-	
		109A00	14.0	12.9	-	-	-	-	
		108A00,108A00	23.0	21.1	037	037	037	037	
	MED	106A00	6.0	5.5	-	-	-	-	
		108A00	11.5	10.6	-	-	-	-	
		109A00	14.0	12.9	-	-	-	-	
		108A00,108A00	23.0	21.1	037	037	037	037	
	HIGH	106A00	6.0	5.5	-	-	-	-	
		108A00	11.5	10.6	-	-	-	-	
		109A00	14.0	12.9	-	-	-	-	
		108A00,108A00	23.0	21.1	037	037	037	037	

**LEGEND:**

- APP PWR - 208 / 230V / 460V / 575V
- C.O. - Convenience outlet
- FLA - Full load amps
- IFM - Indoor fan motor
- NOM PWR - 240V / 480V / 600V
- P.E. - Power exhaust
- PWRD - Powered convenience outlet
- UNPWRD - Unpowered convenience outlet

# ELECTRIC HEAT - ELECTRICAL INFORMATION (UNITS PRODUCED ON OR AFTER JULY 30, 2012)

Table 11 (cont.) - 50TC\*\*06

## 1-STAGE COOLING 1-SPEED INDOOR FAN MOTOR WITHOUT FACTORY INSTALLED NON-FUSED DISCONNECT

NOM. V-PH-Hz.	IFM TYPE	ELECTRIC HEATER PART NUMBER CRHEATERXXXXXX	NOM PWR (kW)	APP PWR (kW)	SINGLE POINT KIT PART NUMBER CRSINGLEXXXXXX			
					NO C.O. or UNPWRD C.O.		w/PWRD C.O.	
					NO P.E.	w/P.E. (pwrd fr/unit)	NO P.E.	w/P.E. (pwrd fr/unit)
208/ 230-1-60	STD	102A00	6.5	4.9/6.0	-	-	-	-
		103B00	8.7	6.5/8.0	037	037	037	037
		102A00,102A00	13.0	9.8/11.9	040	040	040	040
		103B00,103B00	17.4	13.1/16.0	040	040	040	040
		104B00,104B00	21.0	15.8/19.3	040	040	040	040
	MED	102A00	6.5	4.9/6.0	-	-	-	037
		103B00	8.7	6.5/8.0	037	037	040	040
		102A00,102A00	13.0	9.8/11.9	040	040	040	040
		103B00,103B00	17.4	13.1/16.0	040	040	040	040
		104B00,104B00	21.0	15.8/19.3	040	040	040	040
208/ 230-3-60	STD	102A00	6.5	4.9/6.0	-	-	-	-
		104B00	10.5	7.9/9.6	-	-	-	-
		105A00	16.0	12.0/14.7	037	037	038	038
		104B00,104B00	21.0	15.8/19.3	038	038	038	038
		104B00,105A00	26.5	19.9/24.3	038	038	038	038
	MED	102A00	6.5	4.9/6.0	-	-	-	-
		104B00	10.5	7.9/9.6	-	-	-	-
		105A00	16.0	12.0/14.7	037	037	038	038
		104B00,104B00	21.0	15.8/19.3	038	038	038	038
		104B00,105A00	26.5	19.9/24.3	038	038	038	038
	HIGH	102A00	6.5	4.9/6.0	-	-	-	-
		104B00	10.5	7.9/9.6	-	-	-	037
		105A00	16.0	12.0/14.7	037	038	038	038
		104B00,104B00	21.0	15.8/19.3	038	038	038	038
		104B00,105A00	26.5	19.9/24.3	038	038	038	038
460-3-60	STD	106A00	6.0	5.5	-	-	-	-
		108A00	11.5	10.6	-	-	-	-
		109A00	14.0	12.9	-	-	-	-
		108A00,108A00	23.0	21.1	037	037	037	037
		108A00,109A00	25.5	23.4	037	037	037	037
	MED	106A00	6.0	5.5	-	-	-	-
		108A00	11.5	10.6	-	-	-	-
		109A00	14.0	12.9	-	-	-	-
		108A00,108A00	23.0	21.1	037	037	037	037
		108A00,109A00	25.5	23.4	037	037	037	037
	HIGH	106A00	6.0	5.5	-	-	-	-
		108A00	11.5	10.6	-	-	-	-
		109A00	14.0	12.9	-	-	-	-
		108A00,108A00	23.0	21.1	037	037	037	037
		108A00,109A00	25.5	23.4	037	037	037	037

**LEGEND:**

- APP PWR - 208 / 230V / 460V / 575V
- C.O. - Convenience outlet
- FLA - Full load amps
- IFM - Indoor fan motor
- NOM PWR - 240V / 480V / 600V
- P.E. - Power exhaust
- PWRD - Powered convenience outlet
- UNPWRD - Unpowered convenience outlet

# ELECTRIC HEAT - ELECTRICAL INFORMATION (UNITS PRODUCED ON OR AFTER JULY 30, 2012)

Table 11 (cont.) - 50TC\*\*06

## 1-STAGE COOLING 1-SPEED INDOOR FAN MOTOR WITH FACTORY INSTALLED NON-FUSED DISCONNECT

NOM. V-PH-Hz.	IFM TYPE	ELECTRIC HEATER PART NUMBER CRHEATERXXXXXX	NOM PWR (kW)	APP PWR (kW)	SINGLE POINT KIT PART NUMBER CRSINGLEXXXXXX			
					NO C.O. or UNPWRD C.O.		w/PWRD C.O.	
					NO P.E.	w/P.E. (pwrd fr/unit)	NO P.E.	w/P.E. (pwrd fr/unit)
208/ 230-1-60	STD	102A00	6.5	4.9/6.0	037	037	037	037
		103B00	8.7	6.5/8.0	037	037	037	037
		102A00,102A00	13.0	9.8/11.9	040	040	040	040
		103B00,103B00	17.4	13.1/16.0	040	040	040	040
		104B00,104B00	21.0	15.8/19.3	040	040	040	040
	MED	102A00	6.5	4.9/6.0	037	037	037	037
		103B00	8.7	6.5/8.0	037	037	040	040
		102A00,102A00	13.0	9.8/11.9	040	040	040	040
		103B00,103B00	17.4	13.1/16.0	040	040	040	040
		104B00,104B00	21.0	15.8/19.3	040	040	040	040
208/ 230-3-60	STD	102A00	6.5	4.9/6.0	037	037	037	037
		104B00	10.5	7.9/9.6	037	037	037	037
		105A00	16.0	12.0/14.7	037	037	038	038
		104B00,104B00	21.0	15.8/19.3	038	038	038	038
		104B00,105A00	26.5	19.9/24.3	038	038	038	038
	MED	102A00	6.5	4.9/6.0	037	037	037	037
		104B00	10.5	7.9/9.6	037	037	037	037
		105A00	16.0	12.0/14.7	037	037	038	038
		104B00,104B00	21.0	15.8/19.3	038	038	038	038
		104B00,105A00	26.5	19.9/24.3	038	038	038	038
	HIGH	102A00	6.5	4.9/6.0	037	037	037	037
		104B00	10.5	7.9/9.6	037	037	037	037
		105A00	16.0	12.0/14.7	037	038	038	038
		104B00,104B00	21.0	15.8/19.3	038	038	038	038
		104B00,105A00	26.5	19.9/24.3	038	038	038	038
460-3-60	STD	106A00	6.0	5.5	-	-	-	-
		108A00	11.5	10.6	-	-	-	-
		109A00	14.0	12.9	-	-	-	-
		108A00,108A00	23.0	21.1	037	037	037	037
		108A00,109A00	25.5	23.4	037	037	037	037
	MED	106A00	6.0	5.5	-	-	-	-
		108A00	11.5	10.6	-	-	-	-
		109A00	14.0	12.9	-	-	-	-
		108A00,108A00	23.0	21.1	037	037	037	037
		108A00,109A00	25.5	23.4	037	037	037	037
	HIGH	106A00	6.0	5.5	-	-	-	-
		108A00	11.5	10.6	-	-	-	-
		109A00	14.0	12.9	-	-	-	-
		108A00,108A00	23.0	21.1	037	037	037	037
		108A00,109A00	25.5	23.4	037	037	037	037

**LEGEND:**

- APP PWR - 208 / 230V / 460V / 575V
- C.O. - Convenience outlet
- FLA - Full load amps
- IFM - Indoor fan motor
- NOM PWR - 240V / 480V / 600V
- P.E. - Power exhaust
- PWRD - Powered convenience outlet
- UNPWRD - Unpowered convenience outlet

# ELECTRIC HEAT - ELECTRICAL INFORMATION (UNITS PRODUCED ON OR AFTER JULY 30, 2012)

Table 11 (cont.) - 50TC\*\*07

## 1-STAGE COOLING 1-SPEED INDOOR FAN MOTOR WITHOUT FACTORY INSTALLED NON-FUSED DISCONNECT

NOM. V-PH-Hz.	IFM TYPE	ELECTRIC HEATER PART NUMBER CRHEATERXXXXXX	NOM PWR (kW)	APP PWR (kW)	SINGLE POINT KIT PART NUMBER CRSINGLEXXXXXX			
					NO C.O. or UNPWRD C.O.		w/PWRD C.O.	
					NO P.E.	w/P.E. (pwrd fr/unit)	NO P.E.	w/P.E. (pwrd fr/unit)
208/ 230-3-60	STD	102A00	6.5	4.9/6.0	-	-	-	-
		104B00	10.5	7.9/9.6	-	-	-	-
		105A00	16.0	12.0/14.7	037	037	038	038
		104B00,104B00	21.0	15.8/19.3	038	038	038	038
		104B00,105A00	26.5	19.9/24.3	038	038	038	038
	MED	102A00	6.5	4.9/6.0	-	-	-	-
		104B00	10.5	7.9/9.6	-	-	-	037
		105A00	16.0	12.0/14.7	037	038	038	038
		104B00,104B00	21.0	15.8/19.3	038	038	038	038
		104B00,105A00	26.5	19.9/24.3	038	038	038	038
	HIGH	102A00	6.5	4.9/6.0	-	-	-	-
		104B00	10.5	7.9/9.6	-	-	037	037
		105A00	16.0	12.0/14.7	038	038	038	038
		104B00,104B00	21.0	15.8/19.3	038	038	038	038
		104B00,105A00	26.5	19.9/24.3	038	038	038	038
460-3-60	STD	106A00	6.0	5.5	-	-	-	-
		108A00	11.5	10.6	-	-	-	-
		109A00	14.0	12.9	-	-	-	-
		108A00,108A00	23.0	21.1	037	037	037	037
		108A00,109A00	25.5	23.4	037	037	037	037
	MED	106A00	6.0	5.5	-	-	-	-
		108A00	11.5	10.6	-	-	-	-
		109A00	14.0	12.9	-	-	-	-
		108A00,108A00	23.0	21.1	037	037	037	037
		108A00,109A00	25.5	23.4	037	037	037	037
	HIGH	106A00	6.0	5.5	-	-	-	-
		108A00	11.5	10.6	-	-	-	-
		109A00	14.0	12.9	-	-	-	-
		108A00,108A00	23.0	21.1	037	037	037	037
		108A00,109A00	25.5	23.4	037	037	037	037

**LEGEND:**

- APP PWR - 208 / 230V / 460V / 575V
- C.O. - Convenience outlet
- FLA - Full load amps
- IFM - Indoor fan motor
- NOM PWR - 240V / 480V / 600V
- P.E. - Power exhaust
- PWRD - Powered convenience outlet
- UNPWRD - Unpowered convenience outlet



# ELECTRIC HEAT - ELECTRICAL INFORMATION (UNITS PRODUCED ON OR AFTER JULY 30, 2012)

Table 11 (cont.) - 50TC\*\*07

## 1-STAGE COOLING 1-SPEED INDOOR FAN MOTOR WITH FACTORY INSTALLED NON-FUSED DISCONNECT

NOM. V-PH-Hz.	IFM TYPE	ELECTRIC HEATER PART NUMBER CRHEATERXXXXXX	NOM PWR (kW)	APP PWR (kW)	SINGLE POINT KIT PART NUMBER CRSINGLEXXXXXX			
					NO C.O. or UNPWRD C.O.		w/PWRD C.O.	
					NO P.E.	w/P.E. (pwrd fr/unit)	NO P.E.	w/P.E. (pwrd fr/unit)
208/ 230-3-60	STD	102A00	6.5	4.9/6.0	037	037	037	037
		104B00	10.5	7.9/9.6	037	037	037	037
		105A00	16.0	12.0/14.7	037	037	038	038
		104B00,104B00	21.0	15.8/19.3	038	038	038	038
		104B00,105A00	26.5	19.9/24.3	038	038	038	038
	MED	102A00	6.5	4.9/6.0	037	037	037	037
		104B00	10.5	7.9/9.6	037	037	037	037
		105A00	16.0	12.0/14.7	037	038	038	038
		104B00,104B00	21.0	15.8/19.3	038	038	038	038
		104B00,105A00	26.5	19.9/24.3	038	038	038	038
	HIGH	102A00	6.5	4.9/6.0	037	037	037	037
		104B00	10.5	7.9/9.6	037	037	037	037
		105A00	16.0	12.0/14.7	038	038	038	038
		104B00,104B00	21.0	15.8/19.3	038	038	038	038
		104B00,105A00	26.5	19.9/24.3	038	038	038	038
460-3-60	STD	106A00	6.0	5.5	-	-	-	-
		108A00	11.5	10.6	-	-	-	-
		109A00	14.0	12.9	-	-	-	-
		108A00,108A00	23.0	21.1	037	037	037	037
		108A00,109A00	25.5	23.4	037	037	037	037
	MED	106A00	6.0	5.5	-	-	-	-
		108A00	11.5	10.6	-	-	-	-
		109A00	14.0	12.9	-	-	-	-
		108A00,108A00	23.0	21.1	037	037	037	037
		108A00,109A00	25.5	23.4	037	037	037	037
	HIGH	106A00	6.0	5.5	-	-	-	-
		108A00	11.5	10.6	-	-	-	-
		109A00	14.0	12.9	-	-	-	-
		108A00,108A00	23.0	21.1	037	037	037	037
		108A00,109A00	25.5	23.4	037	037	037	037

**LEGEND:**

- APP PWR - 208 / 230V / 460V / 575V
- C.O. - Convenience outlet
- FLA - Full load amps
- IFM - Indoor fan motor
- NOM PWR - 240V / 480V / 600V
- P.E. - Power exhaust
- PWRD - Powered convenience outlet
- UNPWRD - Unpowered convenience outlet

# ELECTRIC HEAT - ELECTRICAL INFORMATION (UNITS PRODUCED ON OR AFTER JULY 30, 2012)

Table 11 (cont.) - 50TC\*\*08

## 1-STAGE COOLING 1-SPEED INDOOR FAN MOTOR WITHOUT FACTORY INSTALLED NON-FUSED DISCONNECT

NOM. V-PH-Hz.	IFM TYPE	ELECTRIC HEATER PART NUMBER CRHEATERXXXXXX	NOM PWR (kW)	APP PWR (kW)	SINGLE POINT KIT PART NUMBER CRSINGLEXXXXXX			
					NO C.O. or UNPWRD C.O.		w/PWRD C.O.	
					NO P.E.	w/P.E. (pwrd fr/unit)	NO P.E.	w/P.E. (pwrd fr/unit)
208/ 230-3-60	STD	117A00	10.4	7.8/9.6	042	042	042	042
		110A00	16.0	12.0/14.7	042	042	043	043
		111A00	24.8	18.6/22.8	043	043	043	043
		112A00	32.0	24.0/29.4	043	043	043	043
		112A00,117A00	42.4	31.8/38.9	045	045	045	045
	MED	117A00	10.4	7.8/9.6	042	042	042	042
		110A00	16.0	12.0/14.7	042	043	043	043
		111A00	24.8	18.6/22.8	043	043	043	043
		112A00	32.0	24.0/29.4	043	043	043	043
		112A00,117A00	42.4	31.8/38.9	045	045	045	045
	HIGH	117A00	10.4	7.8/9.6	042	042	042	043
		110A00	16.0	12.0/14.7	043	043	043	043
111A00		24.8	18.6/22.8	043	043	043	043	
112A00		32.0	24.0/29.4	043	043	043	043	
112A00,117A00		42.4	31.8/38.9	045	045	045	045	
460-3-60	STD	116A00	13.9	12.8	042	042	042	042
		113A00	16.5	15.2	042	042	042	042
		114A00	27.8	25.5	042	042	042	042
		115A00	33.0	30.3	042	042	042	042
		114A00,116A00	41.7	38.3	044	044	044	044
	MED	116A00	13.9	12.8	042	042	042	042
		113A00	16.5	15.2	042	042	042	042
		114A00	27.8	25.5	042	042	042	042
		115A00	33.0	30.3	042	042	042	042
		114A00,116A00	41.7	38.3	044	044	044	044
	HIGH	116A00	13.9	12.8	042	042	042	042
		113A00	16.5	15.2	042	042	042	042
		114A00	27.8	25.5	042	042	042	042
		115A00	33.0	30.3	042	042	044	044
		114A00,116A00	41.7	38.3	044	044	044	044
575-3-60	STD	118A00	17.0	17.0	042	042	042	042
		119A00	34.0	34.0	042	042	042	044
	MED	118A00	17.0	17.0	042	042	042	042
		119A00	34.0	34.0	042	042	042	044
	HIGH	118A00	17.0	17.0	042	042	042	042
		119A00	34.0	34.0	042	044	044	044

**LEGEND:**

- APP PWR - 208 / 230V / 460V / 575V
- C.O. - Convenience outlet
- FLA - Full load amps
- IFM - Indoor fan motor
- NOM PWR - 240V / 480V / 600V
- P.E. - Power exhaust
- PWRD - Powered convenience outlet
- UNPWRD - Unpowered convenience outlet

# ELECTRIC HEAT - ELECTRICAL INFORMATION (UNITS PRODUCED ON OR AFTER JULY 30, 2012)

Table 11 (cont.) - 50TC\*\*08

## 1-STAGE COOLING 1-SPEED INDOOR FAN MOTOR WITH FACTORY INSTALLED NON-FUSED DISCONNECT

NOM. V-PH-Hz.	IFM TYPE	ELECTRIC HEATER PART NUMBER CRHEATERXXXXXX	NOM PWR (kW)	APP PWR (kW)	SINGLE POINT KIT PART NUMBER CRSINGLEXXXXXX			
					NO C.O. or UNPWRD C.O.		w/PWRD C.O.	
					NO P.E.	w/P.E. (pwrd fr/unit)	NO P.E.	w/P.E. (pwrd fr/unit)
208/ 230-3-60	STD	117A00	10.4	7.8/9.6	042	042	042	042
		110A00	16.0	12.0/14.7	042	042	043	043
		111A00	24.8	18.6/22.8	043	043	043	043
		112A00	32.0	24.0/29.4	043	043	043	043
		112A00,117A00	42.4	31.8/38.9	045	045	045	045
	MED	117A00	10.4	7.8/9.6	042	042	042	042
		110A00	16.0	12.0/14.7	042	043	043	043
		111A00	24.8	18.6/22.8	043	043	043	043
		112A00	32.0	24.0/29.4	043	043	043	043
		112A00,117A00	42.4	31.8/38.9	045	045	045	045
	HIGH	117A00	10.4	7.8/9.6	042	042	042	043
		110A00	16.0	12.0/14.7	043	043	043	043
111A00		24.8	18.6/22.8	043	043	043	043	
112A00		32.0	24.0/29.4	043	043	043	043	
112A00,117A00		42.4	31.8/38.9	045	045	045	045	
460-3-60	STD	116A00	13.9	12.8	042	042	042	042
		113A00	16.5	15.2	042	042	042	042
		114A00	27.8	25.5	042	042	042	042
		115A00	33.0	30.3	042	042	042	042
		114A00,116A00	41.7	38.3	044	044	044	044
	MED	116A00	13.9	12.8	042	042	042	042
		113A00	16.5	15.2	042	042	042	042
		114A00	27.8	25.5	042	042	042	042
		115A00	33.0	30.3	042	042	042	042
		114A00,116A00	41.7	38.3	044	044	044	044
	HIGH	116A00	13.9	12.8	042	042	042	042
		113A00	16.5	15.2	042	042	042	042
		114A00	27.8	25.5	042	042	042	042
		115A00	33.0	30.3	042	042	044	044
		114A00,116A00	41.7	38.3	044	044	044	044
575-3-60	STD	118A00	17.0	17.0	042	042	042	042
		119A00	34.0	34.0	042	042	042	044
	MED	118A00	17.0	17.0	042	042	042	042
		119A00	34.0	34.0	042	042	042	044
	HIGH	118A00	17.0	17.0	042	042	042	042
		119A00	34.0	34.0	042	044	044	044

**LEGEND:**

- APP PWR - 208 / 230V / 460V / 575V
- C.O. - Convenience outlet
- FLA - Full load amps
- IFM - Indoor fan motor
- NOM PWR - 240V / 480V / 600V
- P.E. - Power exhaust
- PWRD - Powered convenience outlet
- UNPWRD - Unpowered convenience outlet

## ELECTRIC HEAT - ELECTRICAL INFORMATION (UNITS PRODUCED ON OR AFTER JULY 30, 2012)

Table 11 (cont.) - 50TC\*\*08

### 2-STAGE COOLING 1-SPEED INDOOR FAN MOTOR WITHOUT FACTORY INSTALLED NON-FUSED DISCONNECT

NOM. V-PH-Hz.	IFM TYPE	ELECTRIC HEATER PART NUMBER CRHEATERXXXXXX	NOM PWR (kW)	APP PWR (kW)	SINGLE POINT KIT PART NUMBER CRSINGLEXXXXXX			
					NO C.O. or UNPWRD C.O.		w/PWRD C.O.	
					NO P.E.	w/P.E. (pwrd fr/unit)	NO P.E.	w/P.E. (pwrd fr/unit)
208/ 230-3-60	STD	117A00	10.4	7.8/9.6	042	042	042	042
		110A00	16.0	12.0/14.7	042	042	043	043
		111A00	24.8	18.6/22.8	043	043	043	043
		112A00	32.0	24.0/29.4	043	043	043	043
		112A00,117A00	42.4	31.8/38.9	045	045	045	045
	MED	117A00	10.4	7.8/9.6	042	042	042	042
		110A00	16.0	12.0/14.7	042	043	043	043
		111A00	24.8	18.6/22.8	043	043	043	043
		112A00	32.0	24.0/29.4	043	043	043	043
		112A00,117A00	42.4	31.8/38.9	045	045	045	045
	HIGH	117A00	10.4	7.8/9.6	042	042	042	042
		110A00	16.0	12.0/14.7	043	043	043	043
111A00		24.8	18.6/22.8	043	043	043	043	
112A00		32.0	24.0/29.4	043	043	043	043	
112A00,117A00		42.4	31.8/38.9	045	045	045	045	
460-3-60	STD	116A00	13.9	12.8	042	042	042	042
		113A00	16.5	15.2	042	042	042	042
		114A00	27.8	25.5	042	042	042	042
		115A00	33.0	30.3	042	042	042	042
		114A00,116A00	41.7	38.3	044	044	044	044
	MED	116A00	13.9	12.8	042	042	042	042
		113A00	16.5	15.2	042	042	042	042
		114A00	27.8	25.5	042	042	042	042
		115A00	33.0	30.3	042	042	042	042
		114A00,116A00	41.7	38.3	044	044	044	044
	HIGH	116A00	13.9	12.8	042	042	042	042
		113A00	16.5	15.2	042	042	042	042
		114A00	27.8	25.5	042	042	042	042
		115A00	33.0	30.3	042	042	044	044
		114A00,116A00	41.7	38.3	044	044	044	044
575-3-60	STD	118A00	17.0	17.0	042	042	042	042
		119A00	34.0	34.0	042	042	042	044
	MED	118A00	17.0	17.0	042	042	042	042
		119A00	34.0	34.0	042	042	042	044
	HIGH	118A00	17.0	17.0	042	042	042	042
		119A00	34.0	34.0	042	044	044	044

**LEGEND:**

- APP PWR - 208 / 230V / 460V / 575V
- C.O. - Convenience outlet
- FLA - Full load amps
- IFM - Indoor fan motor
- NOM PWR - 240V / 480V / 600V
- P.E. - Power exhaust
- PWRD - Powered convenience outlet
- UNPWRD - Unpowered convenience outlet

# ELECTRIC HEAT - ELECTRICAL INFORMATION (UNITS PRODUCED ON OR AFTER JULY 30, 2012)

Table 11 (cont.) - 50TC\*\*08

## 2-STAGE COOLING 1-SPEED INDOOR FAN MOTOR WITH FACTORY INSTALLED NON-FUSED DISCONNECT

NOM. V-PH-Hz.	IFM TYPE	ELECTRIC HEATER PART NUMBER CRHEATERXXXXXX	NOM PWR (kW)	APP PWR (kW)	SINGLE POINT KIT PART NUMBER CRSINGLEXXXXXX			
					NO C.O. or UNPWRD C.O.		w/PWRD C.O.	
					NO P.E.	w/P.E. (pwrd fr/unit)	NO P.E.	w/P.E. (pwrd fr/unit)
208/ 230-3-60	STD	117A00	10.4	7.8/9.6	042	042	042	042
		110A00	16.0	12.0/14.7	042	042	043	043
		111A00	24.8	18.6/22.8	043	043	043	043
		112A00	32.0	24.0/29.4	043	043	043	043
		112A00,117A00	42.4	31.8/38.9	045	045	045	045
	MED	117A00	10.4	7.8/9.6	042	042	042	042
		110A00	16.0	12.0/14.7	042	043	043	043
		111A00	24.8	18.6/22.8	043	043	043	043
		112A00	32.0	24.0/29.4	043	043	043	043
		112A00,117A00	42.4	31.8/38.9	045	045	045	045
	HIGH	117A00	10.4	7.8/9.6	042	042	042	042
		110A00	16.0	12.0/14.7	043	043	043	043
111A00		24.8	18.6/22.8	043	043	043	043	
112A00		32.0	24.0/29.4	043	043	043	043	
112A00,117A00		42.4	31.8/38.9	045	045	045	045	
460-3-60	STD	116A00	13.9	12.8	042	042	042	042
		113A00	16.5	15.2	042	042	042	042
		114A00	27.8	25.5	042	042	042	042
		115A00	33.0	30.3	042	042	042	042
		114A00,116A00	41.7	38.3	044	044	044	044
	MED	116A00	13.9	12.8	042	042	042	042
		113A00	16.5	15.2	042	042	042	042
		114A00	27.8	25.5	042	042	042	042
		115A00	33.0	30.3	042	042	042	042
		114A00,116A00	41.7	38.3	044	044	044	044
	HIGH	116A00	13.9	12.8	042	042	042	042
		113A00	16.5	15.2	042	042	042	042
114A00		27.8	25.5	042	042	042	042	
115A00		33.0	30.3	042	042	044	044	
114A00,116A00		41.7	38.3	044	044	044	044	
575-3-60	STD	118A00	17.0	17.0	042	042	042	042
		119A00	34.0	34.0	042	042	042	044
	MED	118A00	17.0	17.0	042	042	042	042
		119A00	34.0	34.0	042	042	042	044
	HIGH	118A00	17.0	17.0	042	042	042	042
		119A00	34.0	34.0	042	044	044	044

**LEGEND:**

- APP PWR - 208 / 230V / 460V / 575V
- C.O. - Convenience outlet
- FLA - Full load amps
- IFM - Indoor fan motor
- NOM PWR - 240V / 480V / 600V
- P.E. - Power exhaust
- PWRD - Powered convenience outlet
- UNPWRD - Unpowered convenience outlet

# ELECTRIC HEAT - ELECTRICAL INFORMATION (UNITS PRODUCED ON OR AFTER JULY 30, 2012)

Table 11 (cont.) - 50TC\*\*08

## 2-STAGE COOLING 2-SPEED INDOOR FAN MOTOR WITHOUT FACTORY INSTALLED NON-FUSED DISCONNECT

NOM. V-PH-Hz.	IFM TYPE	ELECTRIC HEATER PART NUMBER CRHEATERXXXXXX	NOM PWR (kW)	APP PWR (kW)	SINGLE POINT KIT PART NUMBER CRSINGLEXXXXXX			
					NO C.O. or UNPWRD C.O.		w/PWRD C.O.	
					NO P.E.	w/P.E. (pwrd fr/unit)	NO P.E.	w/P.E. (pwrd fr/unit)
208/ 230-3-60	STD	117A00	10.4	7.8/9.6	042	042	042	042
		110A00	16.0	12.0/14.7	042	042	043	043
		111A00	24.8	18.6/22.8	043	043	043	043
		112A00	32.0	24.0/29.4	043	043	043	043
		112A00,117A00	42.4	31.8/38.9	045	045	045	045
	MED	117A00	10.4	7.8/9.6	042	042	042	042
		110A00	16.0	12.0/14.7	042	043	043	043
		111A00	24.8	18.6/22.8	043	043	043	043
		112A00	32.0	24.0/29.4	043	043	043	043
		112A00,117A00	42.4	31.8/38.9	045	045	045	045
	HIGH	117A00	10.4	7.8/9.6	042	042	042	042
		110A00	16.0	12.0/14.7	043	043	043	043
111A00		24.8	18.6/22.8	043	043	043	043	
112A00		32.0	24.0/29.4	043	043	043	043	
112A00,117A00		42.4	31.8/38.9	045	045	045	045	
460-3-60	STD	116A00	13.9	12.8	042	042	042	042
		113A00	16.5	15.2	042	042	042	042
		114A00	27.8	25.5	042	042	042	042
		115A00	33.0	30.3	042	042	042	042
		114A00,116A00	41.7	38.3	044	044	044	044
	MED	116A00	13.9	12.8	042	042	042	042
		113A00	16.5	15.2	042	042	042	042
		114A00	27.8	25.5	042	042	042	042
		115A00	33.0	30.3	042	042	042	042
		114A00,116A00	41.7	38.3	044	044	044	044
	HIGH	116A00	13.9	12.8	042	042	042	042
		113A00	16.5	15.2	042	042	042	042
		114A00	27.8	25.5	042	042	042	042
		115A00	33.0	30.3	042	042	044	044
		114A00,116A00	41.7	38.3	044	044	044	044
575-3-60	STD	118A00	17.0	17.0	042	042	042	042
		119A00	34.0	34.0	042	042	042	044
	MED	118A00	17.0	17.0	042	042	042	042
		119A00	34.0	34.0	042	044	042	044
	HIGH	118A00	17.0	17.0	042	042	042	042
		119A00	34.0	34.0	042	044	044	044

**LEGEND:**

- APP PWR - 208 / 230V / 460V / 575V
- C.O. - Convenience outlet
- FLA - Full load amps
- IFM - Indoor fan motor
- NOM PWR - 240V / 480V / 600V
- P.E. - Power exhaust
- PWRD - Powered convenience outlet
- UNPWRD - Unpowered convenience outlet

# ELECTRIC HEAT - ELECTRICAL INFORMATION (UNITS PRODUCED ON OR AFTER JULY 30, 2012)

Table 11 (cont.) - 50TC\*\*09

## 1-STAGE COOLING 1-SPEED INDOOR FAN MOTOR WITHOUT FACTORY INSTALLED NON-FUSED DISCONNECT

NOM. V-PH-Hz.	IFM TYPE	ELECTRIC HEATER PART NUMBER CRHEATERXXXXXX	NOM PWR (kW)	APP PWR (kW)	SINGLE POINT KIT PART NUMBER CRSINGLEXXXXXX			
					NO C.O. or UNPWRD C.O.		w/PWRD C.O.	
					NO P.E.	w/P.E. (pwrd fr/unit)	NO P.E.	w/P.E. (pwrd fr/unit)
208/ 203-3-60	STD	117A00	10.4	7.8/9.6	047	047	047	049
		110A00	16.0	12.0/14.7	047	047	049	049
		111A00	24.8	18.6/22.8	049	049	049	049
		112A00	32.0	24.0/29.4	049	049	049	049
		112A00,117A00	42.4	31.8/38.9	051	051	051	051
	MED	117A00	10.4	7.8/9.6	047	047	047	049
		110A00	16.0	12.0/14.7	047	049	049	049
		111A00	24.8	18.6/22.8	049	049	049	049
		112A00	32.0	24.0/29.4	049	049	049	049
		112A00,117A00	42.4	31.8/38.9	051	051	051	051
	HIGH	117A00	10.4	7.8/9.6	047	049	049	049
		110A00	16.0	12.0/14.7	049	049	049	049
111A00		24.8	18.6/22.8	049	049	049	049	
112A00		32.0	24.0/29.4	049	049	049	049	
112A00,117A00		42.4	31.8/38.9	051	051	051	051	
460-3-60	STD	116A00	13.9	12.8	047	047	047	047
		113A00	16.5	15.2	047	047	047	047
		114A00	27.8	25.5	047	047	047	047
		115A00	33.0	30.3	047	047	047	047
		114A00,116A00	41.7	38.3	050	050	050	050
	MED	116A00	13.9	12.8	047	047	047	047
		113A00	16.5	15.2	047	047	047	047
		114A00	27.8	25.5	047	047	047	047
		115A00	33.0	30.3	047	047	047	047
		114A00,116A00	41.7	38.3	050	050	050	050
	HIGH	116A00	13.9	12.8	047	047	047	047
		113A00	16.5	15.2	047	047	047	047
		114A00	27.8	25.5	047	047	047	047
		115A00	33.0	30.3	047	047	047	050
		114A00,116A00	41.7	38.3	050	050	050	050
575-3-60	STD	118A00	17.0	17.0	047	047	047	047
		119A00	34.0	34.0	047	047	047	050
	MED	118A00	17.0	17.0	047	047	047	047
		119A00	34.0	34.0	047	047	047	050
	HIGH	118A00	17.0	17.0	047	047	047	047
		119A00	34.0	34.0	047	047	047	050

**LEGEND:**

- APP PWR - 208 / 230V / 460V / 575V
- C.O. - Convenience outlet
- FLA - Full load amps
- IFM - Indoor fan motor
- NOM PWR - 240V / 480V / 600V
- P.E. - Power exhaust
- PWRD - Powered convenience outlet
- UNPWRD - Unpowered convenience outlet



# ELECTRIC HEAT - ELECTRICAL INFORMATION (UNITS PRODUCED ON OR AFTER JULY 30, 2012)

Table 11 (cont.) - 50TC\*\*09

## 1-STAGE COOLING 1-SPEED INDOOR FAN MOTOR WITH FACTORY INSTALLED NON-FUSED DISCONNECT

NOM. V-PH-Hz.	IFM TYPE	ELECTRIC HEATER PART NUMBER CRHEATERXXXXXX	NOM PWR (kW)	APP PWR (kW)	SINGLE POINT KIT PART NUMBER CRSINGLEXXXXXX			
					NO C.O. or UNPWRD C.O.		w/PWRD C.O.	
					NO P.E.	w/P.E. (pwrd fr/unit)	NO P.E.	w/P.E. (pwrd fr/unit)
208/ 203-3-60	STD	117A00	10.4	7.8/9.6	047	047	047	049
		110A00	16.0	12.0/14.7	047	047	049	049
		111A00	24.8	18.6/22.8	049	049	049	049
		112A00	32.0	24.0/29.4	049	049	049	049
		112A00,117A00	42.4	31.8/38.9	051	051	051	051
	MED	117A00	10.4	7.8/9.6	047	047	047	049
		110A00	16.0	12.0/14.7	047	049	049	049
		111A00	24.8	18.6/22.8	049	049	049	049
		112A00	32.0	24.0/29.4	049	049	049	049
		112A00,117A00	42.4	31.8/38.9	051	051	051	051
	HIGH	117A00	10.4	7.8/9.6	047	049	049	049
		110A00	16.0	12.0/14.7	049	049	049	049
111A00		24.8	18.6/22.8	049	049	049	049	
112A00		32.0	24.0/29.4	049	049	049	049	
112A00,117A00		42.4	31.8/38.9	051	051	051	051	
460-3-60	STD	116A00	13.9	12.8	047	047	047	047
		113A00	16.5	15.2	047	047	047	047
		114A00	27.8	25.5	047	047	047	047
		115A00	33.0	30.3	047	047	047	047
		114A00,116A00	41.7	38.3	050	050	050	050
	MED	116A00	13.9	12.8	047	047	047	047
		113A00	16.5	15.2	047	047	047	047
		114A00	27.8	25.5	047	047	047	047
		115A00	33.0	30.3	047	047	047	047
		114A00,116A00	41.7	38.3	050	050	050	050
	HIGH	116A00	13.9	12.8	047	047	047	047
		113A00	16.5	15.2	047	047	047	047
		114A00	27.8	25.5	047	047	047	047
		115A00	33.0	30.3	047	047	047	050
		114A00,116A00	41.7	38.3	050	050	050	050
575-3-60	STD	118A00	17.0	17.0	047	047	047	047
		119A00	34.0	34.0	047	047	047	050
	MED	118A00	17.0	17.0	047	047	047	047
		119A00	34.0	34.0	047	047	047	050
	HIGH	118A00	17.0	17.0	047	047	047	047
		119A00	34.0	34.0	047	047	047	050

**LEGEND:**

- APP PWR - 208 / 230V / 460V / 575V
- C.O. - Convenience outlet
- FLA - Full load amps
- IFM - Indoor fan motor
- NOM PWR - 240V / 480V / 600V
- P.E. - Power exhaust
- PWRD - Powered convenience outlet
- UNPWRD - Unpowered convenience outlet

# ELECTRIC HEAT - ELECTRICAL INFORMATION (UNITS PRODUCED ON OR AFTER JULY 30, 2012)

Table 11 (cont.) - 50TC\*\*09

## 2-STAGE COOLING 1-SPEED INDOOR FAN MOTOR WITHOUT FACTORY INSTALLED NON-FUSED DISCONNECT

NOM. V-PH-Hz.	IFM TYPE	ELECTRIC HEATER PART NUMBER CRHEATERXXXXXX	NOM PWR (kW)	APP PWR (kW)	SINGLE POINT KIT PART NUMBER CRSINGLEXXXXXX			
					NO C.O. or UNPWRD C.O.		w/PWRD C.O.	
					NO P.E.	w/P.E. (pwrd fr/unit)	NO P.E.	w/P.E. (pwrd fr/unit)
208/ 203-3-60	STD	117A00	10.4	7.8/9.6	047	047	047	047
		110A00	16.0	12.0/14.7	047	047	049	049
		111A00	24.8	18.6/22.8	049	049	049	049
		112A00	32.0	24.0/29.4	049	049	049	049
		112A00,117A00	42.4	31.8/38.9	051	051	051	051
	MED	117A00	10.4	7.8/9.6	047	047	047	047
		110A00	16.0	12.0/14.7	047	049	049	049
		111A00	24.8	18.6/22.8	049	049	049	049
		112A00	32.0	24.0/29.4	049	049	049	049
		112A00,117A00	42.4	31.8/38.9	051	051	051	051
	HIGH	117A00	10.4	7.8/9.6	047	047	047	047
		110A00	16.0	12.0/14.7	049	049	049	049
111A00		24.8	18.6/22.8	049	049	049	049	
112A00		32.0	24.0/29.4	049	049	049	049	
112A00,117A00		42.4	31.8/38.9	051	051	051	051	
460-3-60	STD	116A00	13.9	12.8	047	047	047	047
		113A00	16.5	15.2	047	047	047	047
		114A00	27.8	25.5	047	047	047	047
		115A00	33.0	30.3	047	047	047	047
		114A00,116A00	41.7	38.3	050	050	050	050
	MED	116A00	13.9	12.8	047	047	047	047
		113A00	16.5	15.2	047	047	047	047
		114A00	27.8	25.5	047	047	047	047
		115A00	33.0	30.3	047	047	047	047
		114A00,116A00	41.7	38.3	050	050	050	050
	HIGH	116A00	13.9	12.8	047	047	047	047
		113A00	16.5	15.2	047	047	047	047
		114A00	27.8	25.5	047	047	047	047
		115A00	33.0	30.3	047	047	047	050
		114A00,116A00	41.7	38.3	050	050	050	050
575-3-60	STD	118A00	17.0	17.0	047	047	047	047
		119A00	34.0	34.0	047	047	047	050
	MED	118A00	17.0	17.0	047	047	047	047
		119A00	34.0	34.0	047	047	047	050
	HIGH	118A00	17.0	17.0	047	047	047	047
		119A00	34.0	34.0	047	047	047	050

**LEGEND:**

- APP PWR - 208 / 230V / 460V / 575V
- C.O. - Convenience outlet
- FLA - Full load amps
- IFM - Indoor fan motor
- NOM PWR - 240V / 480V / 600V
- P.E. - Power exhaust
- PWRD - Powered convenience outlet
- UNPWRD - Unpowered convenience outlet

# ELECTRIC HEAT - ELECTRICAL INFORMATION (UNITS PRODUCED ON OR AFTER JULY 30, 2012)

Table 11 (cont.) - 50TC\*\*09

## 2-STAGE COOLING 1-SPEED INDOOR FAN MOTOR WITH FACTORY INSTALLED NON-FUSED DISCONNECT

NOM. V-PH-Hz.	IFM TYPE	ELECTRIC HEATER PART NUMBER CRHEATERXXXXXX	NOM PWR (kW)	APP PWR (kW)	SINGLE POINT KIT PART NUMBER CRSINGLEXXXXXX			
					NO C.O. or UNPWRD C.O.		w/PWRD C.O.	
					NO P.E.	w/P.E. (pwrd fr/unit)	NO P.E.	w/P.E. (pwrd fr/unit)
208/ 203-3-60	STD	117A00	10.4	7.8/9.6	047	047	047	047
		110A00	16.0	12.0/14.7	047	047	049	049
		111A00	24.8	18.6/22.8	049	049	049	049
		112A00	32.0	24.0/29.4	049	049	049	049
		112A00,117A00	42.4	31.8/38.9	051	051	051	051
	MED	117A00	10.4	7.8/9.6	047	047	047	047
		110A00	16.0	12.0/14.7	047	049	049	049
		111A00	24.8	18.6/22.8	049	049	049	049
		112A00	32.0	24.0/29.4	049	049	049	049
		112A00,117A00	42.4	31.8/38.9	051	051	051	051
	HIGH	117A00	10.4	7.8/9.6	047	047	047	047
		110A00	16.0	12.0/14.7	049	049	049	049
111A00		24.8	18.6/22.8	049	049	049	049	
112A00		32.0	24.0/29.4	049	049	049	049	
112A00,117A00		42.4	31.8/38.9	051	051	051	051	
460-3-60	STD	116A00	13.9	12.8	047	047	047	047
		113A00	16.5	15.2	047	047	047	047
		114A00	27.8	25.5	047	047	047	047
		115A00	33.0	30.3	047	047	047	047
		114A00,116A00	41.7	38.3	050	050	050	050
	MED	116A00	13.9	12.8	047	047	047	047
		113A00	16.5	15.2	047	047	047	047
		114A00	27.8	25.5	047	047	047	047
		115A00	33.0	30.3	047	047	047	047
		114A00,116A00	41.7	38.3	050	050	050	050
	HIGH	116A00	13.9	12.8	047	047	047	047
		113A00	16.5	15.2	047	047	047	047
		114A00	27.8	25.5	047	047	047	047
		115A00	33.0	30.3	047	047	047	050
		114A00,116A00	41.7	38.3	050	050	050	050
575-3-60	STD	118A00	17.0	17.0	047	047	047	047
		119A00	34.0	34.0	047	047	047	050
	MED	118A00	17.0	17.0	047	047	047	047
		119A00	34.0	34.0	047	047	047	050
	HIGH	118A00	17.0	17.0	047	047	047	047
		119A00	34.0	34.0	047	047	047	050

**LEGEND:**

- APP PWR - 208 / 230V / 460V / 575V
- C.O. - Convenience outlet
- FLA - Full load amps
- IFM - Indoor fan motor
- NOM PWR - 240V / 480V / 600V
- P.E. - Power exhaust
- PWRD - Powered convenience outlet
- UNPWRD - Unpowered convenience outlet

## ELECTRIC HEAT - ELECTRICAL INFORMATION (UNITS PRODUCED ON OR AFTER JULY 30, 2012)

Table 11 (cont.) - 50TC\*\*09

### 2-STAGE COOLING 2-SPEED INDOOR FAN MOTOR WITHOUT FACTORY INSTALLED NON-FUSED DISCONNECT

NOM. V-PH-Hz.	IFM TYPE	ELECTRIC HEATER PART NUMBER CRHEATERXXXXXX	NOM PWR (kW)	APP PWR (kW)	SINGLE POINT KIT PART NUMBER CRSINGLEXXXXXX			
					NO C.O. or UNPWRD C.O.		w/PWRD C.O.	
					NO P.E.	w/P.E. (pwrd fr/unit)	NO P.E.	w/P.E. (pwrd fr/unit)
208/ 203-3-60	STD	117A00	10.4	7.8/9.6	047	047	047	047
		110A00	16.0	12.0/14.7	047	047	049	049
		111A00	24.8	18.6/22.8	049	049	049	049
		112A00	32.0	24.0/29.4	049	049	049	049
		112A00,117A00	42.4	31.8/38.9	051	051	051	051
	MED	117A00	10.4	7.8/9.6	047	047	047	047
		110A00	16.0	12.0/14.7	047	049	049	049
		111A00	24.8	18.6/22.8	049	049	049	049
		112A00	32.0	24.0/29.4	049	049	049	049
		112A00,117A00	42.4	31.8/38.9	051	051	051	051
	HIGH	117A00	10.4	7.8/9.6	047	047	047	047
		110A00	16.0	12.0/14.7	049	049	049	049
111A00		24.8	18.6/22.8	049	049	049	049	
112A00		32.0	24.0/29.4	049	049	049	049	
112A00,117A00		42.4	31.8/38.9	051	051	051	051	
460-3-60	STD	116A00	13.9	12.8	047	047	047	047
		113A00	16.5	15.2	047	047	047	047
		114A00	27.8	25.5	047	047	047	047
		115A00	33.0	30.3	047	047	047	047
		114A00,116A00	41.7	38.3	050	050	050	050
	MED	116A00	13.9	12.8	047	047	047	047
		113A00	16.5	15.2	047	047	047	047
		114A00	27.8	25.5	047	047	047	047
		115A00	33.0	30.3	047	047	047	047
		114A00,116A00	41.7	38.3	050	050	050	050
	HIGH	116A00	13.9	12.8	047	047	047	047
		113A00	16.5	15.2	047	047	047	047
		114A00	27.8	25.5	047	047	047	047
		115A00	33.0	30.3	047	047	047	050
		114A00,116A00	41.7	38.3	050	050	050	050
575-3-60	STD	118A00	17.0	17.0	047	047	047	047
		119A00	34.0	34.0	047	047	047	050
	MED	118A00	17.0	17.0	047	047	047	047
		119A00	34.0	34.0	047	050	047	050
	HIGH	118A00	17.0	17.0	047	047	047	047
		119A00	34.0	34.0	047	050	047	050

**LEGEND:**

- APP PWR - 208 / 230V / 460V / 575V
- C.O. - Convenience outlet
- FLA - Full load amps
- IFM - Indoor fan motor
- NOM PWR - 240V / 480V / 600V
- P.E. - Power exhaust
- PWRD - Powered convenience outlet
- UNPWRD - Unpowered convenience outlet

# ELECTRIC HEAT - ELECTRICAL INFORMATION (UNITS PRODUCED ON OR AFTER JULY 30, 2012)

Table 11 (cont.) - 50TC\*\*12

## 1-STAGE COOLING 1-SPEED INDOOR FAN MOTOR WITHOUT FACTORY INSTALLED NON-FUSED DISCONNECT

NOM. V-PH-Hz.	IFM TYPE	ELECTRIC HEATER PART NUMBER CRHEATERXXXXXX	NOM PWR (kW)	APP PWR (kW)	SINGLE POINT KIT PART NUMBER CRSINGLEXXXXXX			
					NO C.O. or UNPWRD C.O.		w/PWRD C.O.	
					NO P.E.	w/P.E. (pwrd fr/unit)	NO P.E.	w/P.E. (pwrd fr/unit)
208/ 230-3-60	STD	117A00	10.4	7.8/9.6	047	047	047	049
		110A00	16.0	12.0/14.7	047	049	049	049
		112A00	32.0	24.0/29.4	049	049	049	049
		112A00,117A00	42.4	31.8/38.9	051	051	051	051
		112A00,110A00	50.0	37.6/45.9	051	051	051	051
	MED	117A00	10.4	7.8/9.6	047	049	049	049
		110A00	16.0	12.0/14.7	049	049	049	049
		112A00	32.0	24.0/29.4	049	049	049	049
		112A00,117A00	42.4	31.8/38.9	051	051	051	051
		112A00,110A00	50.0	37.6/45.9	051	051	051	051
	HIGH	117A00	10.4	7.8/9.6	049	049	049	049
		110A00	16.0	12.0/14.7	049	049	049	049
112A00		32.0	24.0/29.4	049	049	049	049	
112A00,117A00		42.4	31.8/38.9	051	051	051	051	
112A00,110A00		50.0	37.6/45.9	051	051	051	051	
460-3-60	STD	116A00	13.9	12.8	047	047	047	047
		113A00	16.5	15.2	047	047	047	047
		115A00	33.0	30.3	047	047	047	047
		114A00,116A00	41.7	38.3	050	050	050	050
		115A00,113A00	50.0	45.9	050	050	050	050
	MED	116A00	13.9	12.8	047	047	047	047
		113A00	16.5	15.2	047	047	047	047
		115A00	33.0	30.3	047	047	047	050
		114A00,116A00	41.7	38.3	050	050	050	050
		115A00,113A00	50.0	45.9	050	050	050	050
	HIGH	116A00	13.9	12.8	047	047	047	047
		113A00	16.5	15.2	047	047	047	047
		115A00	33.0	30.3	047	047	050	050
		114A00,116A00	41.7	38.3	050	050	050	050
		115A00,113A00	50.0	45.9	050	050	050	050
575-3-60	STD	118A00	17.0	17.0	047	047	047	047
		119A00	34.0	34.0	047	047	047	050
		118A00,119A00	51.0	51.0	050	050	050	050
	MED	118A00	17.0	17.0	047	047	047	047
		119A00	34.0	34.0	047	047	047	050
		118A00,119A00	51.0	51.0	050	050	050	050
	HIGH	118A00	17.0	17.0	047	047	047	047
		119A00	34.0	34.0	047	050	050	050
		118A00,119A00	51.0	51.0	050	050	050	050

**LEGEND:**

- APP PWR - 208 / 230V / 460V / 575V
- C.O. - Convenience outlet
- FLA - Full load amps
- IFM - Indoor fan motor
- NOM PWR - 240V / 480V / 600V
- P.E. - Power exhaust
- PWRD - Powered convenience outlet
- UNPWRD - Unpowered convenience outlet

# ELECTRIC HEAT - ELECTRICAL INFORMATION (UNITS PRODUCED ON OR AFTER JULY 30, 2012)

Table 11 (cont.) - 50TC\*\*12

## 1-STAGE COOLING 1-SPEED INDOOR FAN MOTOR WITH FACTORY INSTALLED NON-FUSED DISCONNECT

NOM. V-PH-Hz.	IFM TYPE	ELECTRIC HEATER PART NUMBER CRHEATERXXXXXX	NOM PWR (kW)	APP PWR (kW)	SINGLE POINT KIT PART NUMBER CRSINGLEXXXXXX			
					NO C.O. or UNPWRD C.O.		w/PWRD C.O.	
					NO P.E.	w/P.E. (pwrd fr/unit)	NO P.E.	w/P.E. (pwrd fr/unit)
208/ 230-3-60	STD	117A00	10.4	7.8/9.6	047	047	047	049
		110A00	16.0	12.0/14.7	047	049	049	049
		112A00	32.0	24.0/29.4	049	049	049	049
		112A00,117A00	42.4	31.8/38.9	051	051	051	051
		112A00,110A00	50.0	37.6/45.9	051	051	051	051
	MED	117A00	10.4	7.8/9.6	047	049	049	049
		110A00	16.0	12.0/14.7	049	049	049	049
		112A00	32.0	24.0/29.4	049	049	049	049
		112A00,117A00	42.4	31.8/38.9	051	051	051	051
		112A00,110A00	50.0	37.6/45.9	051	051	051	051
	HIGH	117A00	10.4	7.8/9.6	049	049	049	049
		110A00	16.0	12.0/14.7	049	049	049	049
112A00		32.0	24.0/29.4	049	049	049	049	
112A00,117A00		42.4	31.8/38.9	051	051	051	051	
112A00,110A00		50.0	37.6/45.9	051	051	051	051	
460-3-60	STD	116A00	13.9	12.8	047	047	047	047
		113A00	16.5	15.2	047	047	047	047
		115A00	33.0	30.3	047	047	047	047
		114A00,116A00	41.7	38.3	050	050	050	050
		115A00,113A00	50.0	45.9	050	050	050	050
	MED	116A00	13.9	12.8	047	047	047	047
		113A00	16.5	15.2	047	047	047	047
		115A00	33.0	30.3	047	047	047	050
		114A00,116A00	41.7	38.3	050	050	050	050
		115A00,113A00	50.0	45.9	050	050	050	050
	HIGH	116A00	13.9	12.8	047	047	047	047
		113A00	16.5	15.2	047	047	047	047
		115A00	33.0	30.3	047	047	050	050
		114A00,116A00	41.7	38.3	050	050	050	050
		115A00,113A00	50.0	45.9	050	050	050	050
575-3-60	STD	118A00	17.0	17.0	047	047	047	047
		119A00	34.0	34.0	047	047	047	050
		118A00,119A00	51.0	51.0	050	050	050	050
	MED	118A00	17.0	17.0	047	047	047	047
		119A00	34.0	34.0	047	047	047	050
		118A00,119A00	51.0	51.0	050	050	050	050
	HIGH	118A00	17.0	17.0	047	047	047	047
		119A00	34.0	34.0	047	050	050	050
		118A00,119A00	51.0	51.0	050	050	050	050

**LEGEND:**

- APP PWR - 208 / 230V / 460V / 575V
- C.O. - Convenience outlet
- FLA - Full load amps
- IFM - Indoor fan motor
- NOM PWR - 240V / 480V / 600V
- P.E. - Power exhaust
- PWRD - Powered convenience outlet
- UNPWRD - Unpowered convenience outlet

# ELECTRIC HEAT - ELECTRICAL INFORMATION (UNITS PRODUCED ON OR AFTER JULY 30, 2012)

Table 11 (cont.) - 50TC\*\*12

## 2-STAGE COOLING 1-SPEED INDOOR FAN MOTOR WITHOUT FACTORY INSTALLED NON-FUSED DISCONNECT

NOM. V-PH-Hz.	IFM TYPE	ELECTRIC HEATER PART NUMBER CRHEATERXXXXXX	NOM PWR (kW)	APP PWR (kW)	SINGLE POINT KIT PART NUMBER CRSINGLEXXXXXX			
					NO C.O. or UNPWRD C.O.		w/PWRD C.O.	
					NO PE.	w/PE. (pwr fr/unit)	NO PE.	w/PE. (pwr fr/unit)
208/ 230-3-60	STD	117A00	10.4	7.8/9.6	047	047	047	047
		110A00	16.0	12.0/14.7	047	049	049	049
		112A00	32.0	24.0/29.4	049	049	049	049
		112A00,117A00	42.4	31.8/38.9	051	051	051	051
		112A00,110A00	50.0	37.6/45.9	051	051	051	051
	MED	117A00	10.4	7.8/9.6	047	047	047	049
		110A00	16.0	12.0/14.7	049	049	049	049
		112A00	32.0	24.0/29.4	049	049	049	049
		112A00,117A00	42.4	31.8/38.9	051	051	051	051
		112A00,110A00	50.0	37.6/45.9	051	051	051	051
	HIGH	117A00	10.4	7.8/9.6	047	047	049	049
		110A00	16.0	12.0/14.7	049	049	049	049
112A00		32.0	24.0/29.4	049	049	049	049	
112A00,117A00		42.4	31.8/38.9	051	051	051	051	
112A00,110A00		50.0	37.6/45.9	051	051	051	051	
460-3-60	STD	116A00	13.9	12.8	047	047	047	047
		113A00	16.5	15.2	047	047	047	047
		115A00	33.0	30.3	047	047	047	047
		114A00,116A00	41.7	38.3	050	050	050	050
		115A00,113A00	50.0	45.9	050	050	050	050
	MED	116A00	13.9	12.8	047	047	047	047
		113A00	16.5	15.2	047	047	047	047
		115A00	33.0	30.3	047	047	047	050
		114A00,116A00	41.7	38.3	050	050	050	050
		115A00,113A00	50.0	45.9	050	050	050	050
	HIGH	116A00	13.9	12.8	047	047	047	047
		113A00	16.5	15.2	047	047	047	047
		115A00	33.0	30.3	047	047	050	050
		114A00,116A00	41.7	38.3	050	050	050	050
		115A00,113A00	50.0	45.9	050	050	050	050
575-3-60	STD	118A00	17.0	17.0	047	047	047	047
		119A00	34.0	34.0	047	047	047	050
		118A00,119A00	51.0	51.0	050	050	050	050
	MED	118A00	17.0	17.0	047	047	047	047
		119A00	34.0	34.0	047	047	047	050
		118A00,119A00	51.0	51.0	050	050	050	050
	HIGH	118A00	17.0	17.0	047	047	047	047
		119A00	34.0	34.0	047	050	050	050
		118A00,119A00	51.0	51.0	050	050	050	050

**LEGEND:**

- APP PWR - 208 / 230V / 460V / 575V
- C.O. - Convenience outlet
- FLA - Full load amps
- IFM - Indoor fan motor
- NOM PWR - 240V / 480V / 600V
- PE. - Power exhaust
- PWRD - Powered convenience outlet
- UNPWRD - Unpowered convenience outlet



## ELECTRIC HEAT - ELECTRICAL INFORMATION (UNITS PRODUCED ON OR AFTER JULY 30, 2012)

Table 11 (cont.) - 50TC\*\*12

### 2-STAGE COOLING 1-SPEED INDOOR FAN MOTOR WITH FACTORY INSTALLED NON-FUSED DISCONNECT

NOM. V-PH-Hz.	IFM TYPE	ELECTRIC HEATER PART NUMBER CRHEATERXXXXXX	NOM PWR (kW)	APP PWR (kW)	SINGLE POINT KIT PART NUMBER CRSINGLEXXXXXX			
					NO C.O. or UNPWRD C.O.		w/PWRD C.O.	
					NO P.E.	w/P.E. (pwr fr/unit)	NO P.E.	w/P.E. (pwr fr/unit)
208/ 230-3-60	STD	117A00	10.4	7.8/9.6	047	047	047	047
		110A00	16.0	12.0/14.7	047	049	049	049
		112A00	32.0	24.0/29.4	049	049	049	049
		112A00,117A00	42.4	31.8/38.9	051	051	051	051
		112A00,110A00	50.0	37.6/45.9	051	051	051	051
	MED	117A00	10.4	7.8/9.6	047	047	047	049
		110A00	16.0	12.0/14.7	049	049	049	049
		112A00	32.0	24.0/29.4	049	049	049	049
		112A00,117A00	42.4	31.8/38.9	051	051	051	051
		112A00,110A00	50.0	37.6/45.9	051	051	051	051
	HIGH	117A00	10.4	7.8/9.6	047	047	049	049
		110A00	16.0	12.0/14.7	049	049	049	049
112A00		32.0	24.0/29.4	049	049	049	049	
112A00,117A00		42.4	31.8/38.9	051	051	051	051	
112A00,110A00		50.0	37.6/45.9	051	051	051	051	
460-3-60	STD	116A00	13.9	12.8	047	047	047	047
		113A00	16.5	15.2	047	047	047	047
		115A00	33.0	30.3	047	047	047	047
		114A00,116A00	41.7	38.3	050	050	050	050
		115A00,113A00	50.0	45.9	050	050	050	050
	MED	116A00	13.9	12.8	047	047	047	047
		113A00	16.5	15.2	047	047	047	047
		115A00	33.0	30.3	047	047	047	050
		114A00,116A00	41.7	38.3	050	050	050	050
		115A00,113A00	50.0	45.9	050	050	050	050
	HIGH	116A00	13.9	12.8	047	047	047	047
		113A00	16.5	15.2	047	047	047	047
115A00		33.0	30.3	047	047	050	050	
114A00,116A00		41.7	38.3	050	050	050	050	
115A00,113A00		50.0	45.9	050	050	050	050	
575-3-60	STD	118A00	17.0	17.0	047	047	047	047
		119A00	34.0	34.0	047	047	047	050
		118A00,119A00	51.0	51.0	050	050	050	050
	MED	118A00	17.0	17.0	047	047	047	047
		119A00	34.0	34.0	047	047	047	050
		118A00,119A00	51.0	51.0	050	050	050	050
	HIGH	118A00	17.0	17.0	047	047	047	047
		119A00	34.0	34.0	047	050	050	050
		118A00,119A00	51.0	51.0	050	050	050	050

**LEGEND:**

- APP PWR - 208 / 230V / 460V / 575V
- C.O. - Convenience outlet
- FLA - Full load amps
- IFM - Indoor fan motor
- NOM PWR - 240V / 480V / 600V
- P.E. - Power exhaust
- PWRD - Powered convenience outlet
- UNPWRD - Unpowered convenience outlet

# ELECTRIC HEAT - ELECTRICAL INFORMATION (UNITS PRODUCED ON OR AFTER JULY 30, 2012)

Table 11 (cont.) - 50TC\*\*12

## 2-STAGE COOLING 2-SPEED INDOOR FAN MOTOR WITHOUT FACTORY INSTALLED NON-FUSED DISCONNECT

NOM. V-PH-Hz.	IFM TYPE	ELECTRIC HEATER PART NUMBER CRHEATERXXXXXX	NOM PWR (kW)	APP PWR (kW)	SINGLE POINT KIT PART NUMBER CRSINGLEXXXXXX			
					NO C.O. or UNPWRD C.O.		w/PWRD C.O.	
					NO PE.	w/PE. (pwrd fr/unit)	NO PE.	w/PE. (pwrd fr/unit)
208/ 230-3-60	STD	117A00	10.4	7.8/9.6	047	047	047	047
		110A00	16.0	12.0/14.7	047	049	049	049
		112A00	32.0	24.0/29.4	049	049	049	049
		112A00,117A00	42.4	31.8/38.9	051	051	051	051
		112A00,110A00	50.0	37.6/45.9	051	051	051	051
	MED	117A00	10.4	7.8/9.6	047	047	047	049
		110A00	16.0	12.0/14.7	049	049	049	049
		112A00	32.0	24.0/29.4	049	049	049	049
		112A00,117A00	42.4	31.8/38.9	051	051	051	051
		112A00,110A00	50.0	37.6/45.9	051	051	051	051
	HIGH	117A00	10.4	7.8/9.6	047	047	049	049
		110A00	16.0	12.0/14.7	049	049	049	049
112A00		32.0	24.0/29.4	049	049	049	049	
112A00,117A00		42.4	31.8/38.9	051	051	051	051	
112A00,110A00		50.0	37.6/45.9	051	051	051	051	
460-3-60	STD	116A00	13.9	12.8	047	047	047	047
		113A00	16.5	15.2	047	047	047	047
		115A00	33.0	30.3	047	047	047	047
		114A00,116A00	41.7	38.3	050	050	050	050
		115A00,113A00	50.0	45.9	050	050	050	050
	MED	116A00	13.9	12.8	047	047	047	047
		113A00	16.5	15.2	047	047	047	047
		115A00	33.0	30.3	047	047	047	050
		114A00,116A00	41.7	38.3	050	050	050	050
		115A00,113A00	50.0	45.9	050	050	050	050
	HIGH	116A00	13.9	12.8	047	047	047	047
		113A00	16.5	15.2	047	047	047	047
		115A00	33.0	30.3	047	047	050	050
		114A00,116A00	41.7	38.3	050	050	050	050
		115A00,113A00	50.0	45.9	050	050	050	050
575-3-60	STD	118A00	17.0	17.0	047	047	047	047
		119A00	34.0	34.0	047	050	047	050
		118A00,119A00	51.0	51.0	050	050	050	050
	MED	118A00	17.0	17.0	047	047	047	047
		119A00	34.0	34.0	047	050	047	050
		118A00,119A00	51.0	51.0	050	050	050	050
	HIGH	118A00	17.0	17.0	047	047	047	047
		119A00	34.0	34.0	047	050	050	050
		118A00,119A00	51.0	51.0	050	050	050	050

**LEGEND:**

- APP PWR - 208 / 230V / 460V / 575V
- C.O. - Convenience outlet
- FLA - Full load amps
- IFM - Indoor fan motor
- NOM PWR - 240V / 480V / 600V
- PE. - Power exhaust
- PWRD - Powered convenience outlet
- UNPWRD - Unpowered convenience outlet

# ELECTRIC HEAT - ELECTRICAL INFORMATION (UNITS PRODUCED ON OR AFTER JULY 30, 2012)

Table 11 (cont.) - 50TC\*\*14

## 2-STAGE COOLING 1-SPEED INDOOR FAN MOTOR WITHOUT FACTORY INSTALLED NON-FUSED DISCONNECT

NOM. V-PH-Hz.	IFM TYPE	ELECTRIC HEATER PART NUMBER CRHEATERXXXXXX	NOM PWR (kW)	APP PWR (kW)	SINGLE POINT KIT PART NUMBER CRSINGLEXXXXXX			
					NO C.O. or UNPWRD C.O.		w/PWRD C.O.	
					NO PE.	w/PE. (pwrd fr/unit)	NO PE.	w/PE. (pwrd fr/unit)
208/ 230-3-60	STD	117A00	10.4	7.8/9.6	049	049	049	049
		110A00	16.0	12.0/14.7	049	049	049	049
		112A00	32.0	24.0/29.4	049	049	049	049
		112A00,117A00	42.4	31.8/38.9	051	051	051	051
		112A00,110A00	50.0	37.6/45.9	051	051	051	051
	MED	117A00	10.4	7.8/9.6	049	049	049	049
		110A00	16.0	12.0/14.7	049	049	049	049
		112A00	32.0	24.0/29.4	049	049	049	049
		112A00,117A00	42.4	31.8/38.9	051	051	051	051
		112A00,110A00	50.0	37.6/45.9	051	051	051	051
	HIGH	117A00	10.4	7.8/9.6	049	049	049	049
		110A00	16.0	12.0/14.7	049	049	049	049
112A00		32.0	24.0/29.4	049	049	049	049	
112A00,117A00		42.4	31.8/38.9	051	051	051	051	
112A00,110A00		50.0	37.6/45.9	051	051	051	051	
460-3-60	STD	116A00	13.9	12.8	047	047	047	047
		113A00	16.5	15.2	047	047	047	047
		115A00	33.0	30.3	047	047	047	047
		114A00,116A00	41.7	38.3	050	050	050	050
		115A00,113A00	50.0	45.9	050	050	050	050
	MED	116A00	13.9	12.8	047	047	047	047
		113A00	16.5	15.2	047	047	047	047
		115A00	33.0	30.3	047	047	047	050
		114A00,116A00	41.7	38.3	050	050	050	050
		115A00,113A00	50.0	45.9	050	050	050	050
	HIGH	116A00	13.9	12.8	047	047	047	047
		113A00	16.5	15.2	047	047	047	047
		115A00	33.0	30.3	047	047	050	050
		114A00,116A00	41.7	38.3	050	050	050	050
		115A00,113A00	50.0	45.9	050	050	050	050
575-3-60	STD	118A00	17.0	17.0	047	047	047	047
		119A00	34.0	34.0	047	047	047	050
		118A00,119A00	51.0	51.0	050	050	050	050
	MED	118A00	17.0	17.0	047	047	047	047
		119A00	34.0	34.0	047	047	047	050
		118A00,119A00	51.0	51.0	050	050	050	050
	HIGH	118A00	17.0	17.0	047	047	047	047
		119A00	34.0	34.0	047	050	050	050
		118A00,119A00	51.0	51.0	050	050	050	050

**LEGEND:**

- APP PWR - 208 / 230V / 460V / 575V
- C.O. - Convenience outlet
- FLA - Full load amps
- IFM - Indoor fan motor
- NOM PWR - 240V / 480V / 600V
- PE. - Power exhaust
- PWRD - Powered convenience outlet
- UNPWRD - Unpowered convenience outlet

# ELECTRIC HEAT - ELECTRICAL INFORMATION (UNITS PRODUCED ON OR AFTER JULY 30, 2012)

Table 11 (cont.) - 50TC\*\*14

## 2-STAGE COOLING 1-SPEED INDOOR FAN MOTOR WITH FACTORY INSTALLED NON-FUSED DISCONNECT

NOM. V-PH-Hz.	IFM TYPE	ELECTRIC HEATER PART NUMBER CRHEATERXXXXXX	NOM PWR (kW)	APP PWR (kW)	SINGLE POINT KIT PART NUMBER CRSINGLEXXXXXX			
					NO C.O. or UNPWRD C.O.		w/PWRD C.O.	
					NO P.E.	w/PE. (pwrd fr/unit)	NO P.E.	w/PE. (pwrd fr/unit)
208/ 230-3-60	STD	117A00	10.4	7.8/9.6	049	049	049	049
		110A00	16.0	12.0/14.7	049	049	049	049
		112A00	32.0	24.0/29.4	049	049	049	049
		112A00,117A00	42.4	31.8/38.9	051	051	051	051
		112A00,110A00	50.0	37.6/45.9	051	051	051	051
	MED	117A00	10.4	7.8/9.6	049	049	049	049
		110A00	16.0	12.0/14.7	049	049	049	049
		112A00	32.0	24.0/29.4	049	049	049	049
		112A00,117A00	42.4	31.8/38.9	051	051	051	051
		112A00,110A00	50.0	37.6/45.9	051	051	051	051
	HIGH	117A00	10.4	7.8/9.6	-	-	-	049
		110A00	16.0	12.0/14.7	049	049	049	049
		112A00	32.0	24.0/29.4	049	049	049	049
		112A00,117A00	42.4	31.8/38.9	051	051	051	051
		112A00,110A00	50.0	37.6/45.9	051	051	051	051
460-3-60	STD	116A00	13.9	12.8	047	047	047	047
		113A00	16.5	15.2	047	047	047	047
		115A00	33.0	30.3	047	047	047	047
		114A00,116A00	41.7	38.3	050	050	050	050
		115A00,113A00	50.0	45.9	050	050	050	050
	MED	116A00	13.9	12.8	047	047	047	047
		113A00	16.5	15.2	047	047	047	047
		115A00	33.0	30.3	047	047	047	050
		114A00,116A00	41.7	38.3	050	050	050	050
		115A00,113A00	50.0	45.9	050	050	050	050
	HIGH	116A00	13.9	12.8	047	047	047	047
		113A00	16.5	15.2	047	047	047	047
		115A00	33.0	30.3	047	047	050	050
		114A00,116A00	41.7	38.3	050	050	050	050
		115A00,113A00	50.0	45.9	050	050	050	050
575-3-60	STD	118A00	17.0	17.0	047	047	047	047
		119A00	34.0	34.0	047	047	047	050
		118A00,119A00	51.0	51.0	050	050	050	050
	MED	118A00	17.0	17.0	047	047	047	047
		119A00	34.0	34.0	047	047	047	050
		118A00,119A00	51.0	51.0	050	050	050	050
	HIGH	118A00	17.0	17.0	047	047	047	047
		119A00	34.0	34.0	047	050	050	050
		118A00,119A00	51.0	51.0	050	050	050	050

**LEGEND:**

- APP PWR - 208 / 230V / 460V / 575V
- C.O. - Convenience outlet
- FLA - Full load amps
- IFM - Indoor fan motor
- NOM PWR - 240V / 480V / 600V
- P.E. - Power exhaust
- PWRD - Powered convenience outlet
- UNPWRD - Unpowered convenience outlet

# ELECTRIC HEAT - ELECTRICAL INFORMATION (UNITS PRODUCED ON OR AFTER JULY 30, 2012)

Table 11 (cont.) - 50TC\*\*14

## 2-STAGE COOLING 2-SPEED INDOOR FAN MOTOR WITHOUT FACTORY INSTALLED NON-FUSED DISCONNECT

NOM. V-PH-Hz.	IFM TYPE	ELECTRIC HEATER PART NUMBER CRHEATERXXXXXX	NOM PWR (kW)	APP PWR (kW)	SINGLE POINT KIT PART NUMBER CRSINGLEXXXXXX			
					NO C.O. or UNPWRD C.O.		w/PWRD C.O.	
					NO P.E.	w/PE. (pwrd fr/unit)	NO P.E.	w/PE. (pwrd fr/unit)
208/ 230-3-60	STD	117A00	10.4	7.8/9.6	049	049	049	049
		110A00	16.0	12.0/14.7	049	049	049	049
		112A00	32.0	24.0/29.4	049	049	049	049
		112A00,117A00	42.4	31.8/38.9	051	051	051	051
		112A00,110A00	50.0	37.6/45.9	051	051	051	051
	MED	117A00	10.4	7.8/9.6	049	049	049	049
		110A00	16.0	12.0/14.7	049	049	049	049
		112A00	32.0	24.0/29.4	049	049	049	049
		112A00,117A00	42.4	31.8/38.9	051	051	051	051
		112A00,110A00	50.0	37.6/45.9	051	051	051	051
	HIGH	117A00	10.4	7.8/9.6	-	-	-	049
		110A00	16.0	12.0/14.7	049	049	049	049
		112A00	32.0	24.0/29.4	049	049	049	049
		112A00,117A00	42.4	31.8/38.9	051	051	051	051
		112A00,110A00	50.0	37.6/45.9	051	051	051	051
460-3-60	STD	116A00	13.9	12.8	047	047	047	047
		113A00	16.5	15.2	047	047	047	047
		115A00	33.0	30.3	047	047	047	047
		114A00,116A00	41.7	38.3	050	050	050	050
		115A00,113A00	50.0	45.9	050	050	050	050
	MED	116A00	13.9	12.8	047	047	047	047
		113A00	16.5	15.2	047	047	047	047
		115A00	33.0	30.3	047	047	047	050
		114A00,116A00	41.7	38.3	050	050	050	050
		115A00,113A00	50.0	45.9	050	050	050	050
	HIGH	116A00	13.9	12.8	047	047	047	047
		113A00	16.5	15.2	047	047	047	047
		115A00	33.0	30.3	047	047	050	050
		114A00,116A00	41.7	38.3	050	050	050	050
		115A00,113A00	50.0	45.9	050	050	050	050
575-3-60	STD	118A00	17.0	17.0	047	047	047	047
		119A00	34.0	34.0	047	050	047	050
		118A00,119A00	51.0	51.0	050	050	050	050
	MED	118A00	17.0	17.0	047	047	047	047
		119A00	34.0	34.0	047	050	047	050
		118A00,119A00	51.0	51.0	050	050	050	050
	HIGH	118A00	17.0	17.0	047	047	047	047
		119A00	34.0	34.0	047	050	050	050
		118A00,119A00	51.0	51.0	050	050	050	050

**LEGEND:**

- APP PWR - 208 / 230V / 460V / 575V
- C.O. - Convenience outlet
- FLA - Full load amps
- IFM - Indoor fan motor
- NOM PWR - 240V / 480V / 600V
- P.E. - Power exhaust
- PWRD - Powered convenience outlet
- UNPWRD - Unpowered convenience outlet

# ELECTRIC HEAT - ELECTRICAL INFORMATION (UNITS PRODUCED ON OR AFTER JULY 30, 2012)

Table 11 (cont.) - 50TC\*\*16

## 2-STAGE COOLING 1-SPEED INDOOR FAN MOTOR WITHOUT FACTORY INSTALLED NON-FUSED DISCONNECT

NOM. V-PH-Hz.	IFM TYPE	ELECTRIC HEATER PART NUMBER CRHEATERXXXXXX	NOM PWR (kW)	APP PWR (kW)	SINGLE POINT KIT PART NUMBER CRSINGLEXXXXXX			
					NO C.O. or UNPWRD C.O.		w/PWRD C.O.	
					NO P.E.	w/P.E. (pwrd fr/unit)	NO P.E.	w/P.E. (pwrd fr/unit)
208/ 230-3-60	STD	291A00	16.5	12.4/15.2	049	049	049	049
		294A00	33.5	25.2/30.8	049	049	049	049
		288A00,294A00	43.5	32.7/40.0	051	051	051	051
		291A00,294A00	50.0	37.6/45.9	051	051	051	051
		294A00,294A00	67.0	50.3/61.5	053	053	053	053
	MED	291A00	16.5	12.4/15.2	049	049	049	049
		294A00	33.5	25.2/30.8	049	049	049	049
		288A00,294A00	43.5	32.7/40.0	051	051	051	051
		291A00,294A00	50.0	37.6/45.9	051	051	051	051
		294A00,294A00	67.0	50.3/61.5	053	053	053	053
	HIGH	291A00	16.5	12.4/15.2	049	049	049	049
		294A00	33.5	25.2/30.8	049	049	049	049
288A00,294A00		43.5	32.7/40.0	051	051	051	051	
291A00,294A00		50.0	37.6/45.9	051	051	051	051	
294A00,294A00		67.0	50.3/61.5	053	053	053	053	
460-3-60	STD	292A00	16.5	15.2	-	-	-	-
		295A00	33.5	30.8	047	047	047	050
		289A00,295A00	43.5	40.0	050	050	050	050
		292A00,295A00	50.0	45.9	050	050	050	050
		295A00,295A00	67.0	61.5	050	050	050	050
	MED	292A00	16.5	15.2	-	-	-	-
		295A00	33.5	30.8	047	047	047	050
		289A00,295A00	43.5	40.0	050	050	050	050
		292A00,295A00	50.0	45.9	050	050	050	050
		295A00,295A00	67.0	61.5	050	050	050	050
	HIGH	292A00	16.5	15.2	-	-	-	-
		295A00	33.5	30.8	050	050	050	050
289A00,295A00		43.5	40.0	050	050	050	050	
292A00,295A00		50.0	45.9	050	050	050	050	
295A00,295A00		67.0	61.5	050	050	050	050	
575-3-60	STD	293A00	16.5	15.2	-	-	-	-
		296A00	33.5	30.8	047	047	047	047
		290A00,296A00	43.5	40.0	047	050	047	050
		293A00,296A00	50.0	45.9	047	047	047	047
		296A00,296A00	67.0	61.5	050	050	050	050
	MED	293A00	16.5	15.2	-	-	-	-
		296A00	33.5	30.8	047	047	047	047
		290A00,296A00	43.5	40.0	047	050	047	050
		293A00,296A00	50.0	45.9	047	047	047	047
		296A00,296A00	67.0	61.5	050	050	050	050
	HIGH	293A00	16.5	15.2	-	-	-	-
		296A00	33.5	30.8	047	047	047	047
290A00,296A00		43.5	40.0	050	050	050	050	
293A00,296A00		50.0	45.9	050	050	050	050	
296A00,296A00		67.0	61.5	050	050	050	050	

**LEGEND:**

- APP PWR - 208 / 230V / 460V / 575V
- C.O. - Convenience outlet
- FLA - Full load amps
- IFM - Indoor fan motor
- NOM PWR - 240V / 480V / 600V
- P.E. - Power exhaust
- PWRD - Powered convenience outlet
- UNPWRD - Unpowered convenience outlet

# ELECTRIC HEAT - ELECTRICAL INFORMATION (UNITS PRODUCED ON OR AFTER JULY 30, 2012)

Table 11 (cont.) - 50TC\*\*16

## 2-STAGE COOLING 1-SPEED INDOOR FAN MOTOR WITH FACTORY INSTALLED NON-FUSED DISCONNECT

NOM. V-PH-Hz.	IFM TYPE	ELECTRIC HEATER PART NUMBER CRHEATERXXXXXX	NOM PWR (kW)	APP PWR (kW)	SINGLE POINT KIT PART NUMBER CRSINGLEXXXXXX			
					NO C.O. or UNPWRD C.O.		w/PWRD C.O.	
					NO P.E.	w/P.E. (pwrd fr/unit)	NO P.E.	w/P.E. (pwrd fr/unit)
208/ 230-3-60	STD	291A00	16.5	12.4/15.2	049	049	049	049
		294A00	33.5	25.2/30.8	049	049	049	049
		288A00,294A00	43.5	32.7/40.0	051	051	051	051
		291A00,294A00	50.0	37.6/45.9	051	051	051	051
		294A00,294A00	67.0	50.3/61.5	053	053	053	053
	MED	291A00	16.5	12.4/15.2	049	049	049	049
		294A00	33.5	25.2/30.8	049	049	049	049
		288A00,294A00	43.5	32.7/40.0	051	051	051	051
		291A00,294A00	50.0	37.6/45.9	051	051	051	051
		294A00,294A00	67.0	50.3/61.5	053	053	053	053
	HIGH	291A00	16.5	12.4/15.2	049	049	049	049
		294A00	33.5	25.2/30.8	049	049	049	049
288A00,294A00		43.5	32.7/40.0	051	051	051	051	
291A00,294A00		50.0	37.6/45.9	051	051	051	051	
294A00,294A00		67.0	50.3/61.5	053	053	053	053	
460-3-60	STD	292A00	16.5	15.2	-	-	-	-
		295A00	33.5	30.8	047	047	047	050
		289A00,295A00	43.5	40.0	050	050	050	050
		292A00,295A00	50.0	45.9	050	050	050	050
		295A00,295A00	67.0	61.5	050	050	050	050
	MED	292A00	16.5	15.2	-	-	-	-
		295A00	33.5	30.8	047	047	047	050
		289A00,295A00	43.5	40.0	050	050	050	050
		292A00,295A00	50.0	45.9	050	050	050	050
		295A00,295A00	67.0	61.5	050	050	050	050
	HIGH	292A00	16.5	15.2	-	-	-	-
		295A00	33.5	30.8	050	050	050	050
		289A00,295A00	43.5	40.0	050	050	050	050
		292A00,295A00	50.0	45.9	050	050	050	050
		295A00,295A00	67.0	61.5	050	050	050	050
575-3-60	STD	293A00	16.5	15.2	-	-	-	-
		296A00	33.5	30.8	047	047	047	047
		290A00,296A00	43.5	40.0	047	050	047	050
		293A00,296A00	50.0	45.9	047	047	047	047
		296A00,296A00	67.0	61.5	050	050	050	050
	MED	293A00	16.5	15.2	-	-	-	-
		296A00	33.5	30.8	047	047	047	047
		290A00,296A00	43.5	40.0	047	050	047	050
		293A00,296A00	50.0	45.9	047	047	047	047
		296A00,296A00	67.0	61.5	050	050	050	050
	HIGH	293A00	16.5	15.2	-	-	-	-
		296A00	33.5	30.8	047	047	047	047
		290A00,296A00	43.5	40.0	050	050	050	050
		293A00,296A00	50.0	45.9	050	050	050	050
		296A00,296A00	67.0	61.5	050	050	050	050

**LEGEND:**

- APP PWR - 208 / 230V / 460V / 575V
- C.O. - Convenience outlet
- FLA - Full load amps
- IFM - Indoor fan motor
- NOM PWR - 240V / 480V / 600V
- P.E. - Power exhaust
- PWRD - Powered convenience outlet
- UNPWRD - Unpowered convenience outlet



# ELECTRIC HEAT - ELECTRICAL INFORMATION (UNITS PRODUCED ON OR AFTER JULY 30, 2012)

Table 11 (cont.) - 50TC\*\*16

## 2-STAGE COOLING 2-SPEED INDOOR FAN MOTOR WITHOUT FACTORY INSTALLED NON-FUSED DISCONNECT

NOM. V-PH-Hz.	IFM TYPE	ELECTRIC HEATER PART NUMBER CRHEATERXXXXXX	NOM PWR (kW)	APP PWR (kW)	SINGLE POINT KIT PART NUMBER CRSINGLEXXXXXX			
					NO C.O. or UNPWRD C.O.		w/PWRD C.O.	
					NO P.E.	w/P.E. (pwrd fr/unit)	NO P.E.	w/P.E. (pwrd fr/unit)
208/ 230-3-60	STD	291A00	16.5	12.4/15.2	049	049	049	049
		294A00	33.5	25.2/30.8	049	049	049	049
		288A00,294A00	43.5	32.7/40.0	051	051	051	051
		291A00,294A00	50.0	37.6/45.9	051	051	051	051
		294A00,294A00	67.0	50.3/61.5	053	053	053	053
	MED	291A00	16.5	12.4/15.2	049	049	049	049
		294A00	33.5	25.2/30.8	049	049	049	049
		288A00,294A00	43.5	32.7/40.0	051	051	051	051
		291A00,294A00	50.0	37.6/45.9	051	051	051	051
		294A00,294A00	67.0	50.3/61.5	053	053	053	053
	HIGH	294A00	33.5	25.2/30.8	049	049	049	049
		288A00,294A00	43.5	32.7/40.0	051	051	051	051
291A00,294A00		50.0	37.6/45.9	051	051	051	051	
294A00,294A00		67.0	50.3/61.5	053	053	053	053	
460-3-60	STD	292A00	16.5	15.2	-	-	-	-
		295A00	33.5	30.8	047	047	047	050
		289A00,295A00	43.5	40.0	050	050	050	050
		292A00,295A00	50.0	45.9	050	050	050	050
		295A00,295A00	67.0	61.5	050	050	050	050
	MED	292A00	16.5	15.2	-	-	-	-
		295A00	33.5	30.8	047	047	047	050
		289A00,295A00	43.5	40.0	050	050	050	050
		292A00,295A00	50.0	45.9	050	050	050	050
		295A00,295A00	67.0	61.5	050	050	050	050
	HIGH	292A00	16.5	15.2	-	-	-	-
		295A00	33.5	30.8	050	050	050	050
289A00,295A00		43.5	40.0	050	050	050	050	
292A00,295A00		50.0	45.9	050	050	050	050	
575-3-60	STD	293A00	16.5	15.2	-	-	-	-
		296A00	33.5	30.8	047	047	047	047
		290A00,296A00	43.5	40.0	047	050	047	050
		293A00,296A00	50.0	45.9	047	047	047	050
		296A00,296A00	67.0	61.5	050	050	050	050
	MED	293A00	16.5	15.2	-	-	-	-
		296A00	33.5	30.8	047	047	047	047
		290A00,296A00	43.5	40.0	047	050	047	050
		293A00,296A00	50.0	45.9	047	047	047	050
		296A00,296A00	67.0	61.5	050	050	050	050
	HIGH	293A00	16.5	15.2	-	-	-	-
		296A00	33.5	30.8	047	047	047	047
290A00,296A00		43.5	40.0	050	050	050	050	
293A00,296A00		50.0	45.9	050	050	050	050	
HIGH	296A00,296A00	67.0	61.5	050	050	050	050	

**LEGEND:**

- APP PWR - 208 / 230V / 460V / 575V
- C.O. - Convenience outlet
- FLA - Full load amps
- IFM - Indoor fan motor
- NOM PWR - 240V / 480V / 600V
- P.E. - Power exhaust
- PWRD - Powered convenience outlet
- UNPWRD - Unpowered convenience outlet

**ELECTRICAL INFORMATION  
(UNITS PRODUCED ON OR AFTER JULY 30, 2012) cont.**

**Table 12 – UNIT WIRE/FUSE OR HACR BREAKER SIZING DATA**

UNIT	NO M, V-Ph-HZ	ELEC. HTR				NO C.O. or UNPWR C.O.															
		IFM TYPE	CRHEATER***A00	Nom (kW)	FLA	NO PE.			w/ P.E. (pwrld fr/unit)			NO PE.			w/ PWRD C.O.						
						MCA	MAX FUSE or HACR BRKR	DISC. SIZE FLA LRA	MCA	MAX FUSE or HACR BRKR	DISC. SIZE FLA LRA	MCA	MAX FUSE or HACR BRKR	DISC. SIZE FLA LRA	MCA	MAX FUSE or HACR BRKR	DISC. SIZE FLA LRA				
50TC**04		STD	NONE	-	-	28	40	26	95	30	45	29	97	32	45	32	34	50	34	102	
			101A	3.3/4.4	15.9/18.3	28/29	40/40	26/27	95/95	30/32	45/45	29/29	97/97	32/35	45/45	32/32	34/34	50/50	34/34	102/102	
			102A	4.9/6.5	23.5/27.1	36/40	40/45	33/37	95/95	38/43	45/45	35/39	97/97	42/46	45/50	38/42	40/45	50/50	40/45	102/102	
			103B	6.5/8.7	31.4/36.3	48/52	50/60	42/47	95/95	48/54	50/60	44/50	97/97	52/58	60/60	47/53	49/55	60/60	49/55	102/102	
			104B	7.9/10.5	37.9/43.8	54/61	60/70	49/56	95/95	56/64	60/70	51/58	97/97	60/67	60/70	55/62	57/64	70/70	57/64	102/102	
			102A+102A	9.8/13.0	46.9/54.2	65/74	70/80	60/68	95/95	68/77	70/80	62/70	97/97	71/80	80/80	65/73	67/76	80/90	67/76	102/102	
			NONE	-	-	28	40	26	95	30	45	29	97	32	45	32	34	50	34	102	
			101A	3.3/4.4	15.9/18.3	28/29	40/40	26/27	95/95	30/32	45/45	29/29	97/97	32/35	45/45	32/32	34/34	50/50	34/34	102/102	
			102A	4.9/6.5	23.5/27.1	36/40	40/45	33/37	95/95	38/43	45/45	35/39	97/97	42/46	45/50	38/42	40/45	50/50	40/45	102/102	
			103B	6.5/8.7	31.4/36.3	48/52	50/60	42/47	95/95	48/54	50/60	44/50	97/97	52/58	60/60	47/53	49/55	60/60	49/55	102/102	
104B	7.9/10.5	37.9/43.8	54/61	60/70	49/56	95/95	56/64	60/70	51/58	97/97	60/67	60/70	55/62	57/64	70/70	57/64	102/102				
102A+102A	9.8/13.0	46.9/54.2	65/74	70/80	60/68	95/95	68/77	70/80	62/70	97/97	71/80	80/80	65/73	67/76	80/90	67/76	102/102				
208/230-3-60		STD	NONE	-	-	20	30	20	96	22	30	22	98	25	30	27	103				
			101A	3.3/4.4	9.2/10.6	20/20	30/30	20/20	96/96	22/23	30/30	22/22	98/98	25/26	30/30	27/29	30/30	27/27	103/103		
			102A	4.9/6.5	13.6/15.6	24/26	30/30	22/24	96/96	26/29	30/30	24/26	98/98	30/32	30/35	27/29	35/35	29/32	103/103		
			103B	6.5/8.7	18.1/20.9	30/33	30/35	27/30	96/96	32/35	35/40	29/32	98/98	36/39	40/40	32/36	35/38	40/45	35/38	103/103	
			104B	7.9/10.5	21.9/25.3	34/39	35/40	31/35	96/96	37/41	40/45	33/37	98/98	40/45	40/45	37/41	45/50	39/43	40/45	103/103	
			105A	12.0/16.0	33.4/38.5	49/55	50/60	44/50	96/96	51/57	60/60	47/52	98/98	55/61	60/70	50/56	60/70	52/58	60/70	52/58	103/103
			NONE	-	-	20	30	20	96	22	30	22	30	22	98	25	30	27	103		
			101A	3.3/4.4	9.2/10.6	20/20	30/30	20/20	96/96	22/23	30/30	22/22	98/98	25/26	30/30	25/25	30/30	27/29	30/30	27/27	103/103
			102A	4.9/6.5	13.6/15.6	24/26	30/30	22/24	96/96	26/29	30/30	24/26	98/98	30/32	30/35	27/29	35/35	29/32	30/30	27/27	103/103
			103B	6.5/8.7	18.1/20.9	30/33	30/35	27/30	96/96	32/35	35/40	29/32	98/98	36/39	40/40	32/36	35/38	40/45	35/38	103/103	
104B	7.9/10.5	21.9/25.3	34/39	35/40	31/35	96/96	37/41	40/45	33/37	98/98	40/45	40/45	37/41	45/50	39/43	40/45	103/103				
105A	12.0/16.0	33.4/38.5	49/55	50/60	44/50	96/96	51/57	60/60	47/52	98/98	55/61	60/70	50/56	60/70	52/58	60/70	52/58	103/103			
208/230-1-60		STD	NONE	-	-	22	30	22	98	22	30	22	98	25	30	27	103				
			101A	3.3/4.4	15.9/18.3	28/29	40/40	26/27	95/95	30/32	45/45	29/29	97/97	32/35	45/45	32/32	34/34	50/50	34/34	102/102	
			102A	4.9/6.5	23.5/27.1	36/40	40/45	33/37	95/95	38/43	45/45	35/39	97/97	42/46	45/50	38/42	40/45	50/50	40/45	102/102	
			103B	6.5/8.7	31.4/36.3	48/52	50/60	42/47	95/95	48/54	50/60	44/50	97/97	52/58	60/60	47/53	49/55	60/60	49/55	102/102	
			104B	7.9/10.5	37.9/43.8	54/61	60/70	49/56	95/95	56/64	60/70	51/58	97/97	60/67	60/70	55/62	57/64	70/70	57/64	102/102	
			102A+102A	9.8/13.0	46.9/54.2	65/74	70/80	60/68	95/95	68/77	70/80	62/70	97/97	71/80	80/80	65/73	67/76	80/90	67/76	102/102	
			NONE	-	-	22	30	22	98	22	30	22	30	22	98	25	30	27	103		
			101A	3.3/4.4	15.9/18.3	28/29	40/40	26/27	95/95	30/32	45/45	29/29	97/97	32/35	45/45	32/32	34/34	50/50	34/34	102/102	
			102A	4.9/6.5	23.5/27.1	36/40	40/45	33/37	95/95	38/43	45/45	35/39	97/97	42/46	45/50	38/42	40/45	50/50	40/45	102/102	
			103B	6.5/8.7	31.4/36.3	48/52	50/60	42/47	95/95	48/54	50/60	44/50	97/97	52/58	60/60	47/53	49/55	60/60	49/55	102/102	
104B	7.9/10.5	37.9/43.8	54/61	60/70	49/56	95/95	56/64	60/70	51/58	97/97	60/67	60/70	55/62	57/64	70/70	57/64	102/102				
102A+102A	9.8/13.0	46.9/54.2	65/74	70/80	60/68	95/95	68/77	70/80	62/70	97/97	71/80	80/80	65/73	67/76	80/90	67/76	102/102				
208/230-3-60		MED	NONE	-	-	22	30	22	98	22	30	22	98	25	30	27	103				
			101A	3.3/4.4	9.2/10.6	20/20	30/30	20/20	96/96	22/23	30/30	22/22	98/98	25/26	30/30	27/29	30/30	27/27	103/103		
			102A	4.9/6.5	13.6/15.6	24/26	30/30	22/24	96/96	26/29	30/30	24/26	98/98	30/32	30/35	27/29	35/35	29/32	103/103		
			103B	6.5/8.7	18.1/20.9	30/33	30/35	27/30	96/96	32/35	35/40	29/32	98/98	36/39	40/40	32/36	35/38	40/45	35/38	103/103	
			104B	7.9/10.5	21.9/25.3	34/39	35/40	31/35	96/96	37/41	40/45	33/37	98/98	40/45	40/45	37/41	45/50	39/43	40/45	103/103	
			105A	12.0/16.0	33.4/38.5	49/55	50/60	44/50	96/96	51/57	60/60	47/52	98/98	55/61	60/70	50/56	60/70	52/58	60/70	52/58	103/103
			NONE	-	-	22	30	22	98	22	30	22	30	22	98	25	30	27	103		
			101A	3.3/4.4	9.2/10.6	20/20	30/30	20/20	96/96	22/23	30/30	22/22	98/98	25/26	30/30	25/25	30/30	27/29	30/30	27/27	103/103
			102A	4.9/6.5	13.6/15.6	24/26	30/30	22/24	96/96	26/29	30/30	24/26	98/98	30/32	30/35	27/29	35/35	29/32	30/30	27/27	103/103
			103B	6.5/8.7	18.1/20.9	30/33	30/35	27/30	96/96	32/35	35/40	29/32	98/98	36/39	40/40	32/36	35/38	40/45	35/38	103/103	
104B	7.9/10.5	21.9/25.3	34/39	35/40	31/35	96/96	37/41	40/45	33/37	98/98	40/45	40/45	37/41	45/50	39/43	40/45	103/103				
105A	12.0/16.0	33.4/38.5	49/55	50/60	44/50	96/96	51/57	60/60	47/52	98/98	55/61	60/70	50/56	60/70	52/58	60/70	52/58	103/103			
208/230-1-60		HIGH	NONE	-	-	22	30	22	98	22	30	22	98	25	30	27	103				
			101A	3.3/4.4	9.2/10.6	20/20	30/30	20/20	96/96	22/23	30/30	22/22	98/98	25/26	30/30	27/29	30/30	27/27	103/103		
			102A	4.9/6.5	13.6/15.6	24/26	30/30	22/24	96/96	26/29	30/30	24/26	98/98	30/32	30/35	27/29	35/35	29/32	103/103		
			103B	6.5/8.7	18.1/20.9	30/33	30/35	27/30	96/96	32/35	35/40	29/32	98/98	36/39	40/40	32/36	35/38	40/45	35/38	103/103	
			104B	7.9/10.5	21.9/25.3	34/39	35/40	31/35	96/96	37/41	40/45	33/37	98/98	40/45	40/45	37/41	45/50	39/43	40/45	103/103	
			105A	12.0/16.0	33.4/38.5	49/55	50/60	44/50	96/96	51/57	60/60	47/52	98/98	55/61	60/70	50/56	60/70	52/58	60/70	52/58	103/103
			NONE	-	-	22	30	22	98	22	30	22	30	22	98	25	30	27	103		
			101A	3.3/4.4	9.2/10.6	20/20	30/30	20/20	96/96	22/23	30/30	22/22	98/98	25/26	30/30	25/25	30/30	27/29	30/30	27/27	103/103
			102A	4.9/6.5	13.6/15.6	24/26	30/30	22/24	96/96	26/29	30/30	24/26	98/98	30/32	30/35	27/29	35/35	29/32	30/30	27/27	103/103
			103B	6.5/8.7	18.1/20.9	30/33	30/35	27/30	96/96	32/35	35/40	29/32	98/98	36/39	40/40	32/36	35/38	40/45	35/38	103/103	
104B	7.9/10.5	21.9/25.3	34/39																		

**ELECTRICAL INFORMATION  
(UNITS PRODUCED ON OR AFTER JULY 30, 2012) cont.**

**Table 12 - Unit Wire/Fuse or HACR Breaker Sizing Data (cont.)**

UNIT	NO M, V, Ph-HZ	ELEC. HTR			NO C.O. or UNPWR C.O.										w/ PWRD C.O.									
		IFM TYPE	CRHEATER***A00	Nom (kW)	FLA	NO PE.			w/ PE. (pwrld fr/unit)			NO PE.			w/ PWRD C.O.			w/ PE. (pwrld fr/unit)						
						MCA	MAX FUSE or HACR BRKR	DISC. SIZE	MCA	MAX FUSE or HACR BRKR	DISC. SIZE	MCA	MAX FUSE or HACR BRKR	DISC. SIZE	MCA	MAX FUSE or HACR BRKR	DISC. SIZE	MCA	MAX FUSE or HACR BRKR	DISC. SIZE				
				FLA	LRA	LRA	FLA	LRA	LRA	FLA	LRA	LRA	FLA	LRA	LRA	FLA	LRA	LRA	FLA	LRA	LRA			
50TC**04	460-3-60	STD	NONE	-	-	11	49	12	15	12	50	13	15	13	51	14	20	14	20	14	52			
			106A	6.0	7.2	11	49	12	15	12	50	14	15	14	51	17	20	15	20	15	52			
			107A	8.8	10.6	15	49	16	20	16	50	18	20	18	20	51	21	25	19	25	19	52		
			108A	11.5	13.8	19	49	20	25	20	50	24	25	21	25	51	25	25	23	25	23	52		
			109A	14.0	16.8	22	49	23	30	23	50	27	30	25	30	51	29	30	26	30	26	52		
575-3-60	460-3-60	HIGH	NONE	-	-	11	49	12	15	12	50	13	15	13	51	14	20	14	20	14	52			
			106A	6.0	7.2	11	49	12	15	12	50	14	15	14	51	17	20	15	20	15	52			
			107A	8.8	10.6	15	49	16	20	16	50	18	20	18	20	51	21	25	19	25	19	52		
			108A	11.5	13.8	19	49	20	25	20	50	24	25	21	25	51	25	25	23	25	23	52		
			109A	14.0	16.8	22	49	23	30	23	50	27	30	25	30	51	29	30	26	30	26	52		
575-3-60	575-3-60	STD	NONE	-	-	8	46	10	15	10	48	10	15	10	48	10	15	12	15	12	50			
			NONE	-	-	8	46	10	15	10	48	10	15	10	48	10	15	12	15	12	50			
			NONE	-	-	8	50	10	15	10	52	10	15	9	15	11	15	12	15	12	54			

**ELECTRICAL INFORMATION  
(UNITS PRODUCED ON OR AFTER JULY 30, 2012) cont.**

**Table 12 - UNIT WIRE/FUSE OR HACR BREAKER SIZING DATA (cont.)**

UNIT	NO M, V-PH-HZ	ELEC. HTR				NO C.O. or UNPWR C.O.													
		CRHEATER***A00	Nom (kW)	FLA	MCA	NO PE.			w/ P.E. (pwrld fr/unit)			NO PE.			w/ PWRD C.O.				
						MAX FUSE or HACR BRKR	DISC. SIZE	MCA	MAX FUSE or HACR BRKR	DISC. SIZE	MCA	MAX FUSE or HACR BRKR	DISC. SIZE	MCA	MAX FUSE or HACR BRKR	DISC. SIZE	MCA		
IFM TYPE					FLA	LRA		FLA	LRA		FLA	LRA		FLA	LRA		FLA	LRA	
STD		NONE	-	-	34	32	133	36	50	35	135	39	60	38	138	41	60	40	140
		101A	3.3/4.4	15.9/18.3	34/34	32/32	133/133	36/36	50/50	35/35	135/135	39/39	60/60	38/38	138/138	41/41	60/60	40/40	140/140
		103B	6.5/8.7	31.4/36.3	46/52	42/47	133/133	48/54	50/60	44/50	135/135	52/58	60/60	47/53	138/138	54/60	60/60	49/55	140/140
		102A+102A	9.8/13.0	46.9/54.2	65/74	60/68	133/133	68/77	70/80	62/70	135/135	71/80	80/80	65/73	138/138	74/83	80/90	67/76	140/140
MED		103B+103B	13.1/17.4	62.8/72.5	85/97	78/89	133/133	87/100	90/100	80/91	135/135	91/103	100/110	83/95	138/138	93/106	100/110	86/97	140/140
		104B+104B	15.8/21.0	75.8/87.5	101/116	93/106	133/133	104/118	110/125	95/108	135/135	107/122	110/125	98/112	138/138	110/124	110/125	101/114	140/140
		NONE	-	-	34	32	133	36	50	35	135	39	60	38	138	41	60	40	140
		101A	3.3/4.4	15.9/18.3	34/34	32/32	133/133	36/36	50/50	35/35	135/135	39/39	60/60	38/38	138/138	41/41	60/60	40/40	140/140
STD		103B	6.5/8.7	31.4/36.3	46/52	42/47	133/133	48/54	50/60	44/50	135/135	52/58	60/60	47/53	138/138	54/60	60/60	49/55	140/140
		102A+102A	9.8/13.0	46.9/54.2	65/74	60/68	133/133	68/77	70/80	62/70	135/135	71/80	80/80	65/73	138/138	74/83	80/90	67/76	140/140
		103B+103B	13.1/17.4	62.8/72.5	85/97	78/89	133/133	87/100	90/100	80/91	135/135	91/103	100/110	83/95	138/138	93/106	100/110	86/97	140/140
		104B+104B	15.8/21.0	75.8/87.5	101/116	93/106	133/133	104/118	110/125	95/108	135/135	107/122	110/125	98/112	138/138	110/124	110/125	101/114	140/140
50TC**05		NONE	-	-	24	23	106	26	30	26	108	29	40	29	111	31	40	31	113
		102A	4.9/6.5	13.6/15.6	24/26	23/24	106/106	26/29	30/30	26/26	108/108	30/32	40/40	29/29	111/111	32/35	40/40	31/32	113/113
		103B	6.5/8.7	18.1/20.9	30/33	27/30	106/106	32/35	35/40	29/32	108/108	36/39	40/40	32/36	111/111	38/41	40/45	35/38	113/113
		105A	12.0/16.0	33.4/38.5	49/55	44/50	106/106	51/57	60/60	47/52	108/108	55/61	60/70	50/56	111/111	57/63	60/70	52/58	113/113
208/230-3-60		104B+104B	15.8/21.0	43.8/50.5	62/70	56/64	106/106	64/72	70/80	59/66	108/108	68/76	70/80	62/70	111/111	70/78	70/80	64/72	113/113
		NONE	-	-	24	23	106	26	30	26	108	29	40	29	111	31	40	31	113
		102A	4.9/6.5	13.6/15.6	24/26	23/24	106/106	26/29	30/30	26/26	108/108	30/32	40/40	29/29	111/111	32/35	40/40	31/32	113/113
		103B	6.5/8.7	18.1/20.9	30/33	27/30	106/106	32/35	35/40	29/32	108/108	36/39	40/40	32/36	111/111	38/41	40/45	35/38	113/113
HIGH		105A	12.0/16.0	33.4/38.5	49/55	44/50	106/106	51/57	60/60	47/52	108/108	55/61	60/70	50/56	111/111	57/63	60/70	52/58	113/113
		104B+104B	15.8/21.0	43.8/50.5	62/70	56/64	106/106	64/72	70/80	59/66	108/108	68/76	70/80	62/70	111/111	70/78	70/80	64/72	113/113
		NONE	-	-	26/26	25/25	144	28/28	40/40	28/27	146	31/31	40/40	31/31	149	33/32	45/45	33/33	151
		102A	4.9/6.5	13.6/15.6	26/28	25/26	144/144	28/31	40/40	28/28	146/146	32/34	40/40	31/31	149/149	34/37	45/45	33/33	151/151
208/230-3-60		103B	6.5/8.7	18.1/20.9	32/35	29/32	144/144	34/37	40/40	31/34	146/146	38/41	40/45	34/37	149/149	40/43	45/45	36/39	151/151
		105A	12.0/16.0	33.4/38.5	51/57	46/52	144/144	53/59	60/60	49/54	146/146	57/63	60/70	52/58	149/149	59/65	60/70	54/60	151/151
		104B+104B	15.8/21.0	43.8/50.5	64/72	58/66	144/144	66/74	70/80	60/68	146/146	70/78	70/80	64/71	149/149	72/80	80/80	66/73	151/151
		NONE	-	-	64/72	58/66	144/144	66/74	70/80	60/68	146/146	70/78	70/80	64/71	149/149	72/80	80/80	66/73	151/151

**ELECTRICAL INFORMATION  
(UNITS PRODUCED ON OR AFTER JULY 30, 2012) cont.**

**Table 12 - UNIT WIRE/FUSE OR HACR BREAKER SIZING DATA (cont.)**

UNIT	NO M, V-PH-HZ	ELEC. HTR			NO C.O. or UNPWR C.O.										w/ PWRD C.O.												
		IFM TYPE	CRHEATER**A00	Nom (kW)	FLA	NO PE.					w/ PE. (pwrdr fr/unit)					NO PE.					w/ PWRD C.O.						
						MCA	MAX FUSE or HACR BRKR	FLA	LRA	MCA	MAX FUSE or HACR BRKR	FLA	LRA	MCA	MAX FUSE or HACR BRKR	FLA	LRA	MCA	MAX FUSE or HACR BRKR	FLA	LRA						
50TC**05	460-3-60	STD	NONE	-	-	15	11	52	13	15	12	53	14	15	14	54	15	20	15	15	14	54	15	20	15	55	
			106A	6.0	7.2	15	11	52	14	15	12	53	15	15	14	54	17	20	15	15	14	54	17	20	15	55	
			108A	11.5	13.8	25	19	52	22	25	20	53	24	25	21	54	25	25	23	25	21	54	25	25	23	25	55
			109A	14.0	16.8	25	22	52	26	30	23	53	27	30	25	54	29	30	26	30	25	54	29	30	26	30	55
			108A+108A	23.0	27.7	40	35	52	40	40	36	53	41	45	41	45	37	54	45	45	39	37	54	45	45	39	55
		MED	NONE	-	-	15	11	52	13	15	12	53	14	15	14	54	15	20	15	15	14	54	15	20	15	55	
			106A	6.0	7.2	15	11	52	14	15	12	53	15	15	14	54	17	20	15	15	14	54	17	20	15	55	
			108A	11.5	13.8	25	19	52	22	25	20	53	24	25	21	54	25	25	23	25	21	54	25	25	23	25	55
			109A	14.0	16.8	25	22	52	26	30	23	53	27	30	25	54	29	30	26	30	25	54	29	30	26	30	55
			108A+108A	23.0	27.7	40	35	52	40	40	36	53	41	45	41	45	37	54	45	45	39	37	54	45	45	39	55
575-3-60	575-3-60	HIGH	NONE	-	-	15	12	71	13	15	13	72	15	15	14	73	16	20	16	14	73	16	20	16	74		
			106A	6.0	7.2	15	12	71	14	15	13	72	15	15	14	73	18	20	16	15	73	18	20	16	74		
			108A	11.5	13.8	25	20	71	23	25	21	72	25	25	22	73	26	30	23	22	73	26	30	23	74		
			109A	14.0	16.8	30	23	71	27	30	24	72	28	30	26	73	30	30	27	26	73	30	30	27	74		
			108A+108A	23.0	27.7	40	36	71	41	45	37	72	42	45	38	73	43	45	39	38	73	43	45	39	74		
575-3-60	575-3-60	STD	NONE	-	-	15	9	42	11	15	11	44	11	15	11	44	11	15	11	11	44	11	15	13	46		
			NONE	-	-	15	9	42	11	15	11	44	11	15	11	44	11	15	11	11	44	11	15	13	46		
			NONE	-	-	15	9	46	11	15	11	48	11	15	10	48	11	15	13	10	48	11	15	13	50		

# ELECTRICAL INFORMATION (UNITS PRODUCED ON OR AFTER JULY 30, 2012) cont.

**Table 12 - UNIT WIRE/FUSE OR HACR BREAKER SIZING DATA (cont.)**

UNIT	NO M. V-PH-HZ	ELEC. HTR										NO C.O. or UNPWR C.O.										w/ PWRD C.O.									
		IFM TYPE	CRHEATER***A00	Nom (kW)	FLA	NO PE.			w/ PE. (pwrdr fr/unit)			NO PE.			w/ PE. (pwrdr fr/unit)			NO PE.			w/ PE. (pwrdr fr/unit)										
						MCA	MAX FUSE or HACR BRKR	DISC. SIZE	FLA	LRA	MCA	MAX FUSE or HACR BRKR	DISC. SIZE	FLA	LRA	MCA	MAX FUSE or HACR BRKR	DISC. SIZE	FLA	LRA	MCA	MAX FUSE or HACR BRKR	DISC. SIZE	FLA	LRA						
50TC**06	208/230-1-60	STD	NONE	-	-	37	150	42	60	40	152	44	60	43	155	46	60	45	157	48	162	48	182	48	182						
			102A	4.9/6.5	23.5/27.1	37/37	150/150	42/43	60/60	40/40	152/152	44/46	60/60	43/43	155/155	46/49	60/60	45/45	157/157	48/48	182/182	48/48	182/182	48/48	182/182						
			103B	6.5/8.7	31.4/36.3	42/47	150/150	48/54	60/60	44/50	152/152	52/58	60/60	47/53	155/155	54/60	60/60	49/55	157/157	52/58	182/182	52/58	182/182	52/58	182/182						
			102A+102A	9.8/13.0	46.9/54.2	60/68	150/150	68/77	70/80	62/70	152/152	71/80	80/80	65/73	155/155	74/83	80/90	67/76	157/157	74/83	182/182	74/83	182/182	74/83	182/182						
			103B+103B	13.1/17.4	62.8/72.5	78/89	150/150	87/100	90/100	80/91	152/152	91/103	100/110	89/95	155/155	93/106	100/110	86/97	157/157	93/106	182/182	86/97	182/182	86/97	182/182						
			104B+104B	15.8/21.0	75.8/87.5	93/106	150/150	104/118	110/125	95/108	152/152	107/122	110/125	98/112	155/155	110/124	110/125	101/114	157/157	110/124	182/182	101/114	182/182	101/114	182/182						
			NONE	-	-	40	175	44	60	42	177	47	177	47	60	45	180	48	60	48	182	48	182	48	182	48	182				
			102A	4.9/6.5	23.5/27.1	40/40	175/175	44/45	60/60	42/42	177/177	47/49	60/60	45/45	60/60	45/45	180/180	48/51	60/60	48/48	182/182	48/51	182/182	48/51	182/182						
			103B	6.5/8.7	31.4/36.3	44/50	175/175	51/57	60/60	46/52	177/177	54/61	60/70	50/55	60/70	50/55	180/180	57/63	60/70	52/58	182/182	57/63	182/182	57/63	182/182						
			102A+102A	9.8/13.0	46.9/54.2	62/70	175/175	70/79	70/80	64/73	177/177	74/83	80/90	68/76	70/80	68/76	180/180	76/85	80/90	70/78	182/182	76/85	182/182	76/85	182/182						
103B+103B	13.1/17.4	62.8/72.5	80/91	175/175	90/102	90/110	82/94	177/177	94/106	100/110	86/97	90/110	86/97	180/180	96/108	100/110	88/99	182/182	96/108	182/182	96/108	182/182									
104B+104B	15.8/21.0	75.8/87.5	95/109	175/175	106/121	110/125	97/111	177/177	110/125	110/125	101/114	110/125	101/114	180/180	112/127	110/125	103/116	182/182	112/127	182/182	112/127	182/182									
208/230-3-60	208/230-3-60	STD	NONE	-	-	26	133	29	40	135	31	45	31	138	33	45	33	140	33	140	33	140	33	140							
			102A	4.9/6.5	13.6/15.6	26/26	133/133	29/29	40/40	28/28	135/135	31/32	45/45	31/31	138/138	33/35	45/45	33/33	140/140	33/35	140/140	33/35	140/140								
			104B	7.9/10.5	21.9/25.3	31/35	133/133	37/41	40/45	33/37	135/135	40/45	45/45	37/41	138/138	43/47	45/50	39/43	140/140	43/47	140/140	43/47	140/140								
			105A	12.0/16.0	33.4/38.5	44/50	133/133	51/57	60/60	47/52	135/135	55/61	60/70	50/56	138/138	57/63	60/70	52/58	140/140	57/63	140/140	57/63	140/140								
			104B+104B	15.8/21.0	43.8/50.5	56/64	133/133	64/72	70/80	59/66	135/135	68/76	70/80	62/70	138/138	70/78	70/80	64/72	140/140	70/78	140/140	70/78	140/140								
			104B+105A	19.9/26.5	55.2/63.8	69/79	133/133	78/89	80/90	72/82	135/135	82/93	90/100	75/85	138/138	84/95	90/100	77/87	140/140	84/95	140/140	77/87	140/140								
			NONE	-	-	28/27	171	30/30	45/45	30/30	173	33/33	45/45	33/33	45/45	176	35/35	50/50	35/35	178	35/35	178	35/35	178							
			102A	4.9/6.5	13.6/15.6	28/27	171/171	30/31	45/45	30/30	173/173	33/34	45/45	33/33	45/45	176/176	35/37	50/50	35/35	178/178	35/37	178/178	35/35	178/178							
			104B	7.9/10.5	21.9/25.3	33/37	171/171	39/43	45/45	35/39	173/173	42/46	45/50	39/42	176/176	45/49	50/50	41/45	178/178	45/49	178/178	41/45	178/178								
			105A	12.0/16.0	33.4/38.5	46/52	171/171	53/59	60/60	49/54	173/173	57/63	60/70	52/58	176/176	59/65	60/70	54/60	178/178	59/65	178/178	54/60	178/178								
104B+104B	15.8/21.0	43.8/50.5	58/66	171/171	66/74	70/80	60/68	173/173	70/78	70/80	64/71	176/176	72/80	80/80	66/73	178/178	72/80	178/178	66/73	178/178											
104B+105A	19.9/26.5	55.2/63.8	71/81	171/171	80/91	90/100	74/83	173/173	84/95	90/100	77/87	176/176	86/97	90/100	79/89	178/178	86/97	178/178	79/89	178/178											
HIGH	208/230-3-60	102A	NONE	-	-	29/29	186	32/32	45/45	32/31	188	35/35	45/45	191	37/36	50/50	37/37	193	37/36	193	37/37	193									
			102A	4.9/6.5	13.6/15.6	29/29	186/186	32/33	45/45	32/31	188/188	35/36	45/45	35/35	191/191	37/39	50/50	37/37	193/193	37/39	193/193	37/37	193/193								
			104B	7.9/10.5	21.9/25.3	35/39	186/186	41/45	45/45	37/41	188/188	44/48	45/50	40/44	191/191	47/51	50/60	43/46	193/193	47/51	193/193	43/46	193/193								
			105A	12.0/16.0	33.4/38.5	48/54	186/186	55/61	60/70	50/56	188/188	59/65	60/70	54/59	191/191	61/67	70/70	56/62	193/193	61/67	193/193	56/62	193/193								
			104B+104B	15.8/21.0	43.8/50.5	60/68	186/186	66/76	70/80	62/70	188/188	72/80	80/80	66/73	191/191	74/82	80/90	68/75	193/193	74/82	193/193	68/75	193/193								
104B+105A	19.9/26.5	55.2/63.8	73/83	186/186	82/93	90/100	75/85	188/188	86/97	90/100	79/88	191/191	88/99	90/100	81/91	193/193	88/99	193/193	81/91	193/193											

**ELECTRICAL INFORMATION  
(UNITS PRODUCED ON OR AFTER JULY 30, 2012) cont.**

**Table 12 - UNIT WIRE/FUSE OR HACR BREAKER SIZING DATA (cont.)**

UNIT	NO M, V-PH-HZ	ELEC. HTR			NO C.O. or UNPWR C.O.										NO PE.										w/ PWRD C.O.									
		IFM TYPE	CRHEATER**A00	Nom (kW)	FLA	NO PE.			w/ P.E. (pwrdr fr/unit)			NO PE.			w/ PWRD C.O.			NO PE.			w/ PWRD C.O.			w/ P.E. (pwrdr fr/unit)			NO PE.			w/ PWRD C.O.				
						MCA	MAX FUSE or HACR BRKR	FLA	DISC. SIZE	MCA	MAX FUSE or HACR BRKR	FLA	DISC. SIZE	MCA	MAX FUSE or HACR BRKR	FLA	DISC. SIZE	MCA	MAX FUSE or HACR BRKR	FLA	DISC. SIZE	MCA	MAX FUSE or HACR BRKR	FLA	DISC. SIZE	MCA	MAX FUSE or HACR BRKR	FLA	DISC. SIZE	MCA	MAX FUSE or HACR BRKR	FLA	DISC. SIZE	
50TC**06	460-3-60	STD	NONE	-	-	13	20	13	63	14	20	14	64	16	20	15	65	17	20	16	66	17	20	15	65	17	20	16	66					
			106A	6.0	7.2	13	20	13	63	14	20	14	64	16	20	15	65	17	20	16	66	17	20	15	65	17	20	16	66					
			108A	11.5	13.8	21	25	19	63	22	25	20	64	24	25	21	65	25	25	23	26	23	25	21	65	25	23	26	23	25				
			109A	14.0	16.8	25	30	22	63	26	30	23	64	27	30	25	65	29	30	26	30	26	25	25	25	65	29	30	26	26				
			108A+108A	23.0	27.7	38	40	35	63	40	40	36	64	41	45	45	37	65	42	45	39	45	37	39	45	37	39	45	39	45				
		108A+109A	25.5	30.7	42	45	38	63	43	45	39	64	45	45	41	65	46	50	42	50	42	42	45	41	65	46	50	42	42					
		NONE	-	-	14	20	14	82	15	20	15	83	16	20	16	84	17	20	16	17	17	17	17	16	84	17	20	17	17					
		106A	6.0	7.2	14	20	14	82	15	20	15	83	16	20	16	84	17	20	16	18	20	16	84	18	20	16	17	17	17	17				
		108A	11.5	13.8	22	25	20	82	23	25	21	83	25	25	21	84	25	25	22	26	30	22	23	22	84	26	30	23	23	25				
		109A	14.0	16.8	26	30	23	82	27	30	24	83	28	30	24	84	28	30	26	30	26	26	26	26	84	30	30	27	27	27				
108A+108A	23.0	27.7	39	40	36	82	41	45	37	83	42	45	37	84	42	45	38	45	38	38	38	38	84	43	45	39	39	39						
108A+109A	25.5	30.7	43	45	39	82	44	45	40	83	46	50	40	84	46	50	42	47	50	42	42	42	84	47	50	43	43	43						
575-3-60	575-3-60	STD	NONE	-	-	11	15	10	48	13	15	12	50	12	15	12	50	14	20	12	14	20	12	50	14	20	14	20						
			106A	6.0	7.2	15	20	15	90	16	20	16	91	17	20	17	92	18	25	17	17	17	17	92	18	25	18	18	18					
			108A	11.5	13.8	23	25	21	90	24	25	22	91	26	30	23	92	27	30	23	23	23	23	92	27	30	24	24	24					
575-3-60	575-3-60	MED	109A	14.0	16.8	27	30	24	90	28	30	25	91	29	30	27	92	31	35	27	27	27	27	92	31	35	28	28	28					
			108A+108A	23.0	27.7	40	40	37	90	42	45	38	91	43	45	39	92	44	45	39	39	39	39	92	44	45	40	40	40					
			108A+109A	25.5	30.7	44	45	40	90	45	45	41	91	47	50	43	92	48	50	43	43	43	43	92	48	50	44	44	44					
575-3-60	575-3-60	HIGH	NONE	-	-	11	15	11	63	13	15	13	65	13	15	13	65	15	20	13	15	20	13	65	15	20	15	20						
			106A	6.0	7.2	10	15	10	52	12	15	12	54	12	15	12	54	14	15	12	12	12	12	54	14	15	14	14						
			108A	11.5	13.8	11	15	11	63	13	15	11	63	13	15	11	63	15	20	11	11	11	11	63	15	20	15	15						



# ELECTRICAL INFORMATION (UNITS PRODUCED ON OR AFTER JULY 30, 2012) cont.

Table 12 - UNIT WIRE/FUSE OR HACR BREAKER SIZING DATA (cont.)

UNIT	NO M. V-PH-HZ	ELEC. HTR				NO C.O. or UNPWR C.O.																
		ORHEATER**A00	Nom (kW)	FLA	NO PE.			w/ P.E. (pwrd fr/unit)			NO PE.			w/ PWR C.O.								
					MCA	MAX FUSE or BRKR	DISC. SIZE FLA LRA	MCA	MAX FUSE or BRKR	DISC. SIZE FLA LRA	MCA	MAX FUSE or BRKR	DISC. SIZE FLA LRA	MCA	MAX FUSE or BRKR	DISC. SIZE FLA LRA						
50TC**07		NONE	-	-	33/32	50/50	32/31	184	35/34	50/50	34/33	186	37/37	39/39	50/50	37/37	189	39/39	50/50	39/39	191	
		102A	4.9/6.5	13.6/15.6	33/32	50/50	32/31	184/184	35/34	50/50	34/33	186/186	37/37	39/39	50/50	37/37	189/189	39/39	50/50	39/39	191/191	
		104B	7.9/10.5	21.9/25.3	36/40	50/50	33/37	184/184	39/43	50/50	35/39	186/186	42/46	39/42	45/49	50/50	189/189	45/49	50/50	41/45	191/191	
		105A	12.0/16.0	33.4/38.5	51/57	60/60	46/52	184/184	53/59	60/60	49/54	186/186	57/63	52/58	59/65	60/70	189/189	59/65	60/70	54/60	191/191	
		104B+104B	15.8/21.0	43.8/50.5	64/72	70/80	58/66	184/184	66/74	70/80	60/68	186/186	70/78	64/71	70/80	70/80	189/189	72/80	80/80	66/73	191/191	
		104B+105A	19.9/26.5	55.2/63.8	78/89	80/90	71/81	184/184	80/91	90/100	74/83	186/186	84/95	77/87	86/97	90/100	189/189	86/97	90/100	79/89	191/191	
		NONE	-	-	34/34	50/50	33/33	199	36/36	50/50	35/35	201	39/39	39/39	50/50	39/39	204	41/41	50/50	41/41	206	
		102A	4.9/6.5	13.6/15.6	34/34	50/50	33/33	199/199	36/36	50/50	35/35	201/201	39/39	39/39	50/50	39/39	204/204	41/41	50/50	41/41	206/206	
		104B	7.9/10.5	21.9/25.3	38/42	50/50	35/39	199/199	41/45	50/50	37/41	201/201	44/48	40/44	47/51	50/60	204/204	47/51	50/60	43/46	206/206	
		105A	12.0/16.0	33.4/38.5	53/59	60/60	48/54	199/199	55/61	60/70	50/56	201/201	59/65	54/59	61/67	70/70	204/204	61/67	70/70	56/62	206/206	
104B+104B	15.8/21.0	43.8/50.5	66/74	70/80	60/68	199/199	68/76	70/80	62/70	201/201	72/80	66/73	74/82	80/80	204/204	74/82	80/90	68/75	206/206			
104B+105A	19.9/26.5	55.2/63.8	80/91	80/100	73/83	199/199	82/93	90/100	75/85	201/201	86/97	79/88	88/99	90/100	204/204	88/99	90/100	81/91	206/206			
460-3-60		NONE	-	-	36	50	36	213	38	50	38	215	41	43	60	41	218	43	60	43	220	
		106A	6.0	7.2	17	25	16	213/213	38/38	50/50	38/38	215/215	41/41	43/43	60/60	41/41	218/218	43/43	60/60	43/43	220/220	
		108A	11.5	13.8	22	25	20	213/213	43/48	50/50	40/43	215/215	47/51	49/54	60/60	45/49	218/218	49/54	60/60	45/49	220/220	
		109A	14.0	16.8	26	30	23	213/213	58/64	60/70	53/59	215/215	61/68	56/62	70/70	58/64	218/218	64/70	70/70	58/64	220/220	
		108A+108A	23.0	27.7	39	40	36	213/213	71/79	80/80	65/72	215/215	74/83	68/76	80/90	70/78	218/218	77/85	80/90	70/78	220/220	
		108A+109A	25.5	30.7	43	45	39	213/213	85/96	90/100	78/88	215/215	89/99	81/91	100/110	91/102	218/218	91/102	100/110	83/93	220/220	
		NONE	-	-	17	25	16	92	18	25	17	93	19	19	20	25	94	20	25	20	25	95
		106A	6.0	7.2	18	25	17	92	19	25	17	93	19	19	20	25	94	20	25	20	25	95
		108A	11.5	13.8	23	25	21	92	23	25	21	93	25	22	26	30	94	26	30	23	26	30
		109A	14.0	16.8	27	30	24	92	28	30	24	93	28	26	29	30	94	27	31	35	28	30
108A+108A	23.0	27.7	40	40	37	92	42	45	37	93	43	38	44	45	94	39	44	45	40	45		
108A+109A	25.5	30.7	44	45	41	92	44	45	40	93	46	42	47	50	94	43	48	50	44	45		
575-3-60		NONE	-	-	18	25	17	100	19	25	18	101	20	21	30	19	102	21	30	21	103	
		106A	6.0	7.2	18	25	17	100	19	25	18	101	20	21	30	19	102	21	30	21	103	
		108A	11.5	13.8	23	25	21	100	24	25	22	101	26	23	27	30	102	27	30	24	103	
		109A	14.0	16.8	27	30	24	100	28	30	25	101	29	27	31	35	102	31	35	28	103	
		108A+108A	23.0	27.7	40	40	37	100	42	45	38	101	43	39	45	45	102	44	45	40	103	
		108A+109A	25.5	30.7	44	45	41	100	45	45	41	101	47	44	50	48	102	48	50	44	103	
		NONE	-	-	19	25	18	107	20	25	19	108	21	21	22	30	109	22	30	22	110	
		106A	6.0	7.2	19	25	18	107	20	25	19	108	21	21	22	30	109	22	30	22	110	
		108A	11.5	13.8	24	25	20	107	26	30	23	108	27	24	28	30	109	28	30	26	110	
		109A	14.0	16.8	28	30	25	107	29	30	27	108	31	28	32	35	109	32	35	29	110	
108A+108A	23.0	27.7	42	45	38	107	43	45	39	108	44	40	46	50	109	46	50	42	110			
108A+109A	25.5	30.7	45	50	41	107	47	50	43	108	48	44	49	50	109	49	50	45	110			
STD	NONE	-	-	12	15	12	63	14	20	14	65	14	13	20	65	16	20	16	16	67		
MED	NONE	-	-	13	20	12	74	15	20	15	76	15	14	20	76	17	20	17	17	78		
HIGH	NONE	-	-	13	20	12	74	15	20	15	76	15	14	20	76	17	20	17	17	78		

**ELECTRICAL INFORMATION  
(UNITS PRODUCED ON OR AFTER JULY 30, 2012) cont.**

**Table 12 - UNIT WIRE/FUSE OR HACR BREAKER SIZING DATA (cont.)**

UNIT	NO M. V. Ph-HZ	ELEC. HTR				NO C.O. or UNPWR C.O.										w/ PWR C.O.									
		IFM TYPE	CRHEATER***A00	Nom (kW)	FLA	NO RE.				w/ P.E. (pwrd fr/unit)				NO PE.				w/ P.E. (pwrd fr/unit)							
						MCA	MAX FUSE or HACR BRKR	FLA	DISC. SIZE	LRA	MCA	MAX FUSE or HACR BRKR	FLA	DISC. SIZE	LRA	MCA	MAX FUSE or HACR BRKR	FLA	DISC. SIZE	LRA	MCA	MAX FUSE or HACR BRKR	FLA	DISC. SIZE	LRA
50TCA08	208/230-3-60	STD	NONE	-	-	40/40	60/60	38/38	208	44/43	60/60	43/42	212	45/44	60/60	44/43	213	49/48	60/60	48/48	217	52/52	253		
			117A	7.8/10.4	21.7/25.0	40/40	60/60	38/38	208/208	44/43	47/47	60/60	43/42	212/212	45/44	60/60	44/43	213/213	49/49	60/60	48/48	217/217	52/52	253/253	
			110A	12.0/16.0	33.4/38.5	49/55	60/60	44/50	208/208	53/59	47/47	60/60	49/54	212/212	55/61	60/70	50/55	213/213	59/65	60/70	54/60	217/217	58/64	253/253	
			111A	18.6/24.8	51.7/59.7	72/81	80/90	65/74	208/208	76/86	76/86	80/90	70/79	212/212	78/87	80/90	71/80	213/213	82/92	90/100	75/84	81/90	217/217	79/88	253/253
			112A	24.0/32.0	66.7/77.0	90/103	100/110	83/94	208/208	95/108	95/108	100/110	87/99	212/212	96/109	100/110	89/100	213/213	101/114	101/114	110/125	93/104	110/125	96/108	253/253
			112A+117A	31.8/42.4	88.4/102.0	117/134	125/150	108/123	208/208	122/139	122/139	150/150	112/127	212/212	123/140	150/150	113/128	213/213	128/145	128/145	150/150	118/133	150/150	121/137	253/253
	460-3-60	MED	NONE	-	-	48/47	60/60	48/47	260	52/51	60/60	52/51	264	53/52	60/60	53/52	265	57/56	60/80	58/57	289	52/52	289		
			117A	7.8/10.4	21.7/25.0	48/48	60/60	48/47	260/260	52/52	47/47	60/60	46/46	248/248	48/48	60/60	47/47	249/249	52/53	60/60	58/57	269/269	52/52	269/269	
			110A	12.0/16.0	33.4/38.5	59/64	60/70	54/59	260/260	64/69	57/64	60/70	52/58	248/248	59/65	60/70	54/59	249/249	63/70	70/70	64/69	64/69	70/70	58/64	269/269
			111A	18.6/24.8	51.7/59.7	82/91	90/100	75/83	260/260	87/96	80/90	80/90	73/83	248/248	82/91	90/100	81/89	265/265	93/102	100/110	85/93	85/93	100/110	79/88	269/269
			112A	24.0/32.0	66.7/77.0	101/113	110/125	92/103	260/260	106/117	106/117	110/125	97/108	264/264	107/119	110/125	98/109	265/265	112/123	125/125	102/113	102/113	125/125	96/108	269/269
			112A+117A	31.8/42.4	88.4/102.0	129/144	150/150	117/132	260/260	133/149	133/149	150/150	122/136	264/264	134/150	150/150	123/137	265/265	139/155	150/175	127/142	127/142	150/175	96/108	269/269
575-3-60	STD	NONE	-	-	20	30	19	122	22	30	21	124	22	30	21	124	24	30	23	126	23	126			
		116A	13.9	16.7	24	30	22	122	27	30	24	124	27	30	25	124	29	30	27	126	27	126			
		113A	16.5	19.8	28	30	26	122	31	35	28	124	31	35	30	124	33	35	30	30	30	126			
		114A	27.8	33.4	45	45	41	122	48	50	43	124	48	50	50	124	50	50	46	46	46	126			
		115A	33.0	39.7	53	60	49	122	51	60	51	124	56	60	60	124	56	60	51	53	53	126			
		114A+116A	41.7	50.2	66	70	61	122	69	70	63	124	69	71	80	70	63	71	80	65	65	126			
	460-3-60	MED	NONE	-	-	22	30	23	140	23	30	23	142	24	30	23	142	26	30	25	144	25	144		
			116A	13.9	16.7	27	30	24	140	29	30	26	142	29	30	27	142	32	35	29	29	29	144		
			113A	16.5	19.8	30	30	28	140	33	35	30	142	33	35	35	142	35	40	30	32	32	144		
			114A	27.8	33.4	47	50	43	140	50	50	45	142	50	50	50	142	52	60	48	48	48	144		
			115A	33.0	39.7	55	60	50	140	58	60	53	142	58	60	60	142	60	60	53	53	53	144		
			114A+116A	41.7	50.2	68	70	63	140	71	80	65	142	71	80	80	142	73	80	67	67	67	144		
460-3-60	HIGH	NONE	-	-	24	30	23	148	26	30	25	150	26	30	26	150	28	35	28	28	152				
		116A	13.9	16.7	29	30	27	148	32	35	29	150	32	35	35	150	34	40	31	31	152				
		113A	16.5	19.8	33	35	30	148	35	35	32	150	36	40	40	150	38	40	33	35	35	152			
		114A	27.8	33.4	50	50	46	148	52	60	48	150	53	60	60	150	55	60	48	50	50	152			
		115A	33.0	39.7	58	60	53	148	60	60	55	150	60	70	70	150	63	70	56	58	58	152			
		114A+116A	41.7	50.2	71	80	65	148	73	80	67	150	74	80	80	150	76	80	68	70	70	152			
575-3-60	STD	NONE	-	-	15	20	14	89	18	25	18	93	16	20	16	91	20	25	20	20	95				
		118A	17.0	20.4	28	30	25	89	33	35	30	93	30	35	35	91	35	35	32	32	95				
		119A	34.0	40.9	54	60	49	89	58	60	53	93	56	60	70	60	60	60	51	55	55	95			
		NONE	-	-	16	20	15	104	20	25	19	108	17	25	25	106	21	25	21	21	110				
		118A	17.0	20.4	29	30	27	104	34	35	31	108	32	35	40	33	110	36	40	33	33	110			
		119A	34.0	40.9	55	60	50	104	60	60	55	108	57	60	70	60	62	70	62	57	57	110			
575-3-60	HIGH	NONE	-	-	19	25	18	118	22	30	23	122	20	25	20	120	24	30	24	24	124				
		118A	17.0	20.4	33	35	30	118	38	40	34	122	35	40	40	120	40	40	36	36	124				
		119A	34.0	40.9	59	60	53	118	63	60	58	122	61	70	70	120	65	70	60	60	124				

**ELECTRICAL INFORMATION  
(UNITS PRODUCED ON OR AFTER JULY 30, 2012) cont.**

**Table 12 - UNIT WIRE/FUSE OR HACR BREAKER SIZING DATA (cont.)**

UNIT	NO M. V.-Pb-HZ	ELEC. HTR				NO C.O. or UNPWR C.O.										NO P.E.										w/ PWRD C.O.			
		IFM TYPE	CRHEATER***A00	Nom (kW)	FLA	NO PE.			w/ P.E. (pwrd fr/unit)			NO PE.			w/ P.E. (pwrd fr/unit)			MCA		DISC. SIZE		w/ P.E. (pwrd fr/unit)							
						MCA	MAX FUSE or HACR BRKR	FLA	DISC. SIZE	LRA	MCA	MAX FUSE or HACR BRKR	FLA	DISC. SIZE	LRA	MCA	MAX FUSE or HACR BRKR	FLA	DISC. SIZE	LRA	MCA	MAX FUSE or HACR BRKR	FLA	DISC. SIZE	LRA				
50TC-D08	208/230-3-60	STD	NONE	-	-	39/39	50/50	41/40	210	214	44/44	50/50	45/45	46/46	215	48/48	60/60	51/50	219	51/50	219/219	51/50	219/219	51/50	219/219				
			117A	7.8/10.4	21.7/25.0	39/39	50/50	41/40	210/210	214	44/44	50/50	45/45	46/46	215/215	48/48	60/60	51/50	219	51/50	219/219	51/50	219/219	51/50	219/219				
			110A	12.0/16.0	33.4/38.5	49/55	50/60	44/50	210/210	214/214	55/61	60/70	50/55	215/215	59/65	215/215	60/70	54/60	60/70	54/60	60/70	54/60	60/70	54/60	60/70	54/60			
			111A	18.6/24.8	51.7/59.7	72/81	80/90	65/74	210/210	214/214	78/87	80/90	71/80	215/215	82/92	215/215	80/90	75/84	90/100	75/84	90/100	75/84	90/100	75/84	90/100	75/84			
			112A	24.0/32.0	66.7/77.0	90/103	90/110	83/94	210/210	214/214	96/109	100/110	87/99	214/214	96/109	215/215	100/110	88/100	100/110	93/104	93/104	100/110	93/104	100/110	93/104	100/110			
			112A+117A	31.8/42.4	88.4/102.0	117/134	125/150	108/123	210/210	214/214	123/140	125/150	112/127	214/214	123/140	215/215	113/128	118/133	150/150	118/133	219/219	118/133	219/219	118/133	219/219	118/133			
	460-3-60	MED	NONE	-	-	42/42	50/50	44/44	246	250	47/47	50/50	49/49	250	251	51/51	60/60	54/54	255	54/54	255/255	54/54	255/255	54/54	255/255				
			117A	7.8/10.4	21.7/25.0	42/42	50/50	44/44	246/246	250	47/47	50/50	49/49	250/250	251	51/51	60/60	54/54	255	54/54	255/255	54/54	255/255	54/54	255/255				
			110A	12.0/16.0	33.4/38.5	53/59	60/60	48/54	246/246	250/250	59/65	60/70	52/58	250/250	59/65	251/251	63/70	70/70	58/64	255/255	63/70	70/70	58/64	255/255	63/70				
			111A	18.6/24.8	51.7/59.7	76/85	80/90	69/78	246/246	250/250	82/91	90/100	73/83	250/250	82/91	251/251	86/96	90/100	79/88	255/255	86/96	90/100	79/88	255/255	86/96				
			112A	24.0/32.0	66.7/77.0	94/107	100/110	86/98	246/246	250/250	100/113	100/125	91/102	250/250	100/113	251/251	105/118	110/125	96/108	255/255	105/118	110/125	96/108	255/255	105/118				
			112A+117A	31.8/42.4	88.4/102.0	121/138	125/150	111/127	246/246	250/250	127/144	150/150	116/131	250/250	127/144	251/251	132/149	150/150	121/137	255/255	132/149	150/150	121/137	255/255	132/149				
575-3-60	STD	NONE	-	-	18	20	19	104	106	20	25	21	106	21	20	25	21	108	23	25	23	108	23	108					
		116A	13.9	16.7	24	25	22	104	106	27	30	24	106	27	30	25	29	30	25	29	30	25	29	30					
		113A	16.5	19.8	28	30	26	104	106	31	35	28	106	31	35	28	30	25	29	30	25	29	30	25					
		114A	27.8	33.4	45	45	41	104	106	48	50	43	106	48	50	44	50	44	50	44	50	44	50	44	50				
		115A	33.0	39.7	53	60	49	104	106	55	60	51	106	55	60	51	60	51	60	51	60	51	60	51	60				
		114A+116A	41.7	50.2	66	70	61	104	106	69	70	61	106	69	70	61	69	70	61	69	70	61	69	70	61				
	HIGH	NONE	-	-	20	25	21	122	124	22	25	23	124	22	25	22	25	23	126	23	25	23	126	23	126				
		116A	13.9	16.7	27	30	24	122	124	29	30	26	124	29	30	27	30	26	126	29	30	27	30	26	126				
		113A	16.5	19.8	30	30	28	122	124	33	35	30	124	33	35	27	30	27	126	33	35	27	30	27	126				
		114A	27.8	33.4	47	50	43	122	124	50	50	45	124	50	50	46	50	46	126	50	50	46	50	46	126				
		115A	33.0	39.7	55	60	50	122	124	58	60	53	124	58	60	53	60	53	126	60	60	53	60	53	126				
		114A+116A	41.7	50.2	68	70	63	122	124	71	80	65	124	71	80	65	65	65	126	71	80	65	65	65	126				
50TC-D08	460-3-60	STD	NONE	-	-	22	25	23	130	132	24	30	25	132	24	26	30	26	134	26	30	26	134	26	134				
			116A	13.9	16.7	29	30	27	130	132	32	35	29	132	32	35	29	30	26	134	32	35	29	30	26				
			113A	16.5	19.8	33	35	30	130	132	36	40	33	132	36	40	33	35	30	26	134	36	40	33	35				
			114A	27.8	33.4	50	50	46	130	132	53	60	48	132	53	60	48	50	48	134	53	60	48	50	48	134			
			115A	33.0	39.7	58	60	53	130	132	61	70	56	132	61	70	56	60	53	134	61	70	56	60	53	134			
			114A+116A	41.7	50.2	71	80	65	130	132	74	80	67	132	74	80	67	68	70	65	134	74	80	67	68	70	65		
	575-3-60	MED	NONE	-	-	13	15	13	77	81	17	20	17	81	14	15	15	15	83	15	15	15	83	15	83				
			118A	17.0	20.4	28	30	25	77	81	33	35	30	81	33	35	27	30	27	83	33	35	27	30	27				
			119A	34.0	40.9	54	60	49	77	81	58	60	53	81	56	60	51	60	51	83	56	60	51	60	51	83			
			NONE	-	-	14	15	14	92	96	18	20	19	96	16	20	16	20	16	98	16	20	16	20	16	98			
			118A	17.0	20.4	29	30	27	92	96	34	35	31	96	32	35	29	30	29	98	32	35	29	30	29	98			
			119A	34.0	40.9	55	60	50	92	96	60	60	55	96	57	60	52	60	52	98	57	60	52	60	52	98			
575-3-60	HIGH	NONE	-	-	17	20	17	106	110	21	25	22	110	19	20	19	108	24	25	24	112	24	112	24	112				
		118A	17.0	20.4	33	35	30	106	110	38	40	34	110	35	35	32	40	35	112	38	40	35	32	40	35				
		119A	34.0	40.9	59	60	53	106	110	63	60	58	110	61	60	55	65	60	112	63	60	55	65	60	55				

# ELECTRICAL INFORMATION (UNITS PRODUCED ON OR AFTER JULY 30, 2012) cont.

**Table 12 - UNIT WIRE/FUSE OR HACR BREAKER SIZING DATA (cont.)**

UNIT	NO M-V-PH-HZ	ELEC. HTR				NO C.O. or UNPWR C.O.																					
		IFM TYPE	CRHEATER***A00	Nom (KW)	FLA	NO RE.				w/ P.E. (pwrd fr/unit)				NO PE.				w/ PWRD C.O.									
						MCA	MAX FUSE or BRKR	FLA	DISC. SIZE	LRA	MCA	MAX FUSE or BRKR	FLA	DISC. SIZE	LRA	MCA	MAX FUSE or BRKR	FLA	DISC. SIZE	LRA	MCA	MAX FUSE or BRKR	FLA	DISC. SIZE	LRA		
50TC*A09	208/230-3-60	STD	NONE	-	-	46/45	60/60	43/43	239	239	239	49/49	60/60	48/47	243	243	243	50/50	60/60	49/49	244	244	244	54/54	80/80	53/53	248
			117A	7.8/10.4	21.7/25.0	46/45	60/60	43/43	239/239	239/239	49/49	60/60	48/47	243/243	243/243	50/50	60/60	49/49	244/244	244/244	54/54	80/80	53/53	248/248	248/248	248/248	248/248
			110A	12.0/16.0	33.4/38.5	49/55	60/60	44/50	239/239	239/239	53/59	60/60	49/54	243/243	243/243	55/61	60/70	50/55	244/244	244/244	59/65	80/80	56/62	248/248	248/248	248/248	248/248
			111A	18.6/24.8	51.7/59.7	72/81	80/90	65/74	239/239	239/239	76/86	80/90	70/79	243/243	243/243	78/87	80/90	71/80	244/244	244/244	82/92	90/100	75/84	248/248	248/248	248/248	248/248
			112A	24.0/32.0	66.7/77.0	90/103	90/110	83/94	239/239	239/239	95/108	100/110	87/99	243/243	243/243	96/109	100/110	88/100	244/244	244/244	101/114	110/125	93/104	248/248	248/248	248/248	248/248
			112A+117A	31.8/42.4	88.4/102.0	117/134	125/150	108/123	239/239	239/239	122/139	125/150	112/127	243/243	243/243	123/140	125/150	113/128	244/244	244/244	128/145	150/150	118/133	248/248	248/248	248/248	248/248
			NONE	-	-	47/47	60/60	45/45	260	260	51/51	60/60	50/49	264	264	52/52	60/60	51/51	265	265	56/56	80/80	55/55	269	269	269	269
			117A	7.8/10.4	21.7/25.0	47/47	60/60	45/45	260/260	260/260	51/51	60/60	50/49	264/264	264/264	52/52	60/60	51/51	265/265	265/265	56/56	80/80	55/55	269/269	269/269	269/269	269/269
			110A	12.0/16.0	33.4/38.5	51/57	60/60	46/52	260/260	260/260	51/56	60/70	51/56	264/264	264/264	57/63	60/80	52/58	265/265	265/265	62/68	80/80	56/62	269/269	269/269	269/269	269/269
			111A	18.6/24.8	51.7/59.7	74/83	80/90	67/76	260/260	260/260	78/88	80/90	72/81	264/264	264/264	80/89	80/90	73/82	265/265	265/265	84/94	90/100	77/86	269/269	269/269	269/269	269/269
			112A	24.0/32.0	66.7/77.0	92/105	100/110	85/96	260/260	260/260	97/110	100/110	89/101	264/264	264/264	98/111	100/125	90/102	265/265	265/265	103/116	110/125	95/106	269/269	269/269	269/269	269/269
			112A+117A	31.8/42.4	88.4/102.0	120/136	125/150	110/125	260/260	260/260	124/141	125/150	114/129	264/264	264/264	126/142	150/150	115/131	265/265	265/265	130/147	150/150	119/135	269/269	269/269	269/269	269/269
460-3-60	STD	NONE	-	-	23	30	22	117	117	117	25	30	24	119	119	119	25	30	24	119	119	119	27	40	26	121	
		116A	13.9	16.7	24	30	22	117	117	27	30	24	119	119	29	30	25	119	119	29	30	25	119	119	27	121	
		113A	16.5	19.8	28	30	26	117	117	31	35	119	119	33	30	28	119	119	33	40	31	121	121	31	121		
		114A	27.8	33.4	45	45	41	117	117	48	50	43	119	119	48	50	44	119	119	50	50	46	121	121	46	121	
		115A	33.0	39.7	53	60	49	117	117	55	60	51	119	119	56	60	51	119	119	58	60	53	121	121	53	121	
		114A+116A	41.7	50.2	66	70	61	117	117	69	70	63	119	119	69	70	64	119	119	71	80	65	121	121	65	121	
		NONE	-	-	24	30	23	127	127	26	30	25	129	129	26	30	25	129	129	28	40	27	131	131	27	131	
		116A	13.9	16.7	26	30	23	127	127	28	30	25	129	129	28	30	26	129	129	31	40	28	131	131	28	131	
		113A	16.5	19.8	29	30	27	127	127	32	35	29	129	129	32	40	29	129	129	34	40	31	131	131	31	131	
		114A	27.8	33.4	46	50	42	127	127	49	50	44	129	129	49	50	45	129	129	51	60	47	131	131	47	131	
		115A	33.0	39.7	54	60	50	127	127	57	60	52	129	129	57	60	52	129	129	59	60	54	131	131	54	131	
		114A+116A	41.7	50.2	67	70	62	127	127	70	70	64	129	129	70	70	64	129	129	72	80	66	131	131	66	131	
575-3-60	STD	NONE	-	-	19	30	17	91	91	91	22	30	22	95	95	95	20	30	19	93	93	93	24	30	24	97	
		118A	17.0	20.4	28	30	25	91	91	33	35	30	95	95	30	30	27	93	93	35	35	32	97	97	32	97	
		119A	34.0	40.9	54	60	49	91	91	58	60	53	95	95	56	60	51	93	93	60	70	55	97	97	55	97	
		NONE	-	-	19	30	18	95	95	23	30	22	99	99	21	30	20	97	97	24	30	24	101	101	24	101	
		118A	17.0	20.4	28	30	26	95	95	33	35	30	99	99	31	35	28	97	97	35	35	32	101	101	32	101	
		119A	34.0	40.9	54	60	49	95	95	59	60	54	99	99	56	60	51	97	97	61	70	56	101	101	56	101	
		NONE	-	-	20	30	19	106	106	24	30	23	110	110	21	30	21	108	108	25	30	25	112	112	25	112	
		118A	17.0	20.4	29	30	27	106	106	34	35	31	110	110	32	35	29	108	108	36	40	33	112	112	33	112	
		119A	34.0	40.9	55	60	50	106	106	60	60	55	110	110	57	60	52	108	108	62	70	57	112	112	57	112	

# ELECTRICAL INFORMATION (UNITS PRODUCED ON OR AFTER JULY 30, 2012) cont.

**Table 12 - UNIT WIRE/FUSE OR HACR BREAKER SIZING DATA (cont.)**

UNIT	NO M-V-PH-HZ	ELEC. HTR				NO C.O. or UNPWR C.O.																						
		IFM TYPE	CRHEATER***A00	Nom (KW)	FLA	NO RE.				w/ P.E. (pwrd fr/unit)				NO PE.				w/ PWRD C.O.										
						MCA	MAX FUSE or HACR BRKR	FLA	DISC. SIZE	LRA	MCA	MAX FUSE or HACR BRKR	FLA	DISC. SIZE	LRA	MCA	MAX FUSE or HACR BRKR	FLA	DISC. SIZE	LRA	MCA	MAX FUSE or HACR BRKR	FLA	DISC. SIZE	LRA			
507C+D09	460-3-60	STD	NONE	-	-	40/40	50/50	42/42	225	225	44/44	44/44	50/50	46/46	229	229	45/45	45/45	47/47	230	230	49/49	49/49	60/60	52/51	234		
			117A	7.8/10.4	21.7/25.0	40/40	50/50	42/42	225/225	44/44	44/44	50/50	46/46	229/229	45/45	229/229	45/45	45/45	47/47	230/230	230/230	49/49	49/49	60/60	52/51	234/234		
			110A	12.0/16.0	33.4/38.5	49/55	50/60	44/50	225/225	53/59	49/54	60/60	60/60	229/229	55/61	60/70	50/55	50/55	51/51	251/251	251/251	59/65	59/65	70/70	70/70	90/100	82/91	284/284
			111A	18.6/24.8	51.7/59.7	72/81	80/90	65/74	225/225	76/86	70/79	80/90	80/90	229/229	78/87	80/90	71/80	80/90	82/92	82/92	88/100	230/230	230/230	90/100	90/100	110/125	75/84	234/234
			112A	24.0/32.0	66.7/77.0	90/103	90/110	83/94	225/225	95/108	87/99	100/110	100/110	229/229	96/109	100/110	88/100	100/110	93/104	93/104	101/114	230/230	230/230	110/125	110/125	130/147	99/111	284/284
			112A+117A	31.8/42.4	88.4/102.0	117/134	125/150	108/123	225/225	122/139	112/127	229/229	229/229	123/140	123/140	125/150	113/128	125/150	128/145	128/145	130/147	230/230	230/230	150/150	150/150	118/133	118/133	234/234
			NONE	-	-	42/42	50/50	44/44	246	46/46	47/47	250	250	47/47	47/47	60/60	49/49	60/60	51/51	51/51	251	251	51/51	51/51	60/60	54/53	255	
			117A	7.8/10.4	21.7/25.0	42/42	50/50	44/44	246/246	46/46	48/48	250/250	250/250	47/47	47/47	60/60	49/49	60/60	51/51	51/51	251/251	251/251	51/51	51/51	60/60	54/53	255/255	
			110A	12.0/16.0	33.4/38.5	51/57	60/60	46/52	246/246	56/62	51/56	250/250	250/250	57/63	57/63	70/70	52/58	60/70	62/68	62/68	52/58	251/251	251/251	70/70	70/70	90/100	77/86	255/255
			111A	18.6/24.8	51.7/59.7	74/83	80/90	67/76	246/246	78/88	72/81	250/250	250/250	80/89	80/89	90/100	77/86	84/94	84/94	84/94	77/86	251/251	251/251	84/94	84/94	110/125	95/106	255/255
			112A	24.0/32.0	66.7/77.0	92/105	100/110	85/96	246/246	97/110	89/101	250/250	250/250	98/111	98/111	100/110	93/105	103/116	103/116	103/116	93/105	251/251	251/251	103/116	103/116	130/147	119/135	255/255
			112A+117A	31.8/42.4	88.4/102.0	120/136	125/150	110/125	246/246	124/141	114/129	250/250	250/250	126/142	126/142	150/150	118/134	130/147	130/147	130/147	118/134	251/251	251/251	130/147	130/147	150/150	119/135	255/255
507C+D09	460-3-60	STD	NONE	-	-	19	20	19	118	118	20	20	25	21	120	120	21	21	22	120	120	23	23	25	24	122		
			116A	13.9	16.7	24	25	22	118	118	20	20	25	25	21	120	120	27	27	25	120	120	29	29	30	27	122	
			113A	16.5	19.8	28	30	26	118	118	20	20	30	30	25	120	120	30	30	28	130	130	31	31	35	30	132	
			114A	27.8	33.4	45	45	41	118	118	20	20	48	48	50	43	120	120	48	48	44	120	120	50	50	50	46	122
			115A	33.0	39.7	53	60	49	118	118	20	20	55	55	60	51	120	120	56	56	51	130	130	59	59	60	53	132
			114A+116A	41.7	50.2	66	70	61	118	118	20	20	69	69	70	63	120	120	69	69	63	120	120	71	71	80	65	132
			NONE	-	-	20	25	20	128	21	22	130	130	22	22	25	130	130	22	22	23	130	130	24	24	25	25	132
			116A	13.9	16.7	26	30	23	128	28	28	130	130	28	28	30	130	130	28	28	26	130	130	31	31	35	28	132
			113A	16.5	19.8	29	30	27	128	32	29	130	130	32	32	35	130	130	32	32	29	130	130	34	34	35	31	132
			114A	27.8	33.4	46	44	42	128	49	44	130	130	49	49	50	130	130	49	49	45	130	130	51	51	60	47	132
			115A	33.0	39.7	54	60	50	128	57	52	130	130	57	57	60	130	130	57	57	52	130	130	59	59	60	54	132
			114A+116A	41.7	50.2	67	70	62	128	70	64	130	130	72	72	80	130	130	73	73	64	130	130	72	72	80	66	132
575-3-60	STD	NONE	-	-	21	25	143	23	24	145	145	25	24	145	145	24	24	25	145	145	25	25	30	27	147			
		116A	13.9	16.7	28	30	25	143	30	27	145	145	30	30	145	145	31	31	28	145	145	33	33	35	30	147		
		113A	16.5	19.8	32	35	29	143	34	31	145	145	35	35	145	145	35	35	31	145	145	37	37	40	33	147		
		114A	27.8	33.4	49	50	45	143	51	47	145	145	52	52	60	145	145	52	52	44	145	145	54	54	60	49	147	
		115A	33.0	39.7	57	60	52	143	59	54	145	145	59	59	60	145	145	59	59	54	145	145	62	62	70	56	147	
		114A+116A	41.7	50.2	70	70	64	143	72	66	145	145	72	72	80	145	145	73	73	66	145	145	75	75	80	68	147	
		NONE	-	-	16	20	16	85	19	20	89	89	17	17	20	89	89	17	17	18	87	87	21	21	25	22	91	
		118A	17.0	20.4	28	30	25	85	33	30	89	89	30	30	35	90	90	30	30	27	87	87	35	35	35	32	91	
		119A	34.0	40.9	54	60	49	85	58	53	89	89	56	56	60	90	90	56	56	51	87	87	60	60	70	55	91	
		NONE	-	-	16	20	16	89	20	20	93	93	18	18	20	93	93	18	18	18	91	91	21	21	25	22	95	
		118A	17.0	20.4	28	30	26	89	33	30	93	93	33	33	35	93	93	33	33	28	91	91	35	35	35	32	95	
		119A	34.0	40.9	54	60	49	89	59	54	93	93	56	56	60	93	93	56	56	51	91	91	61	61	70	56	95	
575-3-60	HIGH	NONE	-	-	17	20	100	21	21	104	104	21	21	25	104	104	21	21	19	102	102	22	22	25	23	106		
		118A	17.0	20.4	29	30	27	100	34	31	104	104	32	32	35	104	104	32	32	29	102	102	36	36	40	33	106	
		119A	34.0	40.9	55	60	50	100	60	55	104	104	57	57	60	104	104	57	57	52	102	102	62	62	70	57	106	

**ELECTRICAL INFORMATION (UNITS PRODUCED ON OR AFTER JULY 30, 2012) cont.**  
**Table 12 - UNIT WIRE/FUSE OR HACR BREAKER SIZING DATA (cont.)**

UNIT	NO. M-V-PH-HZ	ELEC. HTR										NO C.O. or UNPWR C.O.										NO PWRD C.O.																																
		IFM TYPE	CRHEATER***A00	Nom (kW)	FLA	MCA	NO RE.			w/ P.E. (pwrdr fr/unit)			NO PE.			w/ P.E. (pwrdr fr/unit)			DISC. SIZE	FLA	LRA	DISC. SIZE	FLA	LRA	MAX FUSE or BRKR	MCA	MAX FUSE or BRKR	DISC. SIZE	FLA	LRA																								
							MAX FUSE or BRKR	FLA	LRA	MCA	MAX FUSE or BRKR	FLA	LRA	MCA	MAX FUSE or BRKR	FLA	LRA	MCA													MAX FUSE or BRKR	FLA	LRA	MCA																				
50T*A12	460-3-60	STD	NONE	-	26	26	25	146	27	40	40	40	27	148	29	29	29	148	40	40	40	27	148	31	31	45	30	45	150																									
																														116A	13.9	16.7	16.7	28	40	40	27	161	28	40	40	29	163	29	29	163	45	45	45	30	163	32	32	165
																														113A	16.5	19.8	19.8	32	40	40	29	161	34	45	45	31	163	34	34	163	45	45	45	31	163	37	37	165
																														115A	33.0	39.7	39.7	57	60	60	52	161	59	60	60	54	163	59	59	163	60	60	60	54	163	62	62	165
																														114A+116A	41.7	50.2	50.2	70	70	70	64	161	72	80	80	66	163	73	73	163	80	80	80	66	163	75	75	165
																														115A+119A	50.0	60.1	60.1	67	80	80	75	161	69	80	80	77	163	70	70	163	80	80	80	77	163	78	78	165
																														116A	13.9	16.7	16.7	28	40	40	27	161	30	45	45	29	163	30	30	163	45	45	45	30	163	32	32	165
																														113A	16.5	19.8	19.8	32	40	40	29	161	34	45	45	31	163	34	34	163	45	45	45	31	163	37	37	165
																														115A	33.0	39.7	39.7	57	60	60	52	161	59	60	60	54	163	59	59	163	60	60	60	54	163	62	62	165
																														114A+116A	41.7	50.2	50.2	70	70	70	64	161	72	80	80	66	163	73	73	163	80	80	80	66	163	75	75	165
																														115A+119A	50.0	60.1	60.1	67	80	80	75	161	69	80	80	77	163	70	70	163	80	80	80	77	163	78	78	165
																														575-3-60	STD	NONE	-	29	29	28	162	162	30	30	30	22	99	23	30	30	30	99	30	30	30	22	97	24
116A	13.9	16.7	16.7	28	40	40	27	161	28	40	40	29	163	28	28	163	45	45	45	30	163	32	32	166																														
113A	16.5	19.8	19.8	32	40	40	29	161	34	45	45	31	163	34	34	163	45	45	45	31	163	37	37	166																														
115A	33.0	39.7	39.7	57	60	60	52	161	59	60	60	54	163	59	59	163	60	60	60	54	163	62	62	166																														
114A+116A	41.7	50.2	50.2	70	70	70	64	161	72	80	80	66	163	73	73	163	80	80	80	66	163	75	75	166																														
115A+119A	50.0	60.1	60.1	67	80	80	75	161	69	80	80	77	163	70	70	163	80	80	80	77	163	78	78	166																														
116A	13.9	16.7	16.7	28	40	40	27	161	30	45	45	29	163	30	30	163	45	45	45	30	163	32	32	166																														
113A	16.5	19.8	19.8	32	40	40	29	161	34	45	45	31	163	34	34	163	45	45	45	31	163	37	37	166																														
115A	33.0	39.7	39.7	57	60	60	52	161	59	60	60	54	163	59	59	163	60	60	60	54	163	62	62	166																														
114A+116A	41.7	50.2	50.2	70	70	70	64	161	72	80	80	66	163	73	73	163	80	80	80	66	163	75	75	166																														
115A+119A	50.0	60.1	60.1	67	80	80	75	161	69	80	80	77	163	70	70	163	80	80	80	77	163	78	78	166																														
116A	13.9	16.7	16.7	28	40	40	27	161	30	45	45	29	163	30	30	163	45	45	45	30	163	32	32	166																														
113A	16.5	19.8	19.8	32	40	40	29	161	34	45	45	31	163	34	34	163	45	45	45	31	163	37	37	166																														
115A	33.0	39.7	39.7	57	60	60	52	161	59	60	60	54	163	59	59	163	60	60	60	54	163	62	62	166																														
114A+116A	41.7	50.2	50.2	70	70	70	64	161	72	80	80	66	163	73	73	163	80	80	80	66	163	75	75	166																														
115A+119A	50.0	60.1	60.1	67	80	80	75	161	69	80	80	77	163	70	70	163	80	80	80	77	163	78	78	166																														
208/230-3-60	MED	NONE	-	52	52	50	319	319	60	60	60	50	323	55	80	80	80	323	80	80	80	50	324	60	60	80	80	328																										
																													117A	7.8/10.4	21.7/25.0	21.7/25.0	50/50	60/60	60/60	50/50	319/319	55/55	80/80	80/80	55/55	323/323	56/56	80/80	80/80	80/80	80/80	80/80	56/56	324/324	60/60	60/60	328/328	
																													110A	12.0/16.0	33.4/38.5	33.4/38.5	51/56	60/60	60/60	89/101	319/319	60/67	80/80	80/80	55/61	323/323	61/68	80/80	80/80	80/80	80/80	80/80	56/62	324/324	66/73	66/73	328/328	
																													112A	24.0/32.0	66.7/77.0	66.7/77.0	89/101	100/110	100/110	114/129	319/319	102/115	110/125	110/125	93/105	323/323	103/116	110/125	110/125	110/125	110/125	110/125	110/125	94/106	324/324	108/121	108/121	328/328
																													112A+117A	31.8/42.4	88.4/102.0	88.4/102.0	114/129	125/150	125/150	136/155	319/319	129/146	150/150	150/150	118/134	323/323	130/147	150/150	150/150	150/150	150/150	150/150	119/135	324/324	135/152	135/152	328/328	
																													112A+110A	37.6/50.0	104.2/120.3	104.2/120.3	144/134	150/150	150/150	132/151	319/319	149/139	150/150	150/150	136/155	323/323	150/140	150/150	150/150	150/150	150/150	150/150	138/156	324/324	155/145	155/145	328/328	
																													117A	7.8/10.4	21.7/25.0	21.7/25.0	50/50	60/60	60/60	50/50	319/319	55/55	80/80	80/80	55/55	323/323	56/56	80/80	80/80	80/80	80/80	80/80	56/56	324/324	60/60	60/60	328/328	
																													110A	12.0/16.0	33.4/38.5	33.4/38.5	51/56	60/60	60/60	89/101	319/319	60/67	80/80	80/80	55/61	323/323	61/68	80/80	80/80	80/80	80/80	80/80	56/62	324/324	66/73	66/73	328/328	
																													112A	24.0/32.0	66.7/77.0	66.7/77.0	89/101	100/110	100/110	114/129	319/319	102/115	110/125	110/125	93/105	323/323	103/116	110/125	110/125	110/125	110/125	110/125	94/106	324/324	108/121	108/121	328/328	
																													112A+117A	31.8/42.4	88.4/102.0	88.4/102.0	114/129	125/150	125/150	136/155	319/319	129/146	150/150	150/150	118/134	323/323	130/147	150/150	150/150	150/150	150/150	150/150	119/135	324/324	135/152	135/152	328/328	
																													112A+110A	37.6/50.0	104.2/120.3	104.2/120.3	144/134	150/150	150/150	132/151	319/319	149/139	150/150	150/150	136/155	323/323	150/140	150/150	150/150	150/150	150/150	150/150	138/156	324/324	155/145	155/145	328/328	
																													117A	7.8/10.4	21.7/25.0	21.7/25.0	50/50	60/60	60/60	50/50	319/319	55/55	80/80	80/80	55/55	323/323	56/56	80/80	80/80	80/80	80/80	80/80	56/56	324/324	60/60	60/60	328/328	
110A	12.0/16.0	33.4/38.5	33.4/38.5	51/56	60/60	60/60	89/101	319/319	60/67	80/80	80/80	55/61	323/323	61/68	80/80	80/80	80/80	80/80	80/80	56/62	324/324	66/73	66/73	328/328																														
112A	24.0/32.0	66.7/77.0	66.7/77.0	89/101	100/110	100/110	114/129	319/319	102/115	110/125	110/125	93/105	323/323	103/116	110/125	110/125	110/125	110/125	110/125	94/106	324/324	108/121	108/121	328/328																														
112A+117A	31.8/42.4	88.4/102.0	88.4/102.0	114/129	125/150	125/150	136/155	319/319	129/146	150/150	150/150	118/134	323/323	130/147	150/150	150/150	150/150	150/150	150/150	119/135	324/324	135/152	135/152	328/328																														
112A+110A	37.6/50.0	104.2/120.3	104.2/120.3	144/134	150/150	150/150	132/151	319/319	149/139	150/150	150/150	136/155	323/323	150/140	150/150	150/150	150/150	150/150	150/150	138/156	324/324	155/145	155/145	328/328																														



**ELECTRICAL INFORMATION (UNITS PRODUCED ON OR AFTER JULY 30, 2012) cont.**

**Table 12 - UNIT WIRE/FUSE OR HACR BREAKER SIZING DATA (cont.)**

UNIT	NOM. V-PH-HZ	ELEC. HTR				NO C.O. or UNPWR C.O.																
		IFM TYPE	CRHEATER***A00	Nom (kW)	FLA	NO P.E.						w/ PWRD C.O.										
						MAX FUSE or HACR BRKR	DISC. SIZE	MCA	NO P.E.	MAX FUSE or HACR BRKR	DISC. SIZE	MCA	NO P.E.	MAX FUSE or HACR BRKR	DISC. SIZE	MCA	NO P.E.					
50TC*D12	460-3-60	STD	NONE	-	-	48/47	285	289	289	52/52	50/49	60/60	60/60	51/50	53/53	290	54/54	60/60	60/60	58/57	294	
			117A	7.8/10.4	21.7/25.0	48/47	285/285	289/289	52/52	50/49	60/60	60/60	51/50	53/53	290/290	54/54	60/60	60/60	58/57	294/294		
			110A	12.0/16.0	33.4/38.5	51/57	285/285	289/289	52/56	56/62	60/70	60/70	57/63	53/58	290/290	62/68	70/70	60/70	58/62	294/294		
			112A	24.0/32.0	66.7/77.0	89/101	285/285	289/289	89/101	97/110	100/110	100/110	89/101	89/101	289/289	98/111	103/116	103/116	110/125	95/106	294/294	
			112A+117A	31.8/42.4	88.4/102.0	114/129	110/125	289/289	114/129	124/141	125/150	125/150	114/129	114/129	289/289	126/142	130/147	130/147	150/150	119/135	294/294	
			112A+110A	37.6/50.0	104.2/120.3	139/129	285/285	289/289	128/146	144/134	150/150	132/150	144/134	150/150	289/289	145/135	290/290	290/290	150/140	150/150	138/156	294/294
			NONE	-	-	52	314	318	56	53	60	132/150	53	60	60	54	57	319	58	70	62	323
			117A	7.8/10.4	21.7/25.0	52/52	314/314	318/318	56/56	53/53	60/60	52/52	50/50	60/60	60/60	54/54	57/57	319/319	58/58	70/70	62/62	323/323
			110A	12.0/16.0	33.4/38.5	52/56	314/314	318/318	56/61	60/67	60/70	56/61	60/67	60/70	60/70	61/68	57/62	319/319	66/73	70/80	62/66	323/323
			112A	24.0/32.0	66.7/77.0	89/101	314/314	318/318	93/105	102/115	110/125	93/105	102/115	110/125	110/125	103/116	94/106	319/319	108/121	110/125	99/111	323/323
			112A+117A	31.8/42.4	88.4/102.0	114/129	314/314	318/318	118/134	129/146	150/150	118/134	129/146	150/150	150/150	130/147	119/135	319/319	135/152	150/175	124/139	323/323
			112A+110A	37.6/50.0	104.2/120.3	135/153	316/316	320/320	140/157	152/141	175/175	140/157	152/141	175/175	320/320	154/143	141/158	321/321	155/145	175/175	142/160	323/323
50TC*D12	460-3-60	STD	NONE	-	-	23	136	138	26	25	30	30	25	25	138	27	27	30	28	140		
			116A	13.9	16.7	23	136	138	26	28	30	30	26	28	30	138	31	31	35	28	140	
			113A	16.5	19.8	27	136	138	29	32	35	32	35	35	32	34	138	34	35	31	140	
			115A	33.0	39.7	50	136	138	52	57	60	52	60	60	57	59	138	59	60	54	140	
			114A+116A	41.7	50.2	62	136	138	64	67	70	64	70	70	64	70	138	72	80	66	140	
			115A+113A	50.0	60.1	73	136	138	75	73	80	75	73	80	76	70	138	70	80	78	140	
			NONE	-	-	26	151	153	28	26	30	28	26	30	27	27	153	29	30	30	155	
			116A	13.9	16.7	26	151	153	28	28	30	28	30	30	28	28	153	33	35	30	155	
			113A	16.5	19.8	29	151	153	31	34	35	31	35	35	31	35	153	37	40	33	155	
			115A	33.0	39.7	52	151	153	59	59	60	52	59	60	59	62	153	62	70	56	155	
			114A+116A	41.7	50.2	64	151	153	66	72	80	66	72	80	66	75	153	75	80	68	155	
			115A+113A	50.0	60.1	75	151	153	77	69	80	77	75	80	77	70	153	72	80	80	155	
575-3-60	575-3-60	STD	NONE	-	-	17	93	97	21	20	25	25	18	18	97	22	22	25	23	99		
			118A	17.0	20.4	26	93	97	30	33	35	30	35	35	31	35	95	35	35	32	99	
			119A	34.0	40.9	49	93	97	54	59	60	54	60	60	56	61	95	61	70	56	99	
			118A+119A	51.0	61.3	73	93	97	73	69	80	77	80	80	66	71	95	71	80	79	99	
			NONE	-	-	18	104	108	22	21	25	22	25	25	19	20	106	23	25	24	110	
			118A	17.0	20.4	27	104	108	31	34	35	31	35	35	29	36	106	36	40	33	110	
			119A	34.0	40.9	50	104	108	55	60	60	55	60	60	52	62	106	62	70	57	110	
			118A+119A	51.0	61.3	74	104	108	70	70	80	74	70	80	76	72	106	72	80	80	110	
			NONE	-	-	21	118	122	25	24	30	25	25	25	23	26	120	26	30	27	124	
			118A	17.0	20.4	30	118	122	34	38	40	34	40	40	32	40	120	40	40	36	124	
			119A	34.0	40.9	53	118	122	58	63	70	58	70	70	55	65	120	65	70	60	124	
			118A+119A	51.0	61.3	77	118	122	81	74	80	81	80	80	79	76	120	76	80	83	124	



## ELECTRICAL INFORMATION (UNITS PRODUCED ON OR AFTER JULY 30, 2012) cont.

Table 12 - UNIT WIRE/FUSE OR HACR BREAKER SIZING DATA (cont.)

UNIT	ELEC. HTR			NO C.O. or UNPWR C.O.										w/ PWRD C.O.							
	IFM TYPE	CRHEATER***A00	Nom (KW)	FLA	NO PE.					NO PE.					w/ P.E. (pwrd fr/unit)						
					MCA	MAX FUSE or HACR BRKR	FLA	DISC. SIZE	MCA	MAX FUSE or HACR BRKR	FLA	DISC. SIZE	MCA	MAX FUSE or HACR BRKR	FLA	DISC. SIZE	FLA	LRA			
50TC*D14	STD	NONE	-	-	62/62	80/80	64/64	376	66/66	80/80	69/69	380	67/67	80/80	70/70	381	71/71	80/80	74/74	385	
		117A	7.8/10.4	21.7/25.0	62/62	80/80	64/64	376/376	66/66	80/80	69/69	380/380	67/67	80/80	70/70	381/381	71/71	80/80	74/74	385/385	
		110A	12.0/16.0	33.4/38.5	62/62	80/80	64/64	376/376	66/66	80/80	69/69	380/380	67/67	80/80	70/70	381/381	71/71	80/80	74/74	385/385	
		112A	24.0/32.0	66.7/77.0	94/107	100/110	86/98	376/376	99/112	100/125	91/102	380/380	100/113	100/125	92/104	381/381	105/118	110/125	96/108	385/385	
		112A+117A	31.8/42.4	88.4/102.0	121/138	125/150	111/127	376/376	126/143	150/150	116/131	380/380	127/144	150/150	117/132	381/381	132/149	150/150	121/137	385/385	
		112A+110A	37.6/50.0	104.2/120.3	141/131	150/150	129/148	376/376	146/136	150/150	134/152	380/380	147/137	150/150	135/153	381/381	152/142	175/150	139/158	385/385	
		NONE	-	-	64	80	67	390	68	80	71	394	69	80	72	395	73	80	77	399	
		117A	7.8/10.4	21.7/25.0	64/64	80/80	67/67	390/390	68/68	80/80	71/71	394/394	69/69	80/80	72/72	395/395	73/73	80/80	77/77	399/399	
		110A	12.0/16.0	33.4/38.5	64/64	80/80	67/67	390/390	68/68	80/80	71/71	394/394	69/69	80/80	72/72	395/395	73/73	80/80	77/77	399/399	
		112A	24.0/32.0	66.7/77.0	97/110	100/110	89/101	390/390	102/115	110/125	93/105	394/394	103/116	110/125	94/106	395/395	108/121	110/125	99/111	399/399	
		112A+117A	31.8/42.4	88.4/102.0	124/141	125/150	114/129	390/390	129/146	150/150	118/134	394/394	130/147	150/150	119/135	395/395	135/152	150/175	124/139	399/399	
		112A+110A	37.6/50.0	104.2/120.3	144/134	150/150	132/151	390/390	149/139	150/150	136/155	394/394	150/140	150/150	138/156	395/395	155/145	175/175	142/139	399/399	
460-3-60	HIGH	117A	7.8/10.4	21.7/25.0	67/66	80/80	70/69	392	71/70	80/80	75/74	396	72/71	80/80	76/75	397	76/75	80/79	80/79	401/401	
		110A	12.0/16.0	33.4/38.5	67/66	80/80	70/69	392/392	71/70	80/80	75/74	396/396	72/71	80/80	76/75	397/397	76/75	80/79	80/79	401/401	
		112A	24.0/32.0	66.7/77.0	101/113	110/125	92/103	392/392	106/117	110/125	97/108	396/396	107/119	110/125	98/109	397/397	112/123	125/125	102/113	401/401	
		112A+117A	31.8/42.4	88.4/102.0	128/144	150/150	117/132	392/392	133/149	150/150	122/136	396/396	134/150	150/150	123/137	397/397	139/155	150/175	127/142	401/401	
		112A+110A	37.6/50.0	104.2/120.3	148/137	150/150	135/153	392/392	152/141	175/175	140/157	396/396	154/143	175/175	141/158	397/397	158/147	175/175	145/163	401/401	
		NONE	-	-	31	40	32	189	33	40	34	191	33	40	34	191	35	40	36	193	
		116A	13.9	16.7	16.7	40	32	189	33	40	34	191	33	40	34	191	35	40	36	193	
		113A	16.5	19.8	19.8	31	40	32	189	33	40	34	191	33	40	34	191	35	40	36	193
		115A	33.0	39.7	39.7	55	60	50	189	58	60	53	191	58	60	53	191	60	60	55	193
		114A+116A	41.7	50.2	50.2	68	70	63	189	71	80	65	191	71	80	65	191	73	80	67	193
		115A+113A	50.0	60.1	60.1	66	70	74	189	68	70	76	191	69	80	76	191	71	80	79	193
		575-3-60	STD	NONE	-	-	32	40	33	196	34	40	35	198	34	40	36	198	36	40	38
116A	13.9			16.7	16.7	40	33	196	34	40	35	198	34	40	36	198	36	40	38		
113A	16.5			19.8	19.8	32	40	33	196	34	40	35	198	34	40	36	198	37	45		
115A	33.0			39.7	39.7	57	60	52	196	59	60	54	198	58	60	54	198	62	70		
114A+116A	41.7			50.2	50.2	70	70	64	196	72	80	66	198	73	80	66	198	75	80		
115A+113A	50.0			60.1	60.1	67	80	75	196	69	70	77	198	70	80	78	198	72	80		
NONE	-			-	33	40	34	197	35	40	36	199	35	45	37	199	37	45			
116A	13.9			16.7	16.7	33	40	34	197	35	40	36	199	35	45	37	199	37	45		
113A	16.5			19.8	19.8	33	40	34	197	35	40	36	199	36	45	37	199	38	45		
115A	33.0			39.7	39.7	58	60	53	197	60	60	55	199	61	70	56	199	63	70		
114A+116A	41.7			50.2	50.2	71	80	65	197	73	80	67	199	74	80	68	199	76	80		
115A+113A	50.0			60.1	60.1	69	80	76	197	71	80	79	199	71	80	79	199	74	80		
575-3-60	MED	NONE	-	-	23	30	23	142	27	30	28	146	24	30	25	144	28	30	30		
		118A	17.0	20.4	20.4	29	30	27	142	34	35	31	146	32	35	29	144	36	40		
		119A	34.0	40.9	40.9	55	60	50	142	60	60	55	146	57	60	52	144	62	70		
		118A+119A	51.0	61.3	61.3	65	70	74	142	70	80	78	146	67	70	76	144	72	80		
		NONE	-	-	23	30	23	142	27	30	28	146	24	30	25	144	28	30	30		
		118A	17.0	20.4	20.4	29	30	27	142	34	35	31	146	32	35	29	144	36	40		
		119A	34.0	40.9	40.9	55	60	50	142	60	60	55	146	57	60	52	144	62	70		
		118A+119A	51.0	61.3	61.3	65	70	74	142	70	80	78	146	67	70	76	144	72	80		
		NONE	-	-	26	30	27	156	29	35	31	160	27	35	29	158	31	35	33		
		118A	17.0	20.4	20.4	33	35	30	156	38	40	34	160	35	35	32	158	40	40		
		119A	34.0	40.9	40.9	59	60	53	156	63	70	58	160	61	70	55	158	65	70		
		118A+119A	51.0	61.3	61.3	69	80	77	156	74	80	81	160	71	80	79	158	76	80		

# ELECTRICAL INFORMATION (UNITS PRODUCED ON OR AFTER JULY 30, 2012) cont.

**Table 12 - UNIT WIRE/FUSE OR HACR BREAKER SIZING DATA (cont.)**

UNIT	NO M, V-PH-HZ	ELEC. HTR				NO C.O. or UNPWR C.O.										W/ PWRD C.O.													
		IFM TYPE	Nom (kW)	FLA	MCA	NO PE.			w/ P.E. (pwrd fr/unit)			NO PE.			w/ P.E. (pwrd fr/unit)			NO PE.			w/ P.E. (pwrd fr/unit)								
						MAX FUSE or BRKR	DISC. SIZE FLA	DISC. SIZE LRA	MCA	MAX FUSE or BRKR	DISC. SIZE FLA	DISC. SIZE LRA	MCA	MAX FUSE or BRKR	DISC. SIZE FLA	DISC. SIZE LRA	MCA	MAX FUSE or BRKR	DISC. SIZE FLA	DISC. SIZE LRA	MCA	MAX FUSE or BRKR	DISC. SIZE FLA	DISC. SIZE LRA					
50TC+D16	208/230-3-60	STD	NONE	-	-	70/70	80/80	72/72	412	412	416	73/73	80/80	77/77	416	416	416	74/74	90/90	78/78	417	417	417	78/78	100/100	82/82	421		
			291A	12.4/16.5	34.4/39.7	70/70	80/80	72/72	412/412	412/412	416/416	73/73	80/80	77/77	416/416	416/416	416/416	74/74	90/90	78/78	417/417	417/417	417/417	78/78	100/100	82/82	421/421		
			294A	25.2/33.5	69.9/80.6	98/112	100/125	94/107	103/116	110/125	94/107	104/118	104/118	110/125	110/125	110/125	104/118	104/118	104/118	104/118	110/125	109/122	109/122	109/122	109/122	110/125	100/112	421/421	
			288A+294A	32.7/43.5	90.7/104.7	124/142	125/150	114/130	129/146	150/150	118/134	130/148	130/148	150/150	150/150	150/150	130/148	130/148	130/148	130/148	150/150	119/135	119/135	119/135	119/135	150/175	124/140	421/421	
			291A+294A	37.6/50.0	104.3/120.3	141/131	150/150	130/148	146/136	150/150	134/152	147/137	147/137	150/150	150/150	150/150	147/137	147/137	147/137	147/137	150/150	135/153	135/153	135/153	135/153	175/150	139/158	421/421	
			294A+294A	50.3/67.0	139.7/161.2	151/172	175/200	170/195	155/177	175/200	175/199	157/178	157/178	175/200	175/200	175/200	157/178	157/178	157/178	157/178	175/200	176/200	176/200	176/200	176/200	180/205	180/205	421/421	
			NONE	-	-	72	80	75	426	426	430	76	79	79	100	79	430	430	77	100	80	80	431	431	431	80	100	85	435
			291A	12.4/16.5	34.4/39.7	72/72	80/80	75/75	426/426	426/426	430/430	76/76	79/79	79/79	100/100	79/79	430/430	430/430	77/77	100/100	80/80	80/80	431/431	431/431	431/431	80/80	100/100	85/85	435/435
			294A	25.2/33.5	69.9/80.6	101/114	110/125	93/105	106/119	110/125	97/109	107/120	107/120	110/125	110/125	110/125	107/120	107/120	107/120	107/120	110/125	98/110	98/110	98/110	98/110	125/125	102/115	435/435	
			288A+294A	32.7/43.5	90.7/104.7	127/145	150/150	116/133	132/149	150/150	121/137	133/151	133/151	150/175	150/175	150/175	133/151	133/151	133/151	133/151	150/175	122/138	122/138	122/138	122/138	150/175	126/142	435/435	
291A+294A	37.6/50.0	104.3/120.3	144/134	150/150	132/151	149/139	150/150	137/155	150/140	150/140	150/150	150/150	150/150	150/140	150/140	150/140	150/140	150/150	138/156	138/156	138/156	138/156	175/175	142/160	435/435				
294A+294A	50.3/67.0	139.7/161.2	153/175	175/200	173/198	158/180	175/200	177/202	159/181	159/181	175/200	175/200	175/200	159/181	159/181	159/181	159/181	175/200	178/203	178/203	178/203	178/203	175/200	183/207	435/435				
460-3-60	460-3-60	HIGH	NONE	-	-	82	100	86	432	432	436	85	100	436	436	86	100	92	92	437	437	437	90	100	96	441			
			291A	12.4/16.5	34.4/39.7	82/82	100/100	86/86	432/432	432/432	436/436	85/85	100/100	91/91	436/436	436/436	436/436	86/86	100/100	92/92	92/92	437/437	437/437	437/437	90/90	100/100	96/96	441/441	
			294A	25.2/33.5	69.9/80.6	113/127	125/150	104/116	119/131	125/150	108/121	119/133	119/133	125/150	125/150	119/133	119/133	119/133	119/133	125/150	109/122	109/122	109/122	109/122	125/150	114/126	441/441		
			288A+294A	32.7/43.5	90.7/104.7	139/157	150/175	128/144	144/162	150/175	132/148	145/163	145/163	150/175	150/175	132/148	132/148	132/148	132/148	150/175	133/149	133/149	133/149	133/149	150/175	138/154	441/441		
			291A+294A	37.6/50.0	104.3/120.3	156/146	175/175	143/162	161/151	175/175	148/166	162/152	162/152	175/175	175/175	148/166	148/166	148/166	148/166	175/175	149/167	149/167	149/167	149/167	175/175	153/172	441/441		
			294A+294A	50.3/67.0	139.7/161.2	166/187	175/225	184/209	170/192	175/225	188/213	172/193	172/193	175/225	175/225	188/213	188/213	188/213	172/193	200/225	200/225	200/225	200/225	200/225	200/225	200/225	194/219	441/441	
			NONE	-	-	35	45	36	242	242	244	37	38	38	45	38	244	244	37	45	45	244	244	244	39	50	41	246	
			292A	16.5	19.9	35	45	36	242	242	244	37	38	38	45	38	244	244	37	45	45	244	244	244	39	50	41	246	
			295A	33.5	40.3	56	60	51	242	242	244	58	53	53	60	53	244	244	59	60	60	244	244	244	61	70	56	246	
			288A+295A	43.5	52.3	71	80	65	242	242	244	73	67	67	80	67	244	244	74	80	80	244	244	244	76	80	70	246	
292A+295A	50.0	60.2	66	70	74	242	242	244	68	76	76	80	76	244	244	69	80	80	244	244	244	71	80	79	246				
295A+295A	67.0	80.6	86	100	98	242	242	244	89	100	100	100	100	244	244	89	100	100	244	244	244	91	100	102	246				
460-3-60	460-3-60	MED	NONE	-	-	36	45	38	249	249	251	38	50	251	251	39	50	40	40	251	251	251	40	50	42	253			
			292A	16.5	19.9	36	45	38	249	249	251	38	50	50	40	251	251	39	50	50	251	251	251	40	50	42	253		
			295A	33.5	40.3	57	60	52	249	249	251	60	55	55	60	251	251	60	60	60	251	251	251	62	70	57	253		
			288A+295A	43.5	52.3	72	80	66	249	249	251	75	80	80	80	68	251	251	75	80	80	251	251	251	77	80	71	253	
			292A+295A	50.0	60.2	67	80	75	249	249	251	70	80	80	80	77	251	251	70	80	80	251	251	251	72	80	80	253	
			295A+295A	67.0	80.6	88	100	99	249	249	251	90	100	100	100	101	251	251	90	100	100	251	251	251	93	100	103	253	
			NONE	-	-	41	50	43	252	252	254	43	45	45	50	45	254	254	43	50	50	254	254	254	45	50	48	256	
			292A	16.5	19.9	41	50	43	252	252	254	43	45	45	50	45	254	254	43	50	50	254	254	254	45	50	48	256	
			295A	33.5	40.3	64	70	58	252	252	254	66	60	60	70	60	254	254	66	70	70	254	254	254	69	70	63	256	
			288A+295A	43.5	52.3	79	80	72	252	252	254	81	80	80	80	74	254	254	81	90	90	254	254	254	84	90	76	256	
292A+295A	50.0	60.2	73	80	81	252	252	254	76	80	80	80	83	254	254	76	80	80	254	254	254	78	80	86	256				
295A+295A	67.0	80.6	94	100	104	252	252	254	96	100	100	100	106	254	254	97	100	100	254	254	254	99	100	109	256				

**ELECTRICAL INFORMATION  
(UNITS PRODUCED ON OR AFTER JULY 30, 2012) cont.**

**Table 12 - UNIT WIRE/FUSE OR HACR BREAKER SIZING DATA (cont.)**

UNIT	NO M, V-PH-HZ	IFM TYPE	ELEC. HTR			NO C.O. or UNPWR C.O.																
			CRHEATER**A00	Nom (kW)	FLA	NO PE.			w/ PE. (pwrld fr/unit)			NO PE.			w/ PWRD C.O.							
						MCA	MAX FUSE or HACR BRKR	DISC. SIZE FLA LRA	MCA	MAX FUSE or HACR BRKR	DISC. SIZE FLA LRA	MCA	MAX FUSE or HACR BRKR	DISC. SIZE FLA LRA	MCA	MAX FUSE or HACR BRKR	DISC. SIZE FLA LRA					
50TC*D16	575-3-60	STD	NONE	-	-	30	28	184	31	40	32	188	29	35	30	186	32	40	34	190		
			293A	16.5	15.9	30	28	184	31	40	32	188	29	35	30	186	32	40	34	190		
			296A	33.5	32.2	44	45	184	49	50	45	188	46	50	42	50	42	186	51	60	47	190
			290A+296A	43.5	41.8	56	60	184	61	70	56	188	58	60	53	60	53	186	63	70	58	190
			293A+296A	50.0	48.1	52	60	184	57	60	63	188	54	60	60	60	60	186	59	60	65	190
			296A+296A	67.0	64.4	68	80	184	73	80	82	188	70	80	79	80	79	186	75	80	84	190
50TC*D16	575-3-60	MED	NONE	-	-	30	28	184	31	40	32	188	29	35	30	186	32	40	34	190		
			293A	16.5	15.9	30	28	184	31	40	32	188	29	35	30	186	32	40	34	190		
			296A	33.5	32.2	44	45	184	49	50	45	188	46	50	42	50	42	186	51	60	47	190
			290A+296A	43.5	41.8	56	60	184	61	70	56	188	58	60	53	60	53	186	63	70	58	190
			293A+296A	50.0	48.1	52	60	184	57	60	63	188	54	60	60	60	60	186	59	60	65	190
			296A+296A	67.0	64.4	68	80	184	73	80	82	188	70	80	79	80	79	186	75	80	84	190
50TC*D16	575-3-60	HIGH	NONE	-	-	40	35	196	37	45	39	200	35	40	37	198	39	45	41	202		
			293A	16.5	15.9	40	35	196	37	45	39	200	35	40	37	198	39	45	41	202		
			296A	33.5	32.2	52	60	196	57	60	52	200	54	60	49	60	49	198	59	60	54	202
			290A+296A	43.5	41.8	64	70	196	69	70	63	200	66	70	60	70	60	198	71	80	65	202
			293A+296A	50.0	48.1	60	70	196	65	70	70	200	62	70	68	70	68	198	67	70	72	202
			296A+296A	67.0	64.4	76	80	196	81	90	89	200	78	80	86	80	86	198	83	90	91	202

**ELECTRICAL INFORMATION  
(UNITS PRODUCED ON OR AFTER JULY 30, 2012) cont.**

**Table 13 – UNIT WIRE/FUSE OR HACR BREAKER SIZING DATA WITH 2 SPEED INDOOR FAN MOTOR**

UNIT	NO. M. V. Ph-HZ	ELEC. HTR					NO C.O. or UNPWR C.O.										w/ PWRD C.O.									
		IFM TYPE	CRHEATER***A00	Nom (KW)	FLA	MCA	NO RE.			w/ P.E. (pwrd fr/unit)			NO PE.			w/ PWRD C.O.			w/ P.E. (pwrd fr/unit)							
							MAX FUSE or BRKR	FLA	DISC. SIZE	MCA	MAX FUSE or BRKR	FLA	DISC. SIZE	MCA	MAX FUSE or BRKR	FLA	DISC. SIZE	MCA	MAX FUSE or BRKR	FLA	DISC. SIZE	MCA	MAX FUSE or BRKR	FLA	DISC. SIZE	
50TC+D08	460-3-60	STD	NONE	-	40/40	50/50	41/41	197	44/43	50/50	46/46	201	45/44	50/50	47/47	202	48/48	60/60	51/51	206	206/206					
			117A	7.8/10.4	21.7/25.0	50/50	41/41	197/197	44/43	50/50	46/46	201/201	45/44	50/50	47/47	202/202	48/49	60/60	51/51	206/206						
			110A	12.0/16.0	33.4/38.5	50/60	45/51	197/197	54/60	60/60	49/55	60/70	201/201	55/62	60/70	51/56	202/202	60/66	60/70	55/61	206/206					
			111A	18.6/24.8	51.7/59.7	72/82	66/75	197/197	77/87	80/90	70/79	201/201	78/88	80/90	72/81	202/202	83/93	90/100	76/85	206/206						
			112A	24.0/32.0	66.7/77.0	91/104	83/95	197/197	96/108	100/110	88/99	201/201	97/110	100/110	89/101	202/202	102/114	110/125	93/105	206/206						
			112A+117A	31.8/42.4	88.4/102.0	118/135	108/124	197/197	123/140	125/150	113/128	201/201	124/141	125/150	114/129	202/202	129/146	150/150	118/134	206/206						
			NONE	-	43/42	50/50	45/44	227	46/46	50/50	49/48	231	47/47	60/60	50/49	232	51/50	60/60	55/54	236	236/236					
			117A	7.8/10.4	21.7/25.0	43/42	45/44	227/227	46/46	50/50	49/48	231/231	47/47	60/60	50/49	232/232	51/52	60/60	55/54	236/236						
			110A	12.0/16.0	33.4/38.5	53/58	48/53	227/227	58/63	60/60	53/58	63/70	231/231	59/64	60/70	54/59	232/232	64/69	58/63	236/236						
			111A	18.6/24.8	51.7/59.7	76/85	69/78	227/227	81/90	90/90	74/82	231/231	82/91	90/100	75/83	232/232	87/96	90/100	79/88	236/236						
			112A	24.0/32.0	66.7/77.0	95/108	87/98	227/227	99/111	100/110	91/102	231/231	101/112	110/125	92/103	232/232	105/117	110/125	96/107	236/236						
			112A+117A	31.8/42.4	88.4/102.0	122/138	112/126	227/227	126/142	150/150	116/131	231/231	128/144	150/150	117/132	232/232	132/148	150/150	121/136	236/236						
50TC+D08	460-3-60	STD	NONE	-	48/47	60/50	50/49	262	51/51	60/60	55/54	266	52/52	60/60	56/55	267	56/55	60/60	60/59	271	271/271					
			117A	7.8/10.4	21.7/25.0	48/48	50/50	49/48	262/262	51/52	60/60	55/54	266/266	52/54	60/60	56/55	267/267	56/58	60/59	271/271						
			110A	12.0/16.0	33.4/38.5	59/64	60/70	54/59	64/69	70/70	58/63	66/70	231/231	65/70	70/70	60/64	267/267	70/75	64/69	271/271						
			111A	18.6/24.8	51.7/59.7	82/91	90/100	75/83	82/91	90/100	79/88	266/266	89/97	90/100	81/89	267/267	93/102	100/110	85/93	271/271						
			112A	24.0/32.0	66.7/77.0	101/113	92/103	262/262	106/117	110/125	97/108	266/266	107/119	110/125	98/109	267/267	112/123	125/125	102/113	271/271						
			112A+117A	31.8/42.4	88.4/102.0	128/144	117/132	262/262	133/149	150/150	122/136	266/266	134/150	150/150	123/137	267/267	139/155	150/175	127/142	271/271						
			NONE	-	19	20	19	97	20	25	21	99	21	25	22	99	23	25	24	101						
			116A	13.9	16.7	25	23	97	27	30	25	99	28	30	25	99	29	30	27	101						
			113A	16.5	19.8	29	26	97	31	35	28	99	32	35	29	99	30	34	31	101						
			114A	27.8	33.4	46	42	97	48	50	44	99	49	50	44	99	45	51	46	101						
			115A	33.0	39.7	54	51	97	56	60	51	99	56	60	52	99	53	60	54	101						
			114A+116A	41.7	50.2	67	61	97	69	70	63	99	70	70	64	99	65	72	66	101						
575-3-60	460-3-60	MED	NONE	-	20	25	113	22	115	22	115	23	115	24	115	24	25	25	117							
			116A	13.9	16.7	26	24	113	28	30	26	115	29	30	26	115	31	35	28	117						
			113A	16.5	19.8	30	27	113	32	35	29	115	33	35	30	115	35	35	32	117						
			114A	27.8	33.4	47	43	113	49	50	45	115	50	50	45	115	52	60	47	117						
			115A	33.0	39.7	55	50	113	57	60	52	115	58	60	53	115	60	60	55	117						
			114A+116A	41.7	50.2	68	62	113	70	70	64	115	71	70	65	115	73	80	67	117						
			NONE	-	22	25	130	24	30	25	132	24	30	25	132	26	30	28	28	134						
			116A	13.9	16.7	29	27	130	32	35	29	132	32	35	29	132	34	35	31	134						
			113A	16.5	19.8	33	30	130	35	35	32	132	36	40	33	132	38	40	35	134						
			114A	27.8	33.4	50	46	130	52	50	48	132	53	60	48	132	55	60	50	134						
			115A	33.0	39.7	58	53	130	60	60	55	132	61	70	56	132	63	70	58	134						
			114A+116A	41.7	50.2	71	65	130	73	80	67	132	74	80	68	132	76	80	70	134						
575-3-60	460-3-60	STD	NONE	-	14	15	79	18	83	16	83	16	83	16	81	19	25	21	85							
			118A	17.0	20.4	29	27	79	34	35	31	83	32	35	29	81	36	40	33	85						
			119A	34.0	40.9	55	50	79	60	60	55	83	57	60	52	81	62	70	57	85						
			NONE	-	16	20	92	19	25	21	96	17	20	18	94	21	25	23	23	98						
			118A	17.0	20.4	32	29	92	36	34	33	96	34	35	31	94	38	40	35	98						
			119A	34.0	40.9	57	52	92	62	70	57	96	59	60	54	94	64	70	59	98						
			NONE	-	18	20	106	22	25	23	110	20	25	20	108	23	25	24	24	112						
			118A	17.0	20.4	34	31	106	38	40	35	110	36	40	33	108	41	45	37	112						
			119A	34.0	40.9	59	54	106	64	70	59	110	61	70	56	108	66	70	60	112						

# ELECTRICAL INFORMATION (UNITS PRODUCED ON OR AFTER JULY 30, 2012) cont.

**Table 13 - UNIT WIRE/FUSE OR HACR BREAKER SIZING DATA WITH 2 SPEED INDOOR FAN MOTOR (cont.)**

UNIT	NO M, V, Ph-HZ	ELEC. HTR				NO C.O. or UNPWR C.O.																			
		IFM TYPE	CRHEATER***A00	Nom (kW)	FLA	NO PE.				w/ P.E. (pwrd fr/unit)				NO PE.				w/ PWR C.O.							
						MCA	MAX FUSE or HACR BRKR	FLA	DISC. SIZE	MCA	MAX FUSE or HACR BRKR	FLA	DISC. SIZE	MCA	MAX FUSE or HACR BRKR	FLA	DISC. SIZE	MCA	MAX FUSE or HACR BRKR	FLA	DISC. SIZE				
50TC-D09	208/230-3-60	STD	NONE	-	-	41/41	50/50	43/42	212	45/45	47/47	216	46/46	50/50	48/48	48/48	50/50	48/48	217	50/49	60/60	52/52	221	221/221	
			117A	7.8/10.4	21.7/25.0	41/41	50/50	43/42	212/212	45/45	47/47	216/216	46/46	50/50	48/48	50/50	48/48	50/50	48/48	217/217	50/49	60/60	52/52	221/221	221/221
			110A	12.0/16.0	33.4/38.5	49/56	50/60	45/51	212/212	54/60	49/55	216/216	55/62	60/60	60/70	60/70	51/56	60/70	60/66	217/217	60/66	90/100	55/61	221/221	221/221
			111A	18.6/24.8	51.7/59.7	72/82	80/90	66/75	212/212	77/87	70/79	216/216	78/88	80/90	80/90	80/90	72/81	80/90	80/90	217/217	83/93	90/100	76/85	221/221	221/221
			112A	24.0/32.0	66.7/77.0	91/104	100/110	83/95	212/212	96/108	88/99	216/216	97/110	100/110	100/110	100/110	89/101	100/110	100/110	217/217	102/114	110/125	93/105	221/221	221/221
			112A+117A	31.8/42.4	88.4/102.0	118/135	125/150	108/124	212/212	123/140	113/128	216/216	124/141	125/150	125/150	125/150	114/129	125/150	125/150	217/217	129/146	150/150	118/134	221/221	221/221
	460-3-60	MED	NONE	-	-	42/42	50/50	44/44	216	46/46	48/48	220	47/47	60/60	60/60	50/49	60/60	60/60	221	51/51	60/60	54/54	225	225/225	
			117A	7.8/10.4	21.7/25.0	42/42	50/50	44/44	216/216	46/46	48/48	220/220	47/47	60/60	60/60	60/60	50/49	60/60	60/60	221/221	51/51	60/60	54/54	225/225	225/225
			110A	12.0/16.0	33.4/38.5	51/57	60/60	47/52	216/216	56/62	51/56	220/220	57/63	60/70	60/70	60/70	52/58	60/70	60/68	221/221	62/68	70/70	56/62	225/225	225/225
			111A	18.6/24.8	51.7/59.7	74/84	80/90	68/76	216/216	79/88	80/90	220/220	80/90	80/90	80/90	80/90	73/82	80/90	80/90	221/221	85/94	90/100	78/86	225/225	225/225
			112A	24.0/32.0	66.7/77.0	93/105	100/110	85/96	216/216	97/110	89/101	220/220	99/111	100/110	100/110	100/110	90/102	100/110	103/116	221/221	103/116	110/125	95/106	225/225	225/225
			112A+117A	31.8/42.4	88.4/102.0	120/136	125/150	110/125	216/216	125/141	114/129	220/220	126/142	125/150	125/150	125/150	115/131	125/150	131/147	221/221	131/147	150/150	120/135	225/225	225/225
575-3-60	460-3-60	STD	NONE	-	-	19	25	20	111	21	113	22	25	25	20	25	25	113	23	25	25	24	115	115	
			116A	13.9	16.7	25	30	23	111	27	113	28	30	30	30	25	30	30	113	25	30	27	115	115	
			113A	16.5	19.8	29	30	26	111	31	113	32	35	35	35	28	35	35	113	29	35	31	115	115	
			114A	27.8	33.4	46	50	42	111	48	113	49	50	50	50	44	50	50	113	44	50	46	115	115	
			115A	33.0	39.7	54	60	49	111	56	113	57	60	60	60	51	60	60	113	52	60	54	115	115	
			114A+116A	41.7	50.2	67	70	61	111	69	113	70	70	70	70	63	70	70	113	64	70	66	115	115	
	575-3-60	MED	NONE	-	-	20	25	21	114	22	116	23	25	25	20	25	25	116	23	25	25	24	118	118	
			116A	13.9	16.7	26	30	24	114	28	116	29	30	30	30	26	30	30	116	26	30	28	118	118	
			113A	16.5	19.8	30	30	27	114	32	116	33	35	35	35	29	35	35	116	30	35	32	118	118	
			114A	27.8	33.4	47	50	43	114	49	116	50	50	50	50	45	50	50	116	45	50	47	118	118	
			115A	33.0	39.7	55	60	50	114	57	116	58	60	60	60	52	60	60	116	53	60	55	118	118	
			114A+116A	41.7	50.2	68	70	62	114	70	116	71	70	70	70	64	70	70	116	65	70	67	118	118	

# ELECTRICAL INFORMATION (UNITS PRODUCED ON OR AFTER JULY 30, 2012) cont.

Table 13 - UNIT WIRE/FUSE OR HACR BREAKER SIZING DATA WITH 2 SPEED INDOOR FAN MOTOR (cont.)

UNIT	NO. M. V.-Ph. Hz	ELEC. HTR					NO C.O. or UNPWR C.O.										w/ PWRD C.O.													
		CRHEATER***A00	Nom (kW)	FLA	MCA	MAX FUSE or HACR BRKR	NO P.E.		DISC. SIZE		MCA	MAX FUSE or HACR BRKR	MCA	DISC. SIZE		MCA	MAX FUSE or HACR BRKR	DISC. SIZE		MCA	MAX FUSE or HACR BRKR	DISC. SIZE								
							FLA	FLA	FLA	FLA	FLA	LRA	FLA	FLA	LRA	FLA	FLA	LRA	FLA	FLA	LRA	FLA	LRA							
50TC*12	460-3-60	NONE	-	-	-	-	23	24	24	24	24	122	26	26	26	26	26	26	26	26	26	26	26							
							26	27	27	27	27	122	28	28	28	28	28	28	28	28	28	28	28	28	28	28				
							30	30	30	30	30	122	32	32	32	32	32	124	33	33	33	33	33	33	33	33	33	33		
							55	56	56	56	56	122	57	57	57	57	124	58	58	58	58	58	58	58	58	58	58	58	58	
							68	69	69	69	69	122	68	68	68	68	124	71	71	71	71	71	71	71	71	71	71	71	71	71
							65	65	65	65	65	122	68	68	68	68	124	68	68	68	68	68	68	68	68	68	68	68	68	68
							70	70	70	70	70	122	70	70	70	70	124	70	70	70	70	70	70	70	70	70	70	70	70	70
							80	80	80	80	80	122	73	73	73	73	124	76	76	76	76	76	76	76	76	76	76	76	76	76
							30	30	30	30	30	147	24	24	24	24	147	26	26	26	26	26	26	26	26	26	26	26	26	26
							35	35	35	35	35	147	28	28	28	28	147	34	34	34	34	34	34	34	34	34	34	34	34	34
575-3-60	NONE	-	-	-	-	-	18	19	19	19	95	22	22	22	22	22	22	22	22	22	22	22	22							
							30	30	30	30	30	95	35	35	35	35	35	35	35	35	35	35	35	35	35	35				
							56	56	56	56	56	95	61	61	61	61	99	58	58	58	58	58	58	58	58	58	58	58		
							66	66	66	66	66	95	71	71	71	71	99	68	68	68	68	68	68	68	68	68	68	68	68	
							19	19	19	19	19	104	23	23	23	23	108	21	21	21	21	21	21	21	21	21	21	21	21	
							32	32	32	32	32	104	36	36	36	36	108	34	34	34	34	34	34	34	34	34	34	34	34	
							57	57	57	57	57	104	62	62	62	62	108	59	59	59	59	59	59	59	59	59	59	59	59	
							67	67	67	67	67	104	72	72	72	72	108	70	70	70	70	70	70	70	70	70	70	70	70	70
							21	21	21	21	21	118	25	25	25	25	122	23	23	23	23	23	23	23	23	23	23	23	23	23
							34	34	34	34	34	118	35	35	35	35	122	36	36	36	36	36	36	36	36	36	36	36	36	36



**ELECTRICAL INFORMATION (UNITS PRODUCED ON OR AFTER JULY 30, 2012) cont.**

**Table 13 - UNIT WIRE/FUSE OR HACR BREAKER SIZING DATA WITH 2 SPEED INDOOR FAN MOTOR (cont.)**

UNIT	NO. M. V.-Ph-Hz	ELEC. HTR					NO C.O. or UNPWR C.O.					NO P.E.					w/ PWRD C.O.							
		CRHEATER***A00	Nom (kW)	FLA	MCA	MAX FUSE or BRKR	FLA	DISC. SIZE	MCA	MAX FUSE or BRKR	FLA	DISC. SIZE	MCA	MAX FUSE or BRKR	FLA	DISC. SIZE	MCA	MAX FUSE or BRKR	FLA	DISC. SIZE	MCA	MAX FUSE or BRKR	FLA	DISC. SIZE
50TC*D14	460-3-60	NONE	-	-	62/61	80/80	65/64	357	69/68	80/80	67/66	361	67/66	80/80	70/69	362	71/70	80/80	70/69	362	71/70	80/80	75/74	366
					7.8/10.4	21.7/25.0	62/61	80/80	65/64	357/357	69/68	80/80	67/66	361/361	67/66	80/80	70/69	362/362	71/70	80/80	75/74	366/366		
					117A	7.8/10.4	21.7/25.0	62/61	80/80	65/64	357/357	69/68	80/80	67/66	361/361	67/66	80/80	70/69	362/362	71/70	80/80	75/74	366/366	
					110A	12.0/16.0	33.4/38.5	62/61	80/80	65/64	357/357	69/68	80/80	67/66	361/361	67/66	80/80	70/69	362/362	71/70	80/80	75/74	366/366	
					112A	24.0/32.0	66.7/77.0	95/106	100/110	87/98	357/357	91/102	91/102	100/125	91/102	361/361	101/112	110/125	92/103	362/362	105/117	110/125	96/107	366/366
					112A+117A	31.8/42.4	88.4/102.0	122/138	125/150	112/126	357/357	116/131	116/131	150/150	116/131	361/361	128/144	150/150	117/132	362/362	132/148	150/150	121/136	366/366
					112A+110A	37.6/50.0	104.2/120.3	141/131	150/150	134/152	357/357	146/135	146/135	150/150	134/152	361/361	147/137	150/150	135/153	362/362	152/141	175/150	140/157	366/366
					NONE	-	-	64/63	80/80	67/66	381	68/67	80/80	72/70	385	69/68	80/80	73/72	386	73/72	80/80	77/76	390	
					117A	7.8/10.4	21.7/25.0	64/63	80/80	67/66	381/381	68/67	80/80	72/70	385/385	69/68	80/80	73/72	386/386	73/72	80/80	77/76	390/390	
					110A	12.0/16.0	33.4/38.5	64/63	80/80	67/66	381/381	68/67	80/80	72/70	385/385	69/68	80/80	73/72	386/386	73/72	80/80	77/76	390/390	
50TC*D14	208/230-3-60	NONE	-	-	67/66	80/80	70/69	392	75/74	396	72/71	397	76/75	80/80	76/75	397	76/75	80/80	77/76	397	76/75	80/80	80/79	401
					7.8/10.4	21.7/25.0	67/66	80/80	70/69	392/392	75/74	396/396	72/71	397/397	76/75	80/80	76/75	397/397	76/75	80/80	80/79	401/401		
					117A	7.8/10.4	21.7/25.0	67/66	80/80	70/69	392/392	75/74	396/396	72/71	397/397	76/75	80/80	76/75	397/397	76/75	80/80	80/79	401/401	
					110A	12.0/16.0	33.4/38.5	67/66	80/80	70/69	392/392	75/74	396/396	72/71	397/397	76/75	80/80	76/75	397/397	76/75	80/80	80/79	401/401	
					112A	24.0/32.0	66.7/77.0	101/113	110/125	92/103	392/392	106/117	110/125	92/103	396/396	107/119	110/125	98/109	397/397	112/123	125/125	102/113	401/401	
					112A+117A	31.8/42.4	88.4/102.0	128/144	150/150	117/132	392/392	133/149	150/150	122/136	396/396	134/150	150/150	123/137	397/397	139/155	150/175	127/142	401/401	
					112A+110A	37.6/50.0	104.2/120.3	148/137	150/150	135/153	392/392	152/141	175/175	140/157	396/396	154/143	175/175	141/158	397/397	158/147	175/175	142/163	401/401	
					NONE	-	-	30	40	31	180	32	40	33	182	33	40	34	182	34	40	36	184	
					116A	13.9	16.7	30	40	31	180	32	40	33	182	33	40	34	182	34	40	36	184	
					113A	16.5	19.8	30	40	31	180	32	40	33	182	33	40	34	182	34	40	36	184	
575-3-60	575-3-60	NONE	-	-	30	40	31	180	32	40	33	182	33	40	34	182	34	40	36	184				
					115A	33.0	39.7	55	60	50	180	57	60	52	182	58	60	53	184	61	70	56	196	
					114A+116A	41.7	50.2	68	70	62	180	70	70	64	182	71	80	66	194	74	80	68	196	
					115A+113A	50.0	60.1	65	70	73	180	68	70	66	182	69	80	67	194	74	80	68	196	
					NONE	-	-	33	40	34	197	35	40	36	199	35	45	37	199	37	45	39	201	
					116A	13.9	16.7	33	40	34	197	35	40	36	199	35	45	37	199	37	45	39	201	
					113A	16.5	19.8	33	40	34	197	35	40	36	199	35	45	37	199	37	45	39	201	
					115A	33.0	39.7	58	60	53	197	60	60	55	199	61	70	56	199	63	70	58	201	
					114A+116A	41.7	50.2	71	80	65	197	73	80	67	199	74	80	68	199	76	80	70	201	
					115A+113A	50.0	60.1	69	80	76	197	71	80	79	199	71	80	69	199	74	80	70	201	
575-3-60	575-3-60	NONE	-	-	24	30	25	142	28	30	26	146	26	30	27	144	30	35	32	148				
					118A	17.0	20.4	32	35	29	142	36	40	33	148	34	40	31	144	38	40	35	148	
					119A	34.0	40.9	57	60	52	142	62	70	57	146	59	60	54	144	64	70	59	148	
					118A+119A	51.0	61.3	67	80	76	142	72	80	78	146	74	80	78	144	74	80	82	148	
					NONE	-	-	24	30	25	142	28	30	26	146	26	30	27	144	30	35	32	148	
					118A	17.0	20.4	32	35	29	142	36	40	33	146	34	40	31	144	38	40	35	148	
					119A	34.0	40.9	57	60	52	142	62	70	57	146	59	60	54	144	64	70	59	148	
					118A+119A	51.0	61.3	67	80	76	142	72	80	78	146	74	80	78	144	74	80	82	148	
					NONE	-	-	26	30	27	156	28	30	26	160	28	30	29	158	32	35	34	162	
					118A	17.0	20.4	34	35	31	156	30	34	33	160	36	40	33	158	41	45	37	162	
119A	34.0	40.9	59	60	54	156	64	70	59	160	61	70	56	158	66	70	60	162						
118A+119A	51.0	61.3	70	80	78	156	74	80	82	160	72	80	80	78	158	76	80	84	162					





# ELECTRICAL INFORMATION (UNITS PRODUCED ON OR AFTER JULY 30, 2012) cont.

**Table 13 - UNIT WIRE/FUSE OR HACR BREAKER SIZING DATA WITH 2 SPEED INDOOR FAN MOTOR (cont.)**

UNIT	NO M. V - Ph - HZ	ELEC. HTR				NO C.O. or UNPWR C.O.				NO PE.				w/ PWRD C.O.							
		IFM TYPE	CRHEATER**A00	Nom (kW)	FLA	MCA	MAX FUSE or HACR BRKR	DISC. SIZE		MCA	MAX FUSE or HACR BRKR	DISC. SIZE		MCA	MAX FUSE or HACR BRKR	DISC. SIZE					
								FLA	LRA			FLA	LRA			FLA	LRA				
501C'D16		STD	NONE	-	-	35	30	184	32	40	34	188	30	35	32	186	34	40	36	190	
			293A	16.5	15.9	35	30	184	32	40	34	188	30	35	32	186	34	40	36	190	
			296A	33.5	32.2	50	42	184	51	60	60	47	188	48	50	44	186	53	60	49	190
			290A+296A	43.5	41.8	60	53	184	63	70	60	58	188	60	60	55	186	65	70	60	190
			299A+296A	50.0	48.1	60	60	184	59	60	56	60	188	56	60	62	186	61	70	67	190
			296A+296A	67.0	64.4	80	79	184	75	80	73	80	188	73	80	81	186	77	80	86	190
575-3-60		MED	NONE	-	-	35	30	184	32	40	34	188	30	35	32	186	34	40	36	190	
			293A	16.5	15.9	35	30	184	32	40	34	188	30	35	32	186	34	40	36	190	
			296A	33.5	32.2	50	42	184	51	60	48	47	188	48	50	44	186	53	60	49	190
			290A+296A	43.5	41.8	60	53	184	63	70	60	58	188	60	60	55	186	65	70	60	190
			299A+296A	50.0	48.1	60	60	184	59	60	56	60	188	56	60	62	186	61	70	67	190
			296A+296A	67.0	64.4	80	79	184	75	80	73	80	188	73	80	81	186	77	80	86	190
HIGH		HIGH	NONE	-	-	40	35	196	37	45	39	200	35	40	37	198	39	45	41	202	
			293A	16.5	15.9	40	35	196	37	45	39	200	35	40	37	198	39	45	41	202	
			296A	33.5	32.2	60	47	196	57	60	54	52	200	54	60	49	198	59	60	54	202
			290A+296A	43.5	41.8	70	58	196	69	70	66	63	200	66	70	60	198	71	80	65	202
			299A+296A	50.0	48.1	70	66	196	65	70	62	70	200	62	70	68	198	67	70	72	202
			296A+296A	67.0	64.4	80	84	196	81	90	78	90	200	78	80	86	198	83	90	91	202

LEGEND:

- BRKR - Circuit breaker
- CO - Convenience outlet
- DISC - Disconnect
- FLA - Full load amps
- IFM - Indoor fan motor
- LRA - Locked rotor amps
- MCA - Minimum circuit amps
- MOCBP - MAX FUSE or HACR Breaker
- PE - Power exhaust
- PWRD CO - Powered convenient outlet
- UNPWR CO - Unpowered convenient outlet



Example: Supply voltage is 230-3-60



AB = 224 V  
BC = 231 V  
AC = 226 V

$$\text{Average Voltage} = \frac{(224 + 231 + 226)}{3} = \frac{681}{3} = 227$$

Determine maximum deviation from average voltage.

$$(AB) 227 - 224 = 3 \text{ V}$$

$$(BC) 231 - 227 = 4 \text{ V}$$

$$(AC) 227 - 226 = 1 \text{ V}$$

Maximum deviation is 4 v.

Determine percent of voltage imbalance.

$$\% \text{ Voltage Imbalance} = 100 \times \frac{4}{227} = 1.76\%$$

1. In compliance with NEC requirements for multimotor and combination load equipment (refer to NEC Articles 430 and 440), the overcurrent protective device for the unit shall be fuse or HACR breaker. Canadian units may be fuse or circuit breaker.

**2. Unbalanced 3-Phase Supply Voltage**

Never operate a motor where a phase imbalance in supply voltage is greater than 2%. Use the following formula to determine the percentage of voltage imbalance.

$$\% \text{ Voltage Imbalance} = 100 \times \frac{\text{max voltage deviation from average voltage}}{\text{average voltage}}$$

This amount of phase imbalance is satisfactory as it is below the maximum allowable 2%. **IMPORTANT:** If the supply voltage phase imbalance is more than 2%, contact your local electric utility company immediately.

## ELECTRICAL DATA FOR UNITS PRODUCED PRIOR TO JULY 30, 2012

**NOTE:** Check the serial number of unit to verify production date.

To confirm the date of manufacture, locate the unit nameplate and check the first four digits of the Serial Number. If the number listed in the first 4 digits of the Serial Number is 3111 or lower, the unit was produced prior to July 30, 2012.

Position:	1	2	3	4	5	6	7	8	9	10
Example:	3	1	1	2	U	1	2	3	4	5

Week of manufacture (fiscal calendar)			Sequence number
Year of manufacture ("12" = 2012)	Manufacturing location		

C12562A



**ELECTRICAL INFORMATION**  
**(UNITS PRODUCED PRIOR TO JULY 30, 2012)**

**Table 14 – 50TC\*A04 1-STAGE COOLING WITH 1-SPEED INDOOR FAN MOTOR**

**3 TONS**

V-Ph-Hz	VOLTAGE RANGE		COMP (ea)		OFM (ea)		IFM		
	MIN	MAX	RLA	LRA	WATTS	FLA	TYPE	EFF at Full Load	FLA
208-1-60	187	253	16.6	79	325	1.5	STD	70%	4.9
							MED	70%	4.9
230-1-60	187	253	16.6	79	325	1.5	STD	70%	4.9
							MED	70%	4.9
208-3-60	187	253	10.4	73	325	1.5	STD	70%	4.9
							MED	70%	4.9
							HIGH	80%	5.2
230-3-60	187	253	10.4	73	325	1.5	STD	70%	4.9
							MED	70%	4.9
							HIGH	80%	5.2
460-3-60	414	506	5.8	38	325	0.8	STD	70%	2.1
							MED	70%	2.1
							HIGH	80%	2.6
575-3-60	518	633	3.8	37	325	0.6	STD	71%	1.9
							MED	71%	1.9
							HIGH	80%	2.0

**Table 14 (cont.) - 50TC\*A05 1-STAGE COOLING WITH 1-SPEED INDOOR FAN MOTOR**

**4 TONS**

V-Ph-Hz	VOLTAGE RANGE		COMP (ea)		OFM (ea)		IFM		
	MIN	MAX	RLA	LRA	WATTS	FLA	TYPE	EFF at Full Load	FLA
208-1-60	187	253	21.8	117	325	1.5	STD	70%	4.9
							MED	78%	7.0
230-1-60	187	253	21.8	117	325	1.5	STD	70%	4.9
							MED	78%	7.0
208-3-60	187	253	13.7	83	325	1.5	STD	70%	4.9
							MED	70%	4.9
							HIGH	80%	5.2
230-3-60	187	253	13.7	83	325	1.5	STD	70%	4.9
							MED	70%	4.9
							HIGH	80%	5.2
460-3-60	414	506	6.2	41	325	0.8	STD	70%	2.1
							MED	70%	2.1
							HIGH	80%	2.6
575-3-60	518	633	4.8	37	325	0.6	STD	71%	1.9
							MED	71%	2.1
							HIGH	80%	2.0

**Table 14 (cont.) - 50TC\*A06 1-STAGE COOLING WITH 1-SPEED INDOOR FAN MOTOR**

**5 TONS**

V-Ph-Hz	VOLTAGE RANGE		COMP (ea)		OFM (ea)		IFM		
	MIN	MAX	RLA	LRA	WATTS	FLA	TYPE	EFF at Full Load	FLA
208-1-60	187	253	26.2	134	325	1.5	STD	70%	4.9
							MED	78%	7.0
230-1-60	187	253	26.2	134	325	1.5	STD	70%	4.9
							MED	78%	7.0
208-3-60	187	253	15.6	110	325	1.5	STD	70%	4.9
							MED	80%	5.2
							HIGH	81%	7.5
230-3-60	187	253	15.6	110	325	1.5	STD	70%	4.9
							MED	80%	5.2
							HIGH	81%	7.5
460-3-60	414	506	7.7	52	325	0.8	STD	70%	2.1
							MED	80%	2.6
							HIGH	81%	3.4
575-3-60	518	633	5.8	39	325	0.6	STD	71%	1.9
							MED	81%	2.0
							HIGH	81%	2.8

**ELECTRICAL INFORMATION**  
**(UNITS PRODUCED PRIOR TO JULY 30, 2012) cont.**

**Table 14 (cont.) - 50TC\*A07 1-STAGE COOLING WITH 1-SPEED INDOOR FAN MOTOR**

**6 TONS**

V-Ph-Hz	VOLTAGE RANGE		COMP (ea)		OFM (ea)		IFM		
	MIN	MAX	RLA	LRA	WATTS	FLA	TYPE	EFF at Full Load	FLA
208-3-60	187	253	19.0	123	325	1.5	STD	80%	5.2
							MED	81%	7.5
							HIGH	81%	7.5
230-3-60	187	253	19.0	123	325	1.5	STD	80%	5.2
							MED	81%	7.5
							HIGH	81%	7.5
460-3-60	414	506	9.7	62	325	0.8	STD	80%	2.6
							MED	81%	3.4
							HIGH	81%	4.4
575-3-60	518	633	7.4	50	325	0.6	STD	80%	2.0
							MED	81%	2.8
							HIGH	81%	2.8

**Table 14 (cont.) - 50TC\*A08 1-STAGE COOLING WITH 1-SPEED INDOOR FAN MOTOR**

**7.5 TONS**

V-Ph-Hz	VOLTAGE RANGE		COMP (ea)		OFM (ea)		IFM		
	MIN	MAX	RLA	LRA	WATTS	FLA	TYPE	EFF at Full Load	FLA
208-3-60	187	253	25.0	164	325	1.5	STD	80%	5.2
							MED	81%	7.5
							HIGH	81%	15.0
230-3-60	187	253	25.0	164	325	1.5	STD	80%	5.2
							MED	81%	7.5
							HIGH	81%	15.0
460-3-60	414	506	12.2	100	325	0.8	STD	80%	2.6
							MED	81%	3.4
							HIGH	81%	7.4
575-3-60	518	633	9.0	78	325	0.6	STD	80%	2.4
							MED	81%	2.8
							HIGH	81%	5.6

**Table 14 (cont.) - 50TC\*D08 2-STAGE COOLING WITH 1-SPEED INDOOR FAN MOTOR**

**7.5 TONS**

V-Ph-Hz	VOLTAGE RANGE		COMP (Cir 1)		COMP (Cir 2)		OFM (ea)		IFM		
	MIN	MAX	RLA	LRA	RLA	LRA	WATTS	FLA	TYPE	EFF at Full Load	FLA
208-3-60	187	253	13.6	83	13.6	83	325	1.5	STD	80%	5.2
									MED	81%	7.5
									HIGH	81%	15.0
230-3-60	187	253	13.6	83	13.6	83	325	1.5	STD	80%	5.2
									MED	81%	7.5
									HIGH	81%	15.0
460-3-60	414	506	6.1	41	6.1	41	325	0.8	STD	80%	2.6
									MED	81%	3.4
									HIGH	81%	7.4
575-3-60	518	633	4.2	33	4.2	33	325	0.6	STD	80%	2.4
									MED	81%	2.8
									HIGH	81%	5.6

**ELECTRICAL INFORMATION**  
**(UNITS PRODUCED PRIOR TO JULY 30, 2012) cont.**

**Table 14 (cont.) - 50TC\*D08 2-STAGE COOLING WITH 2-SPEED INDOOR FAN MOTOR**

**7.5 TONS**

V-Ph-Hz	VOLTAGE RANGE		COMP 1		COMP 2		OFM (ea)		IFM		
	MIN	MAX	RLA	LRA	RLA	LRA	WATTS	FLA	TYPE	EFF at Full Load	FLA
208-3-60	187	253	13.6	83	13.6	83	325	1.5	STD	84%	5.8
							325	1.5	MED	85%	8.6
							325	1.5	HIGH	84%	13.6
230-3-60	187	253	13.6	83	13.6	83	325	1.5	STD	84%	5.6
							325	1.5	MED	85%	7.8
							325	1.5	HIGH	84%	12.7
460-3-60	414	506	6.1	41	6.1	41	325	0.8	STD	79%	2.9
							325	0.8	MED	85%	3.8
							325	0.8	HIGH	84%	6.4
575-3-60	518	633	4.2	33	4.2	33	325	0.6	STD	81%	2.8
							325	0.6	MED	84%	4.5
							325	0.6	HIGH	83%	6.2

**Table 14 (cont.) - 50TC\*A09 1-STAGE COOLING WITH 1-SPEED INDOOR FAN MOTOR**

**8.5 TONS**

V-Ph-Hz	VOLTAGE RANGE		COMP (ea)		OFM (ea)		IFM		
	MIN	MAX	RLA	LRA	WATTS	FLA	TYPE	EFF at Full Load	FLA
208-3-60	187	253	29.5	195	325	1.5	STD	80%	5.2
							MED	80%	5.2
							HIGH	80%	10.0
230-3-60	187	253	29.5	195	325	1.5	STD	80%	5.2
							MED	80%	5.2
							HIGH	80%	10.0
460-3-60	414	506	14.7	95	325	0.8	STD	80%	2.6
							MED	80%	2.6
							HIGH	80%	4.4
575-3-60	518	633	12.2	80	325	0.6	STD	80%	2.4
							MED	80%	2.0
							HIGH	81%	2.8

**Table 14 (cont.) - 50TC\*D09 2-STAGE COOLING WITH 1-SPEED INDOOR FAN MOTOR**

**8.5 TONS**

V-Ph-Hz	VOLTAGE RANGE		COMP (Cir 1)		COMP (Cir 2)		OFM (ea)		IFM		
	MIN	MAX	RLA	LRA	RLA	LRA	WATTS	FLA	TYPE	EFF at Full Load	FLA
208-3-60	187	253	14.5	98	13.7	83	325	1.5	STD	80%	5.2
									MED	80%	5.2
									HIGH	80%	10.0
230-3-60	187	253	14.5	98	13.7	83	325	1.5	STD	80%	5.2
									MED	80%	5.2
									HIGH	80%	10.0
460-3-60	414	506	6.3	55	6.2	41	325	0.8	STD	80%	2.6
									MED	80%	2.6
									HIGH	80%	4.4
575-3-60	518	633	6.0	41	4.8	33	325	0.6	STD	80%	2.4
									MED	80%	2.0
									HIGH	81%	2.8

**ELECTRICAL INFORMATION**  
**(UNITS PRODUCED PRIOR TO JULY 30, 2012) cont.**

**Table 14 (cont.) - 50TC\*D09 2-STAGE COOLING WITH 2-SPEED INDOOR FAN MOTOR**

**8.5 TONS**

V-Ph-Hz	VOLTAGE RANGE		COMP 1		COMP 2		OFM (ea)		IFM		
	MIN	MAX	RLA	LRA	RLA	LRA	WATTS	FLA	TYPE	EFF at Full Load	FLA
208-3-60	187	253	14.5	98	13.7	83	325	1.5	STD	84%	5.8
							325	1.5	MED	77%	7.1
							325	1.5	HIGH	82%	10.8
230-3-60	187	253	14.5	98	13.7	83	325	1.5	STD	84%	5.6
							325	1.5	MED	77%	6.8
							325	1.5	HIGH	82%	9.8
460-3-60	414	506	6.3	55	6.2	41	325	0.8	STD	79%	2.9
							325	0.8	MED	77%	3.8
							325	0.8	HIGH	82%	4.9
575-3-60	518	633	6.0	41	4.8	33	325	0.6	STD	81%	2.8
							325	0.6	MED	80%	3.5
							325	0.6	HIGH	84%	4.5

**Table 14 (cont.) - 50TC\*A12 1-STAGE COOLING WITH 1-SPEED INDOOR FAN MOTOR**

**10 TONS**

V-Ph-Hz	VOLTAGE RANGE		COMP (ea)		OFM (ea)		IFM		
	MIN	MAX	RLA	LRA	WATTS	FLA	TYPE	EFF at Full Load	FLA
208-3-60	187	253	30.1	225	325	1.5	STD	80%	5.2
							MED	81%	10.0
							HIGH	81%	15.0
230-3-60	187	253	30.1	225	325	1.5	STD	80%	5.2
							MED	81%	10.0
							HIGH	81%	15.0
460-3-60	414	506	16.7	114	325	0.8	STD	80%	2.6
							MED	81%	4.4
							HIGH	81%	7.4
575-3-60	518	633	12.2	80	325	0.6	STD	80%	2.0
							MED	81%	2.8
							HIGH	81%	5.6

**Table 14 (cont.) - 50TC\*D12 2-STAGE COOLING WITH 1-SPEED INDOOR FAN MOTOR**

**10 TONS**

V-Ph-Hz	VOLTAGE RANGE		COMP (Cir 1)		COMP (Cir 2)		OFM (ea)		IFM		
	MIN	MAX	RLA	LRA	RLA	LRA	WATTS	FLA	TYPE	EFF at Full Load	FLA
208-3-60	187	253	15.6	110	15.9	110	325	1.5	STD	80%	5.2
									MED	81%	10.0
									HIGH	81%	15.0
230-3-60	187	253	15.6	110	15.9	110	325	1.5	STD	80%	5.2
									MED	81%	10.0
									HIGH	81%	15.0
460-3-60	414	506	7.7	52	7.7	52	325	0.8	STD	80%	2.6
									MED	81%	4.4
									HIGH	81%	7.4
575-3-60	518	633	5.8	39	5.7	39	325	0.6	STD	80%	2.0
									MED	81%	2.8
									HIGH	81%	5.6



**ELECTRICAL INFORMATION**  
**(UNITS PRODUCED PRIOR TO JULY 30, 2012) cont.**

**Table 14 (cont.) - 50TC\*D12 2-STAGE COOLING WITH 2-SPEED INDOOR FAN MOTOR**

**10 TONS**

V-Ph-Hz	VOLTAGE RANGE		COMP 1		COMP 2		OFM (ea)		IFM		
	MIN	MAX	RLA	LRA	RLA	LRA	WATTS	FLA	TYPE	EFF at Full Load	FLA
208-3-60	187	253	15.6	110	15.9	110	325	1.5	STD	77%	7.1
							325	1.5	MED	82%	10.8
							325	1.5	HIGH	84%	13.6
230-3-60	187	253	15.6	110	15.9	110	325	1.5	STD	77%	6.8
							325	1.5	MED	82%	9.8
							325	1.5	HIGH	84%	12.7
460-3-60	414	506	7.7	52	7.7	52	325	0.8	STD	77%	3.8
							325	0.8	MED	82%	4.9
							325	0.8	HIGH	84%	6.4
575-3-60	518	633	5.8	39	5.7	39	325	0.6	STD	80%	3.5
							325	0.6	MED	84%	4.5
							325	0.6	HIGH	83%	6.2

**Table 14 (cont.) - 50TC\*D14 2-STAGE COOLING WITH 1-SPEED INDOOR FAN MOTOR**

**12.5 TONS**

V-Ph-Hz	VOLTAGE RANGE		COMP (Cir 1)		COMP (Cir 2)		OFM (ea)		IFM		
	MIN	MAX	RLA	LRA	RLA	LRA	WATTS	FLA	TYPE	EFF at Full Load	FLA
208-3-60	187	253	19.0	123	22.4	149	1288	6.2	STD	81%	7.5
									MED	81%	10.0
									HIGH	81%	15.0
230-3-60	187	253	19.0	123	22.4	149	1288	6.2	STD	81%	7.5
									MED	81%	10.0
									HIGH	81%	15.0
460-3-60	414	506	9.7	62	10.6	75	1288	3.1	STD	81%	3.4
									MED	81%	4.4
									HIGH	81%	7.4
575-3-60	518	633	7.4	50	7.7	54	1288	2.5	STD	81%	2.8
									MED	81%	2.8
									HIGH	81%	5.6

**Table 14 (cont.) - 50TC\*D14 2-STAGE COOLING WITH 2-SPEED INDOOR FAN MOTOR**

**12.5 TONS**

V-Ph-Hz	VOLTAGE RANGE		COMP 1		COMP 2		OFM (ea)		IFM		
	MIN	MAX	RLA	LRA	RLA	LRA	WATTS	FLA	TYPE	EFF at Full Load	FLA
208-3-60	187	253	19.0	123	22.4	149	1070	6.2	STD	85%	8.6
							1070	6.2	MED	82%	10.8
							1070	6.2	HIGH	84%	13.6
230-3-60	187	253	19.0	123	22.4	149	1070	6.2	STD	85%	7.8
							1070	6.2	MED	82%	9.8
							1070	6.2	HIGH	84%	12.7
460-3-60	414	506	9.7	62	10.6	75	1070	3.1	STD	85%	3.8
							1070	3.1	MED	82%	4.9
							1070	3.1	HIGH	84%	6.4
575-3-60	518	633	7.4	50	7.7	54	1070	2.5	STD	84%	4.5
							1070	2.5	MED	84%	4.5
							1070	2.5	HIGH	83%	6.2

**ELECTRICAL INFORMATION**  
**(UNITS PRODUCED PRIOR TO JULY 30, 2012) cont.**

**Table 14 (cont.) - 50TC\*D16 2-STAGE COOLING WITH 1-SPEED INDOOR FAN MOTOR**

**15 TONS**

V-Ph-Hz	VOLTAGE RANGE		COMP (Cir 1)		COMP (Cir 2)		OFM (ea)		IFM		
	MIN	MAX	RLA	LRA	RLA	LRA	WATTS	FLA	TYPE	EFF at Full Load	FLA
208-3-60	187	253	25.0	164	25.0	164	1288	1.5	STD MED HIGH	81% 81% 89.5%	7.5 10.0 20.4
230-3-60	187	253	25.0	164	25.0	164	1288	1.5	STD MED HIGH	81% 81% 89.5%	7.5 10.0 20.4
460-3-60	414	506	12.2	100	12.8	100	1288	0.8	STD MED HIGH	81% 81% 89.5%	3.4 4.4 10.2
575-3-60	518	633	9.8	78	9.6	78	1288	0.6	STD MED HIGH	81% 81% 89.5%	2.8 2.8 9.0

**Table 14 (cont.) - 50TC\*D16 2-STAGE COOLING WITH 2-SPEED INDOOR FAN MOTOR**

**15 TONS**

V-Ph-Hz	VOLTAGE RANGE		COMP 1		COMP 2		OFM (ea)		IFM		
	MIN	MAX	RLA	LRA	RLA	LRA	WATTS	FLA	TYPE	EFF at Full Load	FLA
208-3-60	187	253	25.0	164	25.0	164	280	1.5	STD	85%	8.6
							280	1.5	MED	82%	10.8
							280	1.5	HIGH	90%	20.4
230-3-60	187	253	25.0	164	25.0	164	280	1.5	STD	85%	7.8
							280	1.5	MED	82%	9.8
							280	1.5	HIGH	90%	20.4
460-3-60	414	506	12.2	100	12.8	100	280	0.8	STD	85%	3.8
							280	0.8	MED	82%	4.9
							280	0.8	HIGH	90%	10.2
575-3-60	518	633	9.8	78	9.6	78	280	0.6	STD	84%	4.5
							280	0.6	MED	84%	4.5
							280	0.6	HIGH	94%	9.0

# ELECTRICAL INFORMATION

## (UNITS PRODUCED PRIOR TO JULY 30, 2012) cont.

Table 15 – 50TC\*A04

### ELECTRIC HEAT - ELECTRICAL DATA 1-STAGE COOLING 1-SPEED INDOOR FAN MOTOR

NOM. V-PH-Hz.	IFM TYPE	ELECTRIC HEATER PART NUMBER CRHEATERXXXXXX	NOM PWR (kW)	APP PWR (kW)	SINGLE POINT KIT PART NUMBER CRSINGLEXXXXXX			
					NO C.O. or UNPWRD C.O.		w/PWRD C.O.	
					NO P.E.	w/P.E. (pwr fr/unit)	NO P.E.	w/P.E. (pwr fr/unit)
208/ 230-1-60	STD	101A00	4.4	3.3/4.0	-	-	-	-
		102A00	6.5	4.9/6.0	-	-	-	-
		103B00	8.7	6.5/8.0	037A00	037A00	037A00	037A00
		104B00	10.5	7.9/9.6	040A00	040A00	040A00	040A00
		102A00,102A00	13	9.8/11.9	040A00	040A00	040A00	040A00
	MED	101A00	4.4	3.3/4.0	-	-	-	-
		102A00	6.5	4.9/6.0	-	-	-	-
		103B00	8.7	6.5/8.0	037A00	037A00	037A00	037A00
		104B00	10.5	7.9/9.6	040A00	040A00	040A00	040A00
		102A00,102A00	13	9.8/11.9	040A00	040A00	040A00	040A00
208/ 230-3-60	STD	101A00	4.4	3.3/4.0	-	-	-	-
		102A00	6.5	4.9/6.0	-	-	-	-
		103B00	8.7	6.5/8.0	-	-	-	-
		104B00	10.5	7.9/9.6	-	-	-	-
		105A00	16	12.0/14.7	037A00	037A00	038A00	038A00
	MED	101A00	4.4	3.3/4.0	-	-	-	-
		102A00	6.5	4.9/6.0	-	-	-	-
		103B00	8.7	6.5/8.0	-	-	-	-
		104B00	10.5	7.9/9.6	-	-	-	-
		105A00	16	12.0/14.7	037A00	037A00	038A00	038A00
HIGH	101A00	4.4	3.3/4.0	-	-	-	-	
	102A00	6.5	4.9/6.0	-	-	-	-	
	103B00	8.7	6.5/8.0	-	-	-	-	
	104B00	10.5	7.9/9.6	-	-	-	-	
	105A00	16	12.0/14.7	037A00	037A00	038A00	038A00	
460-3-60	STD	106A00	6	5.5	-	-	-	-
		107A00	8.8	8.1	-	-	-	-
		108A00	11.5	10.6	-	-	-	-
		109A00	14	12.9	-	-	-	-
	MED	106A00	6	5.5	-	-	-	-
		107A00	8.8	8.1	-	-	-	-
		108A00	11.5	10.6	-	-	-	-
		109A00	14	12.9	-	-	-	-
	HIGH	106A00	6	5.5	-	-	-	-
		107A00	8.8	8.1	-	-	-	-
		108A00	11.5	10.6	-	-	-	
		109A00	14	12.9	-	-	-	

**LEGEND**

- APP PWR - 208 / 230V / 460V / 575V
- C.O. - Convenience outlet
- FLA - Full load amps
- IFM - Indoor fan motor
- NOM PWR - 240V / 480V / 600V
- P.E. - Power exhaust
- PWRD - Powered convenience outlet
- UNPWRD - Unpowered convenience outlet

# ELECTRICAL INFORMATION

## (UNITS PRODUCED PRIOR TO JULY 30, 2012) cont.

Table 15 (cont.) - 50TC\*A05

### ELECTRIC HEAT - ELECTRICAL DATA 1-STAGE COOLING 1-SPEED INDOOR FAN MOTOR

NOM. V-PH-Hz.	IFM TYPE	ELECTRIC HEATER PART NUMBER CRHEATERXXXXXX	NOM PWR (kW)	APP PWR (kW)	SINGLE POINT KIT PART NUMBER CRSINGLEXXXXXX			
					NO C.O. or UNPWRD C.O.		w/PWRD C.O.	
					NO P.E.	w/P.E. (pwrd fr/unit)	NO P.E.	w/P.E. (pwrd fr/unit)
208/ 230-1-60	STD	101A00	4.4	3.3/4.0	-	-	-	-
		103B00	8.7	6.5/8.0	037A00	037A00	037A00	037A00
		102A00,102A00	13	9.8/11.9	040A00	040A00	040A00	040A00
		103B00,103B00	17.4	13.1/16.0	040A00	040A00	040A00	040A00
	104B00,104B00	21	15.8/19.3	040A00	040A00	040A00	040A00	
	MED	101A00	4.4	3.3/4.0	-	-	-	-
		103B00	8.7	6.5/8.0	037A00	037A00	037A00	037A00
		102A00,102A00	13	9.8/11.9	040A00	040A00	040A00	040A00
103B00,103B00		17.4	13.1/16.0	040A00	040A00	040A00	040A00	
104B00,104B00	21	15.8/19.3	040A00	040A00	040A00	040A00		
208/ 230-3-60	STD	102A00	6.5	4.9/6.0	-	-	-	-
		103B00	8.7	6.5/8.0	-	-	-	-
		105A00	16	12.0/14.7	037A00	037A00	038A00	038A00
		104B00,104B00	21	15.8/19.3	038A00	038A00	038A00	038A00
	MED	102A00	6.5	4.9/6.0	-	-	-	-
		103B00	8.7	6.5/8.0	-	-	-	-
		105A00	16	12.0/14.7	037A00	037A00	038A00	038A00
		104B00,104B00	21	15.8/19.3	038A00	038A00	038A00	038A00
HIGH	102A00	6.5	4.9/6.0	-	-	-	-	
	103B00	8.7	6.5/8.0	-	-	-	-	
	105A00	16	12.0/14.7	037A00	037A00	038A00	038A00	
	104B00,104B00	21	15.8/19.3	038A00	038A00	038A00	038A00	
460-3-60	STD	106A00	6	5.5	-	-	-	-
		108A00	11.5	10.6	-	-	-	-
		109A00	14	12.9	-	-	-	-
		108A00,108A00	23	21.1	037A00	037A00	037A00	037A00
	MED	106A00	6	5.5	-	-	-	-
		108A00	11.5	10.6	-	-	-	-
		109A00	14	12.9	-	-	-	-
		108A00,108A00	23	21.1	037A00	037A00	037A00	037A00
	HIGH	106A00	6	5.5	-	-	-	-
		108A00	11.5	10.6	-	-	-	-
		109A00	14	12.9	-	-	-	-
		108A00,108A00	23	21.1	037A00	037A00	037A00	037A00

**LEGEND**

- APP PWR - 208 / 230V / 460V / 575V
- C.O. - Convenience outlet
- FLA - Full load amps
- IFM - Indoor fan motor
- NOM PWR - 240V / 480V / 600V
- P.E. - Power exhaust
- PWRD - Powered convenience outlet
- UNPWRD - Unpowered convenience outlet

# ELECTRICAL INFORMATION

## (UNITS PRODUCED PRIOR TO JULY 30, 2012) cont.

Table 15 (cont.) - 50TC\*A06

### ELECTRIC HEAT - ELECTRICAL DATA 1-STAGE COOLING 1-SPEED INDOOR FAN MOTOR

NOM. V-PH-Hz.	IFM TYPE	ELECTRIC HEATER PART NUMBER CRHEATERXXXXXX	NOM PWR (kW)	APP PWR (kW)	SINGLE POINT KIT PART NUMBER CRSINGLEXXXXXX			
					NO C.O. or UNPWRD C.O.		w/PWRD C.O.	
					NO PE.	w/PE. (pwrd fr/unit)	NO PE.	w/PE. (pwrd fr/unit)
208/ 230-1-60	STD	102A00	6.5	4.9/6.0	-	-	-	-
		103B00	8.7	6.5/8.0	037A00	037A00	037A00	037A00
		102A00,102A00	13	9.8/11.9	040A00	040A00	040A00	040A00
		103B00,103B00	17.4	13.1/16.0	040A00	040A00	040A00	040A00
		104B00,104B00	21	15.8/19.3	040A00	040A00	040A00	040A00
	MED	102A00	6.5	4.9/6.0	-	-	-	037A00
		103B00	8.7	6.5/8.0	037A00	037A00	040A00	040A00
		102A00,102A00	13	9.8/11.9	040A00	040A00	040A00	040A00
		103B00,103B00	17.4	13.1/16.0	040A00	040A00	040A00	040A00
		104B00,104B00	21	15.8/19.3	040A00	040A00	040A00	040A00
208/ 230-3-60	STD	102A00	6.5	4.9/6.0	-	-	-	-
		104B00	10.5	7.9/9.6	-	-	-	-
		105A00	16	12.0/14.7	037A00	037A00	038A00	038A00
		104B00,104B00	21	15.8/19.3	038A00	038A00	038A00	038A00
		104B00,105A00	26.5	19.9/24.3	038A00	038A00	038A00	038A00
	MED	102A00	6.5	4.9/6.0	-	-	-	-
		104B00	10.5	7.9/9.6	-	-	-	-
		105A00	16	12.0/14.7	037A00	037A00	038A00	038A00
		104B00,104B00	21	15.8/19.3	038A00	038A00	038A00	038A00
		104B00,105A00	26.5	19.9/24.3	038A00	038A00	038A00	038A00
	HIGH	102A00	6.5	4.9/6.0	-	-	-	-
		104B00	10.5	7.9/9.6	-	-	-	-
		105A00	16	12.0/14.7	037A00	037A00	038A00	038A00
		104B00,104B00	21	15.8/19.3	038A00	038A00	038A00	038A00
		104B00,105A00	26.5	19.9/24.3	038A00	038A00	038A00	038A00
460-3-60	STD	106A00	6	5.5	-	-	-	-
		108A00	11.5	10.6	-	-	-	-
		109A00	14	12.9	-	-	-	-
		108A00,108A00	23	21.1	037A00	037A00	037A00	037A00
		108A00,109A00	25.5	23.4	037A00	037A00	037A00	037A00
	MED	106A00	6	5.5	-	-	-	-
		108A00	11.5	10.6	-	-	-	-
		109A00	14	12.9	-	-	-	-
		108A00,108A00	23	21.1	037A00	037A00	037A00	037A00
		108A00,109A00	25.5	23.4	037A00	037A00	037A00	037A00
	HIGH	106A00	6	5.5	-	-	-	-
		108A00	11.5	10.6	-	-	-	-
		109A00	14	12.9	-	-	-	-
		108A00,108A00	23	21.1	037A00	037A00	037A00	037A00
		108A00,109A00	25.5	23.4	037A00	037A00	037A00	037A00

**LEGEND**

- APP PWR - 208 / 230V / 460V / 575V
- C.O. - Convenience outlet
- FLA - Full load amps
- IFM - Indoor fan motor
- NOM PWR - 240V / 480V / 600V
- PE. - Power exhaust
- PWRD - Powered convenience outlet
- UNPWRD - Unpowered convenience outlet

# ELECTRICAL INFORMATION

## (UNITS PRODUCED PRIOR TO JULY 30, 2012) cont.

Table 15 (cont.) - 50TC\*A07

### ELECTRIC HEAT - ELECTRICAL DATA 1-STAGE COOLING 1-SPEED INDOOR FAN MOTOR

NOM. V-PH-Hz.	IFM TYPE	ELECTRIC HEATER PART NUMBER CRHEATERXXXXXX	NOM PWR (kW)	APP PWR (kW)	SINGLE POINT KIT PART NUMBER CRSINGLEXXXXXX			
					NO C.O. or UNPWRD C.O.		w/PWRD C.O.	
					NO PE.	w/PE. (pwrd fr/unit)	NO PE.	w/PE. (pwrd fr/unit)
208/ 230-3-60	STD	102A00	6.5	4.9/6.0	-	-	-	-
		104B00	10.5	7.9/9.6	-	-	-	-
		105A00	16.0	12.0/14.7	037A00	037A00	038A00	038A00
		104B00,104B00	21.0	15.8/19.3	038A00	038A00	038A00	038A00
		104B00,105A00	26.5	19.9/24.3	038A00	038A00	038A00	038A00
	MED	102A00	6.5	4.9/6.0	-	-	-	-
		104B00	10.5	7.9/9.6	-	-	-	-
		105A00	16.0	12.0/14.7	037A00	037A00	038A00	038A00
		104B00,104B00	21.0	15.8/19.3	038A00	038A00	038A00	038A00
		104B00,105A00	26.5	19.9/24.3	038A00	038A00	038A00	038A00
	HIGH	102A00	6.5	4.9/6.0	-	-	-	-
		104B00	10.5	7.9/9.6	-	-	-	-
105A00		16.0	12.0/14.7	037A00	037A00	038A00	038A00	
104B00,104B00		21.0	15.8/19.3	038A00	038A00	038A00	038A00	
104B00,105A00		26.5	19.9/24.3	038A00	038A00	038A00	038A00	
460-3-60	STD	106A00	6.0	5.5	-	-	-	-
		108A00	11.5	10.6	-	-	-	-
		109A00	14.0	12.9	-	-	-	-
		108A00,108A00	23.0	21.1	037A00	037A00	037A00	037A00
		108A00,109A00	25.5	23.4	037A00	037A00	037A00	037A00
	MED	106A00	6.0	5.5	-	-	-	-
		108A00	11.5	10.6	-	-	-	-
		109A00	14.0	12.9	-	-	-	-
		108A00,108A00	23.0	21.1	037A00	037A00	037A00	037A00
		108A00,109A00	25.5	23.4	037A00	037A00	037A00	037A00
	HIGH	106A00	6.0	5.5	-	-	-	-
		108A00	11.5	10.6	-	-	-	-
109A00		14.0	12.9	-	-	-	-	
108A00,108A00		23.0	21.1	037A00	037A00	037A00	037A00	
108A00,109A00		25.5	23.4	037A00	037A00	037A00	037A00	

**LEGEND**

- APP PWR - 208 / 230V / 460V / 575V
- C.O. - Convenience outlet
- FLA - Full load amps
- IFM - Indoor fan motor
- NOM PWR - 240V / 480V / 600V
- PE. - Power exhaust
- PWRD - Powered convenience outlet
- UNPWRD - Unpowered convenience outlet

# ELECTRICAL INFORMATION

## (UNITS PRODUCED PRIOR TO JULY 30, 2012) cont.

Table 15 (cont.) - 50TC\*A08

### ELECTRIC HEAT - ELECTRICAL DATA 1-STAGE COOLING 1-SPEED INDOOR FAN MOTOR

NOM. V-PH-Hz.	IFM TYPE	ELECTRIC HEATER PART NUMBER CRHEATERXXXXXX	NOM PWR (kW)	APP PWR (kW)	SINGLE POINT KIT PART NUMBER CRSINGLEXXXXXX			
					NO C.O. or UNPWRD C.O.		w/PWRD C.O.	
					NO PE.	w/PE. (pwrd fr/unit)	NO PE.	w/PE. (pwrd fr/unit)
208/ 230-3-60	STD	117A00	10.4	7.8/9.6	042A00	042A00	042A00	042A00
		110A00	16.0	12.0/14.7	042A00	042A00	043A00	043A00
		111A00	24.8	18.6/22.8	043A00	043A00	043A00	043A00
		112A00	32.0	24.0/29.4	043A00	043A00	043A00	043A00
		112A00,117A00	42.4	31.8/38.9	045A00	045A00	045A00	045A00
	MED	117A00	10.4	7.8/9.6	042A00	042A00	042A00	042A00
		110A00	16.0	12.0/14.7	042A00	043A00	043A00	043A00
		111A00	24.8	18.6/22.8	043A00	043A00	043A00	043A00
		112A00	32.0	24.0/29.4	043A00	043A00	043A00	043A00
		112A00,117A00	42.4	31.8/38.9	045A00	045A00	045A00	045A00
	HIGH	117A00	10.4	7.8/9.6	042A00	042A00	043A00	043A00
		110A00	16.0	12.0/14.7	043A00	043A00	043A00	043A00
111A00		24.8	18.6/22.8	043A00	043A00	043A00	043A00	
112A00		32.0	24.0/29.4	043A00	043A00	043A00	043A00	
112A00,117A00		42.4	31.8/38.9	045A00	045A00	045A00	045A00	
460-3-60	STD	116A00	13.9	12.8	042A00	042A00	042A00	042A00
		113A00	16.5	15.2	042A00	042A00	042A00	042A00
		114A00	27.8	25.5	042A00	042A00	042A00	042A00
		115A00	33.0	30.3	042A00	042A00	042A00	042A00
		114A00,116A00	41.7	38.3	044A00	044A00	044A00	044A00
	MED	116A00	13.9	12.8	042A00	042A00	042A00	042A00
		113A00	16.5	15.2	042A00	042A00	042A00	042A00
		114A00	27.8	25.5	042A00	042A00	042A00	042A00
		115A00	33.0	30.3	042A00	042A00	042A00	042A00
		114A00,116A00	41.7	38.3	044A00	044A00	044A00	044A00
	HIGH	116A00	13.9	12.8	042A00	042A00	042A00	042A00
		113A00	16.5	15.2	042A00	042A00	042A00	042A00
114A00		27.8	25.5	042A00	042A00	042A00	042A00	
115A00		33.0	30.3	042A00	044A00	044A00	044A00	
114A00,116A00		41.7	38.3	044A00	044A00	044A00	044A00	
575-3-60	STD	118A00	17.0	17.0	042A00	042A00	042A00	042A00
		119A00	34.0	34.0	042A00	042A00	042A00	044A00
	MED	118A00	17.0	17.0	042A00	042A00	042A00	042A00
		119A00	34.0	34.0	042A00	042A00	042A00	044A00
	HIGH	118A00	17.0	17.0	042A00	042A00	042A00	042A00
		119A00	34.0	34.0	042A00	044A00	044A00	044A00

**LEGEND**

- APP PWR - 208 / 230V / 460V / 575V
- C.O. - Convenience outlet
- FLA - Full load amps
- IFM - Indoor fan motor
- NOM PWR - 240V / 480V / 600V
- PE. - Power exhaust
- PWRD - Powered convenience outlet
- UNPWRD - Unpowered convenience outlet



# ELECTRICAL INFORMATION

## (UNITS PRODUCED PRIOR TO JULY 30, 2012) cont.

Table 15 (cont.) - 50TC\*D08

### ELECTRIC HEAT - ELECTRICAL DATA 2-STAGE COOLING 1-SPEED INDOOR FAN MOTOR

NOM. V-PH-Hz.	IFM TYPE	ELECTRIC HEATER PART NUMBER CRHEATERXXXXXX	NOM PWR (kW)	APP PWR (kW)	SINGLE POINT KIT PART NUMBER CRSINGLEXXXXXX			
					NO C.O. or UNPWRD C.O.		w/PWRD C.O.	
					NO PE.	w/PE. (pwrd fr/unit)	NO PE.	w/PE. (pwrd fr/unit)
208/ 230-3-60	STD	117A00	10.4	7.8/9.6	042A00	042A00	042A00	042A00
		110A00	16.0	12.0/14.7	042A00	042A00	043A00	043A00
		111A00	24.8	18.6/22.8	043A00	043A00	043A00	043A00
		112A00	32.0	24.0/29.4	043A00	043A00	043A00	043A00
		112A00,117A00	42.4	31.8/38.9	045A00	045A00	045A00	045A00
	MED	117A00	10.4	7.8/9.6	042A00	042A00	042A00	042A00
		110A00	16.0	12.0/14.7	042A00	043A00	043A00	043A00
		111A00	24.8	18.6/22.8	043A00	043A00	043A00	043A00
		112A00	32.0	24.0/29.4	043A00	043A00	043A00	043A00
		112A00,117A00	42.4	31.8/38.9	045A00	045A00	045A00	045A00
	HIGH	117A00	10.4	7.8/9.6	042A00	042A00	042A00	043A00
		110A00	16.0	12.0/14.7	043A00	043A00	043A00	043A00
111A00		24.8	18.6/22.8	043A00	043A00	043A00	043A00	
112A00		32.0	24.0/29.4	043A00	043A00	043A00	043A00	
112A00,117A00		42.4	31.8/38.9	045A00	045A00	045A00	045A00	
460-3-60	STD	116A00	13.9	12.8	042A00	042A00	042A00	042A00
		113A00	16.5	15.2	042A00	042A00	042A00	042A00
		114A00	27.8	25.5	042A00	042A00	042A00	042A00
		115A00	33.0	30.3	042A00	042A00	042A00	042A00
		114A00,116A00	41.7	38.3	044A00	044A00	044A00	044A00
	MED	116A00	13.9	12.8	042A00	042A00	042A00	042A00
		113A00	16.5	15.2	042A00	042A00	042A00	042A00
		114A00	27.8	25.5	042A00	042A00	042A00	042A00
		115A00	33.0	30.3	042A00	042A00	042A00	042A00
		114A00,116A00	41.7	38.3	044A00	044A00	044A00	044A00
	HIGH	116A00	13.9	12.8	042A00	042A00	042A00	042A00
		113A00	16.5	15.2	042A00	042A00	042A00	042A00
114A00		27.8	25.5	042A00	042A00	042A00	042A00	
115A00		33.0	30.3	042A00	044A00	044A00	044A00	
114A00,116A00		41.7	38.3	044A00	044A00	044A00	044A00	
575-3-60	STD	118A00	17.0	17.0	042A00	042A00	042A00	042A00
		119A00	34.0	34.0	042A00	042A00	042A00	044A00
	MED	118A00	17.0	17.0	042A00	042A00	042A00	042A00
		119A00	34.0	34.0	042A00	042A00	042A00	044A00
	HIGH	118A00	17.0	17.0	042A00	042A00	042A00	042A00
		119A00	34.0	34.0	042A00	044A00	044A00	044A00

**LEGEND**

- APP PWR - 208 / 230V / 460V / 575V
- C.O. - Convenience outlet
- FLA - Full load amps
- IFM - Indoor fan motor
- NOM PWR - 240V / 480V / 600V
- PE. - Power exhaust
- PWRD - Powered convenience outlet
- UNPWRD - Unpowered convenience outlet

# ELECTRICAL INFORMATION

## (UNITS PRODUCED PRIOR TO JULY 30, 2012) cont.

Table 15 (cont.) - 50TC\*D08

### ELECTRIC HEAT - ELECTRICAL DATA 2-STAGE COOLING 2-SPEED INDOOR FAN MOTOR

NOM. V-PH-Hz.	IFM TYPE	ELECTRIC HEATER PART NUMBER CRHEATERXXXXXX	NOM PWR (kW)	APP PWR (kW)	SINGLE POINT KIT PART NUMBER CRSINGLEXXXXXX			
					NO C.O. or UNPWRD C.O.		w/PWRD C.O.	
					NO PE.	w/PE. (pwrd fr/unit)	NO PE.	w/PE. (pwrd fr/unit)
208/ 230-3-60	STD	117A00	10.4	7.8/9.6	042A00	042A00	042A00	042A00
		110A00	16.0	12.0/14.7	042A00	042A00	043A00	043A00
		111A00	24.8	18.6/22.8	043A00	043A00	043A00	043A00
		112A00	32.0	24.0/29.4	043A00	043A00	043A00	043A00
		112A00,117A00	42.4	31.8/38.9	045A00	045A00	045A00	045A00
	MED	117A00	10.4	7.8/9.6	042A00	042A00	042A00	042A00
		110A00	16.0	12.0/14.7	042A00	043A00	043A00	043A00
		111A00	24.8	18.6/22.8	043A00	043A00	043A00	043A00
		112A00	32.0	24.0/29.4	043A00	043A00	043A00	043A00
		112A00,117A00	42.4	31.8/38.9	045A00	045A00	045A00	045A00
	HIGH	117A00	10.4	7.8/9.6	042A00	042A00	042A00	042A00
		110A00	16.0	12.0/14.7	043A00	043A00	043A00	043A00
111A00		24.8	18.6/22.8	043A00	043A00	043A00	043A00	
112A00		32.0	24.0/29.4	043A00	043A00	043A00	043A00	
112A00,117A00		42.4	31.8/38.9	045A00	045A00	045A00	045A00	
460-3-60	STD	116A00	13.9	12.8	042A00	042A00	042A00	042A00
		113A00	16.5	15.2	042A00	042A00	042A00	042A00
		114A00	27.8	25.5	042A00	042A00	042A00	042A00
		115A00	33.0	30.3	042A00	042A00	042A00	042A00
		114A00,116A00	41.7	38.3	044A00	044A00	044A00	044A00
	MED	116A00	13.9	12.8	042A00	042A00	042A00	042A00
		113A00	16.5	15.2	042A00	042A00	042A00	042A00
		114A00	27.8	25.5	042A00	042A00	042A00	042A00
		115A00	33.0	30.3	042A00	042A00	042A00	042A00
		114A00,116A00	41.7	38.3	044A00	044A00	044A00	044A00
	HIGH	116A00	13.9	12.8	042A00	042A00	042A00	042A00
		113A00	16.5	15.2	042A00	042A00	042A00	042A00
114A00		27.8	25.5	042A00	042A00	042A00	042A00	
115A00		33.0	30.3	042A00	042A00	044A00	044A00	
114A00,116A00		41.7	38.3	044A00	044A00	044A00	044A00	
575-3-60	STD	118A00	17.0	17.0	042A00	042A00	042A00	042A00
		119A00	34.0	34.0	042A00	042A00	042A00	044A00
	MED	118A00	17.0	17.0	042A00	042A00	042A00	042A00
		119A00	34.0	34.0	042A00	044A00	042A00	044A00
	HIGH	118A00	17.0	17.0	042A00	042A00	042A00	042A00
		119A00	34.0	34.0	042A00	044A00	044A00	044A00

**LEGEND**

- APP PWR - 208 / 230V / 460V / 575V
- C.O. - Convenience outlet
- FLA - Full load amps
- IFM - Indoor fan motor
- NOM PWR - 240V / 480V / 600V
- PE. - Power exhaust
- PWRD - Powered convenience outlet
- UNPWRD - Unpowered convenience outlet

# ELECTRICAL INFORMATION

## (UNITS PRODUCED PRIOR TO JULY 30, 2012) cont.

Table 15 (cont.) - 50TC\*A09

### ELECTRIC HEAT - ELECTRICAL DATA 1-STAGE COOLING 1-SPEED INDOOR FAN MOTOR

NOM. V-PH-Hz.	IFM TYPE	ELECTRIC HEATER PART NUMBER CRHEATERXXXXXX	NOM PWR (kW)	APP PWR (kW)	SINGLE POINT KIT PART NUMBER CRSINGLEXXXXXX			
					NO C.O. or UNPWRD C.O.		w/PWRD C.O.	
					NO PE.	w/PE. (pwrd fr/unit)	NO PE.	w/PE. (pwrd fr/unit)
208/ 230-3-60	STD	117A00	10.4	7.8/9.6	047A00	047A00	047A00	049A00
		110A00	16.0	12.0/14.7	047A00	047A00	049A00	049A00
		111A00	24.8	18.6/22.8	049A00	049A00	049A00	049A00
		112A00	32.0	24.0/29.4	049A00	049A00	049A00	049A00
		112A00,117A00	42.4	31.8/38.9	051A00	051A00	051A00	051A00
	MED	117A00	10.4	7.8/9.6	047A00	047A00	047A00	049A00
		110A00	16.0	12.0/14.7	047A00	047A00	049A00	049A00
		111A00	24.8	18.6/22.8	049A00	049A00	049A00	049A00
		112A00	32.0	24.0/29.4	049A00	049A00	049A00	049A00
		112A00,117A00	42.4	31.8/38.9	051A00	051A00	051A00	051A00
	HIGH	117A00	10.4	7.8/9.6	047A00	049A00	049A00	049A00
		110A00	16.0	12.0/14.7	049A00	049A00	049A00	049A00
111A00		24.8	18.6/22.8	049A00	049A00	049A00	049A00	
112A00		32.0	24.0/29.4	049A00	049A00	049A00	049A00	
112A00,117A00		42.4	31.8/38.9	051A00	051A00	051A00	051A00	
460-3-60	STD	116A00	13.9	12.8	047A00	047A00	047A00	047A00
		113A00	16.5	15.2	047A00	047A00	047A00	047A00
		114A00	27.8	25.5	047A00	047A00	047A00	047A00
		115A00	33.0	30.3	047A00	047A00	047A00	047A00
		114A00,116A00	41.7	38.3	050A00	050A00	050A00	050A00
	MED	116A00	13.9	12.8	047A00	047A00	047A00	047A00
		113A00	16.5	15.2	047A00	047A00	047A00	047A00
		114A00	27.8	25.5	047A00	047A00	047A00	047A00
		115A00	33.0	30.3	047A00	047A00	047A00	047A00
		114A00,116A00	41.7	38.3	050A00	050A00	050A00	050A00
	HIGH	116A00	13.9	12.8	047A00	047A00	047A00	047A00
		113A00	16.5	15.2	047A00	047A00	047A00	047A00
		114A00	27.8	25.5	047A00	047A00	047A00	047A00
		115A00	33.0	30.3	047A00	047A00	047A00	050A00
		114A00,116A00	41.7	38.3	050A00	050A00	050A00	050A00
575-3-60	STD	118A00	17.0	17.0	047A00	047A00	047A00	047A00
		119A00	34.0	34.0	047A00	047A00	047A00	050A00
	MED	118A00	17.0	17.0	047A00	047A00	047A00	047A00
		119A00	34.0	34.0	047A00	047A00	047A00	050A00
	HIGH	118A00	17.0	17.0	047A00	047A00	047A00	047A00
		119A00	34.0	34.0	047A00	047A00	047A00	050A00

**LEGEND**

- APP PWR - 208 / 230V / 460V / 575V
- C.O. - Convenience outlet
- FLA - Full load amps
- IFM - Indoor fan motor
- NOM PWR - 240V / 480V / 600V
- PE. - Power exhaust
- PWRD - Powered convenience outlet
- UNPWRD - Unpowered convenience outlet

## ELECTRICAL INFORMATION (UNITS PRODUCED PRIOR TO JULY 30, 2012) cont.

Table 15 (cont.) - 50TC\*D09

### ELECTRIC HEAT - ELECTRICAL DATA 2-STAGE COOLING 1-SPEED INDOOR FAN MOTOR

NOM. V-PH-Hz.	IFM TYPE	ELECTRIC HEATER PART NUMBER CRHEATERXXXXXX	NOM PWR (kW)	APP PWR (kW)	SINGLE POINT KIT PART NUMBER CRSINGLEXXXXXX			
					NO C.O. or UNPWRD C.O.		w/PWRD C.O.	
					NO PE.	w/PE. (pwrd fr/unit)	NO PE.	w/PE. (pwrd fr/unit)
208/ 230-3-60	STD	117A00	10.4	7.8/9.6	047	047	047	047
		110A00	16.0	12.0/14.7	047	047	049	049
		111A00	24.8	18.6/22.8	049	049	049	049
		112A00	32.0	24.0/29.4	049	049	049	049
		112A00,117A00	42.4	31.8/38.9	051	051	051	051
	MED	117A00	10.4	7.8/9.6	047	047	047	047
		110A00	16.0	12.0/14.7	047	047	049	049
		111A00	24.8	18.6/22.8	049	049	049	049
		112A00	32.0	24.0/29.4	049	049	049	049
		112A00,117A00	42.4	31.8/38.9	051	051	051	051
	HIGH	117A00	10.4	7.8/9.6	047	047	047	047
		110A00	16.0	12.0/14.7	049	049	049	049
111A00		24.8	18.6/22.8	049	049	049	049	
112A00		32.0	24.0/29.4	049	049	049	049	
112A00,117A00		42.4	31.8/38.9	051	051	051	051	
460-3-60	STD	116A00	13.9	12.8	047	047	047	047
		113A00	16.5	15.2	047	047	047	047
		114A00	27.8	25.5	047	047	047	047
		115A00	33.0	30.3	047	047	047	047
		114A00,116A00	41.7	38.3	050	050	050	050
	MED	116A00	13.9	12.8	047	047	047	047
		113A00	16.5	15.2	047	047	047	047
		114A00	27.8	25.5	047	047	047	047
		115A00	33.0	30.3	047	047	047	047
		114A00,116A00	41.7	38.3	050	050	050	050
	HIGH	116A00	13.9	12.8	047	047	047	047
		113A00	16.5	15.2	047	047	047	047
114A00		27.8	25.5	047	047	047	047	
115A00		33.0	30.3	047	047	047	050	
114A00,116A00		41.7	38.3	050	050	050	050	
575-3-60	STD	118A00	17.0	17.0	047	047	047	047
		119A00	34.0	34.0	047	047	047	050
	MED	118A00	17.0	17.0	047	047	047	047
		119A00	34.0	34.0	047	047	047	050
	HIGH	118A00	17.0	17.0	047	047	047	047
		119A00	34.0	34.0	047	047	047	050

**LEGEND**

- APP PWR - 208 / 230V / 460V / 575V
- C.O. - Convenience outlet
- FLA - Full load amps
- IFM - Indoor fan motor
- NOM PWR - 240V / 480V / 600V
- PE. - Power exhaust
- PWRD - Powered convenience outlet
- UNPWRD - Unpowered convenience outlet

# ELECTRICAL INFORMATION

## (UNITS PRODUCED PRIOR TO JULY 30, 2012) cont.

Table 15 (cont.) - 50TC\*D09

### ELECTRIC HEAT - ELECTRICAL DATA 2-STAGE COOLING 2-SPEED INDOOR FAN MOTOR

NOM. V-PH-Hz.	IFM TYPE	ELECTRIC HEATER PART NUMBER CRHEATERXXXXXX	NOM PWR (kW)	APP PWR (kW)	SINGLE POINT KIT PART NUMBER CRSINGLEXXXXXX			
					NO C.O. or UNPWRD C.O.		w/PWRD C.O.	
					NO P.E.	w/P.E. (pwrd fr/unit)	NO P.E.	w/P.E. (pwrd fr/ unit)
208/ 203-3-60	STD	117A00	10.4	7.8/9.6	047A00	047A00	047A00	047A00
		110A00	16.0	12.0/14.7	047A00	047A00	049A00	049A00
		111A00	24.8	18.6/22.8	049A00	049A00	049A00	049A00
		112A00	32.0	24.0/29.4	049A00	049A00	049A00	049A00
		112A00,117A00	42.4	31.8/38.9	051A00	051A00	051A00	051A00
	MED	117A00	10.4	7.8/9.6	047A00	047A00	047A00	047A00
		110A00	16.0	12.0/14.7	047A00	049A00	049A00	049A00
		111A00	24.8	18.6/22.8	049A00	049A00	049A00	049A00
		112A00	32.0	24.0/29.4	049A00	049A00	049A00	049A00
		112A00,117A00	42.4	31.8/38.9	051A00	051A00	051A00	051A00
	HIGH	117A00	10.4	7.8/9.6	047A00	047A00	047A00	047A00
		110A00	16.0	12.0/14.7	049A00	049A00	049A00	049A00
111A00		24.8	18.6/22.8	049A00	049A00	049A00	049A00	
112A00		32.0	24.0/29.4	049A00	049A00	049A00	049A00	
112A00,117A00		42.4	31.8/38.9	051A00	051A00	051A00	051A00	
460-3-60	STD	116A00	13.9	12.8	047A00	047A00	047A00	047A00
		113A00	16.5	15.2	047A00	047A00	047A00	047A00
		114A00	27.8	25.5	047A00	047A00	047A00	047A00
		115A00	33.0	30.3	047A00	047A00	047A00	047A00
		114A00,116A00	41.7	38.3	050A00	050A00	050A00	050A00
	MED	116A00	13.9	12.8	047A00	047A00	047A00	047A00
		113A00	16.5	15.2	047A00	047A00	047A00	047A00
		114A00	27.8	25.5	047A00	047A00	047A00	047A00
		115A00	33.0	30.3	047A00	047A00	047A00	047A00
		114A00,116A00	41.7	38.3	050A00	050A00	050A00	050A00
	HIGH	116A00	13.9	12.8	047A00	047A00	047A00	047A00
		113A00	16.5	15.2	047A00	047A00	047A00	047A00
114A00		27.8	25.5	047A00	047A00	047A00	047A00	
115A00		33.0	30.3	047A00	047A00	047A00	050A00	
114A00,116A00		41.7	38.3	050A00	050A00	050A00	050A00	
575-3-60	STD	118A00	17.0	17.0	047A00	047A00	047A00	047A00
		119A00	34.0	34.0	047A00	047A00	047A00	050A00
	MED	118A00	17.0	17.0	047A00	047A00	047A00	047A00
		119A00	34.0	34.0	047A00	050A00	047A00	050A00
	HIGH	118A00	17.0	17.0	047A00	047A00	047A00	047A00
		119A00	34.0	34.0	047A00	050A00	047A00	050A00

**LEGEND**

- APP PWR - 208 / 230V / 460V / 575V
- C.O. - Convenience outlet
- FLA - Full load amps
- IFM - Indoor fan motor
- NOM PWR - 240V / 480V / 600V
- P.E. - Power exhaust
- PWRD - Powered convenience outlet
- UNPWRD - Unpowered convenience outlet

# ELECTRICAL INFORMATION

## (UNITS PRODUCED PRIOR TO JULY 30, 2012) cont.

Table 15 (cont.) - 50TC\*A12

### ELECTRIC HEAT - ELECTRICAL DATA 1-STAGE COOLING 1-SPEED INDOOR FAN MOTOR

NOM. V-PH-Hz.	IFM TYPE	ELECTRIC HEATER PART NUMBER CRHEATERXXXXXX	NOM PWR (kW)	APP PWR (kW)	SINGLE POINT KIT PART NUMBER CRSINGLEXXXXXX			
					NO C.O. or UNPWRD C.O.		w/PWRD C.O.	
					NO PE.	w/PE. (pwrd fr/unit)	NO PE.	w/PE. (pwrd fr/unit)
208/ 230-3-60	STD	117A00	10.4	7.8/9.6	047A00	047A00	047A00	049A00
		110A00	16.0	12.0/14.7	047A00	047A00	049A00	049A00
		112A00	32.0	24.0/29.4	049A00	049A00	049A00	049A00
		112A00,117A00	42.4	31.8/38.9	051A00	051A00	051A00	051A00
		112A00,110A00	50.0	37.6/45.9	051A00	051A00	051A00	051A00
	MED	117A00	10.4	7.8/9.6	047A00	049A00	049A00	049A00
		110A00	16.0	12.0/14.7	049A00	049A00	049A00	049A00
		112A00	32.0	24.0/29.4	049A00	049A00	049A00	049A00
		112A00,117A00	42.4	31.8/38.9	051A00	051A00	051A00	051A00
		112A00,110A00	50.0	37.6/45.9	051A00	051A00	051A00	051A00
	HIGH	117A00	10.4	7.8/9.6	049A00	049A00	049A00	049A00
		110A00	16.0	12.0/14.7	049A00	049A00	049A00	049A00
112A00		32.0	24.0/29.4	049A00	049A00	049A00	049A00	
112A00,117A00		42.4	31.8/38.9	051A00	051A00	051A00	051A00	
112A00,110A00		50.0	37.6/45.9	051A00	051A00	051A00	051A00	
460-3-60	STD	116A00	13.9	12.8	047A00	047A00	047A00	047A00
		113A00	16.5	15.2	047A00	047A00	047A00	047A00
		115A00	33.0	30.3	047A00	047A00	047A00	047A00
		114A00,116A00	41.7	38.3	050A00	050A00	050A00	050A00
		115A00,113A00	50.0	45.9	050A00	050A00	050A00	050A00
	MED	116A00	13.9	12.8	047A00	047A00	047A00	047A00
		113A00	16.5	15.2	047A00	047A00	047A00	047A00
		115A00	33.0	30.3	047A00	047A00	047A00	050A00
		114A00,116A00	41.7	38.3	050A00	050A00	050A00	050A00
		115A00,113A00	50.0	45.9	050A00	050A00	050A00	050A00
	HIGH	116A00	13.9	12.8	047A00	047A00	047A00	047A00
		113A00	16.5	15.2	047A00	047A00	047A00	047A00
115A00		33.0	30.3	047A00	050A00	050A00	050A00	
114A00,116A00		41.7	38.3	050A00	050A00	050A00	050A00	
115A00,113A00		50.0	45.9	050A00	050A00	050A00	050A00	
575-3-60	STD	118A00	17.0	17.0	047A00	047A00	047A00	047A00
		119A00	34.0	34.0	047A00	047A00	047A00	050A00
		118A00,119A00	51.0	51.0	050A00	050A00	050A00	050A00
	MED	118A00	17.0	17.0	047A00	047A00	047A00	047A00
		119A00	34.0	34.0	047A00	047A00	047A00	050A00
		118A00,119A00	51.0	51.0	050A00	050A00	050A00	050A00
	HIGH	118A00	17.0	17.0	047A00	047A00	047A00	047A00
		119A00	34.0	34.0	047A00	050A00	050A00	050A00
		118A00,119A00	51.0	51.0	050A00	050A00	050A00	050A00

**LEGEND**

- APP PWR - 208 / 230V / 460V / 575V
- C.O. - Convenience outlet
- FLA - Full load amps
- IFM - Indoor fan motor
- NOM PWR - 240V / 480V / 600V
- PE. - Power exhaust
- PWRD - Powered convenience outlet
- UNPWRD - Unpowered convenience outlet

# ELECTRICAL INFORMATION

## (UNITS PRODUCED PRIOR TO JULY 30, 2012) cont.

Table 15 (cont.) - 50TC\*D12

### ELECTRIC HEAT - ELECTRICAL DATA 2-STAGE COOLING 1-SPEED INDOOR FAN MOTOR

NOM. V-PH-Hz.	IFM TYPE	ELECTRIC HEATER PART NUMBER CRHEATERXXXXXX	NOM PWR (kW)	APP PWR (kW)	SINGLE POINT KIT PART NUMBER CRSINGLEXXXXXX			
					NO C.O. or UNPWRD C.O.		w/PWRD C.O.	
					NO PE.	w/PE. (pwrd fr/unit)	NO PE.	w/PE. (pwrd fr/unit)
208/ 230-3-60	STD	117A00	10.4	7.8/9.6	047A00	047A00	047A00	047A00
		110A00	16.0	12.0/14.7	047A00	047A00	049A00	049A00
		112A00	32.0	24.0/29.4	049A00	049A00	049A00	049A00
		112A00,117A00	42.4	31.8/38.9	051A00	051A00	051A00	051A00
		112A00,110A00	50.0	37.6/45.9	051A00	051A00	051A00	051A00
	MED	117A00	10.4	7.8/9.6	047A00	047A00	047A00	049A00
		110A00	16.0	12.0/14.7	049A00	049A00	049A00	049A00
		112A00	32.0	24.0/29.4	049A00	049A00	049A00	049A00
		112A00,117A00	42.4	31.8/38.9	051A00	051A00	051A00	051A00
		112A00,110A00	50.0	37.6/45.9	051A00	051A00	051A00	051A00
	HIGH	117A00	10.4	7.8/9.6	047A00	049A00	049A00	049A00
		110A00	16.0	12.0/14.7	049A00	049A00	049A00	049A00
112A00		32.0	24.0/29.4	049A00	049A00	049A00	049A00	
112A00,117A00		42.4	31.8/38.9	051A00	051A00	051A00	051A00	
112A00,110A00		50.0	37.6/45.9	051A00	051A00	051A00	051A00	
460-3-60	STD	116A00	13.9	12.8	047A00	047A00	047A00	047A00
		113A00	16.5	15.2	047A00	047A00	047A00	047A00
		115A00	33.0	30.3	047A00	047A00	047A00	047A00
		114A00,116A00	41.7	38.3	050A00	050A00	050A00	050A00
		115A00,113A00	50.0	45.9	050A00	050A00	050A00	050A00
	MED	116A00	13.9	12.8	047A00	047A00	047A00	047A00
		113A00	16.5	15.2	047A00	047A00	047A00	047A00
		115A00	33.0	30.3	047A00	047A00	047A00	050A00
		114A00,116A00	41.7	38.3	050A00	050A00	050A00	050A00
		115A00,113A00	50.0	45.9	050A00	050A00	050A00	050A00
	HIGH	116A00	13.9	12.8	047A00	047A00	047A00	047A00
		113A00	16.5	15.2	047A00	047A00	047A00	047A00
115A00		33.0	30.3	047A00	050A00	050A00	050A00	
114A00,116A00		41.7	38.3	050A00	050A00	050A00	050A00	
115A00,113A00		50.0	45.9	050A00	050A00	050A00	050A00	
575-3-60	STD	118A00	17.0	17.0	047A00	047A00	047A00	047A00
		119A00	34.0	34.0	047A00	047A00	047A00	050A00
		118A00,119A00	51.0	51.0	050A00	050A00	050A00	050A00
	MED	118A00	17.0	17.0	047A00	047A00	047A00	047A00
		119A00	34.0	34.0	047A00	047A00	047A00	050A00
		118A00,119A00	51.0	51.0	050A00	050A00	050A00	050A00
	HIGH	118A00	17.0	17.0	047A00	047A00	047A00	047A00
		119A00	34.0	34.0	047A00	050A00	050A00	050A00
		118A00,119A00	51.0	51.0	050A00	050A00	050A00	050A00

**LEGEND**

- APP PWR - 208 / 230V / 460V / 575V
- C.O. - Convenience outlet
- FLA - Full load amps
- IFM - Indoor fan motor
- NOM PWR - 240V / 480V / 600V
- PE. - Power exhaust
- PWRD - Powered convenience outlet
- UNPWRD - Unpowered convenience outlet



# ELECTRICAL INFORMATION

## (UNITS PRODUCED PRIOR TO JULY 30, 2012) cont.

Table 15 (cont.) - 50TC\*D12

### ELECTRIC HEAT - ELECTRICAL DATA 2-STAGE COOLING 2-SPEED INDOOR FAN MOTOR

NOM. V-PH-Hz.	IFM TYPE	ELECTRIC HEATER PART NUMBER CRHEATERXXXXXX	NOM PWR (kW)	APP PWR (kW)	SINGLE POINT KIT PART NUMBER CRSINGLEXXXXXX			
					NO C.O. or UNPWRD C.O.		w/PWRD C.O.	
					NO P.E.	w/P.E. (pwrd fr/unit)	NO P.E.	w/P.E. (pwrd fr/ unit)
208/ 230-3-60	STD	117A00	10.4	7.8/9.6	047A00	047A00	047A00	047A00
		110A00	16.0	12.0/14.7	047A00	049A00	049A00	049A00
		112A00	32.0	24.0/29.4	049A00	049A00	049A00	049A00
		112A00,117A00	42.4	31.8/38.9	051A00	051A00	051A00	051A00
		112A00,110A00	50.0	37.6/45.9	051A00	051A00	051A00	051A00
	MED	117A00	10.4	7.8/9.6	047A00	047A00	047A00	049A00
		110A00	16.0	12.0/14.7	049A00	049A00	049A00	049A00
		112A00	32.0	24.0/29.4	049A00	049A00	049A00	049A00
		112A00,117A00	42.4	31.8/38.9	051A00	051A00	051A00	051A00
		112A00,110A00	50.0	37.6/45.9	051A00	051A00	051A00	051A00
	HIGH	117A00	10.4	7.8/9.6	047A00	047A00	049A00	049A00
		110A00	16.0	12.0/14.7	049A00	049A00	049A00	049A00
		112A00	32.0	24.0/29.4	049A00	049A00	049A00	049A00
		112A00,117A00	42.4	31.8/38.9	051A00	051A00	051A00	051A00
		112A00,110A00	50.0	37.6/45.9	051A00	051A00	051A00	051A00
460-3-60	STD	116A00	13.9	12.8	047A00	047A00	047A00	047A00
		113A00	16.5	15.2	047A00	047A00	047A00	047A00
		115A00	33.0	30.3	047A00	047A00	047A00	047A00
		114A00,116A00	41.7	38.3	050A00	050A00	050A00	050A00
		115A00,113A00	50.0	45.9	050A00	050A00	050A00	050A00
	MED	116A00	13.9	12.8	047A00	047A00	047A00	047A00
		113A00	16.5	15.2	047A00	047A00	047A00	047A00
		115A00	33.0	30.3	047A00	047A00	047A00	050A00
		114A00,116A00	41.7	38.3	050A00	050A00	050A00	050A00
		115A00,113A00	50.0	45.9	050A00	050A00	050A00	050A00
	HIGH	116A00	13.9	12.8	047A00	047A00	047A00	047A00
		113A00	16.5	15.2	047A00	047A00	047A00	047A00
		115A00	33.0	30.3	047A00	047A00	050A00	050A00
		114A00,116A00	41.7	38.3	050A00	050A00	050A00	050A00
		115A00,113A00	50.0	45.9	050A00	050A00	050A00	050A00
575-3-60	STD	118A00	17.0	17.0	047A00	047A00	047A00	047A00
		119A00	34.0	34.0	047A00	050A00	047A00	050A00
		118A00,119A00	51.0	51.0	050A00	050A00	050A00	050A00
	MED	118A00	17.0	17.0	047A00	047A00	047A00	047A00
		119A00	34.0	34.0	047A00	050A00	047A00	050A00
		118A00,119A00	51.0	51.0	050A00	050A00	050A00	050A00
	HIGH	118A00	17.0	17.0	047A00	047A00	047A00	047A00
		119A00	34.0	34.0	047A00	050A00	050A00	050A00
		118A00,119A00	51.0	51.0	050A00	050A00	050A00	050A00

**LEGEND**

- APP PWR - 208 / 230V / 460V / 575V
- C.O. - Convenience outlet
- FLA - Full load amps
- IFM - Indoor fan motor
- NOM PWR - 240V / 480V / 600V
- P.E. - Power exhaust
- PWRD - Powered convenience outlet
- UNPWRD - Unpowered convenience outlet

# ELECTRICAL INFORMATION

## (UNITS PRODUCED PRIOR TO JULY 30, 2012) cont.

Table 15 (cont.) - 50TC\*D14

### ELECTRIC HEAT - ELECTRICAL DATA 2-STAGE COOLING 1-SPEED INDOOR FAN MOTOR

NOM. V-PH.HZ.	IFM TYPE	ELECTRIC HEATER PART NUMBER CRHEATERXXXXXX	NOM PWR (kW)	APP PWR (kW)	SINGLE POINT KIT PART NUMBER CRSINGLEXXXXXX			
					NO C.O. or UNPWRD C.O.		w/PWRD C.O.	
					NO PE.	w/PE. (pwrd fr/unit)	NO PE.	w/PE. (pwrd fr/unit)
208/ 230-3/60	STD	117A00	10.4	7.8/9.6	049A00	049A00	049A00	049A00
		110A00	16.0	12.0/14.7	049A00	049A00	049A00	049A00
		112A00	32.0	24.0/29.4	049A00	049A00	049A00	049A00
		112A00,117A00	42.4	31.8/38.9	051A00	051A00	051A00	051A00
		112A00,110A00	50.0	37.6/45.9	051A00	051A00	051A00	051A00
	MED	117A00	10.4	7.8/9.6	049A00	049A00	049A00	049A00
		110A00	16.0	12.0/14.7	049A00	049A00	049A00	049A00
		112A00	32.0	24.0/29.4	049A00	049A00	049A00	049A00
		112A00,117A00	42.4	31.8/38.9	051A00	051A00	051A00	051A00
		112A00,110A00	50.0	37.6/45.9	051A00	051A00	051A00	051A00
	HIGH	Std Unit Without Heat	-	-	-	-	-	049A00
		117A00	10.4	7.8/9.6	049A00	049A00	049A00	049A00
		110A00	16.0	12.0/14.7	049A00	049A00	049A00	049A00
		112A00	32.0	24.0/29.4	049A00	049A00	049A00	049A00
		112A00,117A00	42.4	31.8/38.9	051A00	051A00	051A00	051A00
460-3-60	STD	116A00	13.9	12.8	047A00	047A00	047A00	047A00
		113A00	16.5	15.2	047A00	047A00	047A00	047A00
		115A00	33.0	30.3	047A00	047A00	047A00	047A00
		114A00,116A00	41.7	38.3	050A00	050A00	050A00	050A00
		115A00,113A00	50.0	45.9	050A00	050A00	050A00	050A00
	MED	116A00	13.9	12.8	047A00	047A00	047A00	047A00
		113A00	16.5	15.2	047A00	047A00	047A00	047A00
		115A00	33.0	30.3	047A00	047A00	047A00	050A00
		114A00,116A00	41.7	38.3	050A00	050A00	050A00	050A00
		115A00,113A00	50.0	45.9	050A00	050A00	050A00	050A00
	HIGH	116A00	13.9	12.8	047A00	047A00	047A00	047A00
		113A00	16.5	15.2	047A00	047A00	047A00	047A00
		115A00	33.0	30.3	047A00	050A00	050A00	050A00
		114A00,116A00	41.7	38.3	050A00	050A00	050A00	050A00
		115A00,113A00	50.0	45.9	050A00	050A00	050A00	050A00
575-3-60	STD	118A00	17.0	17.0	047A00	047A00	047A00	047A00
		119A00	34.0	34.0	047A00	047A00	047A00	050A00
		118A00,119A00	51.0	51.0	050A00	050A00	050A00	050A00
	MED	118A00	17.0	17.0	047A00	047A00	047A00	047A00
		119A00	34.0	34.0	047A00	047A00	047A00	050A00
		118A00,119A00	51.0	51.0	050A00	050A00	050A00	050A00
	HIGH	118A00	17.0	17.0	047A00	047A00	047A00	047A00
		119A00	34.0	34.0	047A00	050A00	050A00	050A00
		118A00,119A00	51.0	51.0	050A00	050A00	050A00	050A00

**LEGEND**

- APP PWR - 208 / 230V / 460V / 575V
- C.O. - Convenience outlet
- FLA - Full load amps
- IFM - Indoor fan motor
- NOM PWR - 240V / 480V / 600V
- PE. - Power exhaust
- PWRD - Powered convenience outlet
- UNPWRD - Unpowered convenience outlet

# ELECTRICAL INFORMATION

## (UNITS PRODUCED PRIOR TO JULY 30, 2012) cont.

Table 15 (cont.) - 50TC\*D14

### ELECTRIC HEAT - ELECTRICAL DATA 2-STAGE COOLING 2-SPEED INDOOR FAN MOTOR

NOM. V-PH-Hz.	IFM TYPE	ELECTRIC HEATER PART NUMBER CRHEATERXXXXXX	NOM PWR (kW)	APP PWR (kW)	SINGLE POINT KIT PART NUMBER CRSINGLEXXXXXX				
					NO C.O. or UNPWRD C.O.		w/PWRD C.O.		
					NO P.E.	w/P.E. (pwrd fr/unit)	NO P.E.	w/P.E. (pwrd fr/ unit)	
208/ 230-3-60	STD	117A00	10.4	7.8/9.6	049A00	049A00	049A00	049A00	
		110A00	16.0	12.0/14.7	049A00	049A00	049A00	049A00	
		112A00	32.0	24.0/29.4	049A00	049A00	049A00	049A00	
		112A00,117A00	42.4	31.8/38.9	051A00	051A00	051A00	051A00	
		112A00,110A00	50.0	37.6/45.9	051A00	051A00	051A00	051A00	
	MED	117A00	10.4	7.8/9.6	049A00	049A00	049A00	049A00	
		110A00	16.0	12.0/14.7	049A00	049A00	049A00	049A00	
		112A00	32.0	24.0/29.4	049A00	049A00	049A00	049A00	
		112A00,117A00	42.4	31.8/38.9	051A00	051A00	051A00	051A00	
		112A00,110A00	50.0	37.6/45.9	051A00	051A00	051A00	051A00	
			117A00	10.4	7.8/9.6	049A00	049A00	049A00	049A00
			110A00	16.0	12.0/14.7	049A00	049A00	049A00	049A00
			112A00	32.0	24.0/29.4	049A00	049A00	049A00	049A00
			112A00,117A00	42.4	31.8/38.9	051A00	051A00	051A00	051A00
			112A00,110A00	50.0	37.6/45.9	051A00	051A00	051A00	051A00
460-3-60	STD	116A00	13.9	12.8	047A00	047A00	047A00	047A00	
		113A00	16.5	15.2	047A00	047A00	047A00	047A00	
		115A00	33.0	30.3	047A00	047A00	047A00	047A00	
		114A00,116A00	41.7	38.3	050A00	050A00	050A00	050A00	
		115A00,113A00	50.0	45.9	050A00	050A00	050A00	050A00	
	MED	116A00	13.9	12.8	047A00	047A00	047A00	047A00	
		113A00	16.5	15.2	047A00	047A00	047A00	047A00	
		115A00	33.0	30.3	047A00	047A00	047A00	050A00	
		114A00,116A00	41.7	38.3	050A00	050A00	050A00	050A00	
		115A00,113A00	50.0	45.9	050A00	050A00	050A00	050A00	
	HIGH	116A00	13.9	12.8	047A00	047A00	047A00	047A00	
		113A00	16.5	15.2	047A00	047A00	047A00	047A00	
		115A00	33.0	30.3	047A00	047A00	050A00	050A00	
		114A00,116A00	41.7	38.3	050A00	050A00	050A00	050A00	
		115A00,113A00	50.0	45.9	050A00	050A00	050A00	050A00	
575-3-60	STD	118A00	17.0	17.0	047A00	047A00	047A00	047A00	
		119A00	34.0	34.0	047A00	050A00	047A00	050A00	
		118A00,119A00	51.0	51.0	050A00	050A00	050A00	050A00	
	MED	118A00	17.0	17.0	047A00	047A00	047A00	047A00	
		119A00	34.0	34.0	047A00	050A00	047A00	050A00	
		118A00,119A00	51.0	51.0	050A00	050A00	050A00	050A00	
	HIGH	118A00	17.0	17.0	047A00	047A00	047A00	047A00	
		119A00	34.0	34.0	047A00	050A00	050A00	050A00	
		118A00,119A00	51.0	51.0	050A00	050A00	050A00	050A00	

**LEGEND**

- APP PWR - 208 / 230V / 460V / 575V
- C.O. - Convenience outlet
- FLA - Full load amps
- IFM - Indoor fan motor
- NOM PWR - 240V / 480V / 600V
- P.E. - Power exhaust
- PWRD - Powered convenience outlet
- UNPWRD - Unpowered convenience outlet

## ELECTRICAL INFORMATION (UNITS PRODUCED PRIOR TO JULY 30, 2012) cont.

Table 15 (cont.) - 50TC\*D16

### ELECTRIC HEAT - ELECTRICAL DATA 2-STAGE COOLING 1-SPEED INDOOR FAN MOTOR

NOM. V-PH-Hz.	IFM TYPE	ELECTRIC HEATER PART NUMBER CRHEATERXXXXXX	NOM PWR (kW)	APP PWR (kW)	SINGLE POINT KIT PART NUMBER CRSINGLEXXXXXX			
					NO C.O. or UNPWRD C.O.		w/PWRD C.O.	
					NO P.E.	w/PE. (pwrd fr/unit)	NO P.E.	w/PE. (pwrd fr/unit)
208/ 230-3-60	STD	291A00	16.5	12.4/15.2	049A00	049A00	049A00	049A00
		294A00	33.5	25.2/30.8	049A00	049A00	049A00	049A00
		288A00,294A00	43.5	32.7/40.0	051A00	051A00	051A00	051A00
		291A00,294A00	50.0	37.6/45.9	051A00	051A00	051A00	051A00
		294A00,294A00	67.0	50.3/61.5	053A00	053A00	053A00	053A00
	MED	291A00	16.5	12.4/15.2	049A00	049A00	049A00	049A00
		294A00	33.5	25.2/30.8	049A00	049A00	049A00	049A00
		288A00,294A00	43.5	32.7/40.0	051A00	051A00	051A00	051A00
		291A00,294A00	50.0	37.6/45.9	051A00	051A00	051A00	051A00
		294A00,294A00	67.0	50.3/61.5	053A00	053A00	053A00	053A00
	HIGH	291A00	16.5	12.4/15.2	049A00	049A00	049A00	049A00
		294A00	33.5	25.2/30.8	049A00	049A00	049A00	049A00
288A00,294A00		43.5	32.7/40.0	051A00	051A00	051A00	051A00	
291A00,294A00		50.0	37.6/45.9	051A00	051A00	051A00	051A00	
294A00,294A00		67.0	50.3/61.5	053A00	053A00	053A00	053A00	
460-3-60	STD	292A00	16.5	15.2	-	-	-	-
		295A00	33.5	30.8	047A00	047A00	047A00	047A00
		289A00,295A00	43.5	40.0	050A00	050A00	050A00	050A00
		292A00,295A00	50.0	45.9	050A00	050A00	050A00	050A00
		295A00,295A00	67.0	61.5	050A00	050A00	050A00	050A00
	MED	292A00	16.5	15.2	-	-	-	-
		295A00	33.5	30.8	047A00	047A00	047A00	050A00
		289A00,295A00	43.5	40.0	050A00	050A00	050A00	050A00
		292A00,295A00	50.0	45.9	050A00	050A00	050A00	050A00
		295A00,295A00	67.0	61.5	050A00	050A00	050A00	050A00
	HIGH	292A00	16.5	15.2	-	-	-	-
		295A00	33.5	30.8	050A00	050A00	050A00	050A00
289A00,295A00		43.5	40.0	050A00	050A00	050A00	050A00	
292A00,295A00		50.0	45.9	050A00	050A00	050A00	050A00	
295A00,295A00		67.0	61.5	050A00	050A00	050A00	050A00	
575-3-60	STD	293A00	16.5	15.2	-	-	-	-
		296A00	33.5	30.8	047A00	047A00	047A00	047A00
		290A00,296A00	43.5	40.0	047A00	050A00	047A00	050A00
		293A00,296A00	50.0	45.9	047A00	047A00	047A00	047A00
		296A00,296A00	67.0	61.5	050A00	050A00	050A00	050A00
	MED	293A00	16.5	15.2	-	-	-	-
		296A00	33.5	30.8	047A00	047A00	047A00	047A00
		290A00,296A00	43.5	40.0	047A00	050A00	047A00	050A00
		293A00,296A00	50.0	45.9	047A00	047A00	047A00	047A00
		296A00,296A00	67.0	61.5	050A00	050A00	050A00	050A00
	HIGH	293A00	16.5	15.2	-	-	-	-
		296A00	33.5	30.8	047A00	047A00	047A00	047A00
290A00,296A00		43.5	40.0	050A00	050A00	050A00	050A00	
293A00,296A00		50.0	45.9	050A00	050A00	050A00	050A00	
296A00,296A00		67.0	61.5	050A00	050A00	050A00	050A00	

**LEGEND**

- APP PWR - 208 / 230V / 460V / 575V
- C.O. - Convenience outlet
- FLA - Full load amps
- IFM - Indoor fan motor
- NOM PWR - 240V / 480V / 600V
- P.E. - Power exhaust
- PWRD - Powered convenience outlet
- UNPWRD - Unpowered convenience outlet

# ELECTRICAL INFORMATION

## (UNITS PRODUCED PRIOR TO JULY 30, 2012) cont.

Table 15 (cont.) - 50TC\*D16

### ELECTRIC HEAT - ELECTRICAL DATA 2-STAGE COOLING 2-SPEED INDOOR FAN MOTOR

NOM. V-PH-Hz.	IFM TYPE	ELECTRIC HEATER PART NUMBER CRHEATERXXXXXX	NOM PWR (kW)	APP PWR (kW)	SINGLE POINT KIT PART NUMBER CRSINGLEXXXXXX			
					NO C.O. or UNPWRD C.O.		w/PWRD C.O.	
					NO P.E.	w/P.E. (pwrd fr/unit)	NO P.E.	w/P.E. (pwrd fr/unit)
208/ 230-3-60	STD	291A00	16.5	12.4/15.2	049A00	049A00	049A00	049A00
		294A00	33.5	25.2/30.8	049A00	049A00	049A00	049A00
		288A00,294A00	43.5	32.7/40.0	051A00	051A00	051A00	051A00
		291A00,294A00	50.0	37.6/45.9	051A00	051A00	051A00	051A00
		294A00,294A00	67.0	50.3/61.5	053A00	053A00	053A00	053A00
	MED	291A00	16.5	12.4/15.2	049A00	049A00	049A00	049A00
		294A00	33.5	25.2/30.8	049A00	049A00	049A00	049A00
		288A00,294A00	43.5	32.7/40.0	051A00	051A00	051A00	051A00
		291A00,294A00	50.0	37.6/45.9	051A00	051A00	051A00	051A00
		294A00,294A00	67.0	50.3/61.5	053A00	053A00	053A00	053A00
	HIGH	291A00	16.5	12.4/15.2	049A00	049A00	049A00	049A00
		294A00	33.5	25.2/30.8	049A00	049A00	049A00	049A00
288A00,294A00		43.5	32.7/40.0	051A00	051A00	051A00	051A00	
291A00,294A00		50.0	37.6/45.9	051A00	051A00	051A00	051A00	
294A00,294A00		67.0	50.3/61.5	053A00	053A00	053A00	053A00	
460-3-60	STD	292A00	16.5	15.2	-	-	-	-
		295A00	33.5	30.8	047A00	047A00	047A00	050A00
		289A00,295A00	43.5	40.0	050A00	050A00	050A00	050A00
		292A00,295A00	50.0	45.9	050A00	050A00	050A00	050A00
		295A00,295A00	67.0	61.5	050A00	050A00	050A00	050A00
	MED	292A00	16.5	15.2	-	-	-	-
		295A00	33.5	30.8	047A00	047A00	047A00	050A00
		289A00,295A00	43.5	40.0	050A00	050A00	050A00	050A00
		292A00,295A00	50.0	45.9	050A00	050A00	050A00	050A00
		295A00,295A00	67.0	61.5	050A00	050A00	050A00	050A00
	HIGH	292A00	16.5	15.2	-	-	-	-
		295A00	33.5	30.8	050A00	050A00	050A00	050A00
289A00,295A00		43.5	40.0	050A00	050A00	050A00	050A00	
292A00,295A00		50.0	45.9	050A00	050A00	050A00	050A00	
295A00,295A00		67.0	61.5	050A00	050A00	050A00	050A00	
575-3-60	STD	293A00	16.5	15.2	-	-	-	-
		296A00	33.5	30.8	047A00	047A00	047A00	047A00
		290A00,296A00	43.5	40.0	047A00	050A00	047A00	050A00
		293A00,296A00	50.0	45.9	047A00	047A00	047A00	050A00
		296A00,296A00	67.0	61.5	050A00	050A00	050A00	050A00
	MED	293A00	16.5	15.2	-	-	-	-
		296A00	33.5	30.8	047A00	047A00	047A00	047A00
		290A00,296A00	43.5	40.0	047A00	050A00	047A00	050A00
		293A00,296A00	50.0	45.9	047A00	047A00	047A00	050A00
		296A00,296A00	67.0	61.5	050A00	050A00	050A00	050A00
	HIGH	293A00	16.5	15.2	-	-	-	-
		296A00	33.5	30.8	047A00	047A00	047A00	047A00
290A00,296A00		43.5	40.0	050A00	050A00	050A00	050A00	
293A00,296A00		50.0	45.9	050A00	050A00	050A00	050A00	
296A00,296A00		67.0	61.5	050A00	050A00	050A00	050A00	

**LEGEND**

- APP PWR - 208 / 230V / 460V / 575V
- C.O. - Convenience outlet
- FLA - Full load amps
- IFM - Indoor fan motor
- NOM PWR - 240V / 480V / 600V
- P.E. - Power exhaust
- PWRD - Powered convenience outlet
- UNPWRD - Unpowered convenience outlet

# ELECTRICAL INFORMATION (UNITS PRODUCED PRIOR TO JULY 30, 2012) cont.

**Table 16 – 50TC\*A04 UNIT WIRE/FUSE OR HACR BREAKER SIZING DATA SINGLE STAGE COOLING WITH SINGLE SPEED INDOOR FAN MOTOR**

NOM. V-PH-Hz.	NO C.O. or UNPWR C.O.												W/PWRD C.O.																		
	ELECTRIC HEATER						NO P.E.						w/ P.E. (pwrd fr/unit)						NO P.E.						w/ P.E. (pwrd fr/unit)						
	IFM TYPE	Nom* (kW)	FLA	MCA	MAX FUSE or HACR BRKR	DISC. SIZE		MCA	MAX FUSE or HACR BRKR	DISC. SIZE		MCA	MAX FUSE or HACR BRKR	DISC. SIZE		MCA	MAX FUSE or HACR BRKR	DISC. SIZE		MCA	MAX FUSE or HACR BRKR	DISC. SIZE		MCA	MAX FUSE or HACR BRKR	DISC. SIZE		MCA	MAX FUSE or HACR BRKR	DISC. SIZE	
					FLA	LRA			FLA	LRA			FLA	LRA			FLA	LRA			FLA	LRA			FLA	LRA			FLA	LRA	
208/ 230-1-60	STD	None	None	None	27.2	26	95	29.1	45	29	97	32	45	32	100	33.9	50	34	102	33.9	50	34	102	33.9	50	34	102	33.9	50	34	102
		3.3/4.4	15.9/18.3	None	27.2/29.0	26/27	95/95	29.1/31.4	45/45	29/29	97/97	32/32	45/45	32/32	100/100	34.4/37.4	50/50	34/34	102/102	34.4/37.4	50/50	34/34	102/102	34.4/37.4	50/50	34/34	102/102	34.4/37.4	50/50	34/34	102/102
		4.9/6.5	23.5/27.1	None	35.5/40.0	33/37	95/95	37.9/42.4	45/45	35/39	97/97	38/42	45/50	38/42	100/100	43.9/48.4	50/50	40/45	102/102	43.9/48.4	50/50	40/45	102/102	43.9/48.4	50/50	40/45	102/102	43.9/48.4	50/50	40/45	102/102
		6.5/8.7	31.4/36.3	None	45.4/51.5	42/47	95/95	47.8/53.9	50/60	44/50	97/97	47/53	60/60	47/53	100/100	53.8/59.9	60/60	49/55	102/102	53.8/59.9	60/60	49/55	102/102	53.8/59.9	60/60	49/55	102/102	53.8/59.9	60/60	49/55	102/102
		7.9/10.5	37.9/43.8	None	53.5/60.9	49/56	95/95	55.9/63.3	60/70	51/58	97/97	55/62	70/70	55/62	100/100	61.9/69.3	70/70	57/64	102/102	61.9/69.3	70/70	57/64	102/102	61.9/69.3	70/70	57/64	102/102	61.9/69.3	70/70	57/64	102/102
		9.8/13.0	46.9/54.2	None	64.8/73.9	60/68	95/95	67.1/76.3	70/80	62/70	97/97	65/73	80/80	65/73	100/100	73.1/82.3	80/80	67/76	102/102	73.1/82.3	80/80	67/76	102/102	73.1/82.3	80/80	67/76	102/102	73.1/82.3	80/80	67/76	102/102
	MED	None	None	None	19.4	19	89	21.3	30	22	91	24.2	30	25	94	26.1	30	27	96	26.1	30	27	96	26.1	30	27	96	26.1	30	27	96
		3.3/4.4	15.9/18.3	None	27.2/29.0	26/27	95/95	29.1/31.4	45/45	29/29	97/97	32/32	45/45	32/32	100/100	34.4/37.4	50/50	34/34	102/102	34.4/37.4	50/50	34/34	102/102	34.4/37.4	50/50	34/34	102/102	34.4/37.4	50/50	34/34	102/102
		4.9/6.5	23.5/27.1	None	35.5/40.0	33/37	95/95	37.9/42.4	45/45	35/39	97/97	38/42	45/50	38/42	100/100	43.9/48.4	50/50	40/45	102/102	43.9/48.4	50/50	40/45	102/102	43.9/48.4	50/50	40/45	102/102	43.9/48.4	50/50	40/45	102/102
		6.5/8.7	31.4/36.3	None	45.4/51.5	42/47	95/95	47.8/53.9	50/60	44/50	97/97	47/53	60/60	47/53	100/100	53.8/59.9	60/60	49/55	102/102	53.8/59.9	60/60	49/55	102/102	53.8/59.9	60/60	49/55	102/102	53.8/59.9	60/60	49/55	102/102
		7.9/10.5	37.9/43.8	None	53.5/60.9	49/56	95/95	55.9/63.3	60/70	51/58	97/97	55/62	70/70	55/62	100/100	61.9/69.3	70/70	57/64	102/102	61.9/69.3	70/70	57/64	102/102	61.9/69.3	70/70	57/64	102/102	61.9/69.3	70/70	57/64	102/102
		9.8/13.0	46.9/54.2	None	64.8/73.9	60/68	95/95	67.1/76.3	70/80	62/70	97/97	65/73	80/80	65/73	100/100	73.1/82.3	80/80	67/76	102/102	73.1/82.3	80/80	67/76	102/102	73.1/82.3	80/80	67/76	102/102	73.1/82.3	80/80	67/76	102/102
208/ 230-3-60	STD	None	None	None	19.4	19	89	21.3	30	22	91	24.2	30	25	94	26.1	30	27	96	26.1	30	27	96	26.1	30	27	96	26.1	30	27	96
		3.3/4.4	15.9/18.3	None	27.2/29.0	26/27	95/95	29.1/31.4	45/45	29/29	97/97	32/32	45/45	32/32	100/100	34.4/37.4	50/50	34/34	102/102	34.4/37.4	50/50	34/34	102/102	34.4/37.4	50/50	34/34	102/102	34.4/37.4	50/50	34/34	102/102
		4.9/6.5	23.5/27.1	None	35.5/40.0	33/37	95/95	37.9/42.4	45/45	35/39	97/97	38/42	45/50	38/42	100/100	43.9/48.4	50/50	40/45	102/102	43.9/48.4	50/50	40/45	102/102	43.9/48.4	50/50	40/45	102/102	43.9/48.4	50/50	40/45	102/102
		6.5/8.7	31.4/36.3	None	45.4/51.5	42/47	95/95	47.8/53.9	50/60	44/50	97/97	47/53	60/60	47/53	100/100	53.8/59.9	60/60	49/55	102/102	53.8/59.9	60/60	49/55	102/102	53.8/59.9	60/60	49/55	102/102	53.8/59.9	60/60	49/55	102/102
		7.9/10.5	37.9/43.8	None	53.5/60.9	49/56	95/95	55.9/63.3	60/70	51/58	97/97	55/62	70/70	55/62	100/100	61.9/69.3	70/70	57/64	102/102	61.9/69.3	70/70	57/64	102/102	61.9/69.3	70/70	57/64	102/102	61.9/69.3	70/70	57/64	102/102
		9.8/13.0	46.9/54.2	None	64.8/73.9	60/68	95/95	67.1/76.3	70/80	62/70	97/97	65/73	80/80	65/73	100/100	73.1/82.3	80/80	67/76	102/102	73.1/82.3	80/80	67/76	102/102	73.1/82.3	80/80	67/76	102/102	73.1/82.3	80/80	67/76	102/102
	MED	None	None	None	19.4	19	89	21.3	30	22	91	24.2	30	25	94	26.1	30	27	96	26.1	30	27	96	26.1	30	27	96	26.1	30	27	96
		3.3/4.4	15.9/18.3	None	27.2/29.0	26/27	95/95	29.1/31.4	45/45	29/29	97/97	32/32	45/45	32/32	100/100	34.4/37.4	50/50	34/34	102/102	34.4/37.4	50/50	34/34	102/102	34.4/37.4	50/50	34/34	102/102	34.4/37.4	50/50	34/34	102/102
		4.9/6.5	23.5/27.1	None	35.5/40.0	33/37	95/95	37.9/42.4	45/45	35/39	97/97	38/42	45/50	38/42	100/100	43.9/48.4	50/50	40/45	102/102	43.9/48.4	50/50	40/45	102/102	43.9/48.4	50/50	40/45	102/102	43.9/48.4	50/50	40/45	102/102
		6.5/8.7	31.4/36.3	None	45.4/51.5	42/47	95/95	47.8/53.9	50/60	44/50	97/97	47/53	60/60	47/53	100/100	53.8/59.9	60/60	49/55	102/102	53.8/59.9	60/60	49/55	102/102	53.8/59.9	60/60	49/55	102/102	53.8/59.9	60/60	49/55	102/102
		7.9/10.5	37.9/43.8	None	53.5/60.9	49/56	95/95	55.9/63.3	60/70	51/58	97/97	55/62	70/70	55/62	100/100	61.9/69.3	70/70	57/64	102/102	61.9/69.3	70/70	57/64	102/102	61.9/69.3	70/70	57/64	102/102	61.9/69.3	70/70	57/64	102/102
		9.8/13.0	46.9/54.2	None	64.8/73.9	60/68	95/95	67.1/76.3	70/80	62/70	97/97	65/73	80/80	65/73	100/100	73.1/82.3	80/80	67/76	102/102	73.1/82.3	80/80	67/76	102/102	73.1/82.3	80/80	67/76	102/102	73.1/82.3	80/80	67/76	102/102
460-3-60	STD	None	None	None	10.2	10	46	11.2	15	11	47	12.4	15	13	48	13.4	15	14	49	13.4	15	14	49	13.4	15	14	49	13.4	15	14	49
		6.0	7.2	None	11.6	11	46	12.9	15	12	47	14.4	15	13	48	15.6	20	14	49	15.6	20	14	49	15.6	20	14	49	15.6	20	14	49
		8.8	10.6	None	15.9	15	46	17.1	20	16	47	18.6	20	17	48	19.9	20	18	49	19.9	20	18	49	19.9	20	18	49	19.9	20	18	49
		11.5	13.8	None	19.9	20	46	21.1	25	19	47	22.6	25	21	48	23.9	25	22	49	23.9	25	22	49	23.9	25	22	49	23.9	25	22	49
		14.0	16.8	None	23.6	25	46	24.9	25	23	47	26.4	30	24	48	27.6	30	25	49	27.6	30	25	49	27.6	30	25	49	27.6	30	25	49
		None	None	None	10.2	10	46	11.2	15	11	47	12.4	15	13	48	13.4	15	14	49	13.4	15	14	49	13.4	15	14	49	13.4	15	14	49
	MED	6.0	7.2	None	11.6	11	46	12.9	15	12	47	14.4	15	13	48	15.6	20	14	49	15.6	20	14	49	15.6	20	14	49	15.6	20	14	49
		8.8	10.6	None	15.9	15	46	17.1	20	16	47	18.6	20	17	48	19.9	20	18	49	19.9	20	18	49	19.9	20	18	49	19.9	20	18	49
		11.5	13.8	None	19.9	20	46	21.1	25	19	47	22.6	25	21	48	23.9	25	22	49	23.9	25	22	49	23.9	25	22	49	23.9	25	22	49
		14.0	16.8	None	23.6	25	46	24.9	25	23	47	26.4	30	24	48	27.6	30	25	49	27.6	30	25	49	27.6	30	25	49	27.6	30	25	49
		None	None	None	10.2	10	46	11.2	15	11	47	12.4	15	13	48	13.4	15	14	49	13.4	15	14	49	13.4	15	14	49	13.4	15	14	49









# ELECTRICAL INFORMATION (UNITS PRODUCED PRIOR TO JULY 30, 2012) cont.

**Table 19 – 50TC\*A07 UNIT WIRE/FUSE OR HACR BREAKER SIZING DATA SINGLE STAGE COOLING WITH SINGLE SPEED INDOOR FAN MOTOR**

NOM. V-PH-Hz.	ELECTRIC HEATER				NO C.O. or UNPWR C.O.				W/PWRD C.O.								
	IFM TYPE	Nom* (kW)	FLA	MCA	NO PE.		w/ P.E. (pwrdr fr/unit)		NO PE.		w/ P.E. (pwrdr fr/unit)						
					MAX FUSE or HACR BRKR	DISC. SIZE	MCA	MAX FUSE or HACR BRKR	DISC. SIZE	MCA	MAX FUSE or HACR BRKR	DISC. SIZE					
			FLA	MCA	FLA	LRA	FLA	LRA	FLA	LRA	FLA	LRA					
208/ 230-3-60	STD	None	None	30.5	30	157	32	32.4	50	32	159	35	162	37.2	50	37	164
		4.9/6.5	13.6/15.6	30.5/30.5	30/30	157/157	32/32	32.4/32.4	50/50	32/32	159/159	35/35	162/162	37.2/37.2	50/50	37/37	164/164
		7.9/10.5	21.9/25.3	33.9/38.1	31/35	157/157	33/37	36.3/40.5	50/50	33/37	159/159	37/41	162/162	42.3/46.5	50/50	39/43	164/164
		12.0/16.0	33.4/38.5	48.3/54.6	44/50	157/157	47/62	50.6/57.0	60/60	47/62	159/159	50/56	162/162	56.6/63.0	60/70	52/58	164/164
		15.8/21.0	43.8/50.5	61.3/69.6	56/64	157/157	59/66	63.6/72.0	70/80	59/66	159/159	62/70	162/162	69.6/78.0	70/80	64/72	164/164
		19.9/26.5	55.2/63.8	75.5/86.3	69/79	157/157	72/82	77.9/88.6	80/90	72/82	159/159	75/85	162/162	83.9/94.6	90/100	77/87	164/164
		None	None	32.8	32	183	34	34.7	50	34	185	38	188	39.5	50	40	190
		4.9/6.5	13.6/15.6	32.8/32.8	32/32	183/183	34/34	34.7/34.7	50/50	34/34	185/185	38/38	188/188	39.5/39.5	50/50	40/40	190/190
		7.9/10.5	21.9/25.3	36.8/41.0	34/38	183/183	36/40	39.1/43.4	50/50	36/40	185/185	39/43	188/188	45.1/49.4	50/50	42/45	190/190
		12.0/16.0	33.4/38.5	51.1/57.5	47/53	183/183	49/55	53.5/59.9	60/60	49/55	185/185	53/58	188/188	59.5/65.9	60/70	55/61	190/190
460-3-60	HIGH	None	None	32.8	32	183	34	34.7	50	34	185	38	188	39.5	50	40	190
		4.9/6.5	13.6/15.6	32.8/32.8	32/32	183/183	34/34	34.7/34.7	50/50	34/34	185/185	38/38	188/188	39.5/39.5	50/50	40/40	190/190
		7.9/10.5	21.9/25.3	36.8/41.0	34/38	183/183	36/40	39.1/43.4	50/50	36/40	185/185	39/43	188/188	45.1/49.4	50/50	42/45	190/190
		12.0/16.0	33.4/38.5	51.1/57.5	47/53	183/183	49/55	53.5/59.9	60/60	49/55	185/185	53/58	188/188	59.5/65.9	60/70	55/61	190/190
		15.8/21.0	43.8/50.5	64.1/72.5	59/67	183/183	61/69	66.5/74.9	70/80	61/69	185/185	65/72	188/188	72.5/80.9	80/90	67/74	190/190
		19.9/26.5	55.2/63.8	78.4/89.1	72/82	183/183	74/84	80.8/91.5	90/100	74/84	185/185	78/88	188/188	86.8/97.5	90/100	80/90	190/190
		None	None	32.8	32	183	34	34.7	50	34	185	38	188	39.5	50	40	190
		4.9/6.5	13.6/15.6	32.8/32.8	32/32	183/183	34/34	34.7/34.7	50/50	34/34	185/185	38/38	188/188	39.5/39.5	50/50	40/40	190/190
		7.9/10.5	21.9/25.3	36.8/41.0	34/38	183/183	36/40	39.1/43.4	50/50	36/40	185/185	39/43	188/188	45.1/49.4	50/50	42/45	190/190
		12.0/16.0	33.4/38.5	51.1/57.5	47/53	183/183	49/55	53.5/59.9	60/60	49/55	185/185	53/58	188/188	59.5/65.9	60/70	55/61	190/190
575-3-60	STD	None	None	15.5	15	79	16	16.5	25	16	80	18	81	18.7	25	19	82
		6.0	7.2	15.5	15	79	16	16.5	25	16	80	18	81	18.7	25	19	82
		11.5	13.8	20.5	19	79	20	21.8	25	20	80	21	81	24.5	25	23	82
		14.0	16.8	24.3	22	79	23	25.5	30	23	80	25	81	28.3	30	26	82
		23.0	27.7	37.9	35	79	36	39.1	40	36	80	37	81	41.9	45	39	82
		25.5	30.7	41.6	38	79	39	42.9	45	39	80	41	81	45.6	50	42	82
		None	None	16.3	16	92	17	17.3	25	17	93	19	94	19.5	25	20	95
		6.0	7.2	16.3	16	92	17	17.3	25	17	93	19	94	19.5	25	20	95
		11.5	13.8	21.5	20	92	21	22.8	25	21	93	22	94	25.5	30	23	95
		14.0	16.8	25.3	23	92	24	26.5	30	24	93	26	94	29.3	30	27	95
23.0	27.7	38.9	36	92	37	40.1	45	37	93	38	94	42.9	45	39	95		
25.5	30.7	42.6	39	92	40	43.9	45	40	93	42	94	46.6	50	43	95		
575-3-60	MED	None	None	17.3	17	101	18	18.3	25	18	102	20	103	20.5	30	21	104
		6.0	7.2	17.3	17	101	18	18.3	25	18	102	20	103	20.5	30	21	104
		11.5	13.8	22.8	21	101	22	24.0	25	22	102	23	103	26.8	30	25	104
		14.0	16.8	26.5	24	101	26	27.8	30	26	102	27	103	30.5	35	28	104
		23.0	27.7	40.1	37	101	38	41.4	45	38	102	39	103	44.1	45	41	104
		25.5	30.7	43.9	45	101	42	45.1	50	42	102	43	103	47.9	50	44	104
		None	None	17.3	17	101	18	18.3	25	18	102	20	103	20.5	30	21	104
		6.0	7.2	17.3	17	101	18	18.3	25	18	102	20	103	20.5	30	21	104
		11.5	13.8	22.8	21	101	22	24.0	25	22	102	23	103	26.8	30	25	104
		14.0	16.8	26.5	24	101	26	27.8	30	26	102	27	103	30.5	35	28	104
23.0	27.7	40.1	37	101	38	41.4	45	38	102	39	103	44.1	45	41	104		
25.5	30.7	43.9	45	101	42	45.1	50	42	102	43	103	47.9	50	44	104		
575-3-60	STD	None	None	11.9	15	63	14	13.6	20	14	65	13	65	15.5	20	16	67
	MED	None	None	12.7	20	74	15	14.6	20	15	76	14	76	16.3	20	17	78
	HIGH	None	None	12.7	20	74	15	14.6	20	15	76	14	76	16.3	20	17	78

\* Nominal values, listed as 208/240V, 480V or 600V as appropriate.

# ELECTRICAL INFORMATION (UNITS PRODUCED PRIOR TO JULY 30, 2012) cont.

**Table 20 – 50TC\*A08 UNIT WIRE/FUSE OR HACR BREAKER SIZING DATA SINGLE STAGE COOLING WITH SINGLE SPEED INDOOR FAN MOTOR**

NOM. V- PH-Hz.	ELECTRIC HEATER										NO C.O. or UNPWR C.O.										W/ PWRD C.O.									
	IFM TYPE	Nom* (kW)	FLA	NO PE.			w/ P.E. (pwrdr fr/unit)			NO PE.			w/ P.E. (pwrdr fr/unit)			NO PE.			w/ P.E. (pwrdr fr/unit)											
				MCA	MAX FUSE or HACR BRKR	DISC. SIZE	MCA	MAX FUSE or HACR BRKR	DISC. SIZE	MCA	MAX FUSE or HACR BRKR	DISC. SIZE	MCA	MAX FUSE or HACR BRKR	DISC. SIZE	MCA	MAX FUSE or HACR BRKR	DISC. SIZE												
			FLA	FLA	LRA	FLA	FLA	LRA	FLA	FLA	LRA	FLA	FLA	LRA	FLA	FLA	LRA	FLA	FLA	LRA										
208/ 230-3-60	STD	None	None	38	191	43.3	60	43	195	44.3	60	44	196	48.1	60	48	200													
		7.8/10.4	21.7/25.0	38/38	191/191	43.3/43.3	60/60	43/43	195/195	44.3/44.3	60/60	44/44	196/196	48.1/48.5	60/60	48/48	200/200													
		12.0/16.0	33.4/38.5	44/50	191/191	53.0/59.4	60/60	49/55	195/195	54.3/60.6	60/60	50/56	196/196	59.0/65.4	60/70	54/60	200/200													
		18.6/24.8	51.7/59.7	66/75	191/191	75.9/85.9	80/90	70/79	195/195	77.1/87.1	80/90	71/80	196/196	81.9/91.9	90/100	75/85	200/200													
		24.0/32.0	66.7/77.0	89/95	191/191	94.6/107.5	100/110	87/99	195/195	95.9/108.8	100/110	88/100	196/196	100.6/113.5	110/125	93/104	200/200													
	31.8/42.4	88.4/102.0	108/123	191/191	121.8/138.8	125/150	112/128	195/195	123.0/140.0	125/150	113/129	196/196	127.8/144.8	150/150	118/133	200/200														
	MED	None	None	41	228	45.6	60	45	232	46.6	60	46	233	50.4	60	51	237													
		7.8/10.4	21.7/25.0	41/41	228/228	45.6/45.6	60/60	45/45	232/232	46.6/46.6	60/60	46/46	233/233	50.4/51.4	60/60	51/51	237/237													
		12.0/16.0	33.4/38.5	47/53	228/228	55.9/62.3	60/70	51/57	232/232	57.1/63.5	60/70	53/58	233/233	61.9/68.3	70/70	57/63	237/237													
		18.6/24.8	51.7/59.7	68/77	228/228	78.8/88.8	80/90	72/82	232/232	80.0/90.0	90/100	74/83	233/233	84.8/94.8	90/100	78/87	237/237													
24.0/32.0		66.7/77.0	85/97	228/228	97.5/110.4	100/125	90/102	232/232	98.8/111.6	100/125	91/103	233/233	103.5/116.4	110/125	95/107	237/237														
460-3-60	STD	None	None	49	254	53.1	60	54	258	54.1	70	55	259	57.9	80	59	263													
		7.8/10.4	21.7/25.0	49/49	254/254	53.1/54.8	60/60	54/54	258/258	54.1/56.0	70/70	55/55	259/259	57.9/60.8	80/80	59/59	263/263													
		12.0/16.0	33.4/38.5	56/62	254/254	65.3/71.6	70/80	60/66	258/258	66.5/72.9	80/90	61/67	259/259	71.3/77.6	80/80	66/71	263/263													
		18.6/24.8	51.7/59.7	77/86	254/254	88.1/98.1	90/100	81/90	258/258	89.4/99.4	90/100	82/91	259/259	94.1/104.1	100/110	87/96	263/263													
		24.0/32.0	66.7/77.0	94/106	254/254	106.9/119.8	110/125	98/110	258/258	108.1/121.0	110/125	99/111	259/259	112.9/125.8	125/150	104/116	263/263													
	31.8/42.4	88.4/102.0	119/135	254/254	134.0/151.0	150/175	123/139	258/258	135.3/152.3	150/175	124/140	259/259	140.0/157.0	150/175	129/144	263/263														
	MED	None	None	19	113	21.3	30	21	115	21.7	30	21	115	23.5	30	23	117													
		13.9	16.7	22	113	26.4	30	24	115	26.9	30	25	115	29.1	30	27	117													
		16.5	19.8	26	113	30.3	35	28	115	30.8	35	28	115	33.0	35	30	117													
		27.8	33.4	41	113	47.3	50	43	115	47.8	50	44	115	50.0	60	46	117													
33.0		39.7	60	113	55.1	60	51	115	55.6	60	51	115	57.9	60	53	117														
575-3-60	STD	None	None	61	113	68.3	70	63	115	68.8	70	63	115	71.0	80	65	117													
		None	None	20	132	22.1	30	22	134	22.5	30	22	134	24.3	30	24	136													
		13.9	16.7	23	132	27.4	30	25	134	27.9	30	26	134	30.1	35	28	136													
		16.5	19.8	30	132	31.3	35	29	134	31.8	35	29	134	34.0	35	31	136													
		27.8	33.4	42	132	48.3	50	44	134	48.8	50	44	134	51.0	60	47	136													
	33.0	39.7	60	132	56.1	60	52	134	56.6	60	52	134	58.9	60	54	136														
	MED	None	None	62	132	69.3	70	64	134	69.8	70	64	134	72.0	80	68	136													
		None	None	24	145	26.1	30	24	147	26.5	30	24	147	28.3	40	29	149													
		13.9	16.7	28	145	32.4	35	30	147	32.9	35	30	147	35.1	40	32	149													
		16.5	19.8	31	145	36.3	40	33	147	36.8	40	34	147	39.0	40	36	149													
27.8		33.4	47	145	53.3	60	49	147	53.8	60	49	147	56.0	60	52	149														
575-3-60	STD	None	None	66	145	74.3	80	68	147	74.8	80	69	147	77.0	80	71	149													
		None	None	14	89	18.7	25	19	93	16.6	25	16	91	20.4	25	21	95													
		17.0	20.4	20	89	33.3	35	31	93	30.6	35	28	91	35.4	40	33	95													
		34.0	40.9	50	89	58.9	60	54	93	56.3	60	52	91	61.0	70	56	95													
		None	None	15	104	19.1	25	19	108	17	25	17	106	20.8	25	21	110													
	MED	None	None	27	104	33.8	35	31	108	31.1	35	29	106	35.9	40	33	110													
		None	None	50	104	58.4	60	55	108	56.8	60	52	106	61.5	70	57	110													
		17.0	20.4	30	104	29.0	30	27	104	29.0	30	27	104	31.1	35	29	110													
		34.0	40.9	50	104	54.6	60	50	104	54.6	60	50	104	61.5	70	57	110													
		None	None	18	118	21.9	30	23	122	19.8	25	20	120	23.6	30	24	124													
HIGH	None	None	30	118	37.3	40	34	122	34.6	35	32	120	39.4	40	36	124														
	34.0	40.9	53	118	62.9	70	58	122	60.3	70	55	120	65.0	70	60	124														

\* Nominal values, listed as 208/240V, 480V or 600V as appropriate.

**ELECTRICAL INFORMATION (UNITS PRODUCED PRIOR TO JULY 30, 2012) cont.**  
**UNIT WIRE/FUSE OR HACR BREAKER SIZING DATA 2-STAGE COOLING WITH SINGLE SPEED INDOOR FAN MOTOR**

NOM. V- $\Phi$ -Hz.	ELECTRIC HEATER										NO C.O. or UNPWR C.O.										W/PWRD C.O.									
	IFM TYPE	Nom* (kW)	FLA	NO PE.			w/ P.E. (pwrdr fr/unit)			NO PE.			w/ P.E. (pwrdr fr/unit)			NO PE.			w/ P.E. (pwrdr fr/unit)											
				MCA	MAX FUSE or HACR BRKR	DISC. SIZE FLA LRA	MCA	MAX FUSE or HACR BRKR	DISC. SIZE FLA LRA	MCA	MAX FUSE or HACR BRKR	DISC. SIZE FLA LRA	MCA	MAX FUSE or HACR BRKR	DISC. SIZE FLA LRA	MCA	MAX FUSE or HACR BRKR	DISC. SIZE FLA LRA												
208/ 230-3-60	STD	7.8/10.4	-	21.7/25.0	38.8	50	41	193	42.6	50	45	197	43.6	50	46	198	47.4	60	51	202										
		12.0/16.0	38.8/38.8	33.4/38.5	48.3/54.6	50/60	41/41	193/193	42.6/42.6	50/60	45/45	197/197	43.6/43.8	50/60	46/46	198/198	47.4/48.5	60/60	51/51	202/202										
		18.6/24.8	71.1/81.1	51.7/59.7	71.1/81.1	80/90	66/75	193/193	75.9/85.9	80/90	70/79	197/197	77.1/87.1	80/90	71/80	198/198	81.9/91.9	90/100	75/85	202/202										
		24.0/32.0	89.9/102.8	66.7/77.0	89.9/102.8	90/110	83/95	193/193	94.6/107.5	100/110	87/99	197/197	95.9/108.8	100/110	88/100	198/198	100.6/113.5	110/125	93/104	202/202										
		31.8/42.4	117.0/134.0	88.4/102.0	117.0/134.0	125/150	108/123	193/193	121.8/138.8	125/150	112/128	197/197	123.0/140.0	125/150	113/129	198/198	127.8/144.8	150/175	118/133	202/202										
	MED	7.8/10.4	41.1	21.7/25.0	41.1/41.1	50	43	230	44.9	50	48	234	45.9	50	49	235	49.7	60	53	239										
		12.0/16.0	51.1/57.5	33.4/38.5	51.1/57.5	60/60	47/53	230/230	55.9/62.3	60/70	51/57	234/234	57.1/63.5	60/70	53/58	235/235	61.9/68.3	70/70	57/63	239/239										
		18.6/24.8	74.0/84.0	51.7/59.7	74.0/84.0	80/90	68/77	230/230	78.8/88.8	80/90	72/82	234/234	80.0/90.0	90/100	74/83	235/235	84.8/94.8	90/100	78/87	239/239										
		24.0/32.0	92.8/105.6	66.7/77.0	92.8/105.6	100/110	85/97	230/230	97.5/110.4	100/125	90/102	234/234	98.8/111.6	100/125	91/103	235/235	103.5/116.4	110/125	95/107	239/239										
		31.8/42.4	119.9/136.9	88.4/102.0	119.9/136.9	125/150	110/126	230/230	124.6/141.6	125/150	115/130	234/234	125.9/142.9	150/175	116/131	235/235	130.6/147.6	150/150	120/136	239/239										
460-3-60	STD	7.8/10.4	49.0	21.7/25.0	49.0/50.0	60	52	256	52.8	60	56	260	53.8	60	58	261	57.6	70	62	265										
		12.0/16.0	60.5/66.9	33.4/38.5	60.5/66.9	70/70	56/62	256/256	65.3/71.6	70/80	60/66	260/260	66.5/72.9	70/80	61/67	261/261	71.3/77.6	80/80	66/71	265/265										
		18.6/24.8	83.4/93.4	51.7/59.7	83.4/93.4	90/100	77/86	256/256	88.1/98.1	90/100	81/90	260/260	89.4/99.4	90/100	82/91	261/261	94.1/104.1	100/110	87/96	265/265										
		24.0/32.0	102.1/115.0	66.7/77.0	102.1/115.0	110/125	94/106	256/256	106.9/119.8	110/125	91/110	260/260	108.1/121.0	110/125	99/111	261/261	112.9/125.8	125/150	104/116	265/265										
		31.8/42.4	129.3/146.3	88.4/102.0	129.3/146.3	150/150	119/135	256/256	134.0/151.0	150/175	123/139	260/260	135.3/152.3	150/175	124/140	261/261	140.0/157.0	150/175	129/144	265/265										
	MED	13.9	17.9	16.7	24.1	25	19	95	19.7	25	21	97	20.1	25	21	97	21.9	25	23	99										
		16.5	24.1	19.8	28.0	30	22	95	26.4	30	24	97	26.9	30	25	97	28.1	30	27	99										
		27.8	45.0	33.4	45.0	50	41	95	47.3	50	43	97	47.8	50	44	97	50.0	60	46	99										
		33.0	52.9	39.7	52.9	60	49	95	55.1	60	51	97	55.6	60	51	97	57.9	60	53	99										
		41.7	66.0	50.2	66.0	70	61	95	68.3	70	63	97	68.8	70	63	97	71.0	80	65	99										
575-3-60	STD	13.9	18.7	16.7	25.1	25	20	114	20.5	25	22	116	20.9	25	22	116	22.7	25	24	118										
		16.5	29.0	19.8	29.0	30	27	114	31.3	35	29	116	31.8	35	29	116	34.0	35	31	118										
		27.8	46.0	33.4	46.0	50	42	114	48.3	50	44	116	48.8	50	45	116	51.0	60	47	118										
		33.0	53.9	39.7	53.9	60	50	114	56.1	60	52	116	56.6	60	52	116	58.9	60	54	118										
		41.7	67.0	50.2	67.0	70	62	114	69.3	70	64	116	69.8	70	64	116	72.0	80	66	118										
	MED	13.9	23.1	16.7	30.1	30	24	127	24.9	30	26	129	25.3	30	27	129	27.1	30	29	131										
		16.5	34.0	19.8	34.0	35	28	127	32.4	35	30	129	32.9	35	30	129	35.1	40	32	131										
		27.8	51.0	33.4	51.0	60	47	127	53.3	60	49	129	53.8	60	49	129	56.0	60	52	131										
		33.0	58.9	39.7	58.9	60	54	127	61.1	70	56	129	61.6	70	57	129	63.9	70	59	131										
		41.7	72.0	50.2	72.0	80	66	127	74.3	80	68	129	74.8	80	69	129	77.0	80	71	131										

\* Nominal values, listed as 208/240V, 460V or 600V as appropriate.

# ELECTRICAL INFORMATION (UNITS PRODUCED PRIOR TO JULY 30, 2012) cont.

**Table 22 – 50TC\*D08 UNIT WIRE/FUSE OR HACR BREAKER SIZING DATA 2-STAGE COOLING WITH 2 SPEED INDOOR FAN MOTOR**

NOM. V-PH-Hz.	ELECTRIC HEATER				NO P.W. (p.wrd fr/unit)				NO P.W. (p.wrd fr/unit)				w/ PWRD C.O.				w/ P.E. (p.wrd fr/unit)			
	IFM TYPE	Nom (kW)	FLA	MCA	MAX FUSE or HACR BRKR	DISC. SIZE		MCA	MAX FUSE or HACR BRKR	MCA	DISC. SIZE		MCA	MAX FUSE or HACR BRKR	FLA	LRA	MCA	MAX FUSE or HACR BRKR	FLA	LRA
						FLA	LRA				FLA	LRA								
208/ 230-3-60	STD	7.8/10.4	21.7/25.0	-	39.4/39.2	41/41	197	43.2/43.0	50/50	46/46	201	44.2/44.0	50/50	47/47	202	48.0/47.8	60/60	51/51	206	206
		12.0/16.0	33.4/38.5	-	39.4/39.2	41/41	197/197	43.2/43.0	50/50	46/46	201/201	44.2/44.3	50/50	47/47	202/202	48.0/49.0	60/60	51/51	206/206	206/206
208/ 230-3-60	MED	18.6/24.8	51.7/59.7	-	49.0/55.1	45/51	197/197	53.8/59.9	60/60	49/55	201/201	55.0/61.1	60/70	51/56	202/202	59.9/65.9	60/70	55/61	206/206	206/206
		24.0/32.0	66.7/77.0	-	51.7/59.7	45/51	197/197	76.6/86.4	80/90	70/79	201/201	77.9/87.6	80/90	72/81	202/202	82.6/92.4	90/100	76/85	206/206	206/206
208/ 230-3-60	HIGH	31.8/42.4	88.4/102.0	-	90.6/103.3	83/95	197/197	95.4/108.0	100/110	88/99	201/201	96.6/109.3	100/110	89/101	202/202	101.4/114.0	110/125	93/105	206/206	206/206
		7.8/10.4	21.7/25.0	-	117.8/134.5	108/124	197/197	125.1/139.3	125/150	113/128	201/201	123.8/140.5	125/150	114/129	202/202	128.5/145.3	150/150	118/134	206/206	206/206
460-3-60	STD	13.9	16.7	-	42.2/41.4	45/44	227	46.0/45.2	50/50	49/48	231	47.0/46.2	60/60	50/49	232	50.9/50.0	60/60	55/54	236	236
		16.5	19.8	-	42.2/41.4	45/44	227/227	46.0/45.8	50/50	49/48	231/231	47.0/47.0	60/60	50/49	232/232	50.9/51.8	60/60	55/54	236/236	236/236
460-3-60	MED	18.6/24.8	51.7/59.7	-	52.5/57.9	48/53	227/227	57.3/62.6	60/70	53/58	231/231	58.5/63.9	60/70	54/59	232/232	63.9/68.6	70/70	58/63	236/236	236/236
		24.0/32.0	66.7/77.0	-	75.4/84.4	69/78	227/227	80.1/89.1	90/90	74/82	231/231	81.4/90.4	90/100	75/83	232/232	86.1/95.1	90/100	79/88	236/236	236/236
460-3-60	HIGH	31.8/42.4	88.4/102.0	-	94.1/106.0	87/98	227/227	98.9/110.8	100/125	91/102	231/231	100.1/112.0	110/125	92/103	232/232	104.9/116.8	110/125	96/107	236/236	236/236
		7.8/10.4	21.7/25.0	-	121.3/137.3	112/126	227/227	126.0/142.0	150/150	116/131	231/231	127.3/143.3	150/150	117/132	232/232	132.0/148.0	150/150	121/136	236/236	236/236
575-3-60	STD	13.9	16.7	-	47.2/46.3	50/49	262	51.0/50.1	60/60	55/54	266	52.0/51.1	60/60	56/55	267	55.9/54.9	60/60	60/59	271	271
		16.5	19.8	-	47.2/47.1	50/49	262/262	51.0/51.9	60/60	55/54	266/266	52.0/53.1	60/60	56/55	267/267	55.9/57.9	60/60	60/59	271/271	271/271
575-3-60	MED	18.6/24.8	51.7/59.7	-	56.8/64.0	54/59	262/262	63.5/68.8	70/70	58/63	266/266	64.8/70.0	70/70	60/64	267/267	69.5/74.8	70/80	64/69	271/271	271/271
		24.0/32.0	66.7/77.0	-	81.6/90.5	75/83	262/262	86.4/95.3	90/100	79/88	266/266	87.6/96.5	90/100	81/89	267/267	92.4/101.3	100/110	85/93	271/271	271/271
575-3-60	HIGH	31.8/42.4	88.4/102.0	-	100.4/112.1	92/103	262/262	105.1/116.9	110/125	97/108	266/266	106.4/118.1	110/125	98/109	267/267	111.1/122.9	125/125	102/113	271/271	271/271
		7.8/10.4	21.7/25.0	-	127.5/143.4	117/132	262/262	132.3/148.1	150/150	122/136	266/266	133.5/149.4	150/150	123/137	267/267	138.3/154.1	150/175	127/142	271/271	271/271
575-3-60	STD	13.9	16.7	-	24.5	23	97	20.0	25	21	99	20.4	25	22	99	22.2	25	24	101	101
		16.5	19.8	-	28.4	26	97	30.6	35	28	99	31.1	35	29	99	33.4	35	31	101	101
575-3-60	MED	27.8	33.4	-	45.4	42	97	47.6	50	44	99	48.1	50	44	99	50.4	60	46	101	101
		33.0	39.7	-	53.3	49	97	55.5	60	51	99	56.0	60	52	99	58.3	60	54	101	101
575-3-60	HIGH	41.7	50.2	-	66.4	61	97	68.6	70	63	99	69.1	70	64	99	71.4	80	66	101	101
		13.9	16.7	-	25.6	24	113	27.9	25	22	115	28.4	25	23	115	30.6	25	25	117	117
575-3-60	STD	16.5	19.8	-	29.5	27	113	31.8	30	29	115	32.3	30	30	115	34.5	35	32	117	117
		27.8	33.4	-	46.5	43	113	48.8	50	45	115	49.3	50	45	115	51.5	60	47	117	117
575-3-60	MED	33.0	39.7	-	54.4	50	113	56.6	60	52	115	57.1	60	53	115	59.4	60	55	117	117
		41.7	50.2	-	67.5	62	113	69.8	70	64	115	70.3	80	65	115	72.5	80	67	117	117
575-3-60	HIGH	13.9	16.7	-	21.8	23	130	23.6	25	23	132	24.0	30	26	132	25.8	30	28	134	134
		16.5	19.8	-	28.9	27	130	31.1	35	29	132	31.6	35	29	132	33.9	35	31	134	134
575-3-60	STD	16.5	19.8	-	32.8	30	130	35.0	35	32	132	35.5	40	33	132	37.8	40	35	134	134
		27.8	33.4	-	49.8	46	130	52.0	60	48	132	52.5	60	48	132	54.8	60	50	134	134
575-3-60	MED	33.0	39.7	-	57.6	53	130	59.9	60	55	132	60.4	70	56	132	62.6	70	58	134	134
		41.7	50.2	-	70.8	65	130	73.0	80	67	132	73.5	80	68	132	75.8	80	70	134	134
575-3-60	STD	17.0	20.4	-	13.5	14	79	17.3	20	19	83	15.2	20	16	81	19.0	25	21	85	85
		34.0	40.9	-	29.0	30	79	33.8	35	31	83	31.1	35	29	81	35.9	40	33	85	85
575-3-60	MED	17.0	20.4	-	54.6	50	79	59.4	60	55	83	56.8	60	52	81	61.5	70	57	85	85
		34.0	40.9	-	15.2	16	92	19.0	25	21	96	16.9	20	18	94	20.7	25	23	88	88
575-3-60	HIGH	17.0	20.4	-	31.1	29	94	35.9	40	33	96	33.3	35	31	94	38.0	40	35	98	98
		34.0	40.9	-	56.8	52	92	61.5	70	57	96	58.9	60	54	94	63.6	70	59	98	98
575-3-60	STD	17.0	20.4	-	17.4	20	106	21.2	25	23	110	19.1	25	20	108	22.9	25	24	112	112
		34.0	40.9	-	33.3	31	106	38.0	40	35	110	35.4	40	33	108	40.1	45	37	112	112
575-3-60	MED	17.0	20.4	-	56.9	54	106	63.6	70	59	110	61.0	70	56	108	65.8	70	60	112	112
		34.0	40.9	-	17.4	20	106	21.2	25	23	110	19.1	25	20	108	22.9	25	24	112	112

\* Nominal values, listed as 208/240V, 480V or 600V as appropriate.



# ELECTRICAL INFORMATION (UNITS PRODUCED PRIOR TO JULY 30, 2012) cont.

**Table 23 – 50TC\*A09 UNIT WIRE/FUSE OR HACR BREAKER SIZING DATA SINGLE STAGE COOLING WITH SINGLE SPEED INDOOR FAN MOTOR**

NOM. V-PH-Hz.	ELECTRIC HEATER										NO C.O. or UNPWR C.O.										W/PWR C.O.									
	IFM TYPE	Nom* (kW)	FLA	NO P.E.		w/ P.E. (p.wrd fr/unit)		DISC. SIZE		NO P.E.		w/ P.E. (p.wrd fr/unit)		DISC. SIZE		MCA		NO P.E.		w/ P.E. (p.wrd fr/unit)		DISC. SIZE		MCA		NO P.E.		w/ P.E. (p.wrd fr/unit)		
				MAX FUSE or BRKR	MCA	FLA	LRA	FLA	LRA	FLA	LRA	MAX FUSE or BRKR	MCA	FLA	LRA	FLA	LRA	MAX FUSE or BRKR	MCA	FLA	LRA	MAX FUSE or BRKR	MCA	FLA	LRA	FLA	LRA	MAX FUSE or BRKR	MCA	FLA
208/ 230-3-60	STD	None	None	43	222	48.9	226	48	226	60	48	49.9	227	49	227	49.9	227	60	49	227	60	49	227	53.7	227	80	53	231		
		7.8/10.4	21.7/25.0	43/43	222/222	48/48	226/226	48.9/48.9	237/237	60/60	48/48	49.9/49.9	237/237	60/60	49/49	53.7/53.7	238/238	80/80	53/53	242/242										
		12.0/16.0	33.4/38.5	44/50	222/222	49/55	226/226	53.0/59.4	237/237	60/60	49/55	54.3/60.6	237/237	60/70	50/56	59.0/65.4	238/238	80/80	54/60	242/242										
		18.6/24.8	51.7/59.7	65/75	222/222	70/79	226/226	75.9/85.9	237/237	80/90	70/79	77.1/87.1	237/237	80/90	71/80	81.9/91.9	238/238	90/100	75/85	242/242										
		24.0/32.0	66.7/77.0	83/95	222/222	87/99	226/226	94.6/107.5	237/237	100/110	87/99	95.9/108.8	237/237	100/110	88/100	100.6/113.5	238/238	110/125	93/104	242/242										
	31.8/42.4	88.4/102.0	108/123	222/222	112/128	226/226	121.8/138.8	237/237	125/150	112/128	123.0/140.0	237/237	125/150	113/129	127.8/144.8	238/238	150/150	118/133	242/242											
	MED	None	None	43	233	48.9	237	48	237	60	48	49.9	237	60	49	53.7	238	80	53	242										
		7.8/10.4	21.7/25.0	43/43	233/233	48/48	237/237	48.9/48.9	248/248	60/60	48/48	49.9/49.9	248/248	60/60	49/49	53.7/53.7	249/249	80/80	53/53	254/254										
		12.0/16.0	33.4/38.5	44/50	233/233	49/55	237/237	53.0/59.4	248/248	60/60	49/55	54.3/60.6	248/248	60/70	50/56	59.0/65.4	249/249	80/80	54/60	259/259										
		18.6/24.8	51.7/59.7	65/75	233/233	70/79	237/237	75.9/85.9	248/248	80/90	70/79	77.1/87.1	248/248	80/90	71/80	81.9/91.9	249/249	90/100	75/85	259/259										
24.0/32.0		66.7/77.0	83/95	233/233	87/99	237/237	94.6/107.5	248/248	100/110	87/99	95.9/108.8	248/248	100/110	88/100	100.6/113.5	249/249	110/125	93/104	259/259											
460-3-60	STD	None	None	49	276	53.7	280	53	280	80	53	54.7	280	80	54	58.5	281	80	59	285										
		7.8/10.4	21.7/25.0	49/49	276/276	53/53	280/280	53.7/53.7	291/291	80/80	53/53	54.7/54.7	291/291	80/80	54/54	58.5/58.5	292/292	80/80	59/59	297/297										
		12.0/16.0	33.4/38.5	50/56	276/276	54/60	280/280	59.0/65.4	291/291	80/80	54/60	60.3/66.6	291/291	80/80	55/61	65.0/71.4	292/292	80/80	60/66	297/297										
		18.6/24.8	51.7/59.7	71/80	276/276	75/85	280/280	81.9/91.9	291/291	90/100	75/85	83.1/93.1	291/291	90/100	76/86	87.9/97.9	292/292	100/110	75/85	297/297										
		24.0/32.0	66.7/77.0	88/100	276/276	93/104	280/280	101.9/114.8	291/291	110/125	93/104	106.6/119.5	291/291	110/125	94/106	106.6/119.5	292/292	120/135	93/104	297/297										
	31.8/42.4	88.4/102.0	113/129	276/276	118/133	280/280	127.8/144.8	291/291	150/150	118/133	129.0/146.0	291/291	150/150	119/134	133.8/150.8	292/292	150/175	118/133	297/297											
	MED	None	None	22	108	24.1	110	24	110	30	24	24.8	110	30	24	26.6	111	30	24	112										
		13.9	16.7	22	108	24.1	110	24	110	30	24	26.4	110	30	25	28.1	111	30	25	112										
		16.5	19.8	26	108	30.3	110	28	110	35	28	30.8	110	35	28	33.0	111	35	28	112										
		27.8	33.4	41	108	47.3	110	43	110	50	43	47.8	110	50	44	50.0	111	50	44	112										
33.0		39.7	60	108	55.1	110	51	110	60	51	55.6	110	60	51	57.9	111	60	51	112											
575-3-60	STD	None	None	18	91	18.9	95	18	95	22.7	95	20.6	95	20	20.6	95	20	20	97											
		13.9	16.7	18	91	18.9	95	18.9	95	22.7	95	20.6	95	20	20.6	95	20	20	97											
		16.5	19.8	26	91	28.5	95	31	95	33.3	95	30.6	95	35	28	35.4	30	33	97											
		27.8	33.4	50	91	54.1	95	54	95	56.9	95	56.3	95	60	52	61.0	70	56	97											
		33.0	39.7	80	91	85.5	95	80	95	88.5	95	85.8	95	80	52	85.8	70	56	97											
	MED	None	None	18	95	18.5	99	18	99	22.3	99	20.2	99	20	20.2	99	20	20	101											
		17.0	20.4	26	95	28.0	99	30	99	32.8	99	30.1	99	35	28	34.9	30	32	101											
		34.0	40.9	60	95	53.6	99	60	99	58.4	99	55.8	99	60	51	60.5	70	56	101											
		None	None	19	106	19.3	110	19	110	23.1	110	21	110	20	21	24.8	30	25	112											
		17.0	20.4	27	106	29.0	110	31	110	33.8	110	31.1	110	35	29	35.9	40	33	112											

\* Nominal values, listed as 208/240V, 460V or 600V as appropriate.

# ELECTRICAL INFORMATION (UNITS PRODUCED PRIOR TO JULY 30, 2012) cont.

**Table 24 – 50TC\*D09 UNIT WIRE/FUSE OR HACR BREAKER SIZING DATA 2-STAGE COOLING WITH SINGLE SPEED INDOOR FAN MOTOR**

NOM. V-PH-Hz.	ELECTRIC HEATER				NO P.E.				NO P.E.				w/ PWRD C.O.						
	IFM TYPE	Nom* (kW)	FLA	MCA	MAX FUSE or HACR BRKR	DISC. SIZE		MCA	MAX FUSE or HACR BRKR	DISC. SIZE		MCA	MAX FUSE or HACR BRKR	DISC. SIZE					
						FLA	LRA			FLA	LRA			FLA	LRA	FLA	LRA		
208/ 230-3-60	STD	-	-	-	50	42	208	43.8	50	46	212	44.8	50	47	213	48.6	60	52	217
		7.8/10.4	21.7/25.0	40.0/40.0	50/50	42/42	208/208	43.8/43.8	50/50	46/46	212/212	44.8/44.8	50/50	47/47	213/213	48.6/48.6	60/60	52/52	217/217
		12.0/16.0	33.4/38.5	48.3/54.6	50/60	44/50	208/208	53.0/59.4	60/80	49/55	212/212	54.3/60.6	60/70	50/56	213/213	59.0/65.4	60/70	54/60	217/217
		18.6/24.8	51.7/59.7	71.1/81.1	80/90	65/75	208/208	75.9/85.9	80/90	70/79	212/212	77.1/87.1	80/90	71/80	213/213	81.9/91.9	90/100	75/85	217/217
		24.0/32.0	66.7/77.0	89.9/102.8	90/110	83/95	208/208	94.6/107.5	100/110	87/99	212/212	95.9/108.8	100/110	88/100	213/213	100.6/113.5	110/125	93/104	217/217
	31.8/42.4	88.4/102.0	117.0/134.0	125/150	108/123	208/208	121.8/138.8	125/150	112/128	212/212	123.0/140.0	125/150	113/129	213/213	127.8/144.8	150/150	118/133	217/217	
	MED	-	-	40.0	50	42	219	43.8	50	46	223	44.8	50	47	224	48.6	60	52	228
		7.8/10.4	21.7/25.0	40.0/40.0	50/50	42/42	219/219	43.8/43.8	50/50	46/46	223/223	44.8/44.8	50/50	47/47	224/224	48.6/48.6	60/60	52/52	228/228
		12.0/16.0	33.4/38.5	48.3/54.6	50/60	44/50	219/219	53.0/59.4	60/80	49/55	223/223	54.3/60.6	60/70	50/56	224/224	59.0/65.4	60/70	54/60	228/228
		18.6/24.8	51.7/59.7	71.1/81.1	80/90	65/75	219/219	75.9/85.9	80/90	70/79	223/223	77.1/87.1	80/90	71/80	224/224	81.9/91.9	90/100	75/85	228/228
24.0/32.0		66.7/77.0	89.9/102.8	90/110	83/95	219/219	94.6/107.5	100/110	87/99	223/223	95.9/108.8	100/110	88/100	224/224	100.6/113.5	110/125	93/104	228/228	
31.8/42.4	88.4/102.0	117.0/134.0	125/150	108/123	219/219	121.8/138.8	125/150	112/128	223/223	123.0/140.0	125/150	113/129	224/224	127.8/144.8	150/150	118/133	228/228		
460-3-60	HIGH	-	-	44.8	50	47	262	48.6	60	52	266	49.6	60	53	267	53.4	60	57	271
		7.8/10.4	21.7/25.0	44.8/44.8	50/50	47/47	262/262	48.6/48.6	60/60	52/52	266/266	49.6/49.6	60/60	53/53	267/267	53.4/54.5	60/60	57/57	271/271
		12.0/16.0	33.4/38.5	54.3/60.6	60/70	50/56	262/262	59.0/65.4	60/70	54/60	266/266	60.3/66.6	70/70	55/61	267/267	65.0/71.4	70/80	60/66	271/271
		18.6/24.8	51.7/59.7	77.1/87.1	80/90	71/80	262/262	81.9/91.9	90/100	75/85	266/266	83.1/93.1	90/100	76/86	267/267	87.9/97.9	90/100	81/90	271/271
		24.0/32.0	66.7/77.0	95.9/108.8	100/110	88/100	262/262	100.6/113.5	110/125	93/104	266/266	101.9/114.8	110/125	94/106	267/267	106.6/119.5	110/125	98/110	271/271
	31.8/42.4	88.4/102.0	123.0/140.0	125/150	113/129	262/262	127.8/144.8	150/150	118/133	266/266	129.0/146.0	150/150	119/134	267/267	133.8/150.8	150/175	123/139	271/271	
	STD	-	-	18.3	20	19	109	20.1	25	21	111	20.5	25	22	111	22.3	25	24	113
		13.9	16.7	24.1	25	22	109	26.4	30	24	111	26.9	30	25	111	28.1	30	27	113
		16.5	19.8	28.0	30	26	109	30.3	35	28	111	30.8	35	28	111	33.0	35	30	113
		27.8	33.4	45.0	50	41	109	47.3	50	43	111	47.8	50	44	111	50.0	60	46	113
33.0		39.7	52.9	60	49	109	55.1	60	51	111	55.6	60	51	111	57.9	60	53	113	
41.7	50.2	66.0	70	61	109	68.3	70	63	111	68.8	70	63	111	71.0	80	65	113		
MED	-	-	18.3	20	19	115	20.1	25	21	117	20.5	25	22	117	22.3	25	24	119	
	13.9	16.7	24.1	25	22	115	26.4	30	24	117	26.9	30	25	117	29.1	30	27	119	
	16.5	19.8	28.0	30	26	115	30.3	35	28	117	30.8	35	28	117	33.0	35	30	119	
	27.8	33.4	45.0	50	41	115	47.3	50	43	117	47.8	50	44	117	50.0	60	46	119	
	33.0	39.7	52.9	60	49	115	55.1	60	51	117	55.6	60	51	117	57.9	60	53	119	
41.7	50.2	66.0	70	61	115	68.3	70	63	117	68.8	70	63	117	71.0	80	65	119		
575-3-60	STD	-	-	15.9	20	17	85	19.7	25	21	89	17.6	20	19	87	21.4	25	23	91
		17.0	20.4	28.5	30	26	85	33.3	35	31	89	30.6	35	28	87	35.4	40	33	91
		34.0	40.9	54.1	60	50	85	58.9	60	54	89	56.3	60	52	87	61.0	70	56	91
		-	-	15.5	20	16	89	19.3	25	20	93	17.2	20	18	91	21.0	25	22	95
		17.0	20.4	28.0	30	26	89	32.8	35	30	93	30.1	35	28	91	34.9	35	32	95
	34.0	40.9	53.6	60	49	89	58.4	60	54	93	55.8	60	51	91	60.5	70	56	95	
	HIGH	-	-	16.3	20	17	100	20.1	25	21	104	18.0	20	19	102	21.8	25	23	106
		17.0	20.4	29.0	30	27	100	33.8	35	31	104	31.1	35	29	102	35.9	40	33	106
		34.0	40.9	54.6	60	50	100	59.4	60	55	104	56.8	60	52	102	61.5	70	57	106

\* Nominal values, listed as 208/240V, 480V or 600V as appropriate.





# ELECTRICAL INFORMATION (UNITS PRODUCED PRIOR TO JULY 30, 2012) cont.

**Table 26 – 50TC\*A12 UNIT WIRE/FUSE OR HACR BREAKER SIZING DATA SINGLE STAGE COOLING WITH SINGLE SPEED INDOOR FAN MOTOR**

NOM. V-PH-Hz	ELECTRIC HEATER										NO C.O. or UNPWR C.O.										W/PWR C.O.									
	IFM TYPE	Nom* (kW)	FLA	NO PE.		w/ P.E. (pwrd fr/unit)		NO PE.		w/ P.E. (pwrd fr/unit)		NO PE.		w/ P.E. (pwrd fr/unit)		NO PE.		w/ P.E. (pwrd fr/unit)		NO PE.		w/ P.E. (pwrd fr/unit)								
				MAX FUSE or HACR BRKR	MCA	DISC. SIZE FLA	LRA	MAX FUSE or HACR BRKR	MCA	DISC. SIZE FLA	LRA	MAX FUSE or HACR BRKR	MCA	DISC. SIZE FLA	LRA	MAX FUSE or HACR BRKR	MCA	DISC. SIZE FLA	LRA	MAX FUSE or HACR BRKR	MCA	DISC. SIZE FLA	LRA							
208/ 230-3-60	STD	None	None	45.8	60	44	263	49.6	60	48	267	50.6	60	50	268	54.4	80	54	272	54.4	80	54	272							
		7.8/10.4	21.7/25.0	45.8/45.8	60/60	44/44	263/263	49.6/49.6	60/60	48/48	267/267	50.6/50.6	60/60	50/50	268/268	54.4/54.4	80/80	54/54	272/272	54.4/54.4	80/80	54/54	272/272							
		12.0/16.0	33.4/38.5	48.3/54.6	60/60	44/50	263/263	53.0/59.4	60/60	49/55	267/267	50.6/60.6	60/60	50/56	268/268	59.0/65.4	80/80	54/60	272/272	59.0/65.4	80/80	54/60	272/272							
	MED	24.0/32.0	66.7/77.0	89.9/102.8	90/110	83/95	263/263	94.6/107.5	100/110	87/99	267/267	95.9/108.8	100/110	88/100	268/268	100.6/113.5	110/125	93/104	272/272	100.6/113.5	110/125	93/104	272/272							
		31.8/42.4	88.4/102.0	117.0/134.0	125/150	108/123	263/263	121.8/138.8	125/150	112/128	267/267	123.0/140.0	125/150	113/129	268/268	127.8/144.8	150/150	118/133	272/272	127.8/144.8	150/150	118/133	272/272							
		37.6/50.0	104.2/120.3	136.8/126.8	150/150	126/144	263/263	141.5/131.6	150/150	130/149	267/267	142.8/132.8	150/150	131/150	268/268	147.5/137.6	150/150	136/154	272/272	147.5/137.6	150/150	136/154	272/272							
	460-3-60	STD	None	None	55.6	80	55	315	58.4	80	60	319	60.4	80	61	320	64.2	90	65	324	64.2	90	65	324						
			7.8/10.4	21.7/25.0	55.6/55.6	80/80	55/55	315/315	59.4/59.4	80/80	60/60	319/319	60.4/60.4	80/80	61/61	320/320	64.2/64.2	90/90	65/65	324/324	64.2/64.2	90/90	65/65	324/324						
			12.0/16.0	33.4/38.5	60.5/66.9	80/80	56/62	315/315	65.3/71.6	80/80	60/66	319/319	66.5/72.9	80/80	61/67	320/320	71.3/77.6	90/90	66/71	324/324	71.3/77.6	90/90	66/71	324/324						
		MED	24.0/32.0	66.7/77.0	89.9/102.8	90/110	88/100	306/306	100.6/113.5	110/125	93/104	310/310	101.9/114.8	110/125	94/106	311/311	106.6/119.5	110/125	98/110	315/315	106.6/119.5	110/125	98/110	315/315						
31.8/42.4			88.4/102.0	123.0/140.0	125/150	113/129	306/306	127.8/144.8	150/150	118/133	310/310	129.0/146.0	150/150	119/134	311/311	133.8/150.8	150/175	123/139	315/315	133.8/150.8	150/175	123/139	315/315							
37.6/50.0			104.2/120.3	142.8/132.8	150/150	131/150	306/306	147.5/137.6	150/150	136/154	310/310	148.8/138.8	150/150	137/155	311/311	153.5/143.6	175/175	141/160	315/315	153.5/143.6	175/175	141/160	315/315							
575-3-60		STD	None	None	25.1	30	24	133	26.9	40	26	135	27.3	40	27	135	29.1	45	29	137	29.1	45	29	137						
			13.9	16.7	25.1	30	24	133	26.9	40	26	135	27.3	40	27	135	29.1	45	29	137	29.1	45	29	137						
			16.5	19.8	28.0	30	26	133	30.3	40	28	135	30.8	40	28	135	33.0	45	30	137	33.0	45	30	137						
		MED	24.0/32.0	66.7/77.0	89.9/102.8	90/110	88/100	133	55.1	60	51	135	55.6	60	51	135	55.6	60	51	135	55.6	60	51	135						
	31.8/42.4		88.4/102.0	123.0/146.3	150/150	119/135	133	66.0	70	63	135	66.3	70	63	135	68.8	70	63	135	68.8	70	63	135							
	37.6/50.0		104.2/120.3	149.0/139.1	150/175	137/156	133	73.1	80	74	135	73.1	80	74	135	77.0	80	74	135	77.0	80	74	135							
	HIGH	STD	None	None	26.9	40	26	155	28.7	45	28	157	29.1	45	29	157	30.9	45	31	159	30.9	45	31	159						
			13.9	16.7	26.9	40	26	155	28.7	45	28	157	29.1	45	29	157	31.4	45	31	159	31.4	45	31	159						
			16.5	19.8	30.3	40	28	155	32.5	45	30	157	33.0	45	30	157	35.3	45	32	159	35.3	45	32	159						
		MED	24.0/32.0	66.7/77.0	89.9/102.8	90/110	88/100	155	57.4	60	53	157	57.9	60	53	157	60.1	70	55	159	60.1	70	55	159						
31.8/42.4			88.4/102.0	123.0/146.3	150/150	119/135	155	70.5	80	65	157	71.0	80	65	157	73.3	80	67	159	73.3	80	67	159							
37.6/50.0			104.2/120.3	149.0/139.1	150/175	137/156	155	81.9	90	74	157	82.4	90	74	157	86.8	90	79	159	86.8	90	79	159							
HIGH		STD	None	None	18.5	30	18	95	22.3	30	22	99	20.2	30	20	97	24	30	24	101	24	30	24	101						
			13.9	16.7	30.1	45	30	95	32.4	45	32	99	32.9	45	32	99	34.9	45	32	101	34.9	45	32	101						
			16.5	19.8	34.0	45	31	95	36.3	45	33	99	36.8	45	33	99	39.0	45	33	101	39.0	45	33	101						
		MED	24.0/32.0	66.7/77.0	89.9/102.8	90/110	88/100	159	61.1	70	56	161	61.6	70	56	161	63.9	70	59	163	63.9	70	59	163						
	31.8/42.4		88.4/102.0	123.0/146.3	150/150	119/135	159	74.3	80	68	161	74.8	80	68	161	77.0	80	71	163	77.0	80	71	163							
	37.6/50.0		104.2/120.3	149.0/139.1	150/175	137/156	159	86.8	90	77	161	87.1	90	77	161	91.9	90	79	163	91.9	90	79	163							
	HIGH	STD	None	None	19.3	30	19	106	23.1	30	23	110	21	30	21	108	24.8	30	25	112	24.8	30	25	112						
			13.9	16.7	29.0	30	27	106	33.8	35	31	110	31.1	35	29	108	35.9	40	33	112	35.9	40	33	112						
			16.5	19.8	34.0	40	30	106	59.4	60	55	110	56.8	60	52	108	61.5	70	57	112	61.5	70	57	112						
		MED	24.0/32.0	66.7/77.0	89.9/102.8	90/110	88/100	106	69.6	80	78	110	66.9	70	76	108	71.7	80	80	112	71.7	80	80	112						
31.8/42.4			88.4/102.0	123.0/146.3	150/150	119/135	120	81.9	90	74	120	82.4	90	74	120	86.8	90	79	112	86.8	90	79	112							
37.6/50.0			104.2/120.3	149.0/139.1	150/175	137/156	120	91.9	100	81	120	92.4	100	81	120	97.9	100	83	112	97.9	100	83	112							
HIGH		STD	None	None	22.1	30	22	120	25.9	30	26	124	23.8	30	24	122	27.6	35	28	126	27.6	35	28	126						
			13.9	16.7	32.5	35	30	120	34.6	40	34	124	34.6	40	34	124	39.4	40	36	126	39.4	40	36	126						
			16.5	19.8	34.0	40	30	120	62.9	70	58	124	60.3	70	55	122	65.0	70	60	126	65.0	70	60	126						
		MED	24.0/32.0	66.7/77.0	89.9/102.8	90/110	88/100	77	73.1	80	81	124	70.4	80	79	122	75.2	80	83	126	75.2	80	83	126						
	31.8/42.4		88.4/102.0	123.0/146.3	150/150	119/135	80	86.3	90	77	124	83.1	90	77	124	91.9	90	83	126	91.9	90	83	126							
	37.6/50.0		104.2/120.3	149.0/139.1	150/175	137/156	80	97.9	100	81	124	97.9	100	81	124	106.8	100	83	126	106.8	100	83	126							

\* Nominal values, listed as 208/240V, 480V or 600V as appropriate.

# ELECTRICAL INFORMATION (UNITS PRODUCED PRIOR TO JULY 30, 2012) cont.

**Table 27 – 50TC\*D12 UNIT WIRE/FUSE OR HACR BREAKER SIZING DATA 2-STAGE COOLING WITH SINGLE SPEED INDOOR FAN MOTOR**

NOM. V- $\Phi$ -Hz.	IFM TYPE	ELECTRIC HEATER										W/PWRD C.O.									
		NO P.E.					w/ P.E. (pwrd fr/unit)					NO P.E.					w/ P.E. (pwrd fr/unit)				
		Nom* (kW)	FLA	MCA	MAX FUSE or HACR BRKR	DISC. SIZE FLA LRA	MCA	MAX FUSE or HACR BRKR	DISC. SIZE FLA LRA	MCA	MAX FUSE or HACR BRKR	DISC. SIZE FLA LRA	MCA	MAX FUSE or HACR BRKR	DISC. SIZE FLA LRA	MCA	MAX FUSE or HACR BRKR	DISC. SIZE FLA LRA	MCA	MAX FUSE or HACR BRKR	DISC. SIZE FLA LRA
208/ 230-3-60	STD	7.8/10.4	-	43.7	50	46	258	47.5	60	50	262	48.5	60	51	263	52.3	60	56	56	267	
		12.0/16.0	21.7/25.0	43.7/43.7	50/50	46/46	258/258	47.5/47.5	60/60	50/50	262/262	48.5/48.5	60/60	51/51	263/263	52.3/52.3	60/60	56/56	56	267/267	
		24.0/32.0	33.4/38.5	48.3/54.6	50/60	46/50	258/258	53.0/59.4	60/60	50/55	262/262	54.3/60.6	60/70	51/56	263/263	59.0/65.4	60/70	56/60	56	267/267	
		31.8/42.4	66.7/77.0	89.9/102.8	90/110	83/95	258/258	94.6/107.5	100/110	87/99	262/262	95.9/108.8	100/110	88/100	263/263	100.6/113.5	110/125	93/104	93	267/267	
		37.6/50.0	88.4/102.0	117.0/134.0	125/150	108/123	258/258	121.8/138.8	125/150	112/128	262/262	123.0/140.0	125/150	113/129	263/263	127.8/144.8	150/150	118/133	118	267/267	
	MED	7.8/10.4	-	48.5	60	51	301	52.3	60	56	305	53.3	60	57	306	57.1	70	61	61	310	
		12.0/16.0	21.7/25.0	48.5/48.5	60/60	51/51	301/301	52.3/52.3	60/60	56/56	305/305	53.3/53.3	60/60	57/57	306/306	57.1/57.1	70/70	61/61	61	310/310	
		24.0/32.0	33.4/38.5	54.3/60.6	60/70	51/56	301/301	59.0/65.4	60/70	56/60	305/305	60.3/66.6	70/70	57/61	306/306	65.0/71.4	70/80	61/66	61	310/310	
		31.8/42.4	66.7/77.0	95.9/108.8	100/110	88/100	301/301	100.6/113.5	110/125	93/104	305/305	101.9/114.8	110/125	94/106	306/306	106.6/119.5	110/125	98/110	98	310/310	
		37.6/50.0	88.4/102.0	123.0/140.0	150/150	113/129	301/301	127.8/144.8	150/150	118/133	305/305	129.0/146.0	150/150	119/134	306/306	133.8/150.8	150/175	123/139	123	310/310	
460-3-60	STD	7.8/10.4	-	53.5	60	57	310	57.3	70	61	314	58.3	70	62	315	62.1	70	67	67		
		12.0/16.0	21.7/25.0	53.5/53.5	60/60	57/57	310/310	57.3/57.3	70/70	61/61	314/314	58.3/58.3	70/70	62/62	315/315	62.1/62.1	70/70	67/67	67		
		24.0/32.0	33.4/38.5	60.5/66.9	70/70	57/62	310/310	65.3/71.6	70/80	61/66	314/314	66.5/72.9	70/80	62/67	315/315	71.3/77.6	80/80	67/71	67		
		31.8/42.4	66.7/77.0	102.1/115.0	110/125	94/106	310/310	106.9/119.8	110/125	98/110	314/314	108.1/121.0	110/125	99/111	315/315	112.9/125.8	125/150	104/116	104		
		37.6/50.0	88.4/102.0	129.3/146.3	150/150	119/135	310/310	134.0/151.0	150/175	123/139	314/314	135.3/152.3	150/175	124/140	315/315	140.0/157.0	150/175	129/144	129		
	MED	7.8/10.4	-	21.5	25	23	123	23.3	30	25	125	23.7	30	25	125	25.5	30	27	27		
		12.0/16.0	16.7	24.1	25	23	123	26.4	30	25	125	26.9	30	25	125	28.1	30	27	27		
		24.0/32.0	19.8	28.0	30	26	123	30.3	35	28	125	30.8	35	28	125	33.0	35	30	30		
		31.8/42.4	39.7	52.9	60	49	123	55.1	60	51	125	55.6	60	51	125	57.9	60	53	53		
		37.6/50.0	50.2	66.0	70	61	123	68.3	70	63	125	68.8	70	63	125	71.0	80	65	65		
575-3-60	STD	7.8/10.4	-	63.4	70	72	123	65.6	70	74	125	66.1	70	75	125	68.4	70	77	77		
		12.0/16.0	16.7	24.1	25	23	123	23.3	30	25	125	23.7	30	25	125	25.5	30	27	27		
		24.0/32.0	19.8	28.0	30	26	123	30.3	35	28	125	30.8	35	28	125	33.0	35	30	30		
		31.8/42.4	39.7	52.9	60	49	123	55.1	60	51	125	55.6	60	51	125	57.9	60	53	53		
		37.6/50.0	50.2	66.0	70	61	123	68.3	70	63	125	68.8	70	63	125	71.0	80	65	65		
	MED	7.8/10.4	-	26.3	30	25	145	25.1	30	27	147	25.5	30	27	147	27.3	30	29	29		
		12.0/16.0	16.7	24.1	30	25	145	26.4	30	27	147	26.9	30	27	147	28.1	30	29	29		
		24.0/32.0	19.8	28.0	35	28	145	32.5	35	30	147	32.5	35	30	147	35.3	40	32	32		
		31.8/42.4	39.7	52.9	60	51	145	57.4	60	53	147	57.9	60	53	147	60.1	70	55	55		
		37.6/50.0	50.2	66.0	70	63	145	70.5	80	65	147	71.0	80	65	147	73.3	80	67	67		
HIGH	STD	7.8/10.4	-	65.6	80	74	145	67.9	80	76	147	68.4	80	77	147	70.6	80	79	79		
		12.0/16.0	16.7	24.1	30	25	145	25.1	30	27	147	25.5	30	27	147	27.3	30	29	29		
		24.0/32.0	19.8	28.0	35	28	145	32.5	35	30	147	32.5	35	30	147	35.3	40	32	32		
		31.8/42.4	39.7	52.9	60	51	145	57.4	60	53	147	57.9	60	53	147	60.1	70	55	55		
		37.6/50.0	50.2	66.0	70	63	145	70.5	80	65	147	71.0	80	65	147	73.3	80	67	67		
	MED	7.8/10.4	-	26.3	30	28	149	26.3	30	25	151	26.5	35	31	151	28.5	35	33	33		
		12.0/16.0	16.7	24.1	35	28	149	32.4	35	30	151	32.9	35	31	151	35.1	40	33	33		
		24.0/32.0	19.8	28.0	40	31	149	36.3	40	33	151	36.8	40	34	151	39.0	40	36	36		
		31.8/42.4	39.7	52.9	60	54	149	61.1	70	56	151	61.6	70	57	151	63.9	70	59	59		
		37.6/50.0	50.2	66.0	80	66	149	74.3	80	68	151	74.8	80	69	151	77.0	80	71	71		
HIGH	STD	7.8/10.4	-	69.4	80	74	149	71.6	80	80	151	72.1	80	80	151	74.4	80	82	82		
		12.0/16.0	16.7	24.1	30	25	149	26.3	30	27	151	26.5	35	31	151	28.5	35	33	33		
		24.0/32.0	19.8	28.0	35	28	149	32.4	35	30	151	32.9	35	31	151	35.1	40	33	33		
		31.8/42.4	39.7	52.9	60	54	149	61.1	70	56	151	61.6	70	57	151	63.9	70	59	59		
		37.6/50.0	50.2	66.0	80	66	149	74.3	80	68	151	74.8	80	69	151	77.0	80	71	71		
	MED	7.8/10.4	-	16.2	20	17	93	20.0	25	21	97	17.9	20	19	95	21.7	25	23	23		
		12.0/16.0	20.4	28.0	30	26	93	32.8	35	30	97	30.1	35	28	95	34.9	35	32	32		
		24.0/32.0	40.9	53.6	60	49	93	58.4	60	54	97	55.8	60	51	95	60.5	70	56	56		
		31.8/42.4	61.3	63.8	70	73	93	68.6	80	77	97	65.9	70	75	95	70.7	80	79	79		
		37.6/50.0	61.3	63.8	70	73	93	68.6	80	77	97	65.9	70	75	95	70.7	80	79	79		
HIGH	STD	7.8/10.4	-	17.0	20	18	104	20.8	25	22	108	18.7	25	20	106	22.5	25	24	24		
		12.0/16.0	20.4	29.0	30	27	104	33.8	35	31	108	31.1	35	29	106	35.9	40	33	33		
		24.0/32.0	40.9	54.6	60	50	104	59.4	60	55	108	56.8	60	52	106	61.5	70	57	57		
		31.8/42.4	61.3	64.8	70	74	104	69.6	80	78	108	66.9	70	76	106	71.7	80	80	80		
		37.6/50.0	61.3	64.8	70	74	104	69.6	80	78	108	66.9	70	76	106	71.7	80	80	80		
	MED	7.8/10.4	-	19.8	25	21	118	23.6	30	25	122	21.5	25	23	120	25.3	30	27	27		
		12.0/16.0	20.4	32.5	35	30	118	37.3	40	34	122	34.6	35	32	120	39.4	40	36	36		
		24.0/32.0	40.9	58.1	60	53	118	62.9	70	58	122	60.3	70	55	120	65.0	70	60	60		
		31.8/42.4	61.3	66.3	80	80	118	73.1	80	81	122	70.4	80	79	120	75.2	80	83	83		
		37.6/50.0	61.3	66.3	80	80	118	73.1	80	81	122	70.4	80	79	120	75.2	80	83	83		

\* Nominal values, listed as 208/240V, 460V or 600V as appropriate.



# ELECTRICAL INFORMATION (UNITS PRODUCED PRIOR TO JULY 30, 2012) cont.

**Table 29 – 50TC\*D14 UNIT WIRE/FUSE OR HACR BREAKER SIZING DATA 2-STAGE COOLING WITH SINGLE SPEED INDOOR FAN MOTOR**

NOM. V-PH-Hz.	ELECTRIC HEATER										NO C.O. or UNPWR C.O.										W/PWR C.O.									
	IFM TYPE	Nom* (kW)	FLA	NO PE.		w/ P.E. (pwrd fr/unit)		NO PE.		w/ P.E. (pwrd fr/unit)		NO PE.		w/ P.E. (pwrd fr/unit)		NO PE.		w/ P.E. (pwrd fr/unit)		NO PE.		w/ P.E. (pwrd fr/unit)								
				MCA	MAX FUSE or HACR BRKR	DISC. SIZE	MCA	MAX FUSE or HACR BRKR	DISC. SIZE	MCA	MAX FUSE or HACR BRKR	DISC. SIZE	MCA	MAX FUSE or HACR BRKR	DISC. SIZE	MCA	MAX FUSE or HACR BRKR	DISC. SIZE	MCA	MAX FUSE or HACR BRKR	DISC. SIZE	MCA	MAX FUSE or HACR BRKR	DISC. SIZE						
FLA	FLA	FLA	FLA	LRA	FLA	LRA	FLA	LRA	FLA	LRA	FLA	LRA	FLA	LRA	FLA	LRA	FLA	LRA	FLA	LRA	FLA	LRA								
208/ 230-3-60	STD	7.8/10.4	21.7/25.0	-	63	360	64.5	80	80	68	364	65.5	80	80	69	365	69.3	80	80	69	365	69.3	80	80	73	369				
		12.0/16.0	33.4/38.5	60.7/60.7	63/63	360/360	64.5/64.5	80/80	80/80	68/68	364/364	65.5/65.5	80/80	80/80	69/69	365/365	69.3/69.3	80/80	80/80	69/69	365/365	69.3/69.3	80/80	80/80	73/73	369/369				
		24.0/32.0	66.7/77.0	92.8/105.6	85/97	360/360	97.5/110.4	100/125	100/125	90/102	364/364	98.9/111.6	100/125	100/125	91/103	365/365	103.5/116.4	110/125	110/125	91/103	365/365	103.5/116.4	110/125	110/125	95/107	369/369				
		31.8/42.4	88.4/102.0	119.9/136.9	125/150	360/360	124.6/141.6	125/150	125/150	115/130	364/364	125.9/142.9	150/150	150/150	116/131	365/365	130.6/147.6	150/150	150/150	116/131	365/365	130.6/147.6	150/150	150/150	120/136	369/369				
		37.6/50.0	104.2/120.3	139.6/129.7	150/150	360/360	144.4/134.4	150/150	150/150	133/151	364/364	145.6/135.7	150/150	150/150	134/152	365/365	150.4/140.4	175/150	175/150	134/152	365/365	150.4/140.4	175/150	175/150	138/157	369/369				
	MED	7.8/10.4	21.7/25.0	63.2/63.2	66	377	67.0	80	80	71	381	68.0	80	80	72	382	71.8	80	80	72	382	71.8	80	80	76	386				
		12.0/16.0	33.4/38.5	63.2/63.2	66/66	377/377	67.0/67.0	80/80	80/80	71/71	381/381	68.0/68.0	80/80	80/80	72/72	382/382	71.8/71.8	80/80	80/80	72/72	382/382	71.8/71.8	80/80	80/80	76/76	386/386				
		24.0/32.0	66.7/77.0	95.9/108.8	88/100	377/377	100.6/113.5	110/125	110/125	93/104	381/381	101.9/114.8	110/125	110/125	94/106	382/382	106.6/119.5	110/125	110/125	94/106	382/382	106.6/119.5	110/125	110/125	98/110	386/386				
		31.8/42.4	88.4/102.0	123.0/140.0	113/129	377/377	127.8/144.8	150/150	150/150	118/133	381/381	129.0/146.0	150/150	150/150	119/134	382/382	133.8/150.8	150/175	150/175	119/134	382/382	133.8/150.8	150/175	150/175	123/139	386/386				
		37.6/50.0	104.2/120.3	142.8/132.8	131/150	377/377	147.5/137.6	150/150	150/150	136/154	381/381	148.8/138.8	150/150	150/150	137/155	382/382	153.5/143.6	175/175	175/175	137/155	382/382	153.5/143.6	175/175	175/175	141/160	386/386				
460-3-60	STD	7.8/10.4	21.7/25.0	68.2/68.2	72	386	72.0	80	76	390	73.0	80	80	78	391	76.8	80	80	78	391	76.8	80	80	82	395					
		12.0/16.0	33.4/38.5	68.2/68.2	72/72	386/386	72.0/72.0	80/80	80/80	76/76	390/390	73.0/73.0	80/80	80/80	78/78	391/391	76.8/76.8	80/90	80/90	78/78	391/391	76.8/76.8	80/90	82/82	395/395					
		24.0/32.0	66.7/77.0	102.1/115.0	94/106	386/386	106.9/119.8	110/125	110/125	98/110	390/390	108.1/121.0	110/125	110/125	99/111	391/391	112.9/125.8	125/150	125/150	99/111	391/391	112.9/125.8	125/150	104/116	395/395					
		31.8/42.4	88.4/102.0	129.3/146.3	119/135	386/386	134.0/151.0	150/175	150/175	123/139	390/390	135.3/152.3	150/175	150/175	124/140	391/391	140.0/157.0	150/175	150/175	124/140	391/391	140.0/157.0	150/175	129/144	395/395					
		37.6/50.0	104.2/120.3	149.0/139.1	137/156	386/386	153.8/143.8	175/175	175/175	141/169	390/390	155.0/145.1	175/175	175/175	143/161	391/391	159.8/149.8	175/175	175/175	143/161	391/391	159.8/149.8	175/175	147/165	395/395					
	MED	13.9	16.7	29.5	40	181	31.3	40	40	33	183	31.7	40	40	33	183	33.5	40	40	33	183	33.5	40	40	35	185				
		16.5	19.8	29.5	40	181	31.3	40	40	33	183	31.7	40	40	33	183	33.5	40	40	33	183	33.5	40	40	35	185				
		33.0	39.7	53.9	60	181	56.1	60	60	52	183	56.6	60	60	52	183	58.9	60	60	52	183	58.9	60	60	54	185				
		41.7	50.2	67.0	70	181	69.3	70	70	64	183	69.8	70	70	64	183	72.0	80	80	64	183	72.0	80	80	66	185				
		50.0	60.1	64.4	70	181	66.6	70	70	75	183	67.1	70	70	75	183	69.4	80	80	75	183	69.4	80	80	78	185				
575-3-60	STD	13.9	16.7	30.5	40	190	32.3	40	34	192	32.7	40	40	35	192	34.5	40	40	35	192	34.5	40	40	37	194					
		16.5	19.8	30.5	40	190	32.3	40	40	34	192	32.7	40	40	35	192	34.5	40	40	35	192	34.5	40	40	37	194				
		33.0	39.7	55.1	60	190	57.4	60	60	53	192	57.9	60	60	53	192	60.1	60	53	192	60.1	60	60	55	194					
		41.7	50.2	68.3	70	190	70.5	70	70	65	192	71.0	70	70	65	192	73.3	80	80	65	192	73.3	80	80	67	194				
		50.0	60.1	65.6	80	194	67.9	80	80	76	192	68.4	80	80	77	192	70.6	80	80	77	192	70.6	80	80	79	194				
	MED	17.0	20.4	29.0	30	242	26.1	30	30	28	246	24.0	30	30	25	244	27.8	30	30	25	244	27.8	30	30	30	248				
		34.0	40.9	54.6	60	242	59.4	60	60	55	246	56.8	60	60	52	244	61.5	70	70	52	244	61.5	70	70	57	248				
		51.0	61.3	64.8	70	242	69.6	70	70	78	246	66.9	70	70	76	244	71.7	80	80	76	244	71.7	80	80	80	248				
		17.0	20.4	29.0	30	242	26.1	30	30	28	246	24.0	30	30	25	244	27.8	30	30	25	244	27.8	30	30	30	248				
		34.0	40.9	54.6	60	242	59.4	60	60	55	246	56.8	60	60	52	244	61.5	70	70	52	244	61.5	70	70	57	248				
HIGH	17.0	20.4	25.1	30	27	28.9	35	31	160	26.8	30	30	29	158	30.6	35	35	29	158	30.6	35	35	33	162						
	34.0	40.9	58.1	60	27	62.9	70	58	160	60.3	70	70	55	158	65.0	70	70	55	158	65.0	70	70	60	162						
	51.0	61.3	68.3	80	27	73.1	80	81	160	70.4	80	80	79	158	75.2	80	80	79	158	75.2	80	80	83	162						
	17.0	20.4	32.5	35	30	37.3	40	34	160	34.6	35	35	32	158	39.4	40	40	32	158	39.4	40	40	36	162						
	34.0	40.9	58.1	60	30	62.9	70	58	160	60.3	70	70	55	158	65.0	70	70	55	158	65.0	70	70	60	162						

\* Nominal values, listed as 208/240V, 460V or 600V as appropriate.



**ELECTRICAL INFORMATION (UNITS PRODUCED PRIOR TO JULY 30, 2012) cont.**

**Table 30 - 50TC\*DI4** UNIT WIRE/FUSE OR HACR BREAKER SIZING DATA 2-STAGE COOLING WITH 2 SPEED INDOOR FAN MOTOR

NOM. V-PH-Hz	IFM TYPE	Nom (kW)	FLA	ELECTRIC HEATER								NO P.E.								w/ PWRD C.O.							
				NO P.E.				w/ P.E. (pwrdr fr/unit)				NO P.E.				w/ P.E. (pwrdr fr/unit)				NO P.E.				w/ P.E. (pwrdr fr/unit)			
				MAX FUSE of HACR BRKR	MCA	DISC. SIZE FLA	LRA	MAX FUSE of HACR BRKR	MCA	DISC. SIZE FLA	LRA	MAX FUSE of HACR BRKR	MCA	DISC. SIZE FLA	LRA	MAX FUSE of HACR BRKR	MCA	DISC. SIZE FLA	LRA	MAX FUSE of HACR BRKR	MCA	DISC. SIZE FLA	LRA				
208/230-3-60	STD	7.8/10.4 12.0/16.0 24.0/32.0 31.8/42.4 37.6/50.0	21.7/25.0 33.4/38.5 66.7/77.0 88.4/102.0 104.2/120.3	61.8/61.0	65/64	357	69/68	361	66.5/65.8	80/80	69/68	361	66.5/65.8	80/80	70/69	362	70.4/69.6	80/80	75/74	366/366	75/74	366/366					
				61.8/61.0	65/64	357/357	69/68	361/361	66.5/65.8	80/80	69/68	361/361	66.5/65.8	80/80	70/69	362/362	70.4/69.6	80/80	75/74	366/366							
				94.1/106.0	87/98	357/357	69/68	361/361	100.1/112.0	110/125	92/103	362/362	104.9/116.8	110/125	96/107	366/366											
				121.3/137.3	112/126	357/357	116/131	361/361	127.3/143.3	150/150	117/132	362/362	132.0/148.0	150/150	121/136	366/366											
				141.0/130.1	130/147	357/357	134/152	361/361	147.0/136.1	150/150	135/153	362/362	151.8/140.8	175/150	140/157	366/366											
				64.0/63.0	67/66	381	72/70	385	68.8/67.8	80/80	73/72	386/386	72.6/71.6	80/80	77/76	390/390											
	MED	7.8/10.4 12.0/16.0 24.0/32.0 31.8/42.4 37.6/50.0	21.7/25.0 33.4/38.5 66.7/77.0 88.4/102.0 104.2/120.3	64.0/63.0	67/66	381/381	72/70	385/385	68.8/67.8	80/80	73/72	386/386	72.6/71.6	80/80	77/76	390/390											
				64.0/63.0	67/66	381/381	72/70	385/385	68.8/67.8	80/80	73/72	386/386	72.6/71.6	80/80	77/76	390/390											
				96.9/108.5	89/100	381/381	93/104	385/385	102.9/114.5	110/125	95/105	386/386	107.6/119.3	110/125	99/110	390/390											
				124.0/139.8	114/129	381/381	118/133	385/385	130.0/145.8	150/150	120/134	386/386	134.8/150.5	150/175	124/138	390/390											
				143.8/132.6	132/150	381/381	137/154	385/385	149.8/138.6	150/150	138/155	386/386	154.5/143.3	175/175	142/160	390/390											
				66.8/65.9	70/69	392	75/74	396	71.6/70.7	80/80	76/75	397/397	75.4/74.5	90/90	80/79	401											
HIGH	7.8/10.4 12.0/16.0 24.0/32.0 31.8/42.4 37.6/50.0	21.7/25.0 33.4/38.5 66.7/77.0 88.4/102.0 104.2/120.3	66.8/65.9	70/69	392/392	75/74	396/396	71.6/70.7	80/80	76/75	397/397	75.4/74.5	90/90	80/79	401												
			66.8/65.9	70/69	392/392	75/74	396/396	71.6/70.7	80/80	76/75	397/397	75.4/74.5	90/90	80/79	401												
			100.4/112.1	92/103	392/392	97/108	396/396	106.4/118.1	110/125	98/109	397/397	111.1/122.9	125/125	102/113	401/401												
			127.5/143.4	117/132	392/392	122/136	396/396	133.5/149.4	150/150	123/137	397/397	138.3/154.1	150/175	127/142	401/401												
			147.3/136.2	135/153	392/392	140/157	396/396	153.3/142.2	175/175	141/158	397/397	158.0/146.9	175/175	145/163	401/401												
			29.9	31	180	33	182	32.1	40	34	184	33.9	40	36	184												
460-3-60	STD	13.9 16.5 33.0 41.7 50.0	16.7 19.8 39.7 50.2 60.1	29.9	31	180	33	182	32.1	40	34	182	33.9	40	36	184											
				29.9	31	180	33	182	32.1	40	34	182	33.9	40	36	184											
				54.4	50	180	52	182	57.1	60	53	182	59.4	60	55	184											
				67.5	62	180	64	182	70.3	70	65	182	72.5	80	67	184											
				64.9	73	180	76	182	67.6	80	78	182	69.9	80	78	184											
				31.0	33	192	35	194	32.8	40	35	194	35.0	40	37	196											
	MED	13.9 16.5 33.0 41.7 50.0	16.7 19.8 39.7 50.2 60.1	31.0	33	192	35	194	32.8	40	35	194	35.0	40	37	196											
				31.0	33	192	35	194	32.8	40	35	194	35.0	40	37	196											
				55.8	51	192	53	194	58.0	60	54	194	60.8	70	56	196											
				66.2	63	192	65	194	71.1	70	66	194	73.9	80	68	196											
				66.2	70	192	72	194	68.5	80	77	194	71.2	80	79	196											
				32.5	34	197	36	199	34.7	40	37	199	36.5	45	39	201											
HIGH	13.9 16.5 33.0 41.7 50.0	16.7 19.8 39.7 50.2 60.1	32.5	34	197	36	199	34.7	40	37	199	36.5	45	39	201												
			32.5	34	197	36	199	34.7	40	37	199	36.5	45	39	201												
			57.6	53	197	55	199	60.4	70	56	199	62.6	70	58	201												
			70.8	65	197	67	199	73.0	80	68	199	75.8	80	70	201												
			68.1	76	197	79	199	73.5	80	79	199	73.1	80	81	201												
			24.0	25	142	30	146	25.7	30	27	144	29.5	35	32	148												
575-3-60	STD	17.0 34.0 51.0	20.4 40.9 61.3	24.0	25	142	30	146	25.7	30	27	144	29.5	35	32	148											
				24.0	25	142	30	146	25.7	30	27	144	29.5	35	32	148											
				56.8	52	142	54	144	61.5	60	54	144	63.6	70	59	148											
				66.9	76	142	78	144	71.7	80	78	144	73.8	80	82	148											
				24.0	25	142	30	146	25.7	30	27	144	29.5	35	32	148											
				31.1	29	142	33	146	35.9	40	31	144	38.0	40	35	148											
MED	17.0 34.0 51.0	20.4 40.9 61.3	31.1	29	142	33	146	35.9	40	31	144	38.0	40	35	148												
			31.1	29	142	33	146	35.9	40	31	144	38.0	40	35	148												
			56.8	52	142	54	144	61.5	60	54	144	63.6	70	59	148												
			66.9	76	142	78	144	71.7	80	78	144	73.8	80	82	148												
			25.7	27	156	35	160	27.4	30	29	158	31.2	35	34	162												
			33.3	35	156	38	160	35.4	40	33	158	40.1	45	37	162												
HIGH	17.0 34.0 51.0	20.4 40.9 61.3	33.3	35	156	38	160	35.4	40	33	158	40.1	45	37	162												
			33.3	35	156	38	160	35.4	40	33	158	40.1	45	37	162												
			58.9	54	156	56	158	63.6	70	56	158	65.8	70	60	162												
			69.1	78	156	82	160	73.8	80	82	160	75.9	80	84	162												
			24.0	25	142	30	146	25.7	30	27	144	29.5	35	32	148												
			31.1	29	142	33	146	35.9	40	31	144	38.0	40	35	148												

\* Nominal values, listed as 208/240V, 480V or 600V as appropriate.



**ELECTRICAL INFORMATION (UNITS PRODUCED PRIOR TO JULY 30, 2012) cont.**  
**UNIT WIRE/FUSE OR HACR BREAKER SIZING DATA 2-STAGE COOLING WITH SINGLE SPEED INDOOR FAN MOTOR**

NOM. V-PH-Hz.	ELECTRIC HEATER				NO C.O. or UNPWR C.O.				NO PE.				W/PWRD C.O.							
	IFM TYPE	Nom* (kW)	FLA	MCA	MAX FUSE or HACR BRKR	DISC. SIZE		FLA	MCA	MAX FUSE or HACR BRKR	DISC. SIZE		FLA	MCA	MAX FUSE or HACR BRKR	DISC. SIZE		FLA	LRA	
						FLA	LRA				FLA	LRA				FLA	LRA			FLA
208/230-3-60	STD	12.4/16.5	34.4/39.7	-	68.3	80	71	396	72.1	80	76	400	73.1	80	80	77	401	76.9	81	405
		25.2/33.5	69.9/80.6	89/101	99.6/110.1	80/80	71/71	396/396	101.5/114.9	80/80	76/76	400/400	102.8/116.1	80/80	77/77	401/401	107.5/120.9	81/81	405/405	
		32.7/43.5	90.7/104.7	113/129	122.8/140.3	100/125	89/101	396/396	127.5/145.0	110/125	99/106	400/400	128.8/146.3	150/150	118/135	401/401	133.5/151.0	99/111	405/405	
		37.6/50.0	104.3/120.3	139/147	139.8/129.7	150/150	129/147	396/396	144.5/134.4	150/150	133/151	400/400	145.8/135.7	150/150	134/152	401/401	150.5/140.4	138/157	405/405	
		50.3/67.0	139.7/161.2	169/194	149.1/170.6	175/200	169/194	396/396	153.9/175.3	175/200	174/198	400/400	155.1/176.6	175/200	175/200	401/401	159.8/181.3	179/204	405/405	
460-3-60	MED	12.4/16.5	34.4/39.7	-	70.8	80	74	413	74.6	90	79	417	75.6	100	80	418	79.4	84	422	
		25.2/33.5	69.9/80.6	92/104	99.9/113.3	80/80	74/74	413/413	104.6/118.0	90/90	79/79	417/417	105.9/119.3	100/100	80/80	418/418	110.6/124.0	102/114	422/422	
		32.7/43.5	90.7/104.7	116/132	125.9/143.4	150/150	116/132	413/413	130.6/148.1	150/150	120/136	417/417	131.9/149.4	150/150	121/137	418/418	136.6/154.1	126/142	422/422	
		37.6/50.0	104.3/120.3	142/91/32.8	142.9/132.8	150/150	131/150	413/413	147.6/137.6	150/150	136/154	417/417	148.9/138.8	150/150	137/155	418/418	153.6/143.6	141/160	422/422	
		50.3/67.0	139.7/161.2	152.2/173.7	152.2/173.7	175/200	172/197	413/413	157.0/178.5	175/200	177/201	417/417	158.2/179.7	175/200	178/202	418/418	163.0/184.5	182/207	422/422	
575-3-60	HIGH	12.4/16.5	34.4/39.7	-	81.2	100	86	432	85.0	100	91	436	86.0	100	92	437	89.8	96	441	
		25.2/33.5	69.9/80.6	112/91/26.3	112.9/126.3	150/150	86/86	432/432	117.6/131.0	150/150	108/121	436/436	118.9/132.3	150/150	109/122	437/437	123.6/137.0	114/126	441/441	
		32.7/43.5	90.7/104.7	128/144	138.9/156.4	150/175	128/144	432/432	143.6/161.1	150/175	132/148	436/436	144.9/162.4	150/175	133/149	437/437	149.6/167.1	138/154	441/441	
		37.6/50.0	104.3/120.3	143/162	155.9/145.8	175/175	143/162	432/432	160.6/150.6	175/175	148/166	436/436	161.9/151.8	175/175	149/167	437/437	166.6/156.6	153/172	441/441	
		50.3/67.0	139.7/161.2	165.2/186.7	165.2/186.7	175/225	164/209	432/432	170.0/191.5	175/225	188/213	436/436	171.2/192.7	200/225	190/214	437/437	176.0/197.5	194/219	441/441	
460-3-60	STD	16.5	19.9	40.3	34.0	45	35	234	35.8	45	37	236	36.2	45	38	236	38.0	40	238	
		33.5	40.3	52.3	54.6	60	50	234	56.9	60	52	236	57.4	60	53	236	59.6	60	238	
		43.5	52.3	60.2	64.5	70	64	234	71.9	80	66	236	72.4	80	67	236	74.6	80	238	
		50.0	60.2	80.6	84.9	90	73	234	86.7	90	75	236	87.2	80	76	236	89.5	78	238	
		67.0	80.6	100	86.1	100	97	234	87.1	100	99	236	88.4	100	99	236	89.9	101	238	
460-3-60	MED	16.5	19.9	40.3	35.0	45	37	243	36.8	45	39	245	37.2	45	39	245	39.0	41	247	
		33.5	40.3	52.3	55.9	60	51	243	58.1	60	53	245	58.6	60	54	245	60.9	56	247	
		43.5	52.3	60.2	70.9	80	65	243	73.1	80	67	245	73.6	80	68	245	75.9	70	247	
		50.0	60.2	80.6	86.5	90	74	243	88.0	80	76	245	88.5	80	77	245	90.7	72	247	
		67.0	80.6	100	86.1	100	98	243	88.4	100	100	245	88.9	100	100	245	91.1	100	247	
460-3-60	HIGH	16.5	19.9	40.3	40.8	50	43	252	42.6	50	45	254	43.0	50	46	254	44.8	48	256	
		33.5	40.3	52.3	63.1	70	58	252	65.4	50	45	254	65.9	50	46	254	68.1	48	256	
		43.5	52.3	60.2	78.1	80	72	252	80.4	90	74	254	80.9	90	74	254	83.1	63	256	
		50.0	60.2	80.6	73.0	80	81	252	75.2	80	83	254	75.7	80	83	254	78.0	66	256	
		67.0	80.6	100	67.9	80	77	252	95.6	100	106	254	96.1	100	107	254	98.4	86	256	
460-3-60	STD	16.5	15.9	32.2	26.5	30	28	184	30.3	40	32	188	28.2	35	30	186	32.0	34	190	
		33.5	32.2	43.8	43.8	45	40	184	48.5	50	45	188	45.9	50	42	186	50.6	47	190	
		43.5	41.8	55.8	55.8	60	51	184	60.5	70	56	188	57.9	60	53	186	62.6	58	190	
		50.0	48.1	64.4	51.6	60	59	184	56.4	60	63	188	53.7	60	60	186	58.5	65	190	
		67.0	64.4	80.6	67.9	80	77	184	72.7	80	82	188	70.0	80	79	186	74.8	84	190	
460-3-60	MED	16.5	15.9	32.2	26.5	30	28	184	30.3	40	32	188	28.2	35	30	186	32.0	34	190	
		33.5	32.2	43.8	43.8	45	40	184	48.5	50	45	188	45.9	50	42	186	50.6	47	190	
		43.5	41.8	55.8	55.8	60	51	184	60.5	70	56	188	57.9	60	53	186	62.6	58	190	
		50.0	48.1	64.4	51.6	60	59	184	56.4	60	63	188	53.7	60	60	186	58.5	65	190	
		67.0	64.4	80.6	67.9	80	77	184	72.7	80	82	188	70.0	80	79	186	74.8	84	190	
460-3-60	HIGH	16.5	15.9	32.2	32.7	40	35	196	36.5	45	39	200	34.4	40	37	198	38.2	41	202	
		33.5	32.2	43.8	32.7	40	35	196	48.5	50	45	200	45.9	40	37	198	50.6	41	202	
		43.5	41.8	55.8	32.7	40	35	196	60.5	60	56	200	57.9	60	53	198	62.6	41	202	
		50.0	48.1	64.4	32.7	40	35	196	64.1	70	70	200	61.5	70	68	198	66.2	41	202	
		67.0	64.4	80.6	32.7	40	35	196	75.7	80	84	200	77.8	80	86	198	82.5	91	209	

\* Nominal values, listed as 208/240V, 480V or 600V as appropriate.





**LEGEND:**

- BRKR - Circuit breaker
- CO - Convenience outlet
- DISC - Disconnect
- FLA - Full load amps
- IFM - Indoor fan motor
- LRA - Locked rotor amps
- MCA - Minimum circuit amps
- MOCP - MAX FUSE or HACR Breaker
- PE - Power exhaust
- PWRD CO - Powered convenient outlet
- UNPWR CO - Unpowered convenient outlet



Example: Supply voltage is 230-3-60



AB = 224 v  
BC = 231 v  
AC = 226 v

$$\text{Average Voltage} = \frac{(224 + 231 + 226)}{3} = \frac{681}{3} = 227$$

Determine maximum deviation from average voltage.

(AB)  $227 - 224 = 3$  v

(BC)  $231 - 227 = 4$  v

(AC)  $227 - 226 = 1$  v

Maximum deviation is 4 v.

Determine percent of voltage imbalance.

$$\% \text{ Voltage Imbalance} = 100 \times \frac{4}{227} = 1.76\%$$

This amount of phase imbalance is satisfactory as it is below the maximum allowable 2%.

**IMPORTANT:** If the supply voltage phase imbalance is more than 2%, contact your local electric utility company immediately.

1. In compliance with NEC requirements for multimotor and combination load equipment (refer to NEC Articles 430 and 440), the overcurrent protective device for the unit shall be fuse or HACR breaker. Canadian units may be fuse or circuit breaker.

**2. Unbalanced 3-Phase Supply Voltage**

Never operate a motor where a phase imbalance in supply voltage is greater than 2%. Use the following formula to determine the percentage of voltage imbalance.

$$\% \text{ Voltage Imbalance} = 100 \times \frac{\text{max voltage deviation from average voltage}}{\text{average voltage}}$$



# SEQUENCE OF OPERATION

## General

The sequence below describes the sequence of operation for an electromechanical unit with and without a factory installed EconoMi\$er™ IV and X (called “economizer” in this sequence). For information regarding a direct digital controller, see the start-up, operations, and troubleshooting manual for the applicable controller.

### Electromechanical units with no economizer

#### **Cooling (Single speed indoor fan motor) —**

When the thermostat calls for cooling, terminals G and Y1 are energized. As a result, the indoor fan contactor (IFC) and the compressor contactor (C1) are energized, causing the indoor fan motor (IFM), compressor #1, and outdoor fan to start. If the unit has 2 stages of cooling, the thermostat will additionally energize Y2. The Y2 signal will energize compressor contactor #2 (C2), causing compressor #2 to start. Regardless of the number of stages, the outdoor fan motor runs continuously while unit is cooling.

#### **Cooling (2-speed indoor fan motor) —**

Per ASHRAE 90.1 2010 standard section 6.4.3.10.b, during the first stage of cooling operation the VFD will adjust the fan motor to provide 2/3rd of the total cfm established for the unit. When a call for the second stage of cooling is required, the VFD will allow the total cfm for the unit established (100%).

#### **Heating**

**NOTE:** The 50TC is sold as cooling only. If electric heaters are required, use only factory-approved electric heaters. They will operate as described below.

Units have either 1 or 2 stages of electric heat. When the thermostat calls for heating, power is applied to the W1 terminal at the unit. The unit control will energize the indoor fan contactor and the first stage of electric heat. On units with 2-stage heating, when additional heating is required, the second stage of electric heat (if equipped) will be energized when power is applied at the W2 terminal on the unit.

### Electromechanical units with an economizer

#### **Cooling —**

When free cooling is not available, the compressors will be controlled by the zone thermostat. When free cooling is available, the outdoor air damper is modulated by the EconoMi\$er IV and X control to provide a 50°F (10°C) to 55°F (13°C) mixed air temperature into the zone. As the mixed air temperature fluctuates above 55°F (13°C) or below 50°F (10°C) dampers will be modulated (open or close) to bring the mixed air temperature back within control. If mechanical cooling is utilized with free cooling, the outdoor air damper will maintain its current position at the time the compressor is started. If the

increase in cooling capacity causes the mixed air temperature to drop below 45°F (9°C), then the outdoor air damper position will be decreased to the minimum position. If the mixed air temperature continues to fall, the outdoor air damper will close. Control returns to normal once the mixed air temperature rises above 48°F (9°C). The power exhaust fans will be energized and de-energized, if installed, as the outdoor air damper opens and closes.

If field-installed accessory CO<sub>2</sub> sensors are connected to the EconoMi\$er IV and X control, a demand controlled ventilation strategy will begin to operate. As the CO<sub>2</sub> level in the zone increases above the CO<sub>2</sub> setpoint, the minimum position of the damper will be increased proportionally. As the CO<sub>2</sub> level decreases because of the increase in fresh air, the outdoor air damper will be proportionally closed. For EconoMi\$er IV and X operation, there must be a thermostat call for the fan (G). If the unit is occupied and the fan is on, the damper will operate at minimum position. Otherwise, the damper will be closed.

When the EconoMi\$er IV and X control is in the occupied mode and a call for cooling exists (Y1 on the thermostat), the control will first check for indoor fan operation. If the fan is not on, then cooling will not be activated. If the fan is on, then the control will open the EconoMi\$er IV and X damper to the minimum position.

On the initial power to the EconoMi\$er IV and X control, it will take the damper up to 2 1/2 minutes before it begins to position itself. After the initial power-up, further changes in damper position can take up to 30 seconds to initiate. Damper movement from full closed to full open (or vice versa) will take between 1 1/2 and 2 1/2 minutes. If free cooling can be used as determined from the appropriate changeover command (switch, dry bulb, enthalpy curve, differential dry bulb, or differential enthalpy), then the control will modulate the dampers open to maintain the mixed air temperature setpoint at 50°F (10°C) to 55°F (13°C). If there is a further demand for cooling (cooling second stage - Y2 is energized), then the control will bring on compressor stage 1 to maintain the mixed air temperature setpoint. The EconoMi\$er IV and X damper will be open at maximum position. EconoMi\$er IV and X operation is limited to a single compressor.

**2-Speed Note:** When operating in ventilation mode only, the indoor fan motor will automatically adjust to 2/3rd of the total cfm established.

#### **Heating**

The sequence of operation for the heating is the same as an electromechanical unit with no economizer. The only difference is how the economizer acts. The economizer will stay at the Economizer Minimum Position while the evaporator fan is operating. The outdoor air damper is closed when the indoor fan is not operating.

## SEQUENCE OF OPERATION (cont.)

### Optional Humidi-MiZer Dehumidification System

Units with the factory equipped Humidi-MiZer option are capable of providing multiple modes of improved dehumidification as a variation of the normal cooling cycle. The Humidi-MiZer option includes additional valves in the liquid line and discharge line of each refrigerant circuit, a small reheat condenser coil downstream of the evaporator, and Motormaster variable-speed control of some or all outdoor fans. Operation of the revised refrigerant circuit for each mode is described below.

The Humidi-MiZer system provides three sub-modes of operation: Cool, Reheat1, and Reheat2.

**Cool mode** - provides a normal ratio of Sensible and Latent Cooling effect from the evaporator coil.

**Reheat1** - provides increased Latent Cooling while slightly reducing the Sensible Cooling effect.


**Reheat2** - provides normal Latent Cooling but with null or minimum Sensible Cooling effect delivered to the space.

The Reheat1 and Reheat2 modes are available when the unit is not in a Heating mode and when the Low Ambient Lockout switch is closed.

The following diagrams depict piping for Single Stage cooling units.




## SEQUENCE OF OPERATION (cont.)

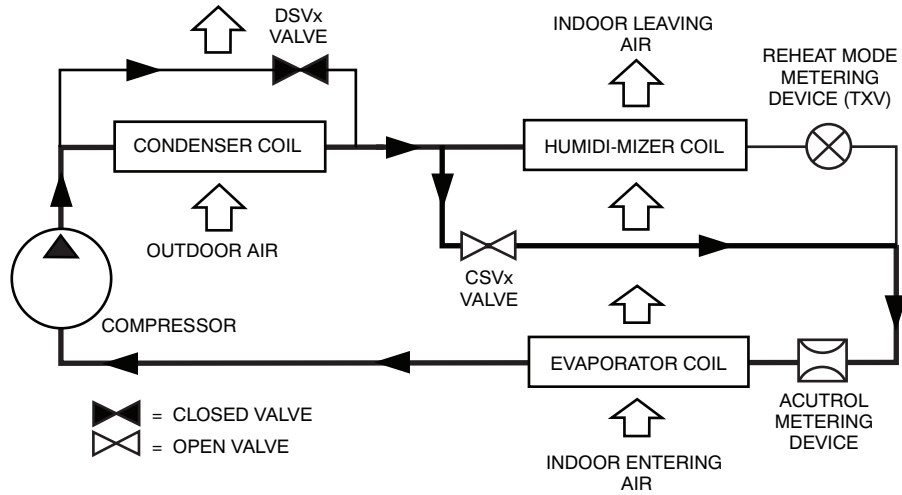


C12647

### Normal Cooling Mode - Humidi-MiZer System with Single Stage Cooling

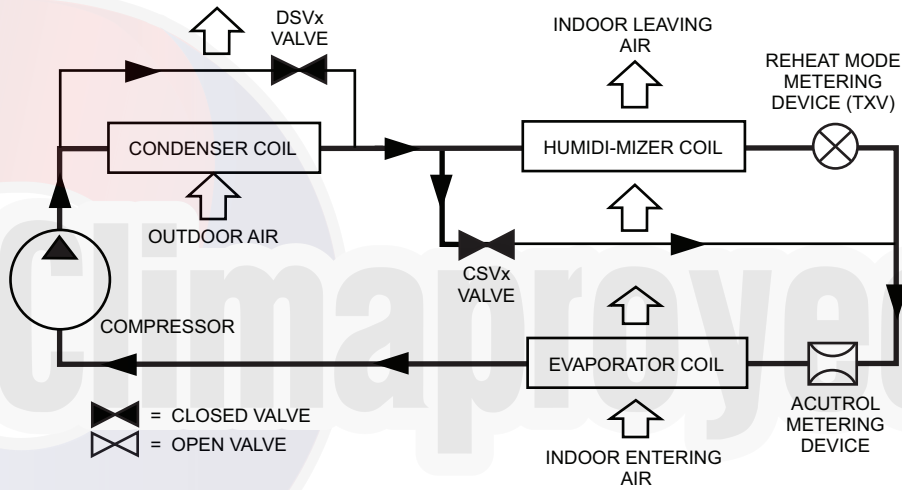

C12648

### Subcooling Mode (Reheat 1) - Humidi-MiZer System with Single Stage Cooling

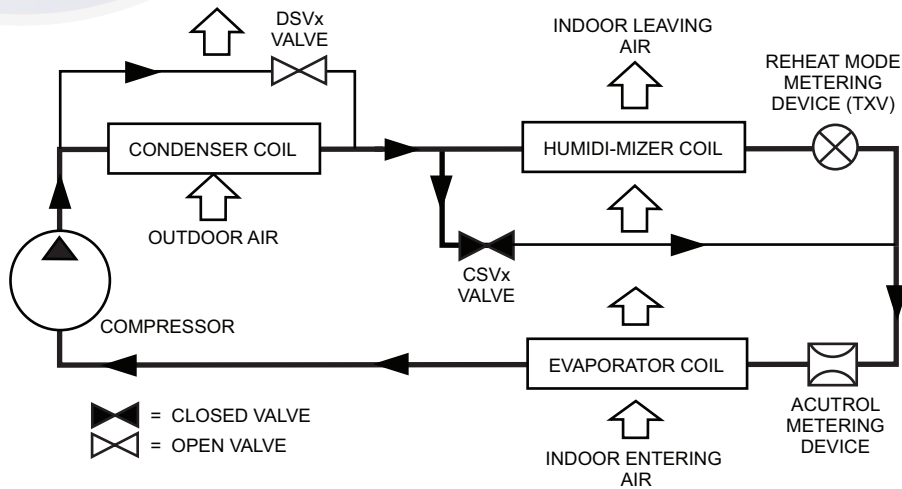

C12649

### Hot Gas Reheat Mode (Reheat 2) - Humidi-MiZer System with Single Stage Cooling

## Cooling Only/Electric Heat Packaged Rooftop

### HVAC Guide Specifications

Size Range: 3 to 15 Nominal Tons



<u>Section</u>	<u>Description</u>
----------------	--------------------

<b>23 06 80</b>	<b>Schedules for Decentralized HVAC Equipment</b>
-----------------	---

23 06 80.13 Decentralized Unitary HVAC Equipment Schedule

23 06 80.13.A. Rooftop unit schedule

1. Schedule is per the project specification requirements.

<b>23 07 16</b>	<b>HVAC Equipment Insulation</b>
-----------------	----------------------------------

23 07 16.13 Decentralized, Rooftop Units:

23 07 16.13.A. Evaporator fan compartment:

1. Interior cabinet surfaces shall be insulated with a minimum 1/2-in. thick, minimum 1 1/2 lb density, flexible fiberglass insulation bonded with a phenolic binder, neoprene coated on the air side.
2. Insulation and adhesive shall meet NFPA 90A requirements for flame spread and smoke generation.

23 07 16.13.B. Electric heat compartment:

1. Aluminum foil-faced fiberglass insulation shall be used.
2. Insulation and adhesive shall meet NFPA 90A requirements for flame spread and smoke generation.

<b>23 09 13</b>	<b>Instrumentation and Control Devices for HVAC</b>
-----------------	---

23 09 13.23 Sensors and Transmitters

23 09 13.23.A. Thermostats

1. Thermostat must
  - a. energize both "W" and "G" when calling for heat.
  - b. have capability to energize 2 different stages of cooling, and 2 different stages of heating.
  - c. include capability for occupancy scheduling.

<b>23 09 23</b>	<b>Direct-digital Control system for HVAC</b>
-----------------	---

23 09 23.13 Decentralized, Rooftop Units:

23 09 23.13.A. PremierLink controller

1. Shall be ASHRAE 62-2001 compliant.
2. Shall accept 18-32VAC input power.
3. Shall have an operating temperature range from -40°F (-40°C) to 158°F (70°C), 10% - 95% RH (non-condensing).
4. Shall include an integrated economizer controller to support an economizer with 4 to 20 mA actuator input and no microprocessor controller.
5. Controller shall accept the following inputs: space temperature, setpoint adjustment, outdoor air temperature, indoor air quality, outdoor air quality, indoor relative humidity, compressor lock-out, fire shutdown, enthalpy, fan status, remote time clock/door switch.
6. Shall accept a CO<sub>2</sub> sensor in the conditioned space, and be Demand Control Ventilation (DCV) ready.
7. Shall provide the following outputs: Economizer, fan, cooling stage 1, cooling stage 2, heat stage 1, heat stage 2, heat stage 3/ exhaust/ reversing valve/ dehumidify/ occupied.
8. Unit shall provide surge protection for the controller through a circuit breaker.
9. Shall be Internet capable, and communicate at a Baud rate of 38.4K or faster
10. Shall have an LED display independently showing the status of activity on the communication bus, and processor operation.
11. Shall include an EIA-485 protocol communication port, an access port for connection of either a computer or a Carrier technician tool, an EIA-485 port for network communication to intelligent space sensors and displays, and a port to connect an optional LonWorks plug-in communications card.
12. Shall have built-in Carrier Comfort Network (CCN) protocol, and be compatible with other CCN devices, including ComfortLink and ComfortVIEW controllers.
13. Shall have built-in support for Carrier technician tool.



14. Software upgrades will be accomplished by local download. Software upgrades through chip replacements are not allowed.
15. Shall be shock resistant in all planes to 5G peak, 11ms during operation, and 100G peak, 11ms during storage.
16. Shall be vibration resistant in all planes to 1.5G @ 20-300 Hz.
17. Shall support a bus length of 4000 ft max, 60 devices per 1000 ft section, and 1 RS-485 repeater per 1000 ft sections.

23 09 23.13.B. Open protocol, direct digital controller:

1. Shall be ASHRAE 62-2001 compliant.
2. Shall accept 18-30VAC, 50-60Hz, and consumer 15VA or less power.
3. Shall have an operating temperature range from -40°F (-40°C) to 130°F (54°C), 10% - 90% RH (non-condensing).
4. Shall include built-in protocol for BACNET (MS/TP and PTP modes), Modbus (RTU and ASCII), Johnson N2 and LonWorks. LonWorks Echelon processor required for all Lon applications shall be contained in separate communication board.
5. Shall allow access of up to 62 network variables (SNVT). Shall be compatible with all open controllers
6. Baud rate Controller shall be selectable using a dipswitch.
7. Shall have an LED display independently showing the status of serial communication, running, errors, power, all digital outputs, and all analog inputs.
8. Shall accept the following inputs: space temperature, setpoint adjustment, outdoor air temperature, indoor air quality, outdoor air quality, compressor lock-out, fire shutdown, enthalpy switch, and fan status/filter status/humidity/ remote occupancy.
9. Shall provide the following outputs: economizer, fan, cooling stage 1, cooling stage 2, heat stage 1, heat stage 2, heat stage 3/ exhaust/ reversing valve.
10. Shall have built-in surge protection circuitry through solid state polyswitches. Polyswitches shall be used on incoming power and network connections. Polyswitches will return to normal when the "trip" condition clears.
11. Shall have a battery backup capable of a minimum of 10,000 hours of data and time clock retention during power outages.
12. Shall have built-in support for Carrier technician tool.
13. Shall include an EIA-485 protocol communication port, an access port for connection of either a computer or a Carrier technician tool, an EIA-485 port for network communication to intelligent space sensors and displays, and a port to connect an optional LonWorks communications card.
14. Software upgrades will be accomplished by either local or remote download. No software upgrades through chip replacements are allowed.

**23 09 33 Electric and Electronic Control System for HVAC**

23 09 33.13 Decentralized, Rooftop Units:

23 09 33.13.A. General:

1. Shall be complete with self-contained low-voltage control circuit protected by a resettable circuit breaker on the 24-v transformer side. Transformer shall have 75VA capability.
2. Shall utilize color-coded wiring.
3. Shall include a central control terminal board to conveniently and safely provide connection points for vital control functions such as: smoke detectors, phase monitor, economizer, thermostat, DDC control options, and low and high pressure switches.
4. Unit shall include a minimum of one 8-pin screw terminal connection board for connection of control wiring.

23 09 33.23.B. Safeties:

1. Compressor over-temperature, over current.
2. Low pressure switch.
  - a. Units with 2 compressors shall have different sized connectors for the circuit 1 and circuit 2 low and high pressure switches. They shall physically prevent the cross-wiring of the safety switches between circuits 1 and 2.
  - b. Low pressure switch shall use different color wire than the high pressure switch. The purpose is to assist the installer and service technician to correctly wire and or troubleshoot the rooftop unit.
3. High pressure switch.
  - a. Units with 2 compressors shall have different sized connectors for the circuit 1 and circuit 2 low and high pressure switches. They shall physically prevent the cross-wiring of the safety switches between circuits 1 and 2.



- b. High pressure switch shall use different color wire than the low pressure switch. The purpose is to assist the installer and service technician to correctly wire and or troubleshoot the rooftop unit.
4. Automatic reset, motor thermal overload protector.

#### **23 09 93 Sequence of Operations for HVAC Controls**

- 23 09 93.13 Decentralized, Rooftop Units:
- 23 09 93.13 INSERT SEQUENCE OF OPERATION

#### **23 40 13 Panel Air Filters**

- 23 40 13.13 Decentralized, Rooftop Units:
- 23 40 13.13.A. Standard filter section
  1. Shall consist of factory-installed, low velocity, throwaway 2-in. thick fiberglass filters of commercially available sizes.
  2. Unit shall use only one filter size. Multiple sizes are not acceptable.
  3. Filters shall be accessible through an access panel with “no-tool” removal as described in the unit cabinet section of this specification (23 81 19.13.H).

#### **23 81 19 Self-Contained Air Conditioners**

- 23 81 19.13 Small-Capacity Self-Contained Air Conditioners (50TC\*\*04-16)
- 23 81 19.13.A. General
  1. Outdoor, rooftop mounted, electrically controlled, heating and cooling unit utilizing a(n) hermetic scroll compressor(s) for cooling duty and gas combustion for heating duty.
  2. Factory assembled, single-piece heating and cooling rooftop unit. Contained within the unit enclosure shall be all factory wiring, piping, controls, and special features required prior to field start-up.
  3. Unit shall use environmentally safe, Puron refrigerant.
  4. Unit shall be installed in accordance with the manufacturer’s instructions.
  5. Unit must be selected and installed in compliance with local, state, and federal codes.

##### **23 81 19.13.B. Quality Assurance**

1. Unit meets ASHRAE 90.1 minimum efficiency requirements.
2. Unit shall be rated in accordance with AHRI Standards 210/240 and 340/360.
3. Unit shall be designed to conform to ASHRAE 15, 2001.
4. Unit shall be UL-tested and certified in accordance with ANSI Z21.47 Standards and UL-listed and certified under Canadian standards as a total package for safety requirements.
5. Insulation and adhesive shall meet NFPA 90A requirements for flame spread and smoke generation.
6. Unit casing shall be capable of withstanding 500-hour salt spray exposure per ASTM B117 (scribed specimen).
7. Unit casing shall be capable of withstanding Federal Test Method Standard No. 141 (Method 6061) 5000-hour salt spray.
8. Unit shall be designed in accordance with ISO 9001:2000, and shall be manufactured in a facility registered by ISO 9001:2000.
9. Roof curb shall be designed to conform to NRCA Standards.
10. Unit shall be subjected to a completely automated run test on the assembly line. The data for each unit will be stored at the factory, and must be available upon request.
11. Unit shall be designed in accordance with UL Standard 1995, including tested to withstand rain.
12. Unit shall be constructed to prevent intrusion of snow and tested to prevent snow intrusion into the control box up to 40 mph.
13. Unit shake tested to assurance level 1, ASTM D4169 to ensure shipping reliability.
14. High Efficient Motors listed shall meet section 313 of the Energy Independence and Security Act of 2007 (EISA 2007).

##### **23 81 19.13.C. Delivery, Storage, and Handling**

1. Unit shall be stored and handled per manufacturer’s recommendations.
2. Lifted by crane requires either shipping top panel or spreader bars.
3. Unit shall only be stored or positioned in the upright position.

##### **23 81 19.13.D. Project Conditions**

1. As specified in the contract.

##### **23 81 19.13.E. Project Conditions**

1. As specified in the contract.

### **23 81 19.13.F. Operating Characteristics**

1. Unit shall be capable of starting and running at 115°F (46°C) ambient outdoor temperature, meeting maximum load criteria of AHRI Standard 210/240 or 340/360 at ± 10% voltage.
2. Compressor with standard controls shall be capable of operation down to 40°F (4°C), ambient outdoor temperatures. Accessory winter start kit is necessary if mechanically cooling at ambient temperatures down to 25°F (-4°C).
3. Unit shall discharge supply air vertically or horizontally as shown on contract drawings.
4. Unit shall be factory configured for vertical supply & return configurations.
5. Unit shall be field convertible from vertical to horizontal airflow on all models. No special kit required on 04-14 models. Supply duct kit required for 16 size model only.
6. Unit shall be capable of mixed operation: vertical supply with horizontal return or horizontal supply with vertical return.

### **23 81 19.13.G. Electrical Requirements**

1. Main power supply voltage, phase, and frequency must match those required by the manufacturer.

### **23 81 19.13.H. Unit Cabinet**

1. Unit cabinet shall be constructed of galvanized steel, and shall be bonderized and coated with a pre-painted baked enamel finish on all externally exposed surfaces.
2. Unit cabinet exterior paint shall be: film thickness, (dry) 0.003 inches minimum, gloss (per ASTM D523, 60°F): 60, Hardness: H-2H Pencil hardness.
3. Evaporator fan compartment interior cabinet insulation shall conform to AHRI Standards 210/240 or 340/360 minimum exterior sweat criteria. Interior surfaces shall be insulated with a minimum 1/2-in. thick, 1 lb density, flexible fiberglass insulation, neoprene coated on the air side. Aluminum foil-faced fiberglass insulation shall be used in the heat compartment.
4. Base of unit shall have a minimum of four locations for thru-the-base gas and electrical connections (factory installed or field installed), standard.
5. Base Rail
  - a. Unit shall have base rails on a minimum of 2 sides.
  - b. Holes shall be provided in the base rails for rigging shackles to facilitate maneuvering and overhead rigging.
  - c. Holes shall be provided in the base rail for moving the rooftop by fork truck.
  - d. Base rail shall be a minimum of 16 gauge thickness.
6. Condensate pan and connections:
  - a. Shall be a sloped condensate drain pan made of a non-corrosive material.
  - b. Shall comply with ASHRAE Standard 62.
  - c. Shall use a 3/4" -14 NPT drain connection, possible either through the bottom or end of the drain pan. Connection shall be made per manufacturer's recommendations.
7. Top panel:
  - a. Shall be a single piece top panel on 04 thru 12 sizes, two piece on 14 and 16 size.
8. Electrical Connections
  - a. All unit power wiring shall enter unit cabinet at a single, factory-prepared, knockout location.
  - b. Thru-the-base capability
    - (1.) Standard unit shall have a thru-the-base electrical location(s) using a raised, embossed portion of the unit basepan.
    - (2.) Optional, factory-approved, water-tight connection method must be used for thru-the-base electrical connections.
    - (3.) No basepan penetration, other than those authorized by the manufacturer, is permitted.
9. Component access panels (standard)
  - a. Cabinet panels shall be easily removable for servicing.
  - b. Unit shall have one factory installed, tool-less, removable, filter access panel.
  - c. Panels covering control box, indoor fan, indoor fan motor, gas components (where applicable), and compressors shall have molded composite handles.
  - d. Handles shall be UV modified, composite. permanently attached, and recessed into the panel.
  - e. Screws on the vertical portion of all removable access panel shall engage into heat resistant, molded composite collars.
  - f. Collars shall be removable and easily replaceable using manufacturer recommended parts.

**23 81 19.13.I. N/A**

**23 81 19.13.J. Coils**

1. Standard Aluminum fin - Copper Tube Coils:
  - a. Standard evaporator and condenser coils shall have aluminum lanced plate fins mechanically bonded to seamless internally grooved copper tubes with all joints brazed.
  - b. Evaporator coils shall be leak tested to 150 psig, pressure tested to 450 psig, and qualified to UL 1995 burst test at 1775 psig.
  - c. Condenser coils shall be leak tested to 150 psig, pressure tested to 650 psig, and qualified to UL 1995 burst test at 1980 psig.
2. Optional Pre-coated aluminum-fin condenser coils (3 Phase Models Only):
  - a. Shall have a durable epoxy-phenolic coating to provide protection in mildly corrosive coastal environments.
  - b. Coating shall be applied to the aluminum fin stock prior to the fin stamping process to create an inert barrier between the aluminum fin and copper tube.
  - c. Epoxy-phenolic barrier shall minimize galvanic action between dissimilar metals.
3. Optional Copper-fin evaporator and condenser coils (3 Phase Models Only):
  - a. Shall be constructed of copper fins mechanically bonded to copper tubes and copper tube sheets.
  - b. Galvanized steel tube sheets shall not be acceptable.
  - c. A polymer strip shall prevent coil assembly from contacting the sheet metal coil pan to minimize potential for galvanic corrosion between coil and pan.
4. Optional E-coated aluminum-fin evaporator and condenser coils (3 Phase Models Only):
  - a. Shall have a flexible epoxy polymer coating uniformly applied to all coil surface areas without material bridging between fins.
  - b. Coating process shall ensure complete coil encapsulation of tubes, fins and headers.
  - c. Color shall be high gloss black with gloss per ASTM D523-89.
  - d. Uniform dry film thickness from 0.8 to 1.2 mil on all surface areas including fin edges.
  - e. Superior hardness characteristics of 2H per ASTM D3363-92A and cross-hatch adhesion of 4B-5B per ASTM D3359-93.
  - f. Impact resistance shall be up to 160 in.-lb (ASTM D2794-93).
  - g. Humidity and water immersion resistance shall be up to minimum 1000 and 250 hours respectively (ASTM D2247-92 and ASTM D870-92).
  - h. Corrosion durability shall be confirmed through testing to be no less than 1000 hours salt spray per ASTM B117-90.
5. Standard All Aluminum Novation Coils:
  - a. Standard condenser coils shall have all aluminum Novation Heat Exchanger Technology design consisting of aluminum multi port flat tube design and aluminum fin. Coils shall be a furnace brazed design and contain epoxy lined shrink wrap on all aluminum to copper connections.
  - b. Condenser coils shall be leak tested to 150 psig, pressure tested to 650 psig, and qualified to UL 1995 burst test at 1980 psig.
6. Optional E-coated aluminum-fin, aluminum tube condenser coils:
  - a. Shall have a flexible epoxy polymer coating uniformly applied to all coil external surface areas without material bridging between fins or louvers.
  - b. Coating process shall ensure complete coil encapsulation, including all exposed fin edges.
  - c. E-coat thickness of 0.8 to 1.2 mil with top coat having a uniform dry film thickness from 1.0 to 2.0 mil on all external coil surface areas, including fin edges, shall be provided.
  - d. Shall have superior hardness characteristics of 2H per ASTM D3363-00 and cross-hatch adhesion of 4B-5B per ASTM D3359-02.
  - e. Shall have superior impact resistance with no cracking, chipping or peeling per NSF/ANSI 51-2002 Method 10.2.

**23 81 19.13.K. Refrigerant Components**

1. Refrigerant circuit shall include the following control, safety, and maintenance features:
  - a. Fixed orifice metering system shall prevent mal-distribution of two-phase refrigerant by including multiple fixed orifice devices in each refrigeration circuit. Each orifice is to be optimized to the coil circuit it serves.
  - b. Refrigerant filter drier.
  - c. Service gauge connections on suction and discharge lines.
  - d. Pressure gauge access through a specially designed access port in the top panel of the unit.

2. There shall be gauge line access port in the skin of the rooftop, covered by a black, removable plug.
  - a. The plug shall be easy to remove and replace.
  - b. When the plug is removed, the gauge access port shall enable maintenance personnel to route their pressure gauge lines.
  - c. This gauge access port shall facilitate correct and accurate condenser pressure readings by enabling the reading with the compressor access panel on.
  - d. The plug shall be made of a leak proof, UV-resistant, composite material.
3. Compressors
  - a. Unit shall use one fully hermetic, scroll compressor for each independent refrigeration circuit.
  - b. Compressor motors shall be cooled by refrigerant gas passing through motor windings.
  - c. Compressors shall be internally protected from high discharge temperature conditions.
  - d. Compressors shall be protected from an over-temperature and over-amperage conditions by an internal, motor overload device.
  - e. Compressor shall be factory mounted on rubber grommets.
  - f. Compressor motors shall have internal line break thermal, current overload and high pressure differential protection.
  - g. Crankcase heaters shall not be required for normal operating range, unless provided by compressor manufacturer due to refrigerant charge limits.

**23 81 19.13.L. Filter Section**

1. Filters access is specified in the unit cabinet section of this specification.
2. Filters shall be held in place by a pivoting filter tray, facilitating easy removal and installation.
3. Shall consist of factory-installed, low velocity, throw-away 2-in. thick fiberglass filters.
4. Filters shall be standard, commercially available sizes.
5. Only one size filter per unit is allowed.

**23 81 19.13.M. Evaporator Fan and Motor**

1. Evaporator fan motor:
  - a. Shall have permanently lubricated bearings.
  - b. Shall have inherent automatic-reset thermal overload protection or circuit breaker.
  - c. Shall have a maximum continuous bhp rating for continuous duty operation; no safety factors above that rating shall be required.
2. Belt-driven Evaporator Fan:
  - a. Belt drive shall include an adjustable pitch motor pulley.
  - b. Shall use sealed, permanently lubricated ball-bearing type.
  - c. Blower fan shall be double-inlet type with forward-curved blades.
  - d. Shall be constructed from steel with a corrosion resistant finish and dynamically balanced.

**23 81 19.13.N. Condenser Fans and Motors**

1. Condenser fan motors:
  - a. Shall be a totally enclosed motor.
  - b. Shall use permanently lubricated bearings.
  - c. Shall have inherent thermal overload protection with an automatic reset feature.
  - d. Shall use a shaft-down design on 04 to 12 and 16 size models and shaft-up design on 14 size with rain shield.
2. Condenser Fans:
  - a. Shall be a direct-driven propeller type fan.
  - b. Shall have aluminum blades riveted to corrosion-resistant steel spiders and shall be dynamically balanced.

**23 81 19.13.O. Special Features, Options and Accessories**

1. Staged Air Volume System (SAV) for 2-stage cooling models only.
  - a. Evaporator fan motor:
    - (1.) Shall have permanently lubricated bearings.
    - (2.) Shall have a maximum continuous bhp rating for continuous duty operation; no safety factors above that rating.
    - (3.) Shall be Variable Frequency duty and 2-speed control.
    - (4.) Shall contain motor shaft grounding ring to prevent electrical bearing fluting damage by safely diverting harmful shaft voltages and bearing currents to ground.

2. Variable Frequency Drive (VFD). Only available on 2-speed indoor fan motor option (SAV):
  - a. Shall be installed inside the unit cabinet, mounted, wired and tested.
  - b. Shall contain Electromagnetic Interference (EMI) frequency protection.
  - c. Insulated Gate Bi-Polar Transistors (IGBT) used to produce the output pulse width modulated (PWM) waveform, allowing for quiet motor operation.
  - d. Self diagnostics with fault and power code LED indicator. Field accessory Display Kit available for further diagnostics and special setup applications.
  - e. RS485 capability standard.
  - f. Electronic thermal overload protection.
  - g. 5% swinging chokes for harmonic reduction and improved power factor.
  - h. All printed circuit boards shall be conformal coated.
3. Standard Integrated Economizers (Factory installed on 3 Phase Models Only. Field installed on all 3 and 1 Phase Models):
  - a. Integrated, gear-driven opposing modulating blade design type capable of simultaneous economizer and compressor operation.
  - b. Independent modules for vertical or horizontal return configurations shall be available. Vertical return modules shall be available as a factory installed option.
  - c. Damper blades shall be galvanized steel with composite gears. Plastic or composite blades on intake or return shall not be acceptable.
  - d. Shall include all hardware and controls to provide free cooling with outdoor air when temperature and/or humidity are below setpoints.
  - e. Shall be equipped with gear driven dampers for both the outdoor ventilation air and the return air for positive air stream control.
  - f. Standard models shall be equipped with low-leakage dampers, not to exceed 2% leakage at 1 in. wg pressure differential. Economizer controller on electromechanical units shall be Honeywell W7212 that provides:
    - (1.) Combined minimum and DCV maximum damper position potentiometers with compressor staging relay.
    - (2.) Functions with solid state analog enthalpy or dry bulb changeover control sensing.
    - (3.) Contain LED indicates for:
      - When free cooling is available
      - When module is in DCV mode
      - When exhaust fan contact is closed
  - g. Ultra low leak EconoMi\$er X system shall be available on models with SAV 2-speed Variable Frequency Drive (VFD) systems. Only available on 2-speed indoor fan motor systems with electromechanical controls or RTU Open.
    - (1.) Maximum damper leakage rate to be equal to or less than 4.0 cfm/sq. ft. at 1.0 in. w.g., meeting or exceeding ASHRAE 90.1 requirements. Economizer controller on electromechanical units shall be Honeywell W7220 that provides:
      - (2.) 2-line LCD interface screen for setup, configuration and troubleshooting
      - (3.) On-board fault detection and diagnostics
      - (4.) Sensor failure loss of communication identification
      - (5.) Automatic sensor detection
      - (6.) Capabilities for use with multiple-speed indoor fan systems
      - (7.) Utilize digital sensors: Dry bulb and Enthalpy
  - h. Shall be capable of introducing up to 100% outdoor air.
  - i. Shall be equipped with a barometric relief damper capable of relieving up to 100% return air.
  - j. Shall be designed to close damper(s) during loss-of-power situations with spring return built into motor.
  - k. Dry bulb outdoor air temperature sensor shall be provided as standard. Outdoor air sensor setpoint shall be adjustable and shall range from 40 to 100° F / 4 to 38° C. Additional sensor options shall be available as accessories.
  - l. The economizer controller shall also provide control of an accessory power exhaust unit function. Factory set at 100%, with a range of 0% to 100%.
  - m. The economizer shall maintain minimum airflow into the building during occupied period and provide design ventilation rate for full occupancy. A remote potentiometer may be used to override the damper setpoint.



- n. Dampers shall be completely closed when the unit is in the unoccupied mode.
  - o. Economizer controller shall accept a 2-10 Vdc CO<sub>2</sub> sensor input for IAQ/DCV control. In this mode, dampers shall modulate the outdoor air damper to provide ventilation based on the sensor input.
  - p. Compressor lockout sensor shall open at 35°F (2°C) and close closes at 50°F (10°C).
  - q. Actuator shall be direct coupled to economizer gear. No linkage arms or control rods shall be acceptable.
  - r. Economizer controller shall provide indications when in free cooling mode, in the DCV mode, or the exhaust fan contact is closed.
4. Two-Position Damper (Factory installed on 3 Phase Models Only. Field installed on all 3 and 1 Phase Models)
    - a. Damper shall be a Two-Position Damper. Damper travel shall be from the full closed position to the field adjustable %-open setpoint.
    - b. Damper shall include adjustable damper travel from 25% to 100% (full open).
    - c. Damper shall include single or dual blade, gear driven dampers and actuator motor.
    - d. Actuator shall be direct coupled to damper gear. No linkage arms or control rods shall be acceptable.
    - e. Damper will admit up to 100% outdoor air for applicable rooftop units.
    - f. Damper shall close upon indoor (evaporator) fan shutoff and/or loss of power.
    - g. The damper actuator shall plug into the rooftop unit's wiring harness plug. No hard wiring shall be required.
    - h. Outside air hood shall include aluminum water entrainment filter
  5. Manual damper
    - a. Manual damper package shall consist of damper, air inlet screen, and rain hood which can be preset to admit up to 50% outdoor air for year round ventilation.
  6. Humidi-MiZer Adaptive Dehumidification System (3 Phase Models Only).
    - a. The Humidi-MiZer Adaptive Dehumidification System shall be factory-installed in single stage 50TC04-07 and 2-stage 50TC08-16 models with RTPF (round tube plate fin) condenser coils, and shall provide greater dehumidification of the occupied space by two modes of dehumidification operations beside its normal design cooling mode:
      - (1.) Subcooling mode further subcools the hot liquid refrigerant leaving the condenser coil when both temperature and humidity in the space are not satisfied.
      - (2.) Hot gas reheat mode shall mix a portion of the hot gas from the discharge of the compressor with the hot liquid refrigerant leaving the condenser coil to create a two-phase heat transfer in the system, resulting in a neutral leaving- air temperature when only humidity in the space is not satisfied.
      - (3.) Includes Head Pressure Controller.
  7. Head Pressure Control Package
    - a. Controller shall control coil head pressure by condenser-fan speed modulation or condenser-fan cycling and wind baffles.
    - b. Shall consist of solid-state control and condenser-coil temperature sensor to maintain condensing temperature between 90°F (32°C) and 110°F (43°C) at outdoor ambient temperatures down to -20°F (-29°C).
  8. Condenser Coil Hail Guard Assembly (Factory installed on 3 Phase Models Only. Field installed on all 3 and 1 Phase Models)
    - a. Shall protect against damage from hail.
    - b. Shall be louvered design.
  9. Unit-Mounted, Non-Fused Disconnect Switch (Available on units with MOCPS of 80 amps or less):
    - a. Switch shall be factory-installed, internally mounted.
    - b. National Electric Code (NEC) and UL approved non-fused switch shall provide unit power shutoff.
    - c. Shall be accessible from outside the unit
    - d. Shall provide local shutdown and lockout capability.
  10. Convenience Outlet (3 Phase Models Only):
    - a. Powered convenience outlet.
      - (1.) Outlet shall be powered from main line power to the rooftop unit.
      - (2.) Outlet shall be powered from line side or load side of disconnect by installing contractor, as required by code. If outlet is powered from load side of disconnect, unit electrical ratings shall be UL certified and rated for additional outlet amperage.
      - (3.) Outlet shall be factory-installed and internally mounted with easily accessible 115-v female receptacle.
      - (4.) Outlet shall include 15 amp GFI receptacles with independent fuse protection.

- (5.) Voltage required to operate convenience outlet shall be provided by a factory-installed step-down transformer.
- (6.) Outlet shall be accessible from outside the unit.
- (7.) Outlet shall include a field-installed "Wet in Use" cover.
- b. Non-Powered convenience outlet.
  - (1.) Outlet shall be powered from a separate 115/120v power source.
  - (2.) A transformer shall not be included.
  - (3.) Outlet shall be factory-installed and internally mounted with easily accessible 115-v female receptacle.
  - (4.) Outlet shall include 15 amp GFI receptacles with independent fuse protection.
  - (5.) Outlet shall be accessible from outside the unit.
  - (6.) Outlet shall include a field-installed "Wet in Use" cover.
11. Thru-the-Base Connectors:
  - a. Kits shall provide connectors to permit electrical connections to be brought to the unit through the unit basepan.
  - b. Minimum of four connection locations per unit.
12. Supply Duct Cover (16 size only):
  - a. Required when field converting the factory standard vertical duct supply to horizontal duct supply configuration. One required per unit.
13. Propeller Power Exhaust:
  - a. Power exhaust shall be used in conjunction with an integrated economizer.
  - b. Independent modules for vertical or horizontal return configurations shall be available.
  - c. Horizontal power exhaust is shall be mounted in return ductwork.
  - d. Power exhaust shall be controlled by economizer controller operation. Exhaust fans shall be energized when dampers open past the 0-100% adjustable setpoint on the economizer control.
14. Roof Curbs (Vertical):
  - a. Full perimeter roof curb with exhaust capability providing separate air streams for energy recovery from the exhaust air without supply air contamination.
  - b. Formed galvanized steel with wood nailer strip and shall be capable of supporting entire unit weight.
  - c. Permits installation and securing of ductwork to curb prior to mounting unit on the curb.
15. Thru-the-Bottom Utility Connectors:
  - a. Kit shall provide connectors to permit gas and electrical connections to be brought to the unit through the basepan.
16. Outdoor Air Enthalpy Sensor:
  - a. The outdoor air enthalpy sensor shall be used to provide single enthalpy control. When used in conjunction with a return air enthalpy sensor, the unit will provide differential enthalpy control. The sensor allows the unit to determine if outside air is suitable for free cooling.
17. Return Air Enthalpy Sensor:
  - a. The return air enthalpy sensor shall be used in conjunction with an outdoor air enthalpy sensor to provide differential enthalpy control.
18. Indoor Air Quality (CO<sub>2</sub>) Sensor:
  - a. Shall be able to provide demand ventilation indoor air quality (IAQ) control.
  - b. The IAQ sensor shall be available in duct mount, wall mount, or wall mount with LED display. The setpoint shall have adjustment capability.
19. Smoke detectors (factory-installed only):
  - a. Shall be a Four-Wire Controller and Detector.
  - b. Shall be environmental compensated with differential sensing for reliable, stable, and drift-free sensitivity.
  - c. Shall use magnet-activated test/reset sensor switches.
  - d. Shall have tool-less connection terminal access.
  - e. Shall have a recessed momentary switch for testing and resetting the detector.
  - f. Controller shall include:
    - (1.) One set of normally open alarm initiation contacts for connection to an initiating device circuit on a fire alarm control panel.
    - (2.) Two Form-C auxiliary alarm relays for interface with rooftop unit or other equipment.



- (3.) One Form-C supervision (trouble) relay to control the operation of the Trouble LED on a remote test/reset station.
  - (4.) Capable of direct connection to two individual detector modules.
  - (5.) Can be wired to up to 14 other duct smoke detectors for multiple fan shutdown applications.
20. Winter start kit
  - a. Shall contain a bypass device around the low pressure switch.
  - b. Shall be required when mechanical cooling is required down to 25°F (-4°C).
  - c. Shall not be required to operate on an economizer when below an outdoor ambient of 40°F (4°C).
21. Time Guard
  - a. Shall prevent compressor short-cycling by providing a 5-minute delay ( $\pm 2$  minutes) before restarting a compressor after shutdown for any reason.
  - b. One device shall be required per compressor.
22. Electric Heat:
  - a. Heating Section
    - (1.) Heater element open coil resistance wire, nickel-chrome alloy, 0.29 inches inside diameter, strung through ceramic insulators mounted on metal frame. Coil ends are staked and welded to terminal screw slots.
    - (2.) Heater assemblies are provided with integral fusing for protection of internal heater circuits not exceeding 48 amps each. Auto reset thermo limit controls, magnetic heater contactors (24 v coil) and terminal block all mounted in electric heater control box (minimum 18 ga galvanized steel) attached to end of heater assembly.
23. Disconnect Switch Bracket (16 size only)
  - a. Provides a pre-engineered and sized mounting bracket for applications requiring a unit mounted fused and non-fused disconnect of greater than 100 amps. Bracket assures that no damage will occur to coils when mounting with screws and other fasteners.
24. California OSHPD Seismic Certification Label
  - a. Units meet the seismic requirements of the International Code Council Evaluation Service (ICC-ES) document AC156 (Acceptance Criteria for Seismic Qualification by Shake-Table Testing of Nonstructural Components and Systems) and per International Building Code (IBC 2009) at an SDS (g) value of 2.00 z/h=1.0, Ip=1.5 and certified by independent structural engineers.
  - b. Units shall include a certification label that meets the CA OSHPD Special Seismic Certification pre-approval labeling requirements on the external chassis of the unit.
25. Hinged Access Panels
  - a. Shall provide easy access through integrated quarter turn latches.
  - b. Shall be on major panels of: filters, control box, fan motor and compressor.
26. Display Kit for Variable Frequency Drive
  - a. Kit allows the ability to access the VFD controller programs to provide special setup capabilities and diagnostics.
  - b. Kit contains display module, mounting bracket and communication cable.
  - c. Display Kit can be permanently installed in the unit or used on any SAV system VFD controller as needed.