



DH4SEA COMMERCIAL

COOLING CAPACITY: 36,000 TO 60,000 BTU/H

HEATING CAPACITY: 36,000 TO 60,000 BTU/H

3, 4, & 5-TON, THREE-PHASE
R-32 SPLIT SYSTEM HEAT PUMP



R32

■ Contents

| | |
|------------------------------|----|
| Nomenclature | 2 |
| Product Specifications | 3 |
| Expanded Cooling Data..... | 4 |
| Expanded Heating Data | 10 |
| Performance | 11 |
| AHRI Ratings | 12 |
| Dimensions | 13 |
| Wiring Diagram..... | 14 |
| Accessories | 15 |

■ Standard Features

- High-efficiency Copeland® scroll compressor
- Advanced Copeland® CoreSense™ technology
- Enhanced aluminum fin coil with 5mm diameter copper tubes in 3-ton
- Enhanced aluminum fin coil with 7mm diameter copper tubes in 4.0- to 5.0-ton
- Time-delay technology to ensure quiet reliable defrost
- Factory-installed bi-flow liquid line filter drier
- Factory-installed suction line accumulator
- Factory-installed compressor crank case heater
- Factory-installed high capacity muffler
- High- and low-pressure switches
- Service valves with sweat connections and easy access to gauge ports
- Fully enclosed contactor with lug connection
- Fully charged for 15' of tubing length
- High density foam compressor sound blanket on 1.5-2.0T
- Capacitors with extended life
- AHRI Certified; ETL Listed

■ Cabinet Features

- Removable grille-style top design compliant with UL 60335-2-40
- Venturi for increased velocity of airflow
- Custom Nickel Gray powder- paint finish with 500- hour salt- spray approval
- Steel louver coil guard with rust-resistant screws
- Wire fan discharge grille
- Steel louver coil guard
- Rust-resistant screws
- Top and side maintenance access
- Single-panel access to controls with space provided for field-installed accessories



* Complete warranty details available from your local dealer or at www.daikincomfort.com.

| | D | H | 4 | S | E | A | 36 | 3 | 0 | A | A |
|--|---|---|---|---|---|---|-----|---|----|----|----|
| | 1 | 2 | 3 | 4 | 5 | 6 | 7,8 | 9 | 10 | 11 | 12 |
| Brand D - Daikin | | | | | | | | | | | |
| Type - Split System C - Condenser R32 H - Heat Pump R32 | | | | | | | | | | | |
| Efficiency (SEER2) 13.4 SEER2 = 3 14.3 SEER2 = 4 | | | | | | | | | | | |
| Compressor Type S - Single Stage | | | | | | | | | | | |
| Feature E - Base | | | | | | | | | | | |
| Sales Region A - All Region | | | | | | | | | | | |
| | Minor revision A: Intial Release B: 1st Revision | | | | | | | | | | |
| | Major revision A: Intial Release B: 1st Revision | | | | | | | | | | |
| | Variations | | | | | | | | | | |
| | Electrical 3 - 208/230 V Three-Phase 60 Hz 4 - 460 V Three-Phase 60 Hz | | | | | | | | | | |
| | Nominal Capacity 36 - 3 Tons 48 - 4 Tons 60 - 5 Tons | | | | | | | | | | |



| | DH4SEA 3630* | DH4SEA 4830* | DH4SEA 6030* | DH4SEA 3640* | DH4SEA 4840* | DH4SEA 6040* |
|--|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| COOLING CAPACITIES | | | | | | |
| NOMINAL COOLING (BTU/H) | 36,000 | 48,000 | 60,000 | 36,000 | 48,000 | 60,000 |
| Nominal Heating (BTU/h) | 36,000 | 48,000 | 60,000 | 36,000 | 48,000 | 60,000 |
| Decibels (dB) | 72 | 74 | 74 | 72 | 74 | 74 |
| COMPRESSOR | | | | | | |
| RLA | 10.6 | 12.2 | 15.4 | 4.9 | 5.8 | 7.7 |
| LRA | 97.5 | 120.0 | 156.0 | 44.3 | 55.1 | 69.0 |
| Stage | Single | Single | Single | Single | Single | Single |
| Type | Scroll | Scroll | Scroll | Scroll | Scroll | Scroll |
| CONDENSER FAN MOTOR | | | | | | |
| Motor Type | PSC | PSC | PSC | PSC | PSC | PSC |
| Horsepower | 1/6 | 1/4 | 1/4 | 1/6 | 1/4 | 1/4 |
| FLA | 0.97 | 1.30 | 1.30 | 0.60 | 0.80 | 0.80 |
| REFRIGERATION SYSTEM | | | | | | |
| Refrigerant Line Size ¹ | | | | | | |
| Liquid Line Size ("O.D.) | 3/8" | 3/8" | 3/8" | 3/8" | 3/8" | 3/8" |
| Suction Line Size ("O.D.) | 7/8" | 1 1/8" | 1 1/8" | 7/8" | 1 1/8" | 1 1/8" |
| Refrigerant Connection Size | | | | | | |
| Liquid Valve Size ("O.D.) | 3/8" | 3/8" | 3/8" | 3/8" | 3/8" | 3/8" |
| Suction Valve Size ("O.D.) | 7/8" | 7/8" | 7/8" | 7/8" | 7/8" | 7/8" |
| Valve Connection Type | Sweat | Sweat | Sweat | Sweat | Sweat | Sweat |
| Refrigerant Charge | 83 | 174 | 194 | 83 | 174 | 194 |
| ELECTRICAL DATA | | | | | | |
| Voltage-Phase | 208/230-3 | 208/230-3 | 208/230-3 | 460-3 | 460-3 | 460-3 |
| Minimum Circuit Ampacity ² | 14.2 | 16.5 | 20.5 | 6.7 | 8.0 | 10.4 |
| Max. Overcurrent Protection ³ | 20 | 25 | 35 | 10 | 10 | 15 |
| Min / Max Volts | 197/253 | 197/253 | 197/253 | 437/506 | 437/506 | 437/506 |
| Electrical Conduit Size | 1/2" or 3/4" | 1/2" or 3/4" | 1/2" or 3/4" | 1/2" or 3/4" | 1/2" or 3/4" | 1/2" or 3/4" |
| UNIT WEIGHTS | | | | | | |
| EQUIPMENT WEIGHT | 198 | 263 | 286 | 199 | 266 | 288 |
| SHIPPING WEIGHT | 218 | 283 | 306 | 219 | 286 | 308 |

¹ Tested and rated in accordance with ARI Standard

² Wire size should be determined in accordance with National Electrical Codes; extensive wireruns will require larger wire sizes

³ Must use time-delay fuses or HACR-type circuit breakers of the same size as noted.

NOTES

- Always check the S&R plate for electrical data on the unit being installed.
- Installer will need to supply 3/8" to 1 1/8" adapters for suction line connections.
- Unit is charged with refrigerant for 15' of 3/8" liquid line. System charge must be adjusted per Installation Instructions Final Charge Procedure.
- Installation of these units requires the specified TXV Kit to be installed on the indoor coil. THE SPECIFIED TXV IS DETERMINED BY THE OUTDOOR UNIT NOT THE INDOOR COIL.

EXPANDED COOLING DATA — DH4SEA3630A*/3640A*+AMST36CU1300A*

| IDB | | OUTDOOR AMBIENT TEMPERATURE | | | | | | | | | | | | ENTERING INDOOR WET BULB TEMPERATURE | | | | | | | | | | | |
|-------------|------|-----------------------------|------|------|------|------|------|------|------|------|------|------|------|--------------------------------------|-------------|------|------|------|------|------|------|------|------|------|------|
| | | 65 | | | | 75 | | | | 85 | | | | 95 | | | | 105 | | | | 115 | | | |
| | | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 |
| 70 | MBh | 35.6 | 36.1 | 37.2 | - | 35.3 | 35.8 | 36.9 | - | 34.4 | 34.9 | 36.0 | - | 32.8 | 33.3 | 34.4 | - | 30.8 | 31.3 | 32.4 | - | 29.0 | 29.5 | 30.6 | - |
| | S/T | 0.61 | 0.53 | 0.40 | - | 0.62 | 0.54 | 0.41 | - | 0.64 | 0.57 | 0.43 | - | 0.66 | 0.59 | 0.45 | - | 1.00 | 0.61 | 0.47 | - | 1.00 | 0.66 | 0.52 | - |
| | ΔT | 19 | 18 | 14 | - | 19 | 18 | 14 | - | 20 | 18 | 14 | - | 19 | 18 | 14 | - | 19 | 17 | 14 | - | 20 | 18 | 15 | - |
| | KW | 2.02 | 2.02 | 2.02 | - | 2.26 | 2.26 | 2.26 | - | 2.53 | 2.53 | 2.52 | - | 2.82 | 2.81 | 2.81 | - | 3.14 | 3.14 | 3.13 | - | 3.52 | 3.51 | 3.51 | - |
| | Amps | 7.6 | 7.6 | 7.5 | - | 8.7 | 8.6 | 8.6 | - | 9.9 | 9.9 | 9.8 | - | 11.2 | 11.2 | 11.2 | - | 12.7 | 12.7 | 12.6 | - | 14.4 | 14.4 | 14.4 | - |
| 1050 | MBh | 36.1 | 36.6 | 37.6 | - | 35.8 | 36.3 | 37.3 | - | 34.8 | 35.3 | 36.4 | - | 33.2 | 33.7 | 34.8 | - | 31.3 | 31.8 | 32.8 | - | 29.5 | 30.0 | 31.1 | - |
| | S/T | 0.67 | 0.59 | 0.45 | - | 0.67 | 0.60 | 0.46 | - | 0.70 | 0.62 | 0.49 | - | 0.72 | 0.64 | 0.51 | - | 1.00 | 0.66 | 0.53 | - | 1.00 | 0.71 | 0.58 | - |
| | ΔT | 18 | 17 | 13 | - | 18 | 17 | 13 | - | 19 | 17 | 13 | - | 18 | 17 | 13 | - | 18 | 16 | 13 | - | 19 | 17 | 14 | - |
| | KW | 2.03 | 2.03 | 2.03 | - | 2.27 | 2.27 | 2.27 | - | 2.54 | 2.54 | 2.53 | - | 2.83 | 2.83 | 2.82 | - | 3.15 | 3.15 | 3.14 | - | 3.53 | 3.53 | 3.52 | - |
| | Amps | 7.6 | 7.6 | 7.6 | - | 8.7 | 8.7 | 8.7 | - | 9.9 | 9.9 | 9.9 | - | 11.2 | 11.2 | 11.2 | - | 12.7 | 12.7 | 12.7 | - | 14.5 | 14.4 | 14.4 | - |
| 1350 | MBh | 36.7 | 37.2 | 38.3 | - | 36.4 | 36.9 | 37.9 | - | 35.4 | 35.9 | 37.0 | - | 33.8 | 34.3 | 35.4 | - | 31.9 | 32.4 | 33.4 | - | 30.1 | 30.6 | 31.7 | - |
| | S/T | 0.70 | 0.63 | 0.49 | - | 0.71 | 0.63 | 0.50 | - | 0.73 | 0.66 | 0.52 | - | 1.00 | 0.68 | 0.54 | - | 1.00 | 0.70 | 0.56 | - | 1.00 | 0.75 | 0.61 | - |
| | ΔT | 17 | 16 | 12 | - | 17 | 16 | 12 | - | 18 | 16 | 12 | - | 17 | 16 | 12 | - | 17 | 15 | 12 | - | 18 | 16 | 13 | - |
| | KW | 2.04 | 2.04 | 2.04 | - | 2.28 | 2.28 | 2.28 | - | 2.55 | 2.55 | 2.54 | - | 2.84 | 2.84 | 2.83 | - | 3.16 | 3.16 | 3.16 | - | 3.54 | 3.54 | 3.53 | - |
| | Amps | 7.7 | 7.7 | 7.6 | - | 8.8 | 8.7 | 8.7 | - | 10.0 | 10.0 | 10.0 | - | 11.3 | 11.3 | 11.3 | - | 12.8 | 12.8 | 12.7 | - | 14.5 | 14.5 | 14.5 | - |
| 75 | MBh | 35.7 | 36.2 | 37.2 | 38.8 | 35.3 | 35.8 | 36.9 | 38.5 | 34.4 | 34.9 | 36.0 | 37.6 | 32.8 | 33.3 | 34.4 | 36.0 | 30.9 | 31.4 | 32.4 | 34.0 | 29.1 | 29.6 | 30.6 | 32.3 |
| | S/T | 0.74 | 0.66 | 0.53 | 0.39 | 0.75 | 0.67 | 0.53 | 0.39 | 1.00 | 0.70 | 0.56 | 0.42 | 1.00 | 0.71 | 0.58 | 0.44 | 1.00 | 0.74 | 0.60 | 0.46 | 1.00 | 0.79 | 0.65 | 0.51 |
| | ΔT | 23 | 22 | 18 | 15 | 23 | 22 | 18 | 15 | 24 | 22 | 18 | 15 | 23 | 22 | 18 | 15 | 23 | 21 | 18 | 14 | 24 | 22 | 19 | 16 |
| | KW | 2.02 | 2.02 | 2.01 | 2.0 | 2.26 | 2.26 | 2.25 | 2.3 | 2.53 | 2.52 | 2.52 | 2.5 | 2.81 | 2.81 | 2.81 | 2.8 | 3.14 | 3.14 | 3.13 | 3.1 | 3.52 | 3.51 | 3.51 | 3.5 |
| | Amps | 7.6 | 7.5 | 7.5 | 7.6 | 8.6 | 8.6 | 8.6 | 8.7 | 9.9 | 9.9 | 9.8 | 9.9 | 11.2 | 11.2 | 11.2 | 11.2 | 12.7 | 12.7 | 12.6 | 12.7 | 14.4 | 14.4 | 14.4 | 14.5 |
| 1050 | MBh | 36.1 | 36.6 | 37.7 | 39.3 | 35.8 | 36.3 | 37.3 | 39.0 | 34.8 | 35.4 | 36.4 | 38.0 | 33.2 | 33.8 | 34.8 | 36.4 | 31.3 | 31.8 | 32.9 | 34.5 | 29.5 | 30.0 | 31.1 | 32.7 |
| | S/T | 0.80 | 0.72 | 0.58 | 0.44 | 0.80 | 0.73 | 0.59 | 0.45 | 1.00 | 0.75 | 0.62 | 0.47 | 1.00 | 0.77 | 0.63 | 0.49 | 1.00 | 0.79 | 0.66 | 0.51 | 1.00 | 1.00 | 0.71 | 0.57 |
| | ΔT | 22 | 21 | 17 | 14 | 22 | 21 | 17 | 14 | 23 | 21 | 17 | 14 | 22 | 21 | 17 | 14 | 22 | 20 | 17 | 13 | 23 | 21 | 18 | 15 |
| | KW | 2.03 | 2.03 | 2.03 | 2.04 | 2.27 | 2.27 | 2.27 | 2.28 | 2.54 | 2.54 | 2.53 | 2.55 | 2.83 | 2.82 | 2.82 | 2.84 | 3.15 | 3.15 | 3.14 | 3.16 | 3.53 | 3.53 | 3.52 | 3.54 |
| | Amps | 7.6 | 7.6 | 7.6 | 7.7 | 8.7 | 8.7 | 8.7 | 8.8 | 9.9 | 9.9 | 9.9 | 10.0 | 11.2 | 11.2 | 11.2 | 11.3 | 12.7 | 12.7 | 12.7 | 12.8 | 14.4 | 14.4 | 14.4 | 14.5 |
| 1350 | MBh | 36.7 | 37.2 | 38.3 | 39.9 | 36.4 | 36.9 | 38.0 | 39.6 | 35.5 | 36.0 | 37.0 | 38.6 | 33.9 | 34.4 | 35.4 | 37.0 | 31.9 | 32.4 | 33.5 | 35.1 | 30.1 | 30.6 | 31.7 | 33.3 |
| | S/T | 0.83 | 0.76 | 0.62 | 0.48 | 0.84 | 0.76 | 0.63 | 0.48 | 1.00 | 0.79 | 0.65 | 0.51 | 1.00 | 0.81 | 0.67 | 0.53 | 1.00 | 0.83 | 0.69 | 0.55 | 1.00 | 1.00 | 0.74 | 0.60 |
| | ΔT | 21 | 20 | 16 | 13 | 21 | 20 | 16 | 13 | 22 | 20 | 16 | 13 | 21 | 20 | 16 | 13 | 21 | 19 | 16 | 12 | 22 | 20 | 17 | 14 |
| | KW | 2.04 | 2.04 | 2.04 | 2.1 | 2.28 | 2.28 | 2.28 | 2.3 | 2.55 | 2.55 | 2.54 | 2.6 | 2.84 | 2.84 | 2.83 | 2.8 | 3.16 | 3.16 | 3.15 | 3.2 | 3.54 | 3.54 | 3.53 | 3.6 |
| | Amps | 7.7 | 7.6 | 7.6 | 7.7 | 8.8 | 8.7 | 8.7 | 8.8 | 10.0 | 10.0 | 9.9 | 10.0 | 11.3 | 11.3 | 11.3 | 11.3 | 12.8 | 12.8 | 12.7 | 12.8 | 14.5 | 14.5 | 14.5 | 14.6 |

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area is ACCA (TVA) conditions.
 KW=Total system power
 Amps = outdoor unit amps (Comp.+Fan)

EXPANDED COOLING DATA — DH4SEA3630A*/3640A*+AMST36CU1300A* (CONT.)

| IDB | | OUTDOOR AMBIENT TEMPERATURE | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---------|------|--------------------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|----|----|----|----|
| | | 65 | | | | 75 | | | | 85 | | | | 95 | | | | 105 | | | | 115 | | | | | | | |
| | | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | | | | |
| | | ENTERING INDOOR WET BULB TEMPERATURE | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| AIRFLOW | | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 |
| 1050 | MBh | 35.8 | 36.3 | 37.4 | 39.0 | 35.5 | 36.0 | 37.1 | 38.7 | 34.6 | 35.1 | 36.2 | 37.8 | 33.0 | 33.5 | 34.6 | 36.2 | 31.0 | 31.5 | 32.6 | 34.2 | 29.3 | 29.8 | 30.8 | 32.4 | | | | |
| | S/T | 0.87 | 0.79 | 0.65 | 0.51 | 1.00 | 0.80 | 0.66 | 0.52 | 1.00 | 0.82 | 0.69 | 0.54 | 1.00 | 0.84 | 0.70 | 0.56 | 1.00 | 1.00 | 0.73 | 0.58 | 1.00 | 1.00 | 0.78 | 0.64 | | | | |
| | ΔT | 27 | 26 | 22 | 19 | 27 | 26 | 22 | 19 | 28 | 26 | 22 | 19 | 27 | 26 | 22 | 19 | 27 | 25 | 22 | 18 | 28 | 26 | 23 | 20 | | | | |
| | kW | 2.02 | 2.02 | 2.02 | 2.0 | 2.26 | 2.26 | 2.25 | 2.3 | 2.53 | 2.53 | 2.52 | 2.5 | 2.82 | 2.81 | 2.81 | 2.8 | 3.14 | 3.14 | 3.13 | 3.2 | 3.52 | 3.51 | 3.51 | 3.5 | | | | |
| | Amps | 7.6 | 7.6 | 7.5 | 7.6 | 8.7 | 8.6 | 8.6 | 8.7 | 9.9 | 9.9 | 9.8 | 9.9 | 11.2 | 11.2 | 11.2 | 11.3 | 12.7 | 12.7 | 12.6 | 12.7 | 14.4 | 14.4 | 14.4 | 14.5 | | | | |
| 80 | MBh | 36.3 | 36.8 | 37.8 | 39.5 | 36.0 | 36.5 | 37.5 | 39.2 | 35.0 | 35.5 | 36.6 | 38.2 | 33.4 | 33.9 | 35.0 | 36.6 | 31.5 | 32.0 | 33.0 | 34.7 | 29.7 | 30.2 | 31.3 | 32.9 | | | | |
| | S/T | 1.00 | 0.85 | 0.71 | 0.57 | 1.00 | 0.85 | 0.72 | 0.57 | 1.00 | 0.88 | 0.74 | 0.60 | 1.00 | 0.90 | 0.76 | 0.62 | 1.00 | 1.00 | 0.78 | 0.64 | 1.00 | 1.00 | 0.83 | 0.69 | | | | |
| | ΔT | 26 | 25 | 21 | 18 | 26 | 25 | 21 | 18 | 27 | 25 | 21 | 18 | 26 | 25 | 21 | 18 | 26 | 24 | 21 | 17 | 27 | 25 | 22 | 19 | | | | |
| | kW | 2.03 | 2.03 | 2.03 | 2.05 | 2.27 | 2.27 | 2.27 | 2.28 | 2.54 | 2.54 | 2.53 | 2.55 | 2.83 | 2.83 | 2.82 | 2.84 | 3.15 | 3.15 | 3.14 | 3.16 | 3.53 | 3.53 | 3.52 | 3.54 | | | | |
| | Amps | 7.6 | 7.6 | 7.6 | 7.7 | 8.7 | 8.7 | 8.7 | 8.8 | 9.9 | 9.9 | 9.9 | 10.0 | 11.2 | 11.2 | 11.2 | 11.3 | 12.7 | 12.7 | 12.7 | 12.8 | 14.5 | 14.4 | 14.4 | 14.5 | | | | |
| 1350 | MBh | 36.9 | 37.4 | 38.5 | 40.1 | 36.6 | 37.1 | 38.1 | 39.8 | 35.6 | 36.1 | 37.2 | 38.8 | 34.0 | 34.5 | 35.6 | 37.2 | 32.1 | 32.6 | 33.7 | 35.3 | 30.3 | 30.8 | 31.9 | 33.5 | | | | |
| | S/T | 1.00 | 0.88 | 0.75 | 0.60 | 1.00 | 0.89 | 0.75 | 0.61 | 1.00 | 0.91 | 0.78 | 0.63 | 1.00 | 1.00 | 0.80 | 0.65 | 1.00 | 1.00 | 0.82 | 0.67 | 1.00 | 1.00 | 0.87 | 0.73 | | | | |
| | ΔT | 25 | 24 | 20 | 17 | 25 | 24 | 20 | 17 | 26 | 24 | 20 | 17 | 25 | 24 | 20 | 17 | 25 | 23 | 20 | 16 | 26 | 24 | 21 | 18 | | | | |
| | kW | 2.04 | 2.04 | 2.04 | 2.1 | 2.28 | 2.28 | 2.28 | 2.3 | 2.55 | 2.55 | 2.54 | 2.6 | 2.84 | 2.84 | 2.83 | 2.9 | 3.16 | 3.16 | 3.16 | 3.2 | 3.54 | 3.54 | 3.53 | 3.6 | | | | |
| | Amps | 7.7 | 7.7 | 7.6 | 7.7 | 8.8 | 8.7 | 8.7 | 8.8 | 10.0 | 10.0 | 10.0 | 10.0 | 11.3 | 11.3 | 11.3 | 11.4 | 12.8 | 12.8 | 12.7 | 12.8 | 14.5 | 14.5 | 14.5 | 14.6 | | | | |

| | | | | | | | | | | | | | | | | | | | | | | | | | |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 1050 | MBh | 36.4 | 36.9 | 38.0 | 39.6 | 36.1 | 36.6 | 37.7 | 39.3 | 35.2 | 35.7 | 36.8 | 38.4 | 33.6 | 34.1 | 35.2 | 36.8 | 31.6 | 32.1 | 33.2 | 34.8 | 29.9 | 30.4 | 31.4 | 33.0 |
| | S/T | 1.00 | 0.89 | 0.76 | 0.61 | 1.00 | 0.90 | 0.76 | 0.62 | 1.00 | 1.00 | 0.79 | 0.64 | 1.00 | 1.00 | 0.81 | 0.66 | 1.00 | 1.00 | 0.83 | 0.68 | 1.00 | 1.00 | 1.00 | 0.74 |
| | ΔT | 31 | 29 | 26 | 22 | 31 | 29 | 26 | 22 | 31 | 29 | 26 | 22 | 31 | 29 | 26 | 22 | 31 | 29 | 25 | 22 | 32 | 30 | 27 | 23 |
| | kW | 2.03 | 2.02 | 2.02 | 2.0 | 2.27 | 2.26 | 2.26 | 2.3 | 2.53 | 2.53 | 2.53 | 2.5 | 2.82 | 2.82 | 2.81 | 2.8 | 3.14 | 3.14 | 3.14 | 3.2 | 3.52 | 3.52 | 3.52 | 3.5 |
| | Amps | 7.6 | 7.6 | 7.6 | 7.6 | 8.7 | 8.7 | 8.6 | 8.7 | 9.9 | 9.9 | 9.9 | 10.0 | 11.2 | 11.2 | 11.2 | 11.3 | 12.7 | 12.7 | 12.7 | 12.7 | 14.4 | 14.4 | 14.4 | 14.5 |
| 85 | MBh | 36.9 | 37.4 | 38.4 | 40.1 | 36.6 | 37.1 | 38.1 | 39.8 | 35.6 | 36.1 | 37.2 | 38.8 | 34.0 | 34.5 | 35.6 | 37.2 | 32.1 | 32.6 | 33.6 | 35.3 | 30.3 | 30.8 | 31.9 | 33.5 |
| | S/T | 1.00 | 0.95 | 0.81 | 0.67 | 1.00 | 0.95 | 0.82 | 0.67 | 1.00 | 1.00 | 0.84 | 0.70 | 1.00 | 1.00 | 0.86 | 0.72 | 1.00 | 1.00 | 0.88 | 0.74 | 1.00 | 1.00 | 1.00 | 0.79 |
| | ΔT | 30 | 28 | 25 | 21 | 30 | 28 | 25 | 21 | 30 | 28 | 25 | 21 | 30 | 28 | 25 | 21 | 30 | 28 | 24 | 21 | 31 | 29 | 26 | 22 |
| | kW | 2.04 | 2.04 | 2.03 | 2.05 | 2.28 | 2.28 | 2.27 | 2.29 | 2.54 | 2.54 | 2.54 | 2.56 | 2.83 | 2.83 | 2.83 | 2.84 | 3.15 | 3.15 | 3.15 | 3.17 | 3.53 | 3.53 | 3.53 | 3.55 |
| | Amps | 7.6 | 7.6 | 7.6 | 7.7 | 8.7 | 8.7 | 8.7 | 8.8 | 9.9 | 9.9 | 9.9 | 10.0 | 11.3 | 11.3 | 11.2 | 11.3 | 12.7 | 12.7 | 12.7 | 12.8 | 14.5 | 14.5 | 14.4 | 14.5 |
| 1350 | MBh | 37.5 | 38.0 | 39.1 | 40.7 | 37.2 | 37.7 | 38.7 | 40.4 | 36.2 | 36.7 | 37.8 | 39.4 | 34.6 | 35.1 | 36.2 | 37.8 | 32.7 | 33.2 | 34.3 | 35.9 | 30.9 | 31.4 | 32.5 | 34.1 |
| | S/T | 1.00 | 0.98 | 0.85 | 0.70 | 1.00 | 1.00 | 0.85 | 0.71 | 1.00 | 1.00 | 0.88 | 0.73 | 1.00 | 1.00 | 0.90 | 0.75 | 1.00 | 1.00 | 0.92 | 0.78 | 1.00 | 1.00 | 1.00 | 0.83 |
| | ΔT | 29 | 27 | 24 | 20 | 29 | 27 | 24 | 20 | 29 | 27 | 24 | 20 | 29 | 27 | 24 | 20 | 29 | 27 | 23 | 20 | 30 | 28 | 25 | 21 |
| | kW | 2.05 | 2.05 | 2.04 | 2.1 | 2.29 | 2.29 | 2.28 | 2.3 | 2.55 | 2.55 | 2.55 | 2.6 | 2.84 | 2.84 | 2.84 | 2.9 | 3.17 | 3.16 | 3.16 | 3.2 | 3.54 | 3.54 | 3.54 | 3.6 |
| | Amps | 7.7 | 7.7 | 7.7 | 7.7 | 8.8 | 8.8 | 8.8 | 8.8 | 10.0 | 10.0 | 10.0 | 10.1 | 11.3 | 11.3 | 11.3 | 11.4 | 12.8 | 12.8 | 12.8 | 12.9 | 14.5 | 14.5 | 14.5 | 14.6 |

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area is ACCA (TVA) conditions.
 kW= Total system power
 Amps = outdoor unit amps (comp.+fan)

EXPANDED COOLING DATA — DH4SEA4830A*/4840A*+AMST48CU1300A*

| IDB | | OUTDOOR AMBIENT TEMPERATURE | | | | | | | | | | | | ENTERING INDOOR WET BULB TEMPERATURE | | | | | | | | | | | | Amps | | KW | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----------|-----------|-----------------------------|------|------|------|------|------|------|------|------|------|------|------|--------------------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| | | 65 | | | | 75 | | | | 85 | | | | 95 | | | | 105 | | | | 115 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 70 | MBh | 46.9 | 47.6 | 48.9 | - | 46.5 | 47.1 | 48.5 | - | 45.3 | 45.9 | 47.3 | - | 43.2 | 43.9 | 45.2 | - | 40.7 | 41.3 | 42.7 | - | 38.3 | 39.0 | 40.4 | - | 1450 | S/T | 0.67 | 0.59 | 0.45 | - | 0.67 | 0.60 | 0.46 | - | 0.70 | 0.62 | 0.49 | - | 0.72 | 0.64 | 0.51 | - | 1.00 | 0.66 | 0.53 | - | 1.00 | 0.71 | 0.58 | - | ΔT | 19 | 17 | 13 | - | 19 | 17 | 13 | - | 19 | 17 | 13 | - | 18 | 16 | 13 | - | 19 | 18 | 14 | - | kW | 2.63 | 2.63 | 2.62 | - | 2.95 | 2.94 | 2.94 | - | 3.30 | 3.29 | 3.29 | - | 3.68 | 3.67 | 3.67 | - | 4.10 | 4.10 | 4.09 | - | 4.60 | 4.60 | 4.59 | - | Amps | 10.0 | 10.0 | 9.9 | - | 11.4 | 11.4 | 11.4 | - | 13.0 | 13.0 | 13.0 | - | 14.8 | 14.8 | 14.7 | - | 16.7 | 16.7 | 16.7 | - | 19.0 | 19.0 | 18.9 | - |
| | MBh | 47.5 | 48.1 | 49.5 | - | 47.1 | 47.7 | 49.1 | - | 45.9 | 46.5 | 47.9 | - | 43.8 | 44.4 | 45.8 | - | 41.2 | 41.9 | 43.3 | - | 38.9 | 39.6 | 41.0 | - | | S/T | 0.70 | 0.62 | 0.48 | - | 0.70 | 0.63 | 0.49 | - | 0.73 | 0.65 | 0.52 | - | 0.75 | 0.67 | 0.54 | - | 1.00 | 0.69 | 0.56 | - | 1.00 | 0.74 | 0.61 | - | ΔT | 18 | 16 | 13 | - | 18 | 16 | 13 | - | 18 | 16 | 13 | - | 18 | 16 | 12 | - | 19 | 17 | 13 | - | kW | 2.64 | 2.64 | 2.64 | - | 2.96 | 2.96 | 2.95 | - | 3.31 | 3.31 | 3.30 | - | 3.69 | 3.69 | 3.68 | - | 4.11 | 4.11 | 4.10 | - | 4.61 | 4.61 | 4.60 | - | Amps | 10.0 | 10.0 | 10.0 | - | 11.5 | 11.5 | 11.4 | - | 13.1 | 13.1 | 13.0 | - | 14.8 | 14.8 | 14.8 | - | 16.8 | 16.7 | 16.7 | - | 19.0 | 19.0 | 19.0 | - |
| | MBh | 48.4 | 49.1 | 50.5 | - | 48.0 | 48.7 | 50.1 | - | 46.8 | 47.5 | 48.9 | - | 44.7 | 45.4 | 46.8 | - | 42.2 | 42.9 | 44.2 | - | 39.9 | 40.5 | 41.9 | - | | S/T | 0.71 | 0.64 | 0.50 | - | 0.72 | 0.64 | 0.51 | - | 0.74 | 0.67 | 0.53 | - | 1.00 | 0.69 | 0.55 | - | 1.00 | 0.71 | 0.57 | - | 1.00 | 0.76 | 0.62 | - | ΔT | 17 | 15 | 12 | - | 17 | 15 | 12 | - | 17 | 15 | 12 | - | 17 | 15 | 11 | - | 18 | 16 | 13 | - | kW | 2.66 | 2.65 | 2.65 | - | 2.97 | 2.97 | 2.96 | - | 3.32 | 3.32 | 3.31 | - | 3.70 | 3.70 | 3.69 | - | 4.13 | 4.12 | 4.12 | - | 4.62 | 4.62 | 4.61 | - | Amps | 10.1 | 10.1 | 10.1 | - | 11.5 | 11.5 | 11.5 | - | 13.1 | 13.1 | 13.1 | - | 14.9 | 14.9 | 14.8 | - | 16.8 | 16.8 | 16.8 | - | 19.1 | 19.1 | 19.1 | - |
| | MBh | 46.9 | 47.6 | 49.0 | 51.1 | 46.5 | 47.2 | 48.5 | 50.7 | 45.3 | 46.0 | 47.3 | 49.5 | 43.2 | 43.9 | 45.3 | 47.4 | 40.7 | 41.3 | 42.7 | 44.8 | 38.4 | 39.0 | 40.4 | 42.5 | | S/T | 0.80 | 0.72 | 0.58 | 0.44 | 0.80 | 0.73 | 0.59 | 0.45 | 1.00 | 0.75 | 0.62 | 0.47 | 1.00 | 0.77 | 0.63 | 0.49 | 1.00 | 0.79 | 0.66 | 0.51 | 1.00 | 0.84 | 0.71 | 0.57 | ΔT | 23 | 21 | 17 | 14 | 23 | 21 | 17 | 14 | 23 | 21 | 17 | 14 | 23 | 21 | 17 | 14 | 23 | 22 | 18 | 15 | kW | 2.63 | 2.63 | 2.62 | 2.6 | 2.94 | 2.94 | 2.94 | 3.0 | 3.30 | 3.29 | 3.29 | 3.3 | 3.67 | 3.67 | 3.67 | 3.7 | 4.10 | 4.10 | 4.09 | 4.1 | 4.60 | 4.59 | 4.59 | 4.6 | Amps | 10.0 | 10.0 | 9.9 | 10.0 | 11.4 | 11.4 | 11.4 | 11.5 | 13.0 | 13.0 | 13.0 | 13.1 | 14.8 | 14.7 | 14.7 | 14.8 | 16.7 | 16.7 | 16.7 | 16.8 | 19.0 | 19.0 | 18.9 | 19.0 |
| | 75 | MBh | 47.5 | 48.2 | 49.6 | 51.7 | 47.1 | 47.8 | 49.1 | 51.3 | 45.9 | 46.6 | 47.9 | 50.0 | 43.8 | 44.5 | 45.9 | 48.0 | 41.3 | 41.9 | 43.3 | 45.4 | 39.0 | 39.6 | 41.0 | | 43.1 | S/T | 0.83 | 0.75 | 0.61 | 0.47 | 0.83 | 0.76 | 0.62 | 0.48 | 1.00 | 0.78 | 0.65 | 0.50 | 1.00 | 0.80 | 0.66 | 0.52 | 1.00 | 0.82 | 0.69 | 0.54 | 1.00 | 1.00 | 0.74 | 0.60 | ΔT | 22 | 20 | 17 | 13 | 22 | 20 | 17 | 13 | 22 | 20 | 17 | 13 | 22 | 20 | 16 | 13 | 23 | 21 | 17 | 14 | kW | 2.64 | 2.64 | 2.63 | 2.66 | 2.96 | 2.95 | 2.95 | 2.97 | 3.31 | 3.30 | 3.30 | 3.32 | 3.69 | 3.68 | 3.68 | 3.70 | 4.11 | 4.11 | 4.10 | 4.13 | 4.61 | 4.60 | 4.60 | 4.62 | Amps | 10.0 | 10.0 | 10.0 | 10.1 | 11.5 | 11.5 | 11.4 | 11.5 | 13.1 | 13.1 | 13.0 | 13.1 | 14.8 | 14.8 | 14.8 | 14.9 | 16.7 | 16.7 | 16.7 | 16.8 | 19.0 | 19.0 | 19.0 |
| MBh | | 48.5 | 49.1 | 50.5 | 52.6 | 48.1 | 48.7 | 50.1 | 52.2 | 46.8 | 47.5 | 48.9 | 51.0 | 44.8 | 45.4 | 46.8 | 48.9 | 42.2 | 42.9 | 44.3 | 46.4 | 39.9 | 40.6 | 41.9 | 44.1 | S/T | 0.84 | 0.76 | 0.63 | 0.49 | 0.85 | 0.77 | 0.64 | 0.49 | 1.00 | 0.80 | 0.66 | 0.52 | 1.00 | 0.82 | 0.68 | 0.54 | 1.00 | 0.84 | 0.70 | 0.56 | 1.00 | 1.00 | 0.75 | 0.61 | ΔT | 21 | 19 | 16 | 12 | 21 | 19 | 16 | 12 | 21 | 19 | 16 | 12 | 21 | 19 | 15 | 12 | 22 | 20 | 17 | 13 | kW | 2.66 | 2.65 | 2.65 | 2.7 | 2.97 | 2.97 | 2.96 | 3.0 | 3.32 | 3.32 | 3.31 | 3.3 | 3.70 | 3.70 | 3.69 | 3.7 | 4.12 | 4.12 | 4.12 | 4.1 | 4.62 | 4.62 | 4.61 | 4.6 | Amps | 10.1 | 10.1 | 10.1 | 10.2 | 11.5 | 11.5 | 11.5 | 11.6 | 13.1 | 13.1 | 13.1 | 13.2 | 14.9 | 14.9 | 14.8 | 14.9 | 16.8 | 16.8 | 16.8 | 16.9 | 19.1 | 19.1 | 19.0 | 19.2 | |

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area is ACCA (TVA) conditions.
 Amps = outdoor unit amps (Comp.+Fan)
 KW=Total system power

EXPANDED COOLING DATA — DH4SEA4830A*/4840A*+AMST48CU1300A* (CONT.)

| IDB | | OUTDOOR AMBIENT TEMPERATURE | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---------|------|--------------------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|----|----|----|----|
| | | 65 | | | | 75 | | | | 85 | | | | 95 | | | | 105 | | | | 115 | | | | | | | |
| | | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | | | | |
| | | ENTERING INDOOR WET BULB TEMPERATURE | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| AIRFLOW | | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 |
| 1450 | MBh | 47.2 | 47.8 | 49.2 | 51.3 | 46.8 | 47.4 | 48.8 | 50.9 | 45.5 | 46.2 | 47.6 | 49.7 | 43.5 | 44.1 | 45.5 | 47.6 | 40.9 | 41.6 | 43.0 | 45.1 | 38.6 | 39.3 | 40.6 | 42.8 | | | | |
| | S/T | 0.92 | 0.85 | 0.71 | 0.57 | 1.00 | 0.85 | 0.72 | 0.57 | 1.00 | 0.88 | 0.74 | 0.60 | 1.00 | 0.90 | 0.76 | 0.62 | 1.00 | 1.00 | 0.78 | 0.64 | 1.00 | 1.00 | 0.83 | 0.69 | | | | |
| | ΔT | 27 | 25 | 21 | 18 | 27 | 25 | 21 | 18 | 27 | 25 | 22 | 18 | 27 | 25 | 21 | 18 | 26 | 25 | 21 | 18 | 28 | 26 | 22 | 19 | | | | |
| | kW | 2.63 | 2.63 | 2.62 | 2.6 | 2.95 | 2.94 | 2.94 | 3.0 | 3.30 | 3.29 | 3.29 | 3.3 | 3.68 | 3.67 | 3.67 | 3.7 | 4.10 | 4.10 | 4.09 | 4.1 | 4.60 | 4.60 | 4.59 | 4.6 | | | | |
| | Amps | 10.0 | 10.0 | 9.9 | 10.1 | 11.4 | 11.4 | 11.4 | 11.5 | 13.0 | 13.0 | 13.0 | 13.1 | 14.8 | 14.7 | 14.7 | 14.8 | 16.7 | 16.7 | 16.7 | 16.8 | 19.0 | 19.0 | 18.9 | 19.1 | | | | |
| 80 | MBh | 47.8 | 48.4 | 49.8 | 51.9 | 47.3 | 48.0 | 49.4 | 51.5 | 46.1 | 46.8 | 48.2 | 50.3 | 44.1 | 44.7 | 46.1 | 48.2 | 41.5 | 42.2 | 43.6 | 45.7 | 39.2 | 39.8 | 41.2 | 43.3 | | | | |
| | S/T | 1.00 | 0.87 | 0.74 | 0.60 | 1.00 | 0.88 | 0.75 | 0.60 | 1.00 | 0.91 | 0.77 | 0.63 | 1.00 | 0.93 | 0.79 | 0.65 | 1.00 | 1.00 | 0.81 | 0.67 | 1.00 | 1.00 | 0.86 | 0.72 | | | | |
| | ΔT | 26 | 24 | 21 | 17 | 26 | 24 | 21 | 17 | 26 | 24 | 21 | 17 | 26 | 24 | 21 | 17 | 26 | 24 | 20 | 17 | 27 | 25 | 21 | 18 | | | | |
| | kW | 2.64 | 2.64 | 2.64 | 2.66 | 2.96 | 2.96 | 2.95 | 2.97 | 3.31 | 3.31 | 3.30 | 3.32 | 3.69 | 3.69 | 3.68 | 3.70 | 4.11 | 4.11 | 4.10 | 4.13 | 4.61 | 4.61 | 4.60 | 4.63 | | | | |
| | Amps | 10.0 | 10.0 | 10.0 | 10.1 | 11.5 | 11.5 | 11.4 | 11.5 | 13.1 | 13.1 | 13.0 | 13.2 | 14.8 | 14.8 | 14.8 | 14.9 | 16.8 | 16.7 | 16.7 | 16.8 | 19.0 | 19.0 | 19.0 | 19.1 | | | | |
| 1800 | MBh | 48.7 | 49.4 | 50.7 | 52.9 | 48.3 | 48.9 | 50.3 | 52.4 | 47.1 | 47.7 | 49.1 | 51.2 | 45.0 | 45.7 | 47.0 | 49.2 | 42.5 | 43.1 | 44.5 | 46.6 | 40.1 | 40.8 | 42.2 | 44.3 | | | | |
| | S/T | 1.00 | 0.89 | 0.75 | 0.61 | 1.00 | 0.90 | 0.76 | 0.62 | 1.00 | 0.92 | 0.79 | 0.64 | 1.00 | 1.00 | 0.81 | 0.66 | 1.00 | 1.00 | 0.83 | 0.68 | 1.00 | 1.00 | 0.88 | 0.74 | | | | |
| | ΔT | 25 | 23 | 20 | 16 | 25 | 23 | 20 | 16 | 25 | 23 | 20 | 16 | 25 | 23 | 20 | 16 | 25 | 23 | 19 | 16 | 26 | 24 | 21 | 17 | | | | |
| | kW | 2.66 | 2.65 | 2.65 | 2.7 | 2.97 | 2.97 | 2.96 | 3.0 | 3.32 | 3.32 | 3.31 | 3.3 | 3.70 | 3.70 | 3.69 | 3.7 | 4.13 | 4.12 | 4.12 | 4.1 | 4.62 | 4.62 | 4.61 | 4.6 | | | | |
| | Amps | 10.1 | 10.1 | 10.1 | 10.2 | 11.5 | 11.5 | 11.5 | 11.6 | 13.1 | 13.1 | 13.1 | 13.2 | 14.9 | 14.9 | 14.8 | 14.9 | 16.8 | 16.8 | 16.8 | 16.9 | 19.1 | 19.1 | 19.1 | 19.2 | | | | |
| 85 | MBh | 47.9 | 48.6 | 50.0 | 52.1 | 47.5 | 48.2 | 49.6 | 51.7 | 46.3 | 47.0 | 48.4 | 50.5 | 44.2 | 44.9 | 46.3 | 48.4 | 41.7 | 42.4 | 43.7 | 45.9 | 39.4 | 40.0 | 41.4 | 43.5 | | | | |
| | S/T | 1.00 | 0.95 | 0.81 | 0.67 | 1.00 | 0.95 | 0.82 | 0.67 | 1.00 | 1.00 | 0.84 | 0.70 | 1.00 | 1.00 | 0.86 | 0.72 | 1.00 | 1.00 | 0.88 | 0.74 | 1.00 | 1.00 | 1.00 | 0.79 | | | | |
| | ΔT | 30 | 28 | 25 | 21 | 30 | 28 | 25 | 21 | 30 | 29 | 25 | 22 | 30 | 28 | 25 | 21 | 30 | 28 | 25 | 21 | 31 | 29 | 26 | 22 | | | | |
| | kW | 2.64 | 2.64 | 2.63 | 2.7 | 2.95 | 2.95 | 2.94 | 3.0 | 3.30 | 3.30 | 3.29 | 3.3 | 3.68 | 3.68 | 3.67 | 3.7 | 4.11 | 4.10 | 4.10 | 4.1 | 4.60 | 4.60 | 4.60 | 4.6 | | | | |
| | Amps | 10.0 | 10.0 | 10.0 | 10.1 | 11.4 | 11.4 | 11.4 | 11.5 | 13.1 | 13.0 | 13.0 | 13.1 | 14.8 | 14.8 | 14.8 | 14.9 | 16.7 | 16.7 | 16.7 | 16.8 | 19.0 | 19.0 | 19.0 | 19.1 | | | | |
| 1600 | MBh | 48.5 | 49.2 | 50.6 | 52.7 | 48.1 | 48.8 | 50.2 | 52.3 | 46.9 | 47.6 | 49.0 | 51.1 | 44.8 | 45.5 | 46.9 | 49.0 | 42.3 | 42.9 | 44.3 | 46.4 | 40.0 | 40.6 | 42.0 | 44.1 | | | | |
| | S/T | 1.00 | 0.98 | 0.84 | 0.70 | 1.00 | 0.98 | 0.85 | 0.70 | 1.00 | 1.00 | 0.87 | 0.73 | 1.00 | 1.00 | 0.89 | 0.75 | 1.00 | 1.00 | 0.91 | 0.77 | 1.00 | 1.00 | 1.00 | 0.82 | | | | |
| | ΔT | 29 | 28 | 24 | 21 | 29 | 28 | 24 | 21 | 30 | 28 | 24 | 21 | 29 | 28 | 24 | 21 | 29 | 27 | 24 | 20 | 30 | 28 | 25 | 22 | | | | |
| | kW | 2.65 | 2.65 | 2.64 | 2.67 | 2.96 | 2.96 | 2.96 | 2.98 | 3.31 | 3.31 | 3.31 | 3.33 | 3.69 | 3.69 | 3.69 | 3.71 | 4.12 | 4.12 | 4.11 | 4.13 | 4.61 | 4.61 | 4.61 | 4.63 | | | | |
| | Amps | 10.1 | 10.1 | 10.0 | 10.1 | 11.5 | 11.5 | 11.5 | 11.6 | 13.1 | 13.1 | 13.1 | 13.2 | 14.8 | 14.8 | 14.8 | 14.9 | 16.8 | 16.8 | 16.7 | 16.9 | 19.1 | 19.0 | 19.0 | 19.1 | | | | |
| 1800 | MBh | 49.5 | 50.1 | 51.5 | 53.6 | 49.1 | 49.7 | 51.1 | 53.2 | 47.9 | 48.5 | 49.9 | 52.0 | 45.8 | 46.4 | 47.8 | 49.9 | 43.2 | 43.9 | 45.3 | 47.4 | 40.9 | 41.6 | 43.0 | 45.1 | | | | |
| | S/T | 1.00 | 0.99 | 0.86 | 0.71 | 1.00 | 1.00 | 0.86 | 0.72 | 1.00 | 1.00 | 0.89 | 0.74 | 1.00 | 1.00 | 0.91 | 0.76 | 1.00 | 1.00 | 0.93 | 0.79 | 1.00 | 1.00 | 1.00 | 0.84 | | | | |
| | ΔT | 29 | 27 | 23 | 20 | 29 | 27 | 23 | 20 | 29 | 27 | 24 | 20 | 28 | 27 | 23 | 20 | 28 | 26 | 23 | 19 | 29 | 28 | 24 | 21 | | | | |
| | kW | 2.66 | 2.66 | 2.66 | 2.7 | 2.98 | 2.97 | 2.97 | 3.0 | 3.33 | 3.33 | 3.32 | 3.3 | 3.71 | 3.70 | 3.70 | 3.7 | 4.13 | 4.13 | 4.12 | 4.1 | 4.63 | 4.63 | 4.62 | 4.6 | | | | |
| | Amps | 10.1 | 10.1 | 10.1 | 10.2 | 11.6 | 11.5 | 11.5 | 11.6 | 13.2 | 13.2 | 13.1 | 13.2 | 14.9 | 14.9 | 14.9 | 15.0 | 16.8 | 16.8 | 16.8 | 16.9 | 19.1 | 19.1 | 19.1 | 19.2 | | | | |

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area is ACCA (TVA) conditions.
 KW= Total system power
 Amps = outdoor unit amps (comp.+fan)

EXPANDED COOLING DATA — DH4SEA6030A*/6040A*+AMST60DU1300A*

| IDB | | OUTDOOR AMBIENT TEMPERATURE | | | | | | | | | | | | ENTERING INDOOR WET BULB TEMPERATURE | | | | | | | | | | | | KW=Total system power Amps = outdoor unit amps (Comp.+fan) | |
|-------------|------|-----------------------------|------|------|------|------|------|------|------|------|------|------|------|--------------------------------------|------|------|------|------|------|------|------|------|------|------|------|---|--|
| | | 65 | | | | 75 | | | | 85 | | | | 95 | | | | 105 | | | | 115 | | | | | |
| | | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | | |
| 70 | MBh | 58.2 | 59.0 | 60.8 | - | 57.7 | 58.5 | 60.3 | - | 56.2 | 57.0 | 58.8 | - | 53.6 | 54.5 | 56.2 | - | 50.5 | 51.3 | 53.0 | - | 47.6 | 48.4 | 50.1 | - | | |
| | S/T | 0.65 | 0.57 | 0.44 | - | 0.66 | 0.58 | 0.45 | - | 0.68 | 0.61 | 0.47 | - | 0.70 | 0.62 | 0.49 | - | 1.00 | 0.65 | 0.51 | - | 1.00 | 0.70 | 0.56 | - | | |
| | ΔT | 19 | 17 | 14 | - | 19 | 17 | 14 | - | 19 | 17 | 14 | - | 19 | 17 | 14 | - | 19 | 17 | 13 | - | 20 | 18 | 15 | - | | |
| | KW | 3.21 | 3.21 | 3.20 | - | 3.62 | 3.62 | 3.61 | - | 4.07 | 4.07 | 4.06 | - | 4.57 | 4.56 | 4.56 | - | 5.12 | 5.12 | 5.11 | - | 5.76 | 5.76 | 5.75 | - | | |
| | Amps | 12.6 | 12.6 | 12.6 | - | 14.5 | 14.5 | 14.5 | - | 16.6 | 16.6 | 16.5 | - | 18.8 | 18.8 | 18.8 | - | 21.4 | 21.3 | 21.3 | - | 24.3 | 24.3 | 24.3 | - | | |
| 1800 | MBh | 59.0 | 59.8 | 61.6 | - | 58.5 | 59.3 | 61.0 | - | 57.0 | 57.8 | 59.5 | - | 54.4 | 55.2 | 57.0 | - | 51.3 | 52.1 | 53.8 | - | 48.4 | 49.2 | 50.9 | - | | |
| | S/T | 0.68 | 0.61 | 0.47 | - | 0.69 | 0.61 | 0.48 | - | 0.71 | 0.64 | 0.50 | - | 0.73 | 0.65 | 0.52 | - | 1.00 | 0.68 | 0.54 | - | 1.00 | 0.73 | 0.59 | - | | |
| | ΔT | 18 | 16 | 13 | - | 18 | 16 | 13 | - | 18 | 17 | 13 | - | 18 | 16 | 13 | - | 18 | 16 | 13 | - | 19 | 17 | 14 | - | | |
| | KW | 3.23 | 3.22 | 3.22 | - | 3.63 | 3.63 | 3.62 | - | 4.09 | 4.09 | 4.08 | - | 4.58 | 4.58 | 4.57 | - | 5.13 | 5.13 | 5.12 | - | 5.78 | 5.78 | 5.77 | - | | |
| | Amps | 12.7 | 12.7 | 12.7 | - | 14.6 | 14.6 | 14.5 | - | 16.7 | 16.6 | 16.6 | - | 18.9 | 18.9 | 18.9 | - | 21.4 | 21.4 | 21.4 | - | 24.4 | 24.4 | 24.3 | - | | |
| 2250 | MBh | 60.2 | 61.0 | 62.8 | - | 59.7 | 60.5 | 62.2 | - | 58.2 | 59.0 | 60.7 | - | 55.6 | 56.4 | 58.2 | - | 52.5 | 53.3 | 55.0 | - | 49.6 | 50.4 | 52.1 | - | | |
| | S/T | 0.69 | 0.62 | 0.49 | - | 0.70 | 0.62 | 0.49 | - | 0.72 | 0.65 | 0.52 | - | 1.00 | 0.67 | 0.54 | - | 1.00 | 0.69 | 0.56 | - | 1.00 | 0.74 | 0.61 | - | | |
| | ΔT | 17 | 15 | 12 | - | 17 | 15 | 12 | - | 17 | 16 | 12 | - | 17 | 15 | 12 | - | 17 | 15 | 12 | - | 18 | 16 | 13 | - | | |
| | KW | 3.24 | 3.24 | 3.23 | - | 3.65 | 3.65 | 3.64 | - | 4.11 | 4.10 | 4.10 | - | 4.60 | 4.60 | 4.59 | - | 5.15 | 5.15 | 5.14 | - | 5.80 | 5.79 | 5.79 | - | | |
| | Amps | 12.8 | 12.8 | 12.7 | - | 14.7 | 14.6 | 14.6 | - | 16.7 | 16.7 | 16.7 | - | 19.0 | 19.0 | 18.9 | - | 21.5 | 21.5 | 21.5 | - | 24.5 | 24.5 | 24.4 | - | | |
| 1800 | MBh | 58.3 | 59.1 | 60.8 | 63.4 | 57.8 | 58.6 | 60.3 | 62.9 | 56.3 | 57.1 | 58.8 | 61.4 | 53.7 | 54.5 | 56.2 | 58.8 | 50.5 | 51.3 | 53.0 | 55.7 | 47.6 | 48.4 | 50.2 | 52.8 | | |
| | S/T | 0.77 | 0.70 | 0.57 | 0.43 | 0.78 | 0.71 | 0.57 | 0.44 | 1.00 | 0.73 | 0.60 | 0.46 | 1.00 | 0.75 | 0.62 | 0.48 | 1.00 | 0.77 | 0.64 | 0.50 | 1.00 | 0.82 | 0.69 | 0.55 | | |
| | ΔT | 23 | 21 | 18 | 14 | 23 | 21 | 18 | 14 | 23 | 21 | 18 | 14 | 23 | 21 | 18 | 14 | 23 | 21 | 17 | 14 | 24 | 22 | 19 | 15 | | |
| | KW | 3.21 | 3.20 | 3.20 | 3.2 | 3.62 | 3.61 | 3.61 | 3.6 | 4.07 | 4.07 | 4.06 | 4.1 | 4.56 | 4.56 | 4.55 | 4.6 | 5.12 | 5.11 | 5.11 | 5.1 | 5.76 | 5.76 | 5.75 | 5.8 | | |
| | Amps | 12.6 | 12.6 | 12.6 | 12.7 | 14.5 | 14.5 | 14.4 | 14.6 | 16.6 | 16.6 | 16.5 | 16.7 | 18.8 | 18.8 | 18.8 | 18.9 | 21.3 | 21.3 | 21.3 | 21.4 | 24.3 | 24.3 | 24.3 | 24.4 | | |
| 2000 | MBh | 59.1 | 59.9 | 61.6 | 64.2 | 58.6 | 59.4 | 61.1 | 63.7 | 57.1 | 57.9 | 59.6 | 62.2 | 54.5 | 55.3 | 57.0 | 59.6 | 51.3 | 52.1 | 53.8 | 56.5 | 48.4 | 49.2 | 51.0 | 53.6 | | |
| | S/T | 0.81 | 0.73 | 0.60 | 0.46 | 0.81 | 0.74 | 0.61 | 0.47 | 1.00 | 0.76 | 0.63 | 0.49 | 1.00 | 0.78 | 0.65 | 0.51 | 1.00 | 0.80 | 0.67 | 0.53 | 1.00 | 1.00 | 0.72 | 0.58 | | |
| | ΔT | 22 | 20 | 17 | 13 | 22 | 20 | 17 | 13 | 23 | 21 | 17 | 14 | 22 | 20 | 17 | 13 | 22 | 20 | 17 | 13 | 23 | 21 | 18 | 14 | | |
| | KW | 3.22 | 3.22 | 3.21 | 3.24 | 3.63 | 3.63 | 3.62 | 3.65 | 4.09 | 4.08 | 4.08 | 4.11 | 4.58 | 4.57 | 4.57 | 4.60 | 5.13 | 5.13 | 5.12 | 5.15 | 5.78 | 5.77 | 5.77 | 5.80 | | |
| | Amps | 12.7 | 12.7 | 12.6 | 12.8 | 14.6 | 14.5 | 14.5 | 14.7 | 16.6 | 16.6 | 16.6 | 16.7 | 18.9 | 18.9 | 18.9 | 19.0 | 21.4 | 21.4 | 21.4 | 21.5 | 24.4 | 24.4 | 24.3 | 24.5 | | |
| 2250 | MBh | 60.3 | 61.1 | 62.8 | 65.4 | 59.8 | 60.6 | 62.3 | 64.9 | 58.3 | 59.1 | 60.8 | 63.4 | 55.7 | 56.5 | 58.2 | 60.8 | 52.5 | 53.3 | 55.0 | 57.7 | 49.6 | 50.4 | 52.2 | 54.8 | | |
| | S/T | 0.82 | 0.74 | 0.61 | 0.47 | 0.82 | 0.75 | 0.62 | 0.48 | 1.00 | 0.78 | 0.64 | 0.50 | 1.00 | 0.79 | 0.66 | 0.52 | 1.00 | 0.82 | 0.68 | 0.54 | 1.00 | 1.00 | 0.73 | 0.59 | | |
| | ΔT | 21 | 19 | 16 | 12 | 21 | 19 | 16 | 12 | 22 | 20 | 16 | 13 | 21 | 19 | 16 | 12 | 21 | 19 | 16 | 12 | 22 | 20 | 17 | 13 | | |
| | KW | 3.24 | 3.24 | 3.23 | 3.3 | 3.65 | 3.65 | 3.64 | 3.7 | 4.11 | 4.10 | 4.10 | 4.1 | 4.60 | 4.60 | 4.59 | 4.6 | 5.15 | 5.15 | 5.14 | 5.2 | 5.80 | 5.79 | 5.79 | 5.8 | | |
| | Amps | 12.8 | 12.8 | 12.7 | 12.9 | 14.6 | 14.6 | 14.6 | 14.7 | 16.7 | 16.7 | 16.7 | 16.8 | 19.0 | 19.0 | 18.9 | 19.1 | 21.5 | 21.5 | 21.5 | 21.6 | 24.5 | 24.4 | 24.4 | 24.6 | | |

IDB: Entering Indoor Dry Bulb Temperature
High and low pressures are measured at the liquid and suction service valves.
Shaded area is ACCA (TVA) conditions.
KW=Total system power
Amps = outdoor unit amps (Comp.+fan)

EXPANDED COOLING DATA — DH4SEA6030A*/6040A*+AMST60DU1300A* (CONT.)

| IDB | | OUTDOOR AMBIENT TEMPERATURE | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|------|--------------------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|-------------|------|------|------|------|------|------|------|------|------|
| | | 65 | | | | 75 | | | | 85 | | | | 95 | | | | 105 | | | | 115 | | | |
| | | ENTERING INDOOR WET BULB TEMPERATURE | | | | | | | | | | | | | | | | | | | | | | | |
| AIRFLOW | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | |
| 1800 | MBh | 58.6 | 59.4 | 61.1 | 63.7 | 58.1 | 58.9 | 60.6 | 63.2 | 56.6 | 57.4 | 59.1 | 61.7 | 54.0 | 54.8 | 56.5 | 59.1 | 50.8 | 51.6 | 53.3 | 56.0 | 47.9 | 48.7 | 50.5 | 53.1 |
| | S/T | 0.90 | 0.82 | 0.69 | 0.55 | 1.00 | 0.83 | 0.70 | 0.56 | 1.00 | 0.85 | 0.72 | 0.58 | 1.00 | 0.87 | 0.74 | 0.60 | 1.00 | 1.00 | 0.76 | 0.62 | 1.00 | 1.00 | 0.81 | 0.67 |
| | ΔT | 27 | 25 | 22 | 18 | 27 | 25 | 22 | 18 | 27 | 26 | 22 | 19 | 27 | 25 | 22 | 18 | 27 | 25 | 22 | 18 | 28 | 26 | 23 | 19 |
| | KW | 3.21 | 3.21 | 3.20 | 3.2 | 3.62 | 3.62 | 3.61 | 3.6 | 4.07 | 4.07 | 4.06 | 4.1 | 4.57 | 4.56 | 4.56 | 4.6 | 5.12 | 5.11 | 5.11 | 5.1 | 5.76 | 5.76 | 5.75 | 5.8 |
| | Amps | 12.6 | 12.6 | 12.6 | 12.7 | 14.5 | 14.5 | 14.4 | 14.6 | 16.6 | 16.6 | 16.5 | 16.7 | 18.8 | 18.8 | 18.8 | 18.9 | 21.4 | 21.3 | 21.3 | 21.5 | 24.3 | 24.3 | 24.3 | 24.4 |
| 2000 | MBh | 59.4 | 60.2 | 61.9 | 64.5 | 58.9 | 59.7 | 61.4 | 64.0 | 57.4 | 58.2 | 59.9 | 62.5 | 54.8 | 55.6 | 57.3 | 59.9 | 51.6 | 52.4 | 54.1 | 56.8 | 48.7 | 49.5 | 51.3 | 53.9 |
| | S/T | 1.00 | 0.85 | 0.72 | 0.58 | 1.00 | 0.86 | 0.73 | 0.59 | 1.00 | 0.88 | 0.75 | 0.61 | 1.00 | 0.90 | 0.77 | 0.63 | 1.00 | 1.00 | 0.79 | 0.65 | 1.00 | 1.00 | 0.84 | 0.70 |
| | ΔT | 26 | 25 | 21 | 17 | 26 | 25 | 21 | 17 | 27 | 25 | 21 | 18 | 26 | 24 | 21 | 17 | 26 | 24 | 21 | 17 | 27 | 25 | 22 | 18 |
| | KW | 3.23 | 3.22 | 3.22 | 3.25 | 3.63 | 3.63 | 3.62 | 3.66 | 4.09 | 4.09 | 4.08 | 4.11 | 4.58 | 4.58 | 4.57 | 4.60 | 5.13 | 5.13 | 5.12 | 5.15 | 5.78 | 5.78 | 5.77 | 5.80 |
| | Amps | 12.7 | 12.7 | 12.7 | 12.8 | 14.6 | 14.6 | 14.5 | 14.7 | 16.7 | 16.6 | 16.6 | 16.8 | 18.9 | 18.9 | 18.9 | 19.0 | 21.4 | 21.4 | 21.4 | 21.5 | 24.4 | 24.4 | 24.3 | 24.5 |
| 2250 | MBh | 60.6 | 61.4 | 63.1 | 65.7 | 60.1 | 60.9 | 62.6 | 65.2 | 58.5 | 59.4 | 61.1 | 63.7 | 56.0 | 56.8 | 58.5 | 61.1 | 52.8 | 53.6 | 55.3 | 58.0 | 49.9 | 50.7 | 52.5 | 55.1 |
| | S/T | 1.00 | 0.87 | 0.73 | 0.60 | 1.00 | 0.87 | 0.74 | 0.60 | 1.00 | 0.90 | 0.77 | 0.63 | 1.00 | 1.00 | 0.78 | 0.64 | 1.00 | 1.00 | 0.81 | 0.67 | 1.00 | 1.00 | 0.86 | 0.72 |
| | ΔT | 25 | 24 | 20 | 17 | 25 | 24 | 20 | 16 | 26 | 24 | 20 | 17 | 25 | 24 | 20 | 16 | 25 | 23 | 20 | 16 | 26 | 24 | 21 | 17 |
| | KW | 3.24 | 3.24 | 3.23 | 3.3 | 3.65 | 3.65 | 3.64 | 3.7 | 4.11 | 4.10 | 4.10 | 4.1 | 4.60 | 4.60 | 4.59 | 4.6 | 5.15 | 5.15 | 5.14 | 5.2 | 5.80 | 5.79 | 5.79 | 5.8 |
| | Amps | 12.8 | 12.8 | 12.7 | 12.9 | 14.6 | 14.6 | 14.6 | 14.7 | 16.7 | 16.7 | 16.7 | 16.8 | 19.0 | 19.0 | 18.9 | 19.1 | 21.5 | 21.5 | 21.5 | 21.6 | 24.5 | 24.5 | 24.4 | 24.6 |
| 1800 | MBh | 59.5 | 60.3 | 62.1 | 64.7 | 59.0 | 59.8 | 61.6 | 64.2 | 57.5 | 58.3 | 60.1 | 62.7 | 54.9 | 55.8 | 57.5 | 60.1 | 51.8 | 52.6 | 54.3 | 56.9 | 48.9 | 49.7 | 51.4 | 54.1 |
| | S/T | 1.00 | 0.92 | 0.79 | 0.65 | 1.00 | 0.93 | 0.80 | 0.66 | 1.00 | 1.00 | 0.82 | 0.68 | 1.00 | 1.00 | 0.84 | 0.70 | 1.00 | 1.00 | 0.86 | 0.72 | 1.00 | 1.00 | 1.00 | 0.77 |
| | ΔT | 31 | 29 | 26 | 22 | 31 | 29 | 26 | 22 | 31 | 29 | 26 | 22 | 31 | 29 | 26 | 22 | 31 | 29 | 25 | 22 | 32 | 30 | 26 | 23 |
| | KW | 3.22 | 3.21 | 3.21 | 3.2 | 3.63 | 3.62 | 3.62 | 3.6 | 4.08 | 4.08 | 4.07 | 4.1 | 4.57 | 4.57 | 4.56 | 4.6 | 5.13 | 5.12 | 5.12 | 5.1 | 5.77 | 5.77 | 5.76 | 5.8 |
| | Amps | 12.7 | 12.6 | 12.6 | 12.8 | 14.5 | 14.5 | 14.5 | 14.6 | 16.6 | 16.6 | 16.6 | 16.7 | 18.9 | 18.9 | 18.8 | 19.0 | 21.4 | 21.4 | 21.3 | 21.5 | 24.4 | 24.3 | 24.3 | 24.4 |
| 2000 | MBh | 60.3 | 61.1 | 62.9 | 65.5 | 59.8 | 60.6 | 62.3 | 65.0 | 58.3 | 59.1 | 60.8 | 63.5 | 55.7 | 56.5 | 58.3 | 60.9 | 52.6 | 53.4 | 55.1 | 57.7 | 49.7 | 50.5 | 52.2 | 54.9 |
| | S/T | 1.00 | 0.95 | 0.82 | 0.68 | 1.00 | 0.96 | 0.83 | 0.69 | 1.00 | 1.00 | 0.85 | 0.71 | 1.00 | 1.00 | 0.87 | 0.73 | 1.00 | 1.00 | 0.89 | 0.75 | 1.00 | 1.00 | 1.00 | 0.80 |
| | ΔT | 30 | 28 | 25 | 21 | 30 | 28 | 25 | 21 | 30 | 28 | 25 | 21 | 30 | 28 | 25 | 21 | 30 | 28 | 24 | 21 | 31 | 29 | 26 | 22 |
| | KW | 3.23 | 3.23 | 3.22 | 3.25 | 3.64 | 3.64 | 3.63 | 3.66 | 4.10 | 4.09 | 4.09 | 4.12 | 4.59 | 4.59 | 4.58 | 4.61 | 5.14 | 5.14 | 5.13 | 5.16 | 5.79 | 5.78 | 5.78 | 5.81 |
| | Amps | 12.7 | 12.7 | 12.7 | 12.8 | 14.6 | 14.6 | 14.6 | 14.7 | 16.7 | 16.7 | 16.6 | 16.8 | 18.9 | 18.9 | 18.9 | 19.0 | 21.5 | 21.5 | 21.4 | 21.6 | 24.4 | 24.4 | 24.4 | 24.5 |
| 2250 | MBh | 61.5 | 62.3 | 64.1 | 66.7 | 61.0 | 61.8 | 63.5 | 66.2 | 59.5 | 60.3 | 62.0 | 64.7 | 56.9 | 57.7 | 59.5 | 62.1 | 53.8 | 54.6 | 56.3 | 58.9 | 50.9 | 51.7 | 53.4 | 56.1 |
| | S/T | 1.00 | 0.97 | 0.83 | 0.69 | 1.00 | 1.00 | 0.84 | 0.70 | 1.00 | 1.00 | 0.86 | 0.72 | 1.00 | 1.00 | 0.88 | 0.74 | 1.00 | 1.00 | 0.90 | 0.77 | 1.00 | 1.00 | 1.00 | 0.82 |
| | ΔT | 29 | 27 | 24 | 20 | 29 | 27 | 24 | 20 | 29 | 27 | 24 | 20 | 29 | 27 | 24 | 20 | 29 | 27 | 23 | 20 | 30 | 28 | 25 | 21 |
| | KW | 3.25 | 3.25 | 3.24 | 3.3 | 3.66 | 3.66 | 3.65 | 3.7 | 4.12 | 4.11 | 4.10 | 4.1 | 4.61 | 4.61 | 4.60 | 4.6 | 5.16 | 5.16 | 5.15 | 5.2 | 5.81 | 5.80 | 5.80 | 5.8 |
| | Amps | 12.8 | 12.8 | 12.8 | 12.9 | 14.7 | 14.7 | 14.6 | 14.8 | 16.8 | 16.8 | 16.7 | 16.9 | 19.0 | 19.0 | 19.0 | 19.1 | 21.5 | 21.5 | 21.5 | 21.6 | 24.5 | 24.5 | 24.5 | 24.6 |

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area is ACCA (TVA) conditions.
 KW= Total system power
 Amps = outdoor unit amps (comp.+fan)

EXPANDED HEATING DATA

DH4SEA3630A*/3640A*+AMST36CU1300A*

| | OUTDOOR AMBIENT TEMPERATURE | | | | | | | | | | | | | | | | |
|------|-----------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| | 65 | 60 | 55 | 50 | 47 | 45 | 40 | 35 | 30 | 25 | 20 | 17 | 15 | 10 | 5 | 0 | -5 |
| MBh | 43.76 | 41.15 | 38.57 | 36.04 | 34.40 | 33.21 | 30.27 | 27.46 | 25.15 | 23.47 | 22.25 | 21.60 | 20.75 | 18.61 | 16.48 | 14.35 | 12.21 |
| T/R | 32.74 | 31.08 | 29.42 | 27.76 | 26.77 | 25.88 | 23.55 | 21.37 | 19.57 | 18.26 | 17.32 | 16.81 | 16.14 | 14.48 | 12.82 | 11.16 | 9.50 |
| KW | 2.78 | 2.74 | 2.70 | 2.66 | 2.64 | 2.62 | 2.58 | 2.54 | 2.50 | 2.46 | 2.42 | 2.40 | 2.38 | 2.34 | 2.30 | 2.26 | 2.22 |
| AMPS | 10.2 | 10.0 | 9.9 | 9.7 | 9.6 | 9.5 | 9.3 | 9.2 | 9.0 | 8.8 | 8.6 | 8.5 | 8.5 | 8.3 | 8.1 | 7.9 | 7.8 |
| COP | 4.61 | 4.39 | 4.18 | 3.97 | 3.82 | 3.71 | 3.43 | 3.17 | 2.95 | 2.79 | 2.69 | 2.64 | 2.55 | 2.33 | 2.10 | 1.86 | 1.61 |

DH4SEA4830A*/4840A*+AMST48CU1300A*

| | OUTDOOR AMBIENT TEMPERATURE | | | | | | | | | | | | | | | | |
|------|-----------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| | 65 | 60 | 55 | 50 | 47 | 45 | 40 | 35 | 30 | 25 | 20 | 17 | 15 | 10 | 5 | 0 | -5 |
| MBh | 59.20 | 55.50 | 51.87 | 48.30 | 46.00 | 44.34 | 40.09 | 36.12 | 32.88 | 30.49 | 28.74 | 27.80 | 26.59 | 23.55 | 20.52 | 17.49 | 14.45 |
| T/R | 29.28 | 27.72 | 26.16 | 24.60 | 23.66 | 22.81 | 20.62 | 18.58 | 16.91 | 15.68 | 14.78 | 14.30 | 13.68 | 12.12 | 10.56 | 8.99 | 7.43 |
| KW | 4.09 | 3.89 | 3.69 | 3.49 | 3.37 | 3.29 | 3.09 | 2.89 | 2.70 | 2.50 | 2.30 | 2.18 | 2.10 | 1.90 | 1.70 | 1.50 | 1.30 |
| AMPS | 14.9 | 14.0 | 13.2 | 12.3 | 11.8 | 11.5 | 10.6 | 9.7 | 8.9 | 8.0 | 7.1 | 6.6 | 6.3 | 5.4 | 4.5 | 3.7 | 2.8 |
| COP | 4.25 | 4.19 | 4.12 | 4.06 | 4.00 | 3.95 | 3.80 | 3.66 | 3.58 | 3.58 | 3.67 | 3.74 | 3.71 | 3.63 | 3.53 | 3.41 | 3.25 |

DH4SEA6030A*/6040A*+AMST60DU1300A*


| | OUTDOOR AMBIENT TEMPERATURE | | | | | | | | | | | | | | | | |
|------|-----------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| | 65 | 60 | 55 | 50 | 47 | 45 | 40 | 35 | 30 | 25 | 20 | 17 | 15 | 10 | 5 | 0 | -5 |
| MBh | 73.01 | 68.53 | 64.12 | 59.79 | 57.00 | 54.98 | 49.87 | 45.06 | 41.13 | 38.24 | 36.13 | 35.00 | 33.53 | 29.87 | 26.20 | 22.53 | 18.87 |
| T/R | 36.11 | 34.23 | 32.34 | 30.45 | 29.32 | 28.30 | 25.66 | 23.18 | 21.16 | 19.67 | 18.59 | 18.00 | 17.25 | 15.36 | 13.48 | 11.59 | 9.70 |
| KW | 4.42 | 4.34 | 4.26 | 4.18 | 4.14 | 4.10 | 4.03 | 3.95 | 3.87 | 3.79 | 3.71 | 3.66 | 3.63 | 3.55 | 3.47 | 3.40 | 3.32 |
| AMPS | 16.4 | 16.0 | 15.7 | 15.3 | 15.1 | 15.0 | 14.6 | 14.3 | 14.0 | 13.6 | 13.3 | 13.1 | 12.9 | 12.6 | 12.3 | 11.9 | 11.6 |
| COP | 4.84 | 4.63 | 4.41 | 4.19 | 4.04 | 3.93 | 3.63 | 3.35 | 3.12 | 2.96 | 2.85 | 2.80 | 2.71 | 2.46 | 2.21 | 1.94 | 1.67 |

Calculations are based on nominal CFM and 70 °F indoor dry bulb.

Amps = Outdoor unit amps (comp.+fan)

Note: Shaded area is AHRI Rating Conditions at 47°F outdoor ambient temperature

kW = Total system power

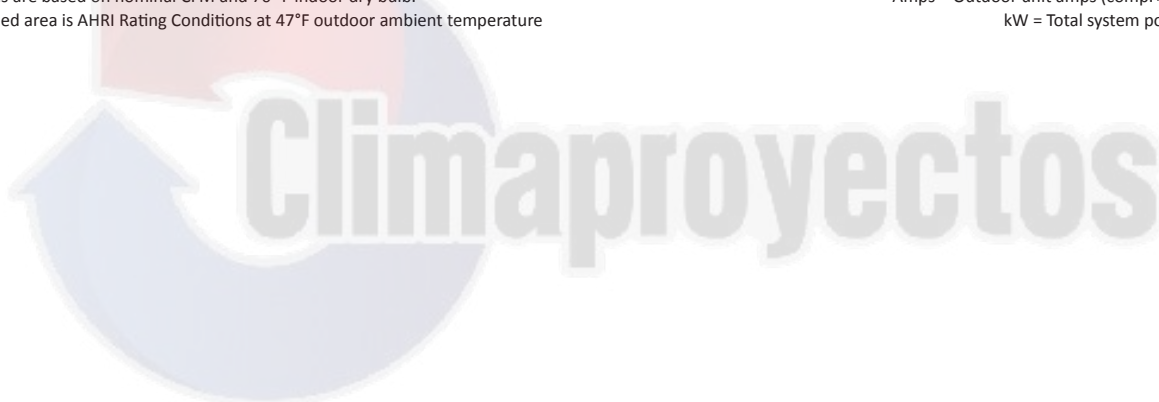

DH4SEA3630A*/3640A*+AMST36CU1300A*

| Conditions: 80 °F IBD, 67 °F IWB @ 1190 CFM | | | | |
|---|---------------|----------------|--------------|--------------|
| Outdoor Tem. ° F. | Total BTU/h | Sensible BTU/h | Latent BTU/h | Total Watts |
| 75 | 37,530 | 26,860 | 10,670 | 2,270 |
| 80 | 37,065 | 26,985 | 10,080 | 2,400 |
| 85 | 36,600 | 27,110 | 9,490 | 2,530 |
| 90 | 35,800 | 26,860 | 8,940 | 2,675 |
| 95 | 35,000 | 26,610 | 8,390 | 2,820 |
| 100 | 34,020 | 26,230 | 7,790 | 2,980 |
| 105 | 33,040 | 25,850 | 7,190 | 3,140 |
| 110 | 32,150 | 25,960 | 6,190 | 3,330 |
| 115 | 31,260 | 26,070 | 5,190 | 3,520 |
| TVA Conditions @ 95° OD DB, 75° ID DB 63° ID WB | | | | |
| 95° | 33,750 | 26,000 | 7,750 | 2,820 |

DH4SEA4830A*/4840A*+AMST48CU1300A*


| Conditions: 80 °F IBD, 67 °F IWB @ 1600 CFM | | | | |
|---|---------------|----------------|--------------|--------------|
| Outdoor Tem. ° F. | Total BTU/h | Sensible BTU/h | Latent BTU/h | Total Watts |
| 75 | 49,380 | 36,810 | 12,570 | 2,950 |
| 80 | 48,775 | 36,965 | 11,810 | 3,125 |
| 85 | 48,170 | 37,120 | 11,050 | 3,300 |
| 90 | 47,130 | 36,770 | 10,360 | 3,490 |
| 95 | 46,090 | 36,420 | 9,670 | 3,680 |
| 100 | 44,820 | 35,895 | 8,925 | 3,890 |
| 105 | 43,550 | 35,370 | 8,180 | 4,100 |
| 110 | 42,390 | 35,490 | 6,900 | 4,350 |
| 115 | 41,230 | 35,610 | 5,620 | 4,600 |
| TVA Conditions @ 95° OD DB, 75° ID DB 63° ID WB | | | | |
| 95° | 44,470 | 35,590 | 8,890 | 3,680 |

DH4SEA6030A*/6040A*+AMST60DU1300A*


| Conditions: 80 °F IBD, 67 °F IWB @ 2000 CFM | | | | |
|---|---------------|----------------|---------------|--------------|
| Outdoor Tem. ° F. | Total BTU/h | Sensible BTU/h | Latent BTU/h | Total Watts |
| 75 | 61,380 | 44,650 | 16,730 | 3,620 |
| 80 | 60,630 | 44,835 | 15,795 | 3,850 |
| 85 | 59,880 | 45,020 | 14,860 | 4,080 |
| 90 | 58,590 | 44,590 | 14,000 | 4,325 |
| 95 | 57,300 | 44,160 | 13,140 | 4,570 |
| 100 | 55,720 | 43,530 | 12,190 | 4,845 |
| 105 | 54,140 | 42,900 | 11,240 | 5,120 |
| 110 | 52,700 | 43,040 | 9,660 | 5,445 |
| 115 | 51,260 | 43,180 | 8,080 | 5,770 |
| TVA Conditions @ 95° OD DB, 75° ID DB 63° ID WB | | | | |
| 95° | 55,280 | 43,160 | 12,130 | 4,580 |

***ALL AHRI SYSTEM RATINGS ARE ACCESSIBLE IN THE UNITARY MATCHUP TOOL VIA
DAIKIN CITY OR IN THE DAIKIN SYSTEM CONFIGURATOR TOOL VIA PARTNERLINK.***



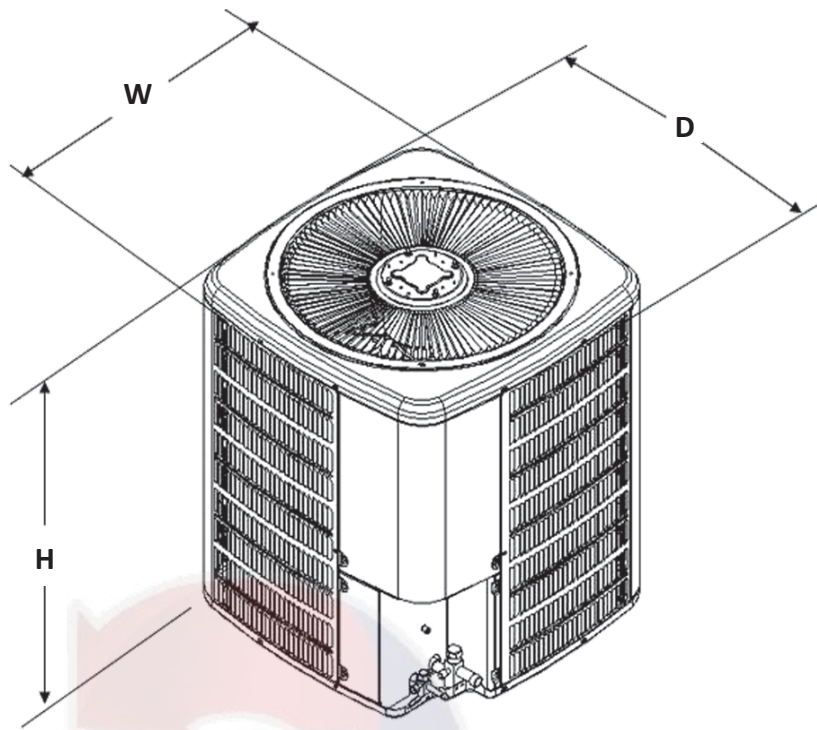

| MODEL | DIMENSIONS | | |
|--------------|------------|-----|-----|
| | W" | D" | H" |
| DH4SEA3630A* | 35½ | 35½ | 35¾ |
| DH4SEA4830A* | 35½ | 35½ | 36½ |
| DH4SEA6030A* | 35½ | 35½ | 41¾ |
| DH4SEA3640A* | 35½ | 35½ | 35¾ |
| DH4SEA4840A* | 35½ | 35½ | 36½ |
| DH4SEA6040A* | 35½ | 35½ | 41¾ |

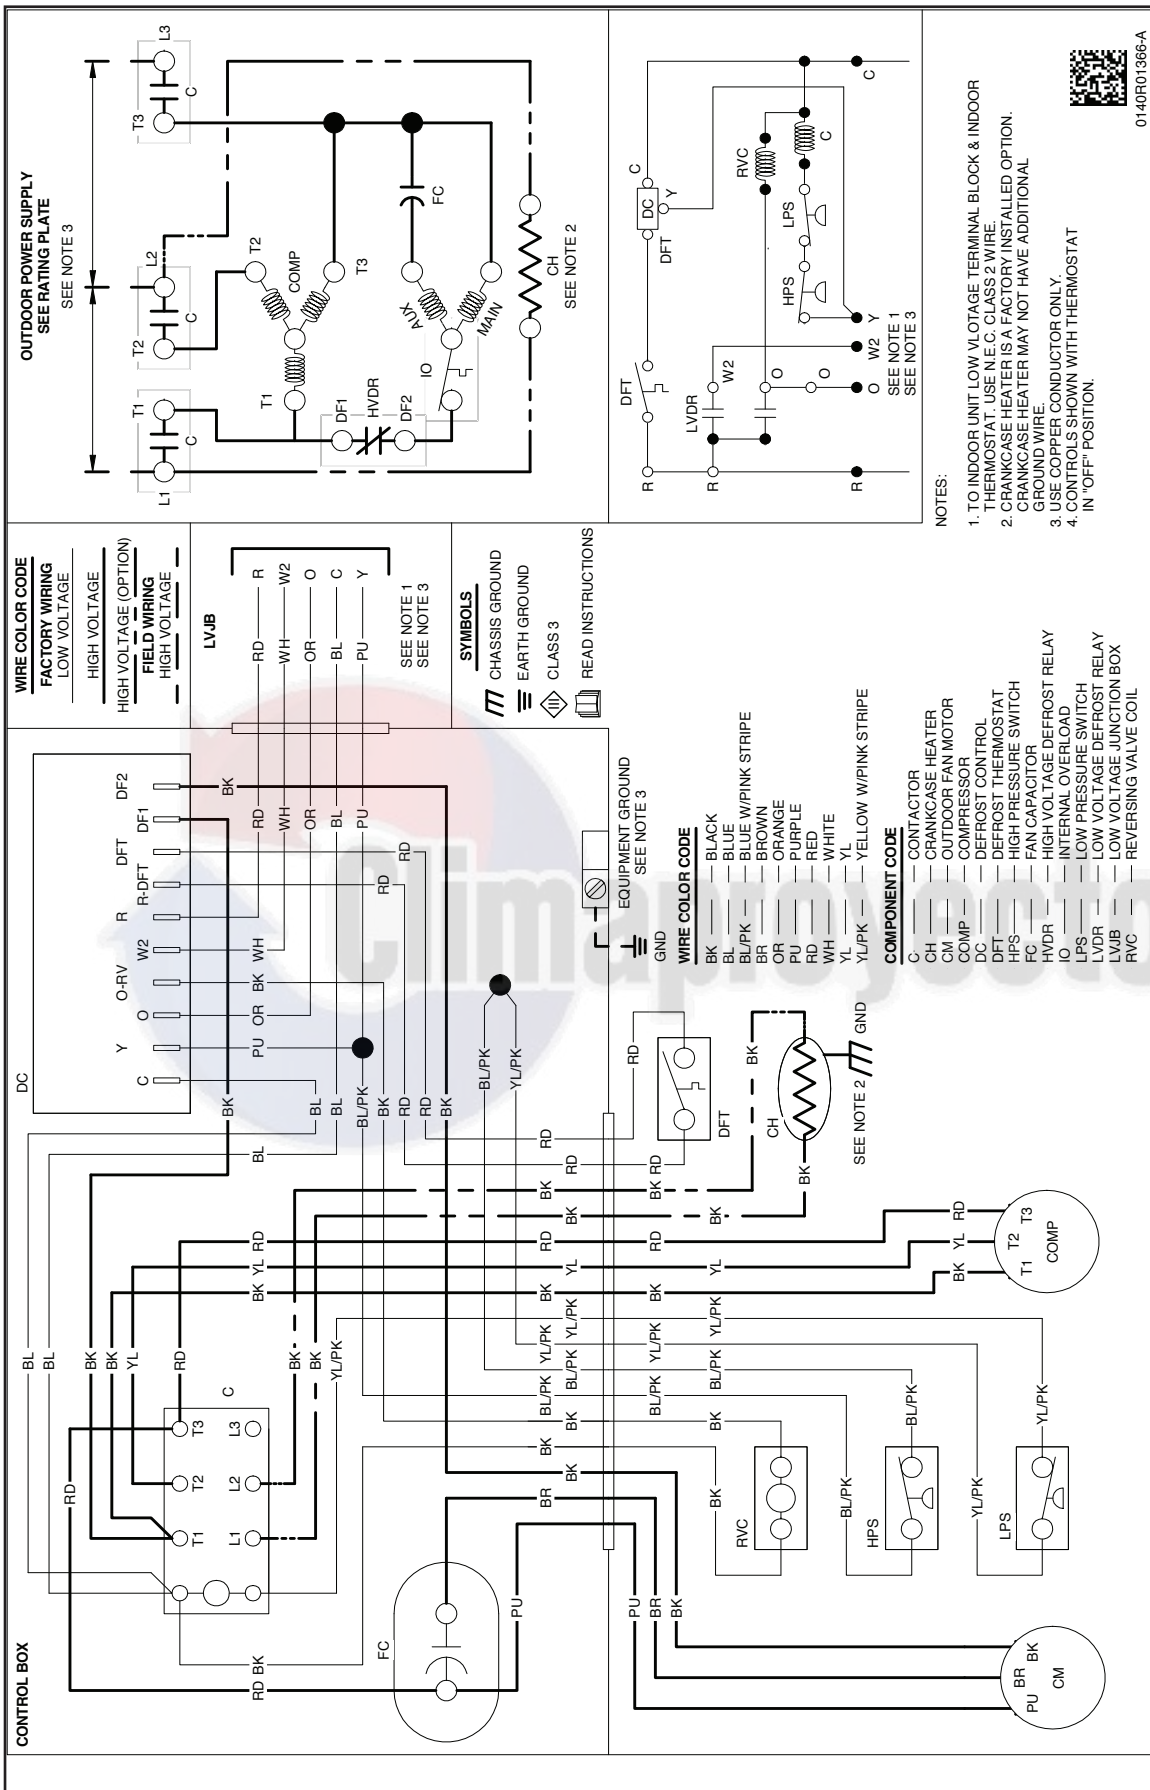

0140R01366-A

NOTES:

1. TO INDOOR UNIT LOW VOLTAGE TERMINAL BLOCK & INDOOR THERMOSTAT. USE N.E.C. CLASS 2 WIRE.
2. CRANKCASE HEATER IS A FACTORY INSTALLED OPTION. CRANKCASE HEATER MAY NOT HAVE ADDITIONAL GROUND WIRE.
3. USE COPPER CONDUCTOR ONLY.
4. CONTROLS SHOWN WITH THERMOSTAT IN "OFF" POSITION.



WARNING
 High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.



Wiring is subject to change. Always refer to the wiring diagram or the unit for the most up-to-date wiring.

| MODEL # | DESCRIPTION | DH4SEA 3630*/3640* | DH4SEA 4830*/4840* | DH4SEA 6030*/6040* |
|-----------------------|------------------------------------|-----------------------|-----------------------|-----------------------|
| ABK-20 | Anchor Bracket Kit ◊ | X | X | X |
| ASC01A | Anti-Short Cycle Kit | X | X | X |
| CSR-U-1 | Hard-start Kit | X | | |
| CSR-U-2 | Hard-start Kit | | X | X |
| CSR-U-3 | Hard-start Kit | | | X |
| FSK01A ¹ | Freeze Protection Kit | X | X | X |
| LSK02A | Liquid Line Solenoid Kit | X | X | X |
| LAKT01 | Low-Ambient Kit | X | X | X |
| OT18-60A ² | Outdoor Thermostat w/ Lockout Stat | X | X | X |

^ Contains 20 brackets; four brackets needed to anchor unit to pad

¹ Installed on indoor coil

² Required for heat pump applications where ambient temperatures fall below 0°F with 50% or higher relative humidity.



