



**42CT Fan Coil Units
Installation Operation
Maintenance Manual**

Table of Contents

1. General Information	25
2. Unit Dimensions and Water Coil Connections	26
3. Installation, Commisisoning, Operation, Maintenance Safety Considerations.....	29
4. Operating Limits.....	31
5. Handling & Installation & Commissioning	32
6. Electrical Data	36
7. Commissioning	39



1. GENERAL INFORMATION

The fan coil units covered in this manual are suitable for indoor installation and ductable for horizontal concealed ceiling application.

1.1. Casing

Along with the air plenum box with filter options. Rear return air plenum and bottom return air plenum options fabricated with a galvanised steel.

1.2. Coil

Blue hydrophilic aluminium fan coil, with copper tube and aluminium fan.

The coil shall have 3 rows/4 rows configurations for 2 pipe application and 3+1 row configuration for 4 pipe application.

1.3. Filters

Washable nylon mesh panel filter&aluminium frame provided as standard. Easily removable from bottom/rear and easily demounted.

1.4. Drain Pan

Fabricated with galvanized with powder coating or stainless steel, and flat design sloped. Drain pan shall be insulated with elastomeric rubber foam.

Stainless steel and extended length drain pans (200 mm longer than standard pans) are optional.

1.5. Fans

Fans are designed wide and large diameter impeller, low speed forward blade.


1.6. Motors

AC motor with permanent split capacitor with three phase.

2. UNIT DIMENSIONS AND WATER COIL CONNECTIONS


Notes:

- The piping connections drain pan outlet and control box can be located on the right hand side or left hand side facing the airflow in the field when needed.
- Unit should be installed for horizontal discharge only.
- All Dimensions are in mm.

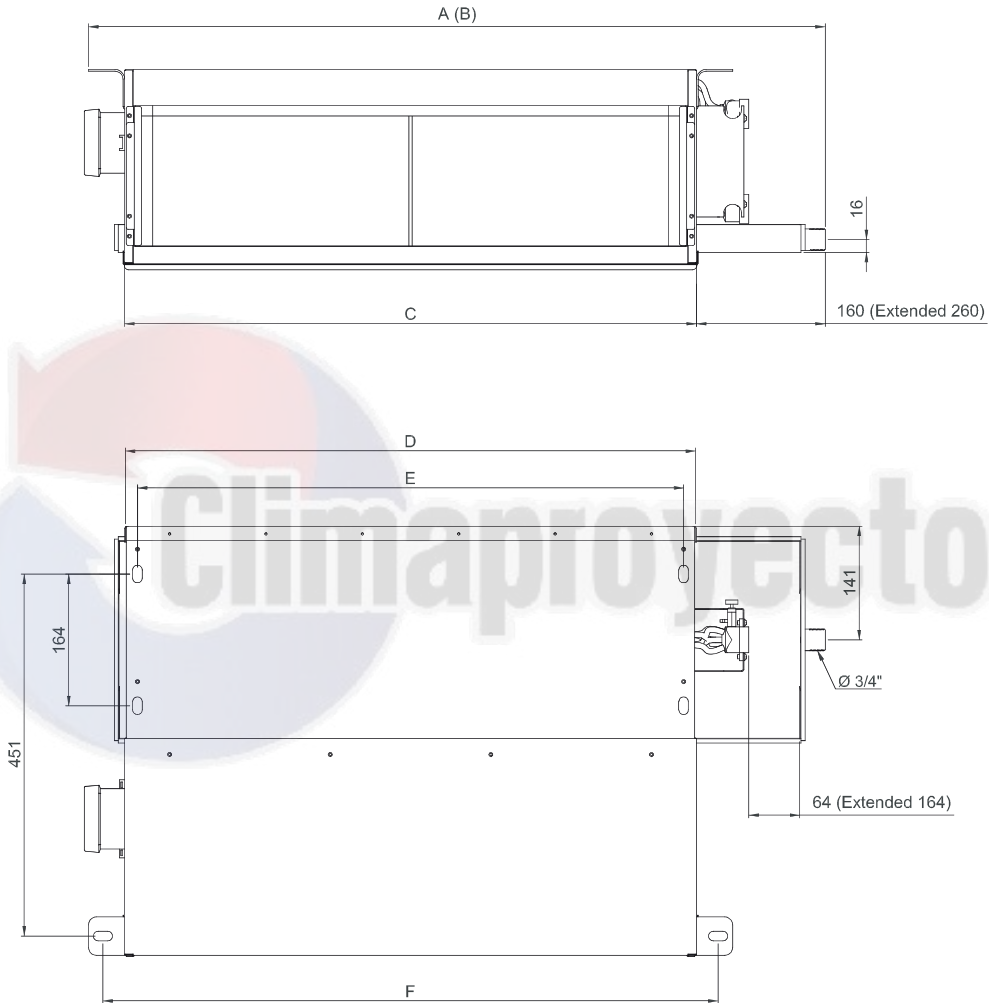


SIZE	A (STANDARD)	B (EXTENDED)	C	D	E	F
02	703	803	492	490	460	546
03	843	943	632	630	600	686
04	923	1023	712	710	680	766
05	1003	1103	792	790	760	846
06	1163	1263	952	950	920	1006
07	1243	1343	1032	1030	1000	1086
08	1483	1583	1272	1270	1240	1326
10	1533	1633	1322	1320	1290	1376
12	1733	1833	1522	1520	1490	1576
14	2103	2203	1892	1890	1860	1946

Standard 2 pipe unit with rear plenum


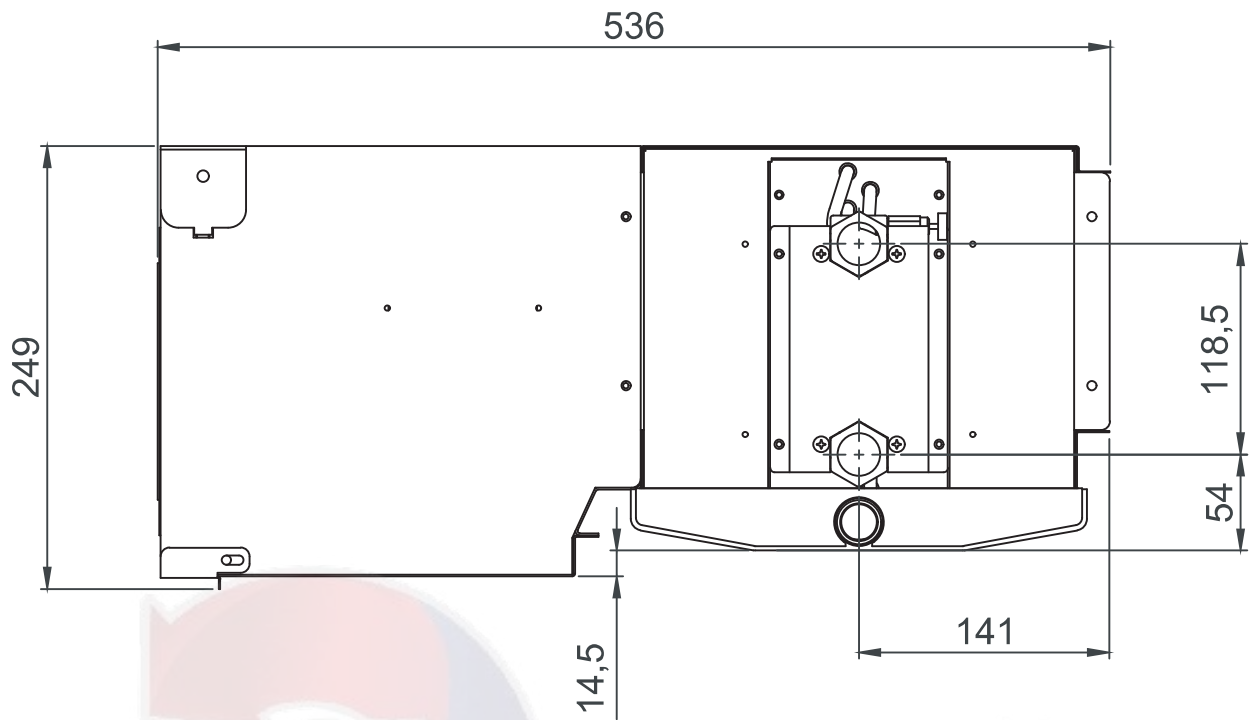


Standard 4 pipe unit with rear plenum

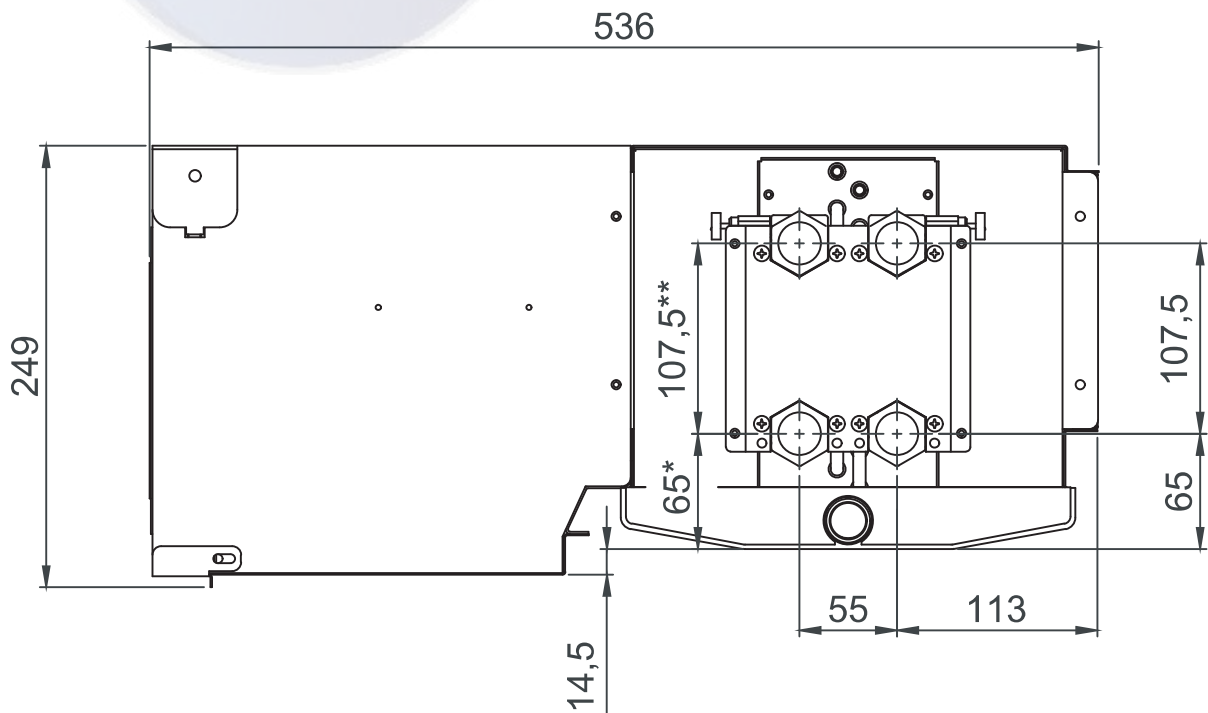

* For the unit size 14, dimension is 54 mm

** For the unit size 14, dimension is 118,5 mm

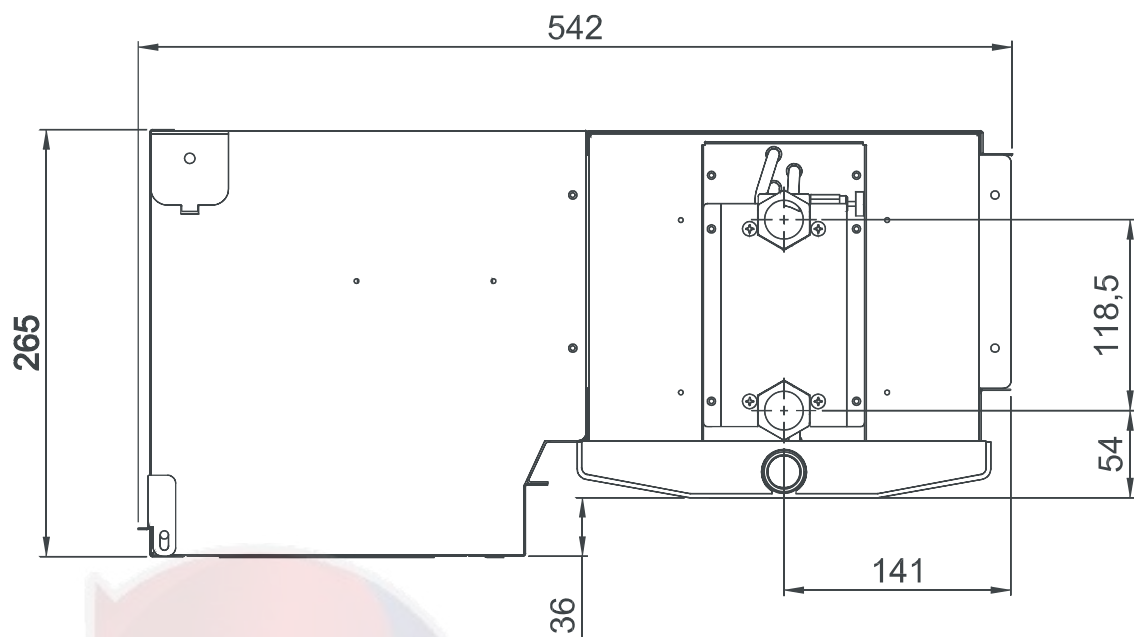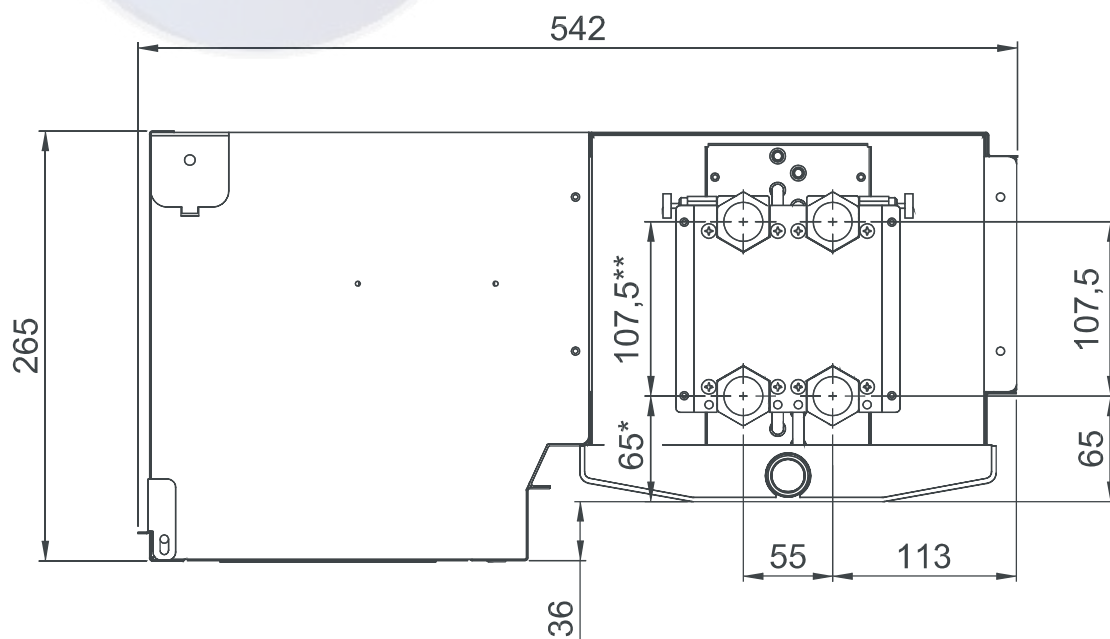Standard 2 pipe unit with bottom plenum*Standard 4 pipe unit with bottom plenum*

* For the unit size 14, dimension is 54 mm

** For the unit size 14, dimension is 118,5 mm

3. INSTALLATION, COMMISSIONING, OPERATION, MAINTENANCE SAFETY CONSIDERATIONS

It is essential that installation, operation and maintenance must be carried out by a qualified, trained and experienced technicians. For safety reasons, technicians are required to read this manual carefully.

The unit is not to be used by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction

- This appliance can be used by children aged from 8 years and above and persons with reduced physical, sensory or mental capabilities or lack of experience and knowledge if they have been given supervision or instruction concerning use of the appliance in a safe way and understand the hazards involved,
- Children being supervised not to play with the appliance,
- Cleaning and user maintenance shall not be made by children without supervision.

Improper installation, adjustment, alteration, service, maintenance or use can cause explosion, fire, electrical shock or other conditions which may cause personal injury or property damage.

All power must be disconnected prior to installation and servicing this equipment. Insure that all power sources have been disconnected to avoid electrocution or shock injuries.

Check that voltage and frequency of the mains power supply are those required for the unit to be installed; the available power must be adequate to operate any other appliances connected to the same line.

Motor and fan must be disconnected to all power prior to opening access panels and servicing.

Ensure that national safety code requirements have been followed for the main supply circuit. Follow all current national safety code requirements. Ensure that a properly sized and connected ground wire is in place. Wear safety glasses and work gloves.

The manufacturer declines any liability for damage resulting from modifications or errors in the electrical or other connections. Failure to observe the installation instructions, or use of the unit under conditions other than those indicated in the unit installation manual, will immediately invalidate the unit warranty.

In order to avoid electric shock, fire or injury, stop the unit and disconnect the safety switch in case of abnormal events (such as smell of burning) and call Alarko Carrier Service for further instructions. Do not place containers filled with liquids or other objects onto the unit.

Motor and fan must be disconnected to all power prior to opening access panels and servicing any maintenance operations or prior to handling any internal parts of the unit.

A routine maintenance should be carried out on the unit to check the correct operation of the electric connections and protection devices.

Do not attempt to repair, move, modify or re-install the unit on your own. To avoid electric shock or fire make sure these operations are carried out by qualified personnel only.

Contact the qualified service if one of the following events takes place:

- Hot or damaged power supply cable;
- Unusual noise during operation;
- Unusual smell (such as smell of burning).

3.1 Warranty

Warranty is based on the general terms and conditions of the manufacturer. Any modifications to the design and/or installation made without discussion with Alarko Carrier and without advance written agreement will result in the loss of the right to any warranty claims and any claim for injury to personnel as a result of these modifications.

4. OPERATING LIMITS

	Cooling mode	Heating mode
Water circuit	Min. inlet temperature > 5°C	Max. inlet temperature < 90°C
	< 50% ethylene / propylene glycol	< 50% ethylene / propylene glycol
	Water side pressure < 16 bar	Water side pressure < 16 bar
Ambient temperature and humidity	T < 30°C / 60% relative humidity	T < 30°C
Supply air temperature	T > 12°C with maximum ambient humidity conditions (14.7 g/kg dry air)	T < 60°C
AC motor - Electrical input	220V - 240V/1ph/50Hz	220V - 240V/1ph/50Hz



5. HANDLING & INSTALLATION & COMMISSIONING

- 42CT fan coil units are shipped individually packed in carton boxes. The units should never be stored and installed where they may be subjected to extreme conditions such as rain, snow, or extreme temperatures, direct sun, too close to heat sources, on humid positions with water hazard, e.g. laundry premises, full of dust, high frequency waves. The unit is for indoor installation. The units should be installed in an area free from obstructions which may cause irregular air distribution and/or return and where condensate can easily be piped to an appropriate drain. The ceiling structure should be strong enough to hook the unit and avoid deformation, rupture or vibration during operation.
- When receiving a shipment, check the condition of the units, report any damage in transit to the shipping file claim with transportation company and notify Alarko Carrier immediately.
- Do not unpack the units until just before they are due to be installed, and make sure they are as close as possible to the installation site when unpacking them.

5.1. Checklist before installation

This unit should be installed on top of the false ceiling. Following is a checklist before the installation is started;

- a. Space requirement and clearance,
- b. Ceiling or mounting strength,
- c. Piping connections,
- d. Condensate drain connection,
- e. Power supply and wiring,
- f. Air duct connections,
- g. Check all critical dimensions such as pipe, wire, and duct connection requirements. Refer to job drawings and product dimension drawings as required,
- h. Be sure power requirements match available power source. Refer to unit wiring diagram see Fig,
- i. Check all tags on unit to determine if shipping screws are to be removed. Remove screws as directed,
- j. Rotate the fan wheel by hand to ensure that the fan is unrestricted and can rotate freely,
- k. The piping connections, drain pan outlet and control box are located on the right side or left side of the unit facing the airflow direction.

5.2. Installation

Drill four holes for the screw anchors close to the four side hooks.

Hook the unit on the screw anchors in the ceiling with $\varnothing 10$ screw.

Adjust the screws to make certain the fan coil is horizontally leveled.

Make certain there is enough space for maintenance and repair when installing the unit. (see below drawing) any rise in the condensate drain piping.


Avoid slack on electrical connections.

Avoid disconnecting water connections after installation.

Avoid only partial insulation of the piping.

Avoid installation not correctly leveled which will cause condensate dripping.

Avoid flattening or kinking pipes or condensate pipes.

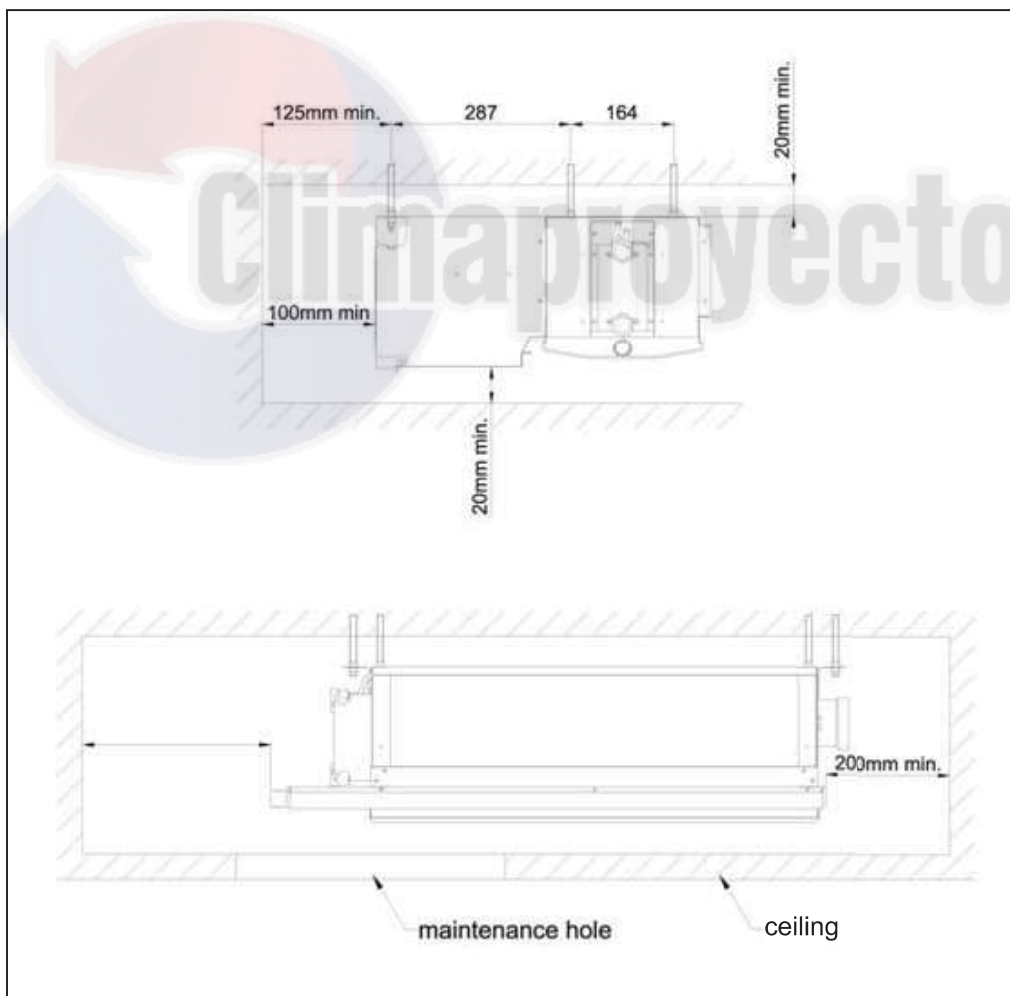

Note: The air duct used in site should match with the normal ESP of unit.

5.3. Condensate drain

Coil surface condensation formed during the cooling cycle is collected in a pan purposely placed under the coil and then drained out through a drain pipe fitted on the coil connection side. A simple flexible tube which fits $\varnothing 19$ mm is recommended.

To facilitate correct condensate draining, make sure that the drain pipe is not bent or restricted and that it has the required slope (at least 2%) along its length.


5.4. Checking

Before unit operation verify that the water flows into the internal condensate drain pan by pouring some water into it.

If problems are detected, check the drain pipe slope and look for possible obstructions.

5.5. Water connections

- In/Out connection is 3/4" FPT, drain connection is 3/4" MPT,
- The water pipe connect with header should be flexible, and use PTFE TAPE to seal. The installation torque shouldn't be larger than 60Nm, or may cause the header to be broken and leakage,
- All the connection pipes must be insulated with a condensation-proof material such as polyurethane, propylene or neoprene of 5 mm to 10 mm thickness,
- Before start-up, blow off all the air in coil through the air vent valve. The air in tube will result the reduction of the capacity and the abnormal noise in the coil.

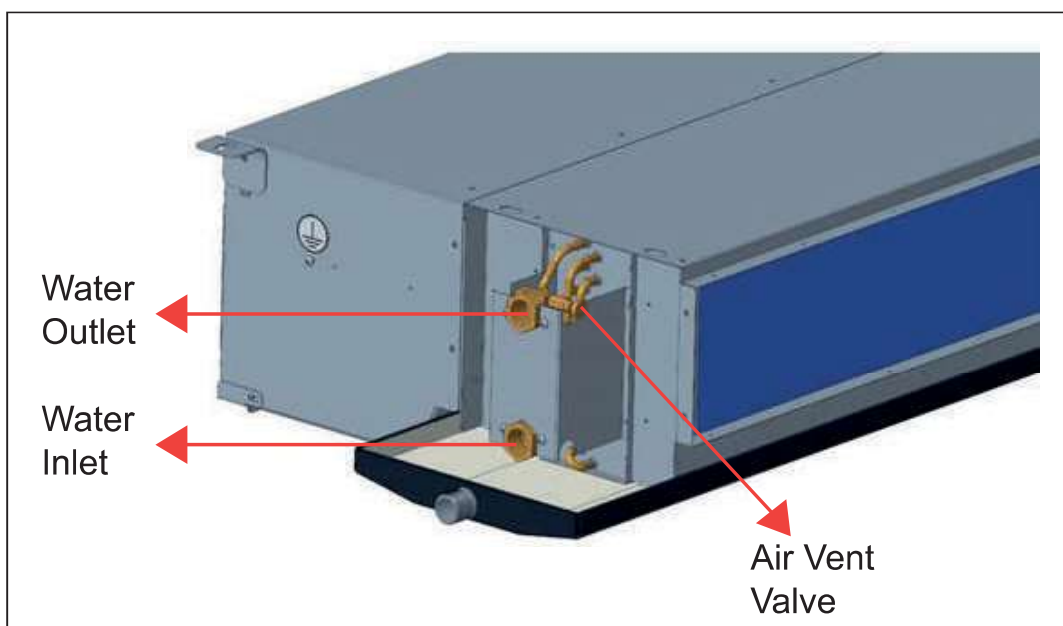

5.6. Electrical connections

All field wiring and components must be installed by a licensed electrician and must comply with relevant local and national regulations.

Check that the power supply corresponds to the nominal power supply stated on the unit nameplate.

To avoid inter-disturbing within motors, do not connect two or more units into one control switch.

For the unit power supply, it is recommended to use cables with a minimum size of 1.5 mm².

Disconnect the power supply to all circuits prior to handling any electrical components.

In order to make the electrical connections you must remove the terminal box cover to access the terminal block.

Make earth connection prior to any other electrical connections.

The unit-wiring diagram shows all unit and field wiring. Before proceeding with the unit connection to the mains supply locate live L and neutral N, then make connections as shown in the wiring diagram.


Terminal box can be mounted on either sides.



Ensure that the mains supply connection is made through a switch that disconnects all poles, with contact gap of a least 3 mm and a suitable safety fuse (F).

All electrical connections should be checked for tightness before startup.

After making all electrical connections do not forget to close the terminal box cover.

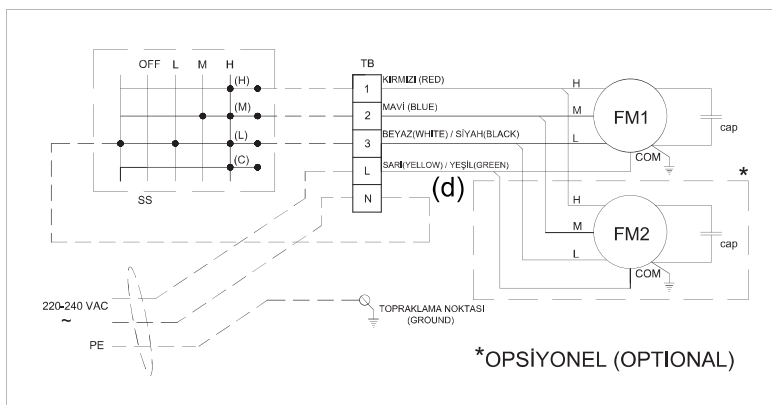

FM	Fan Motor
SS	Switch
TB	Terminal Block
cap	Capacitor
PE	Ground
-	Cabling by manufacturer
--	Cabling by service

6. ELECTRICAL DATA

Fan operation 230V/1ph/50Hz and values are given for units with standard filter.

42CT 2 Pipe 3 Rows Models

42CT0230S				
	Current	Power Consumption	Air Flow	ESP
	A	W	m ³ /h	Pa
Low Speed	0,14	31,80	222	0
	0,14	31,15	196	10
	0,13	30,74	180	15
	0,13	29,55	142	25
	0,12	28,51	114	30
Medium Speed	0,18	41,94	379	0
	0,18	41,31	351	10
	0,18	40,97	336	15
	0,17	39,76	288	30
	0,16	37,49	214	50
High Speed	0,22	50,69	480	0
	0,22	50,08	451	10
	0,22	49,73	436	15
	0,21	48,53	390	30
	0,20	46,56	326	50
	0,20	45,39	294	60

42CT 2 Pipe 4 Rows Models

42CT0240S				
	Current	Power Consumption	Air Flow	ESP
	A	W	m ³ /h	Pa
Low Speed	0,14	31,86	225	0
	0,14	31,29	201	10
	0,13	30,94	188	15
	0,13	30,03	156	25
	0,13	29,39	137	30
	0,12	27,08	83	40
Medium Speed	0,18	41,70	368	0
	0,18	41,11	342	10
	0,18	40,79	329	15
	0,17	39,67	285	30
	0,17	38,77	254	40
	0,16	37,67	219	50
High Speed	0,22	50,25	459	0
	0,22	49,64	432	10
	0,21	49,30	418	15
	0,21	48,15	376	30
	0,20	46,32	319	50
	0,20	45,25	290	60

42CT 4 Pipe 3+1 Rows Models

42CT0231S				
	Current	Power Consumption	Air Flow	ESP
	A	W	m ³ /h	Pa
Low Speed	0,14	31,91	227	0
	0,14	31,34	203	10
	0,13	30,98	189	15
	0,13	30,02	156	25
	0,13	29,31	135	30
	0,12	27,26	87	40
Medium Speed	0,18	41,79	372	0
	0,18	41,21	347	10
	0,18	40,90	333	15
	0,17	39,79	290	30
	0,17	38,89	258	40
	0,16	37,79	223	50
High Speed	0,22	50,31	461	0
	0,22	49,72	435	10
	0,21	49,39	422	15
	0,21	48,28	381	30
	0,20	46,48	324	50
	0,20	45,42	295	60

42CT0330S				
	Current	Power Consumption	Air Flow	ESP
	A	W	m ³ /h	Pa
Low Speed	0,25	57,54	377	0
	0,24	55,59	310	10
	0,24	54,75	284	15
	0,23	53,26	240	25
	0,23	52,59	220	30
	0,22	51,31	184	40
Medium Speed	0,31	70,60	581	0
	0,30	69,48	544	10
	0,30	68,77	523	15
	0,29	65,86	450	30
	0,27	62,69	384	40
High Speed	0,35	81,25	750	0
	0,35	79,78	708	10
	0,34	79,01	686	15
	0,33	76,51	616	30
	0,31	72,40	508	50
	0,30	69,72	443	60

42CT0340S				
	Current	Power Consumption	Air Flow	ESP
	A	W	m ³ /h	Pa
Low Speed	0,25	57,27	367	0
	0,24	55,65	312	10
	0,24	54,91	289	15
	0,23	53,56	248	25
	0,23	52,93	230	30
	0,23	51,75	196	40
Medium Speed	0,30	69,58	555	0
	0,30	68,63	519	10
	0,30	67,90	499	15
	0,28	65,02	431	30
	0,27	62,09	372	40
	0,25	56,63	280	50
High Speed	0,35	79,46	699	0
	0,34	78,10	661	10
	0,34	77,39	640	15
	0,33	75,04	576	30
	0,31	71,23	479	50
	0,30	68,82	423	60

42CT0331S				
	Current	Power Consumption	Air Flow	ESP
	A	W	m ³ /h	Pa
Low Speed	0,25	57,49	375	0
	0,24	55,79	317	10
	0,24	55,02	292	15
	0,23	53,60	250	25
	0,23	52,95	231	30
	0,22	51,71	195	40
Medium Speed	0,30	69,94	558	0
	0,30	68,78	523	10
	0,30	68,08	504	15
	0,28	65,33	438	30
	0,27	62,54	381	40
	0,25	57,27	290	50
High Speed	0,35	79,36	696	0
	0,34	78,07	660	10
	0,34	77,39	641	15
	0,33	75,16	579	30
	0,31	71,50	486	50
	0,30	69,17	431	60

42CT0430S				
	Current	Power Consumption	Air Flow	ESP
	A	W	m ³ /h	Pa
Low Speed	0,28	64,58	468	0
	0,28	63,60	433	10
	0,27	62,88	415	15
	0,27	61,01	375	25
	0,26	59,83	353	30
	0,25	56,83	302	40
Medium Speed	0,33	76,79	685	0
	0,33	74,90	646	10
	0,32	73,95	626	15
	0,31	70,86	558	30
	0,30	68,48	507	40
	0,29	65,61	447	50
High Speed	0,38	86,64	836	0
	0,37	84,90	798	10
	0,37	84,03	778	15
	0,35	81,36	714	30
	0,34	77,28	612	50
	0,32	74,74	550	60

42CT0440S				
	Current	Power Consumption	Air Flow	ESP
	A	W	m ³ /h	Pa
Low Speed	0,28	64,51	465	0
	0,28	63,53	432	10
	0,27	62,85	414	15
	0,27	61,14	377	25
	0,26	60,10	357	30
	0,25	57,57	314	40
Medium Speed	0,33	76,33	676	0
	0,32	74,44	636	10
	0,32	73,48	616	15
	0,31	70,41	548	30
	0,30	68,09	499	40
	0,28	65,39	443	50
High Speed	0,38	86,43	831	0
	0,37	84,60	791	10
	0,36	83,70	770	15
	0,35	80,92	703	30
	0,33	76,73	599	50
	0,32	74,19	537	60

42CT0431S				
	Current	Power Consumption	Air Flow	ESP
	A	W	m ³ /h	Pa
Low Speed	0,28	64,52	465	0
	0,28	63,57	433	10
	0,27	62,90	416	15
	0,27	61,21	379	25
	0,26	60,16	358	30
	0,25	57,54	314	40
Medium Speed	0,33	75,50	659	0
	0,32	73,83	623	10
	0,32	72,97	604	15
	0,31	70,17	543	30
	0,30	68,01	497	40
	0,28	65,46	444	50
High Speed	0,37	84,54	790	0
	0,36	83,06	755	10
	0,36	82,30	737	15
	0,35	79,92	678	30
	0,33	76,23	586	50
	0,32	73,94	531	60

42CT 2 Pipe 3 Rows Models

42CT0530S				
	Current	Power Consumption	Air Flow	ESP
	A	W	m ³ /h	Pa
Low Speed	0,39	89,68	584	0
	0,38	87,80	556	10
	0,38	86,76	542	15
	0,37	84,47	510	25
	0,36	83,19	493	30
Medium Speed	0,35	80,26	455	40
	0,43	99,35	785	0
	0,42	96,23	741	10
	0,41	94,68	719	15
	0,39	90,05	653	30
High Speed	0,38	86,91	607	40
	0,36	83,68	562	50
	0,49	113,64	1072	0
	0,48	110,13	996	10
	0,47	108,36	960	15
	0,45	102,99	854	30
	0,42	95,61	722	50
	0,40	91,78	660	60

42CT 2 Pipe 4 Rows Models

42CT0540S				
	Current	Power Consumption	Air Flow	ESP
	A	W	m ³ /h	Pa
Low Speed	0,39	89,58	583	0
	0,38	87,62	554	10
	0,38	86,53	538	15
	0,37	84,10	505	25
	0,36	82,71	487	30
Medium Speed	0,35	79,46	445	40
	0,43	99,49	787	0
	0,42	96,35	743	10
	0,41	94,79	721	15
	0,39	90,05	653	30
High Speed	0,38	86,79	606	40
	0,36	83,40	558	50
	0,49	113,17	1062	0
	0,48	109,93	992	10
	0,47	108,27	958	15
	0,45	103,12	857	30
	0,42	95,74	725	50
	0,40	91,80	660	60

42CT 4 Pipe 3+1 Rows Models

42CT0531S				
	Current	Power Consumption	Air Flow	ESP
	A	W	m ³ /h	Pa
Low Speed	0,39	89,52	582	0
	0,38	87,47	552	10
	0,38	86,33	535	15
	0,36	83,72	500	25
	0,36	82,21	480	30
Medium Speed	0,34	78,54	434	40
	0,43	99,13	782	0
	0,42	95,86	736	10
	0,41	94,22	713	15
	0,39	89,22	641	30
High Speed	0,37	85,73	591	40
	0,36	82,05	539	50
	0,49	112,03	1037	0
	0,47	108,65	966	10
	0,46	106,90	930	15
	0,44	101,41	825	30
	0,41	93,36	685	50
	0,39	88,97	616	60

42CT0630S				
	Current	Power Consumption	Air Flow	ESP
	A	W	m ³ /h	Pa
Low Speed	0,42	97,07	604	0
	0,41	95,36	564	10
	0,41	93,97	544	15
	0,39	90,62	508	25
	0,39	88,77	490	30
Medium Speed	0,37	84,85	456	40
	0,51	116,55	934	0
	0,49	112,79	889	10
	0,48	110,85	866	15
	0,45	104,61	792	30
High Speed	0,43	99,99	738	40
	0,41	94,87	679	50
	0,54	124,72	1176	0
	0,53	120,83	1083	10
	0,52	118,62	1037	15
	0,48	111,01	900	30
	0,43	98,55	720	50
	0,40	91,33	632	60

42CT0640S				
	Current	Power Consumption	Air Flow	ESP
	A	W	m ³ /h	Pa
Low Speed	0,42	97,11	608	0
	0,42	95,67	569	10
	0,41	94,37	550	15
	0,40	91,16	513	25
	0,39	89,35	495	30
Medium Speed	0,37	85,47	461	40
	0,50	114,88	914	0
	0,48	111,46	873	10
	0,48	109,68	852	15
	0,45	103,96	784	30
High Speed	0,43	99,71	735	40
	0,41	94,98	681	50
	0,54	124,26	1164	0
	0,53	121,44	1097	10
	0,52	119,86	1062	15
	0,50	114,38	957	30
	0,46	105,12	810	50
	0,43	99,53	733	60

42CT0631S				
	Current	Power Consumption	Air Flow	ESP
	A	W	m ³ /h	Pa
Low Speed	0,42	96,85	594	0
	0,41	94,96	558	10
	0,41	93,63	540	15
	0,39	90,51	507	25
	0,39	88,79	490	30
Medium Speed	0,37	85,13	458	40
	0,49	112,15	882	0
	0,47	108,77	841	10
	0,47	107,01	820	15
	0,44	101,36	754	30
High Speed	0,42	97,19	706	40
	0,40	92,59	654	50
	0,53	121,35	1095	0
	0,51	118,27	1030	10
	0,51	116,57	997	15
	0,48	110,86	897	30
	0,44	101,65	761	50
	0,42	96,31	692	60

42CT0830S				
	Current	Power Consumption	Air Flow	ESP
	A	W	m ³ /h	Pa
Low Speed	0,62	142,24	862	0
	0,59	135,19	789	10
	0,58	132,52	760	15
	0,56	128,30	709	25
	0,55	126,60	686	30
Medium Speed	0,54	123,78	644	40
	0,75	172,31	1337	0
	0,71	163,17	1253	10
	0,69	159,33	1215	15
	0,65	149,97	1108	30
High Speed	0,63	145,11	1042	40
	0,61	141,06	981	50
	0,83	191,98	1750	0
	0,80	184,57	1674	10
	0,79	181,19	1635	15
	0,75	171,97	1513	30
	0,70	161,01	1332	50
	0,68	155,76	1233	60

42CT0840S				
	Current	Power Consumption	Air Flow	ESP
	A	W	m ³ /h	Pa
Low Speed	0,61	141,11	850	0
	0,59	134,84	785	10
	0,58	132,38	758	15
	0,56	128,41	710	25
	0,55	126,78	688	30
Medium Speed	0,54	124,04	648	40
	0,72	165,90	1280	0
	0,69	158,72	1208	10
	0,68	155,61	1175	15
	0,64	147,81	1080	30
High Speed	0,62	143,62	1021	40
	0,61	140,06	965	50
	0,80	183,31	1660	0
	0,77	177,45	1589	10
	0,76	174,70	1552	15
	0,73	167,02	1436	30
	0,68	157,54	1267	50
	0,66	152,92	1176	60

42CT0831S				
	Current	Power Consumption	Air Flow	ESP
	A	W	m ³ /h	Pa
Low Speed	0,61	140,82	847	0
	0,59	134,66	783	10
	0,57	132,23	756	15
	0,56	128,32	709	25
	0,55	126,71	687	30
Medium Speed	0,54	124,00	648	40
	0,72	166,27	1283	0
	0,69	158,84	1210	10
	0,68	155,66	1175	15
	0,64	147,73	1079	30
High Speed	0,62	143,51	1019	40
	0,61	139,95	963	50
	0,80	185,11	1680	0
	0,78	178,75	1605	10
	0,76	175,81	1567	15
	0,73	167,64	1446	30
	0,69	157,73	1271	50
	0,67	152,96	1176	60

42CT 2 Pipe 3 Rows Models

42CT1030S				
	Current	Power Consumption	Air Flow	ESP
	A	W	m ³ /h	Pa
Low Speed	0,75	173,02	1067	0
	0,74	169,10	1034	10
	0,73	167,30	1016	15
	0,71	163,76	976	25
	0,70	161,94	953	30
Medium Speed	0,69	157,90	900	40
	0,86	196,72	1487	0
	0,83	190,53	1434	10
	0,82	187,53	1406	15
	0,78	178,54	1314	30
High Speed	0,75	172,23	1245	40
	0,72	165,32	1166	50
	0,95	217,38	1992	0
	0,92	211,72	1907	10
	0,91	208,96	1863	15
High Speed	0,87	200,83	1733	30
	0,83	190,13	1555	50
	0,80	184,74	1465	60

42CT 2 Pipe 4 Rows Models

42CT1040S				
	Current	Power Consumption	Air Flow	ESP
	A	W	m ³ /h	Pa
Low Speed	0,75	172,64	1064	0
	0,73	168,99	1033	10
	0,73	167,30	1016	15
	0,71	164,00	979	25
	0,71	162,32	958	30
Medium Speed	0,69	158,72	911	40
	0,83	191,74	1445	0
	0,81	186,32	1394	10
	0,80	183,65	1368	15
	0,76	175,50	1282	30
High Speed	0,74	169,77	1217	40
	0,71	163,54	1146	50
	0,91	208,35	1854	0
	0,89	203,73	1780	10
	0,88	201,44	1743	15
High Speed	0,85	194,62	1630	30
	0,81	185,48	1477	50
	0,79	180,84	1400	60

42CT 4 Pipe 3+1 Rows Models

42CT1031S				
	Current	Power Consumption	Air Flow	ESP
	A	W	m ³ /h	Pa
Low Speed	0,75	173,39	1070	0
	0,74	169,48	1037	10
	0,73	167,69	1020	15
	0,71	164,21	981	25
	0,71	162,43	959	30
Medium Speed	0,69	158,54	908	40
	0,85	194,97	1473	0
	0,82	189,24	1422	10
	0,81	186,44	1395	15
	0,77	177,98	1308	30
High Speed	0,75	172,02	1243	40
	0,72	165,51	1168	50
	0,92	211,68	1906	0
	0,90	207,00	1832	10
	0,89	204,67	1795	15
High Speed	0,86	197,70	1681	30
	0,82	188,28	1524	50
	0,80	183,44	1443	60

42CT1230S				
	Current	Power Consumption	Air Flow	ESP
	A	W	m ³ /h	Pa
Low Speed	0,97	223,66	1500	0
	0,94	216,08	1444	10
	0,92	212,52	1415	15
	0,89	205,49	1352	25
	0,88	201,93	1318	30
Medium Speed	0,85	194,46	1242	40
	1,07	246,74	2007	0
	1,04	238,90	1929	10
	1,02	235,17	1890	15
	0,98	224,43	1769	30
High Speed	0,95	217,50	1687	40
	0,92	210,64	1604	50
	1,17	268,69	2521	0
	1,14	262,42	2405	10
	1,13	259,28	2347	15
High Speed	1,09	249,79	2172	30
	1,03	236,84	1937	50
	1,00	230,17	1818	60

42CT1240S				
	Current	Power Consumption	Air Flow	ESP
	A	W	m ³ /h	Pa
Low Speed	0,95	219,33	1469	0
	0,92	212,55	1415	10
	0,91	209,27	1387	15
	0,88	202,73	1325	25
	0,87	199,39	1292	30
Medium Speed	0,84	192,37	1220	40
	1,04	238,61	1926	0
	1,01	231,77	1852	10
	0,99	228,45	1815	15
	0,95	218,78	1703	30
High Speed	0,92	212,48	1626	40
	0,90	206,21	1549	50
	1,13	259,82	2357	0
	1,10	254,06	2250	10
	1,09	251,17	2197	15
High Speed	1,05	242,45	2037	30
	1,00	230,57	1826	50
	0,98	224,49	1720	60

42CT1231S				
	Current	Power Consumption	Air Flow	ESP
	A	W	m ³ /h	Pa
Low Speed	0,95	218,59	1464	0
	0,92	211,99	1410	10
	0,91	208,79	1382	15
	0,88	202,35	1322	25
	0,87	199,04	1289	30
Medium Speed	0,84	192,06	1217	40
	1,02	235,51	1893	0
	1,00	229,29	1825	10
	0,98	226,24	1790	15
	0,94	217,24	1684	30
High Speed	0,92	211,28	1612	40
	0,89	205,31	1538	50
	1,11	254,27	2254	0
	1,08	249,35	2164	10
	1,07	246,86	2118	15
High Speed	1,04	239,21	1979	30
	0,99	228,53	1790	50
	0,97	222,94	1693	60

42CT1430S				
	Current	Power Consumption	Air Flow	ESP
	A	W	m ³ /h	Pa
Low Speed	1,26	288,68	1411	0
	1,20	276,59	1364	10
	1,18	271,27	1339	15
	1,14	261,29	1287	25
	1,11	256,45	1259	30
Medium Speed	1,07	246,69	1198	40
	1,44	332,10	2206	0
	1,38	318,10	2080	10
	1,35	311,41	2018	15
	1,27	292,17	1831	30
High Speed	1,22	279,86	1708	40
	1,16	267,79	1584	50
	1,57	361,85	2683	0
	1,54	355,11	2584	10
	1,53	351,83	2533	15
High Speed	1,49	342,15	2370	30
	1,43	328,96	2126	50
	1,40	321,87	1987	60

42CT1440S				
	Current	Power Consumption	Air Flow	ESP
	A	W	m ³ /h	Pa
Low Speed	1,26	290,06	1415	0
	1,21	278,05	1370	10
	1,19	272,82	1347	15
	1,14	263,10	1297	25
	1,12	258,43	1270	30
Medium Speed	1,08	249,16	1214	40
	1,43	328,89	2178	0
	1,37	315,44	2056	10
	1,34	309,03	1995	15
	1,26	290,71	1817	30
High Speed	1,21	279,07	1700	40
	1,16	267,74	1584	50
	1,57	360,27	2660	0
	1,54	353,52	2560	10
	1,52	350,24	2507	15
High Speed	1,48	340,59	2343	30
	1,42	327,53	2098	50
	1,39	320,60	1962	60

42CT1431S				
	Current	Power Consumption	Air Flow	ESP
	A	W	m ³ /h	Pa
Low Speed	1,22	280,40	1380	0
	1,18	270,40	1335	10
	1,16	265,78	1311	15
	1,12	256,88	1261	25
	1,10	252,50	1235	30
Medium Speed	1,06	243,61	1178	40
	1,34	308,91	1994	0
	1,30	298,19	1891	10
	1,27	292,96	1839	15
	1,21	277,64	1685	30
High Speed	1,16	267,66	1583	40
	1,12	257,78	1482	50
	1,50	346,10	2439	0
	1,48	340,61	2343	10
	1,47	337,86	2293	15
High Speed	1,43	329,53	2137	30
	1,38	317,74	1905	50
	1,35	311,28	1775	60

7. COMMISSIONING

The following procedures are designed as a guide to enable the units to be commissioned in accordance with the design requirements.

Ensure that the unit is installed correctly and undamaged.

Ensure that all unit sections are thoroughly clean and free from installation debris, that the filter is clean and free from dust.

Ensure that all access panels and blanking plates are in position and secure.

Ensure that all electrical wiring complies with unit wiring diagram and local by-laws and that all components, where applicable, are provided with all necessary safety, protection and isolating devices.

Check that the coil faces are free from any debris and check all coil connections for leaks.

Ensure that all air is vented from both coils and the system independently.

Check that the small gap between coil cheek plate and the drain pan has not been blocked by site debris.

Introduce water to the drain pan to verify free flow of water into drain.

Start the fan the system thoroughly.

Check that the unit air volume and the external pressure are as design.

Check that the motor full load current is approximately equivalent to the unit nameplate value.

Check the on/off temperature across coils and adjust water flows accordingly.

After initial start-up and some continuous running of the unit, it is recommended that the following are checked; the motor full load current, the filter condition, the condensate and drains have free flow&no leaks, the valve connections have no leaks and that the controls operate correctly.

7.1. Service and Periodic Maintenance

IMPORTANT:

Keep fan coil unit installation space clean to avoid dust entering unit, which may lead to damage or comfort issue.

Disconnect the mains power supply prior to any maintenance operations or prior to handling any internal parts of the unit.

7.2. Condensate draining

During the summer season check that the condensate drain is free from dust and lint that could clog it, causing condensate water overflow.

The following procedures are designed as a guide to enable the units to be commissioned in accordance with the design requirements and should also be carried out with standard industry management.

7.3. Motor Fan Assembly

Disconnect the power supply to the unit before carrying out any work on the unit.

Remove the filter.

Remove the fan access panel.

Disconnect the fan assembly power supply cables (power and control wiring for variable-speed motor).

The fan assembly and its panel are held in place by four screws. Remove these screws and slide the assembly down.

Remove the fan motor assembly.

Note: Be careful not to damage the fan impellers during the removal process to avoid unbalancing the fans.

WARNING: The electrical connections to the fan motor must be made in accordance with the labels on the connector block.

To re-install, follow the reverse procedure, ensuring that the electrical supply is isolated, making sure to reconnect all wiring harnesses. Dirt and dust should not be allowed to accumulate on the fan impeller or housing. This can result in an unbalanced fan impeller and damage the impeller or motor. The impellers can be cleaned periodically with a vacuum cleaner and brush.

WARNING: A check on the fan/motor assembly is advisable to ascertain if any overheating of the motor is occurring and that the fan impeller is free running and has not sustained any damage. If any overheating is occurring, check that the full load current of the motor is within the nameplate rated value, the impeller is running freely and that there is no obstruction upstream or downstream of the fan causing a high resistance with consequent lack of airflow.

7.4. Motor

The motor is permanently lubricated, therefore no periodical maintenance is required.

7.5. Heat exchanger coil

Isolate the electrical supply.

Isolate flow and return pipework to both heating and cooling connections.

Drain down coils.

The coil should be inspected, at the same time as cleaning the filter, to ascertain if any solids or foreign matter has accumulated between the fins and that the coil connections are free from leaks. The coil should be cleaned by using a soft brush or vacuum cleaner and great care must be taken not to damage the fins, If fins become contaminated too frequently it is advisable to check the air filter to ensuring it is functioning correctly. Remove flow and return pipework to valves and condensate pipe.

Support weight of coil and remove the six M6 bolts holding the coil to the rear of the unit. Slide out the condensate tray and coil assembly from unit.

To reinstall, follow the reverse procedure, ensuring the electrical supply is isolated. The coil must be vented when refilling with water.


7.6. Drain Pan

Drain pan may be removed for cleaning independently of the coil and should be inspected annually. Lock open and tag unit electrical service switch. Check drain pan, drain line and trap at start of each cooling season. A standard type pipe cleaner for 3/4-in. ID pipe can be used to ensure that pipe is clear of obstruction so that condensate is carried away.

7.7. Air Filter

Take off the filter from the bottom or rear under the front panel or bottom.

Unit with rear plenum

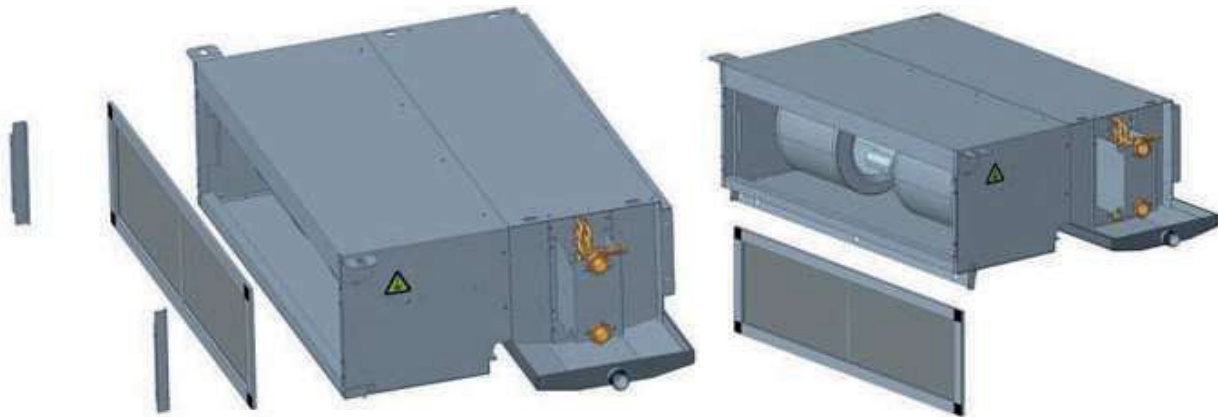

Unit with bottom plenum



Clean standart nylon filters with vacuum cleaner or water and soap solution. Rinse and allow them to dry before re-installation.

Optional filters can be vacuum cleaned. Replace it every 6 months, shorten the period if necessary.



Order No: X0001, 09.2021 - Supersedes order No.: New
The manufacturer reserves the right to make changes to the product specifications without notice.

